



<http://algs4.cs.princeton.edu>

4.2 DIRECTED GRAPHS

→ edges → معرفة بجهة معينة

- ▶ *introduction*
- ▶ *digraph API*
- ▶ *digraph search*
- ▶ *topological sort*
- ▶ *strong components*



<http://algs4.cs.princeton.edu>

4.2 DIRECTED GRAPHS

- *introduction*
- *digraph API*
- *digraph search*
- *topological sort*
- *strong components*


Directed graphs

Digraph. Set of vertices connected pairwise by **directed** edges.

ملاحظة: لف على Point
ثانية وجا فيجيد على مادل ومحدد بالرسم الاحجبه


* $A \rightarrow B$ = From A to B

$A \leftarrow B$ = From A to B
B to A
تحتسب بالاتجاهين

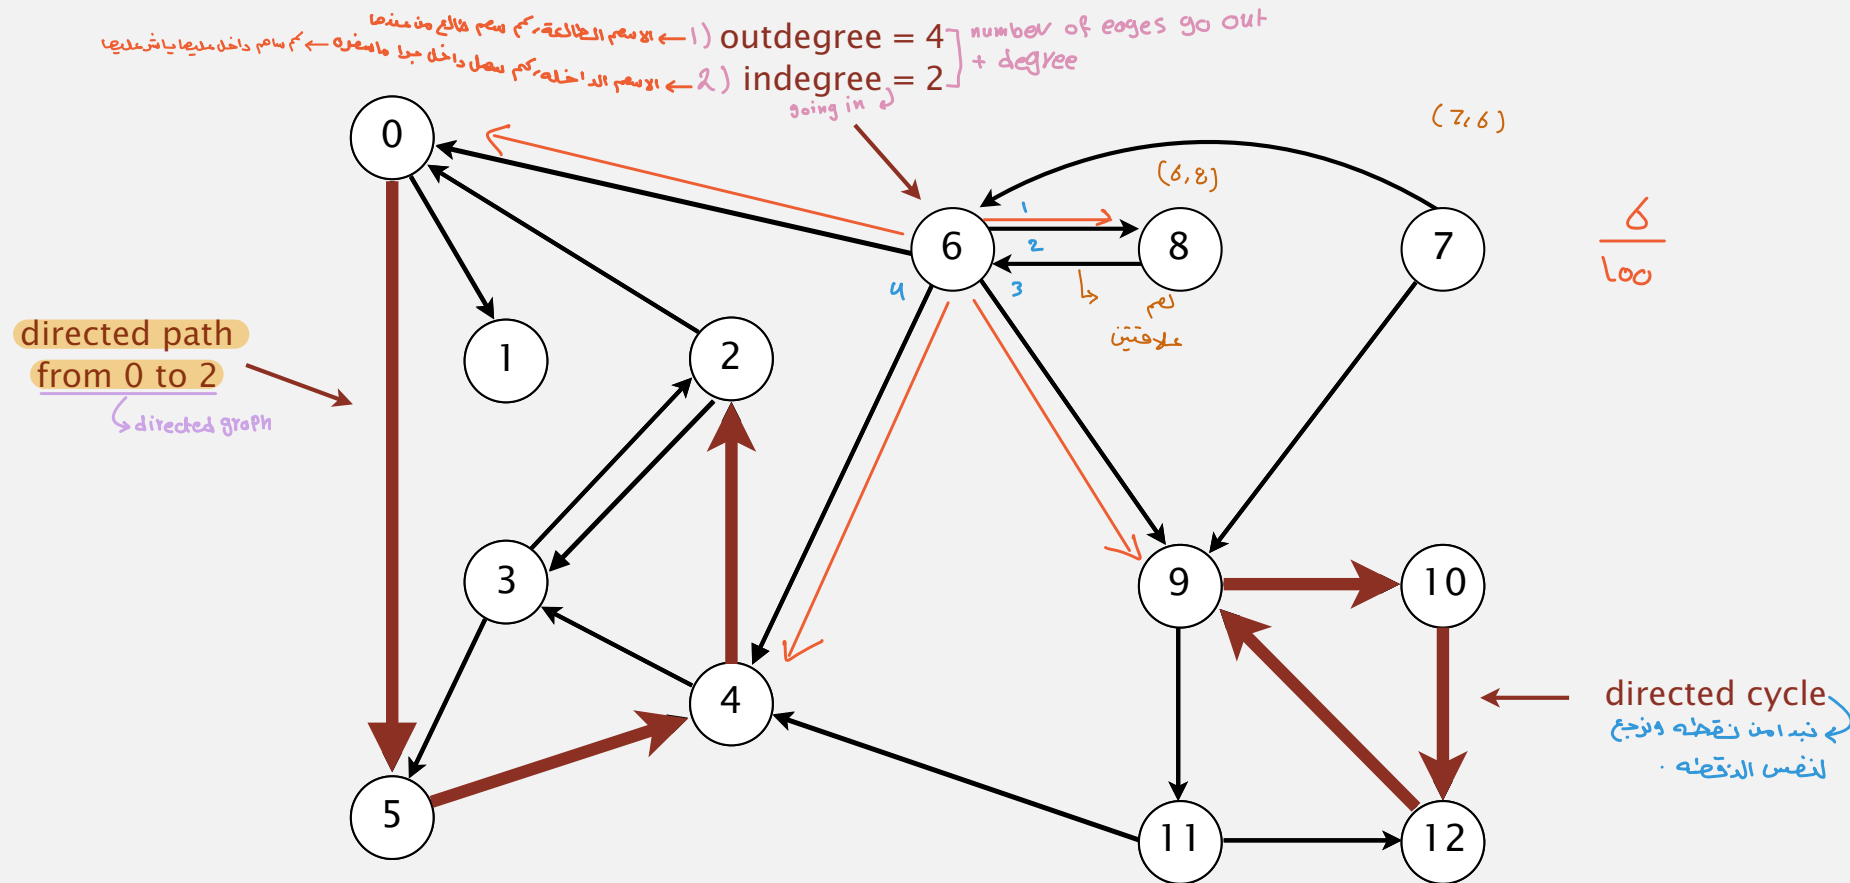


Road network

Vertex = intersection; edge = one-way street.

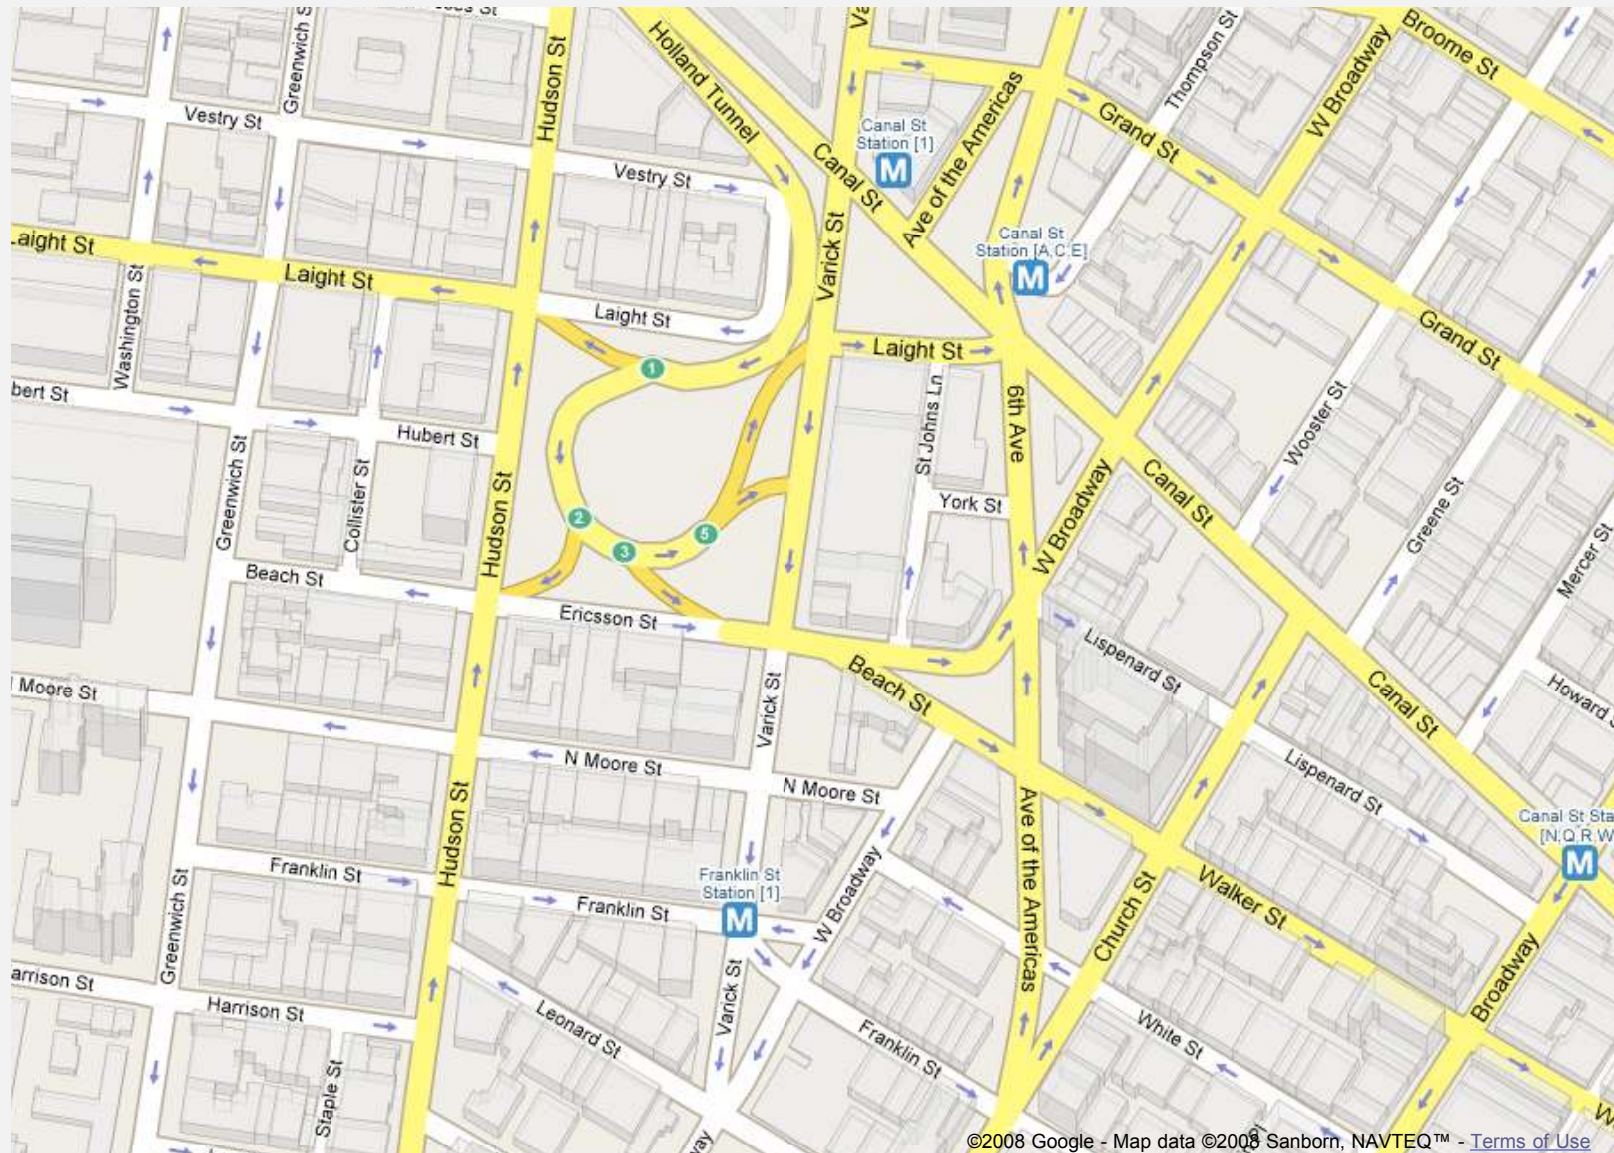

Political blogosphere graph


Vertex = political blog; edge = link.

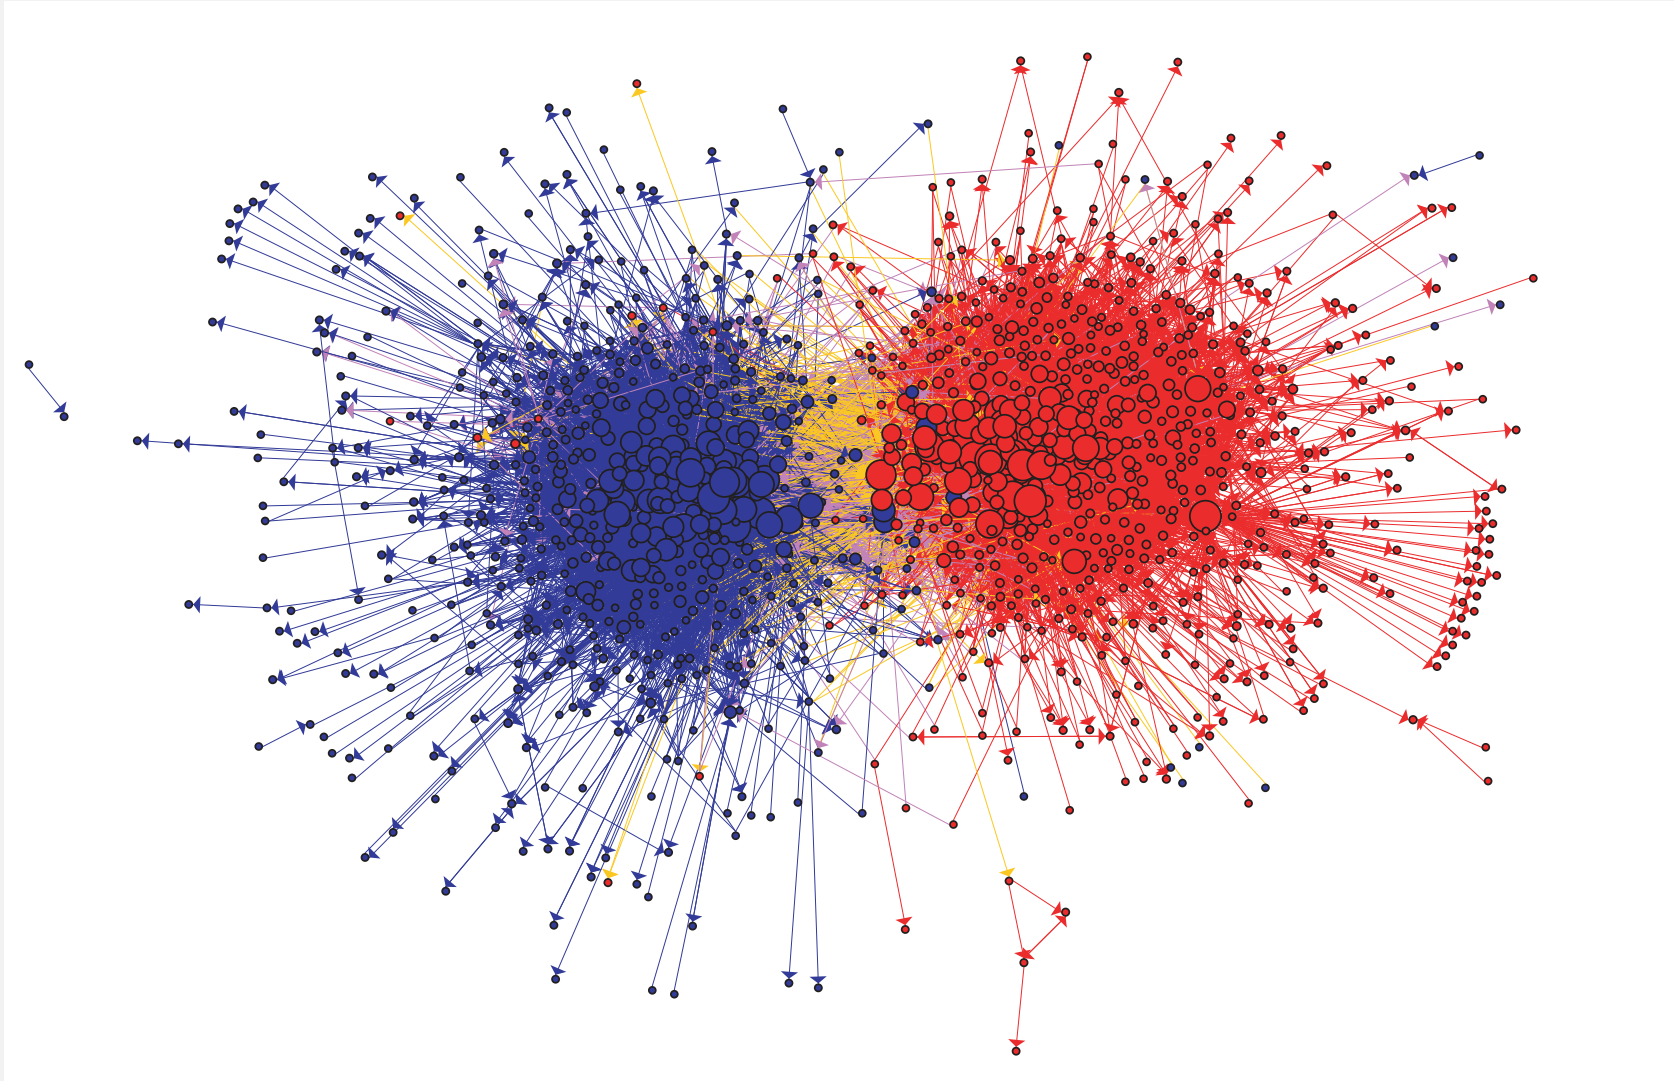

The Political Blogosphere and the 2004 U.S. Election: Divided They Blog, Adamic and Glance, 2005

Overnight interbank loan graph


Vertex = bank; edge = overnight loan.

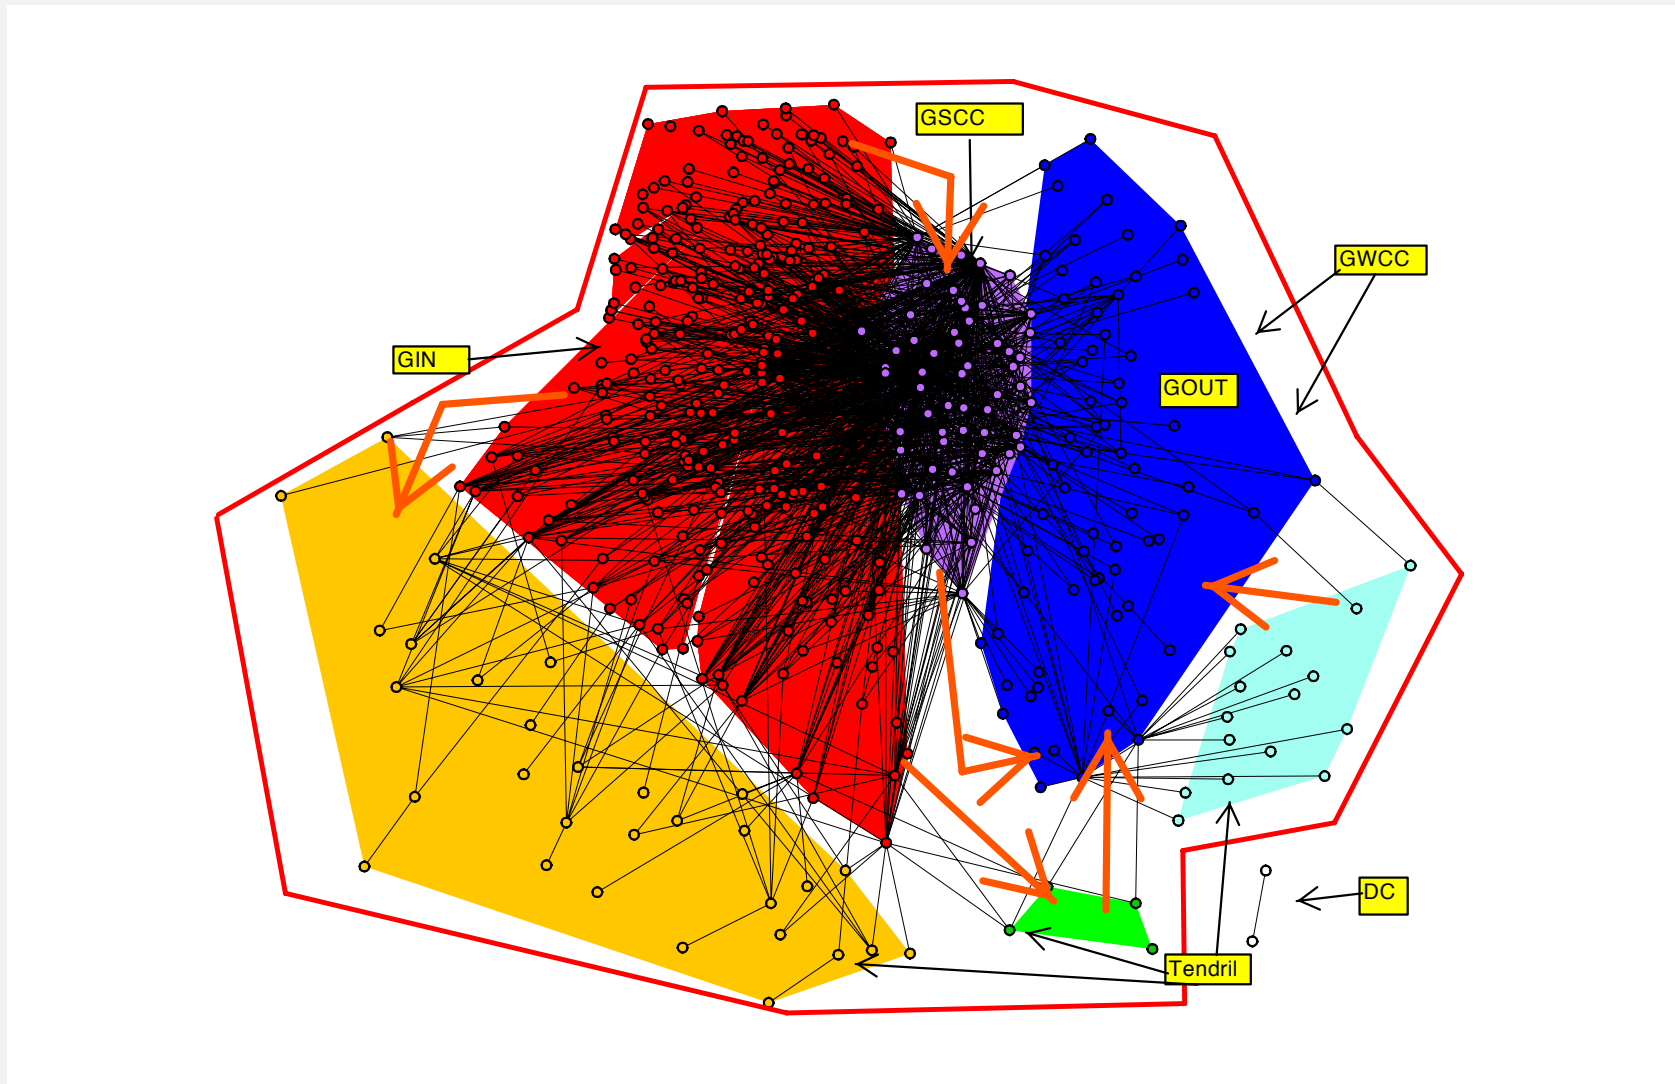

The Topology of the Federal Funds Market, Bech and Atalay, 2008

Uber taxi graph


Vertex = taxi pickup; edge = taxi ride.

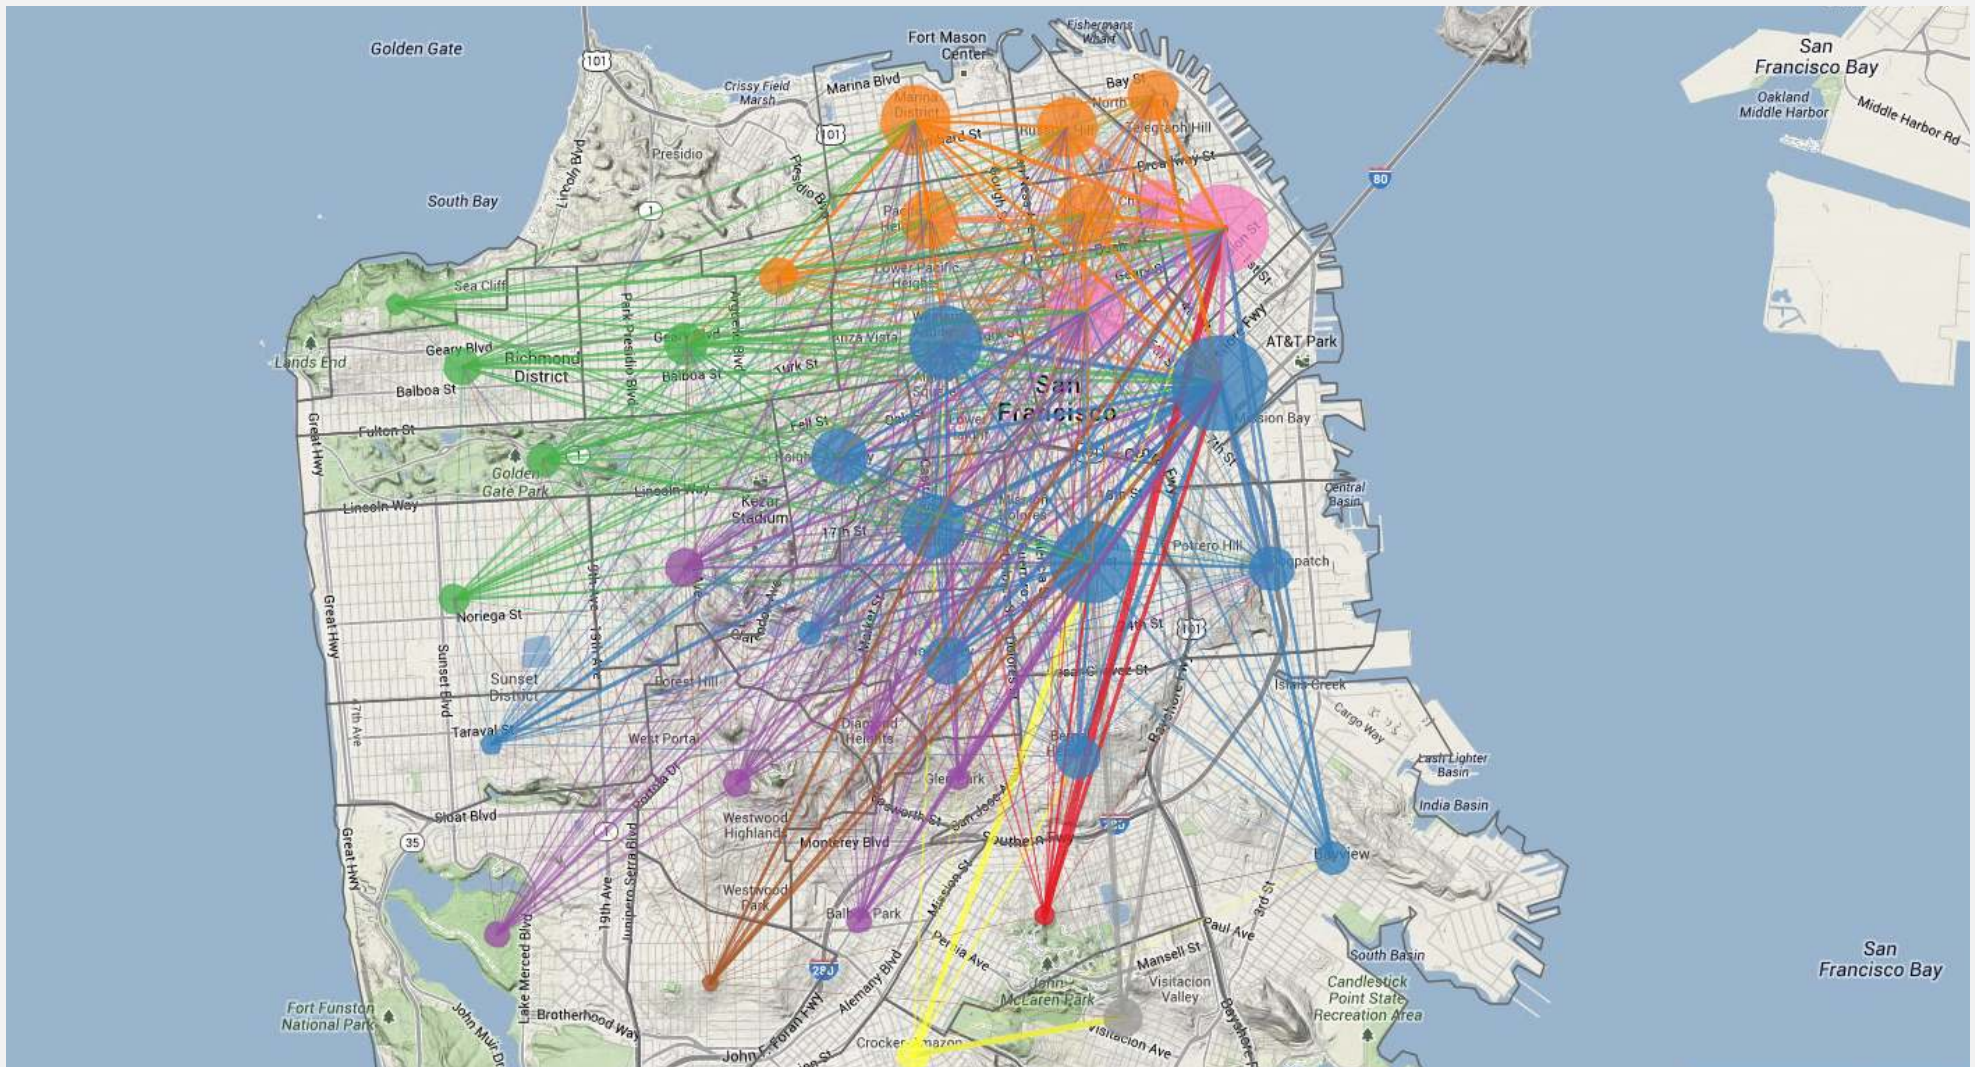

<http://blog.uber.com/2012/01/09/uberdata-san-franciscocomics/>


Implication graph

Vertex = variable; edge = logical implication.

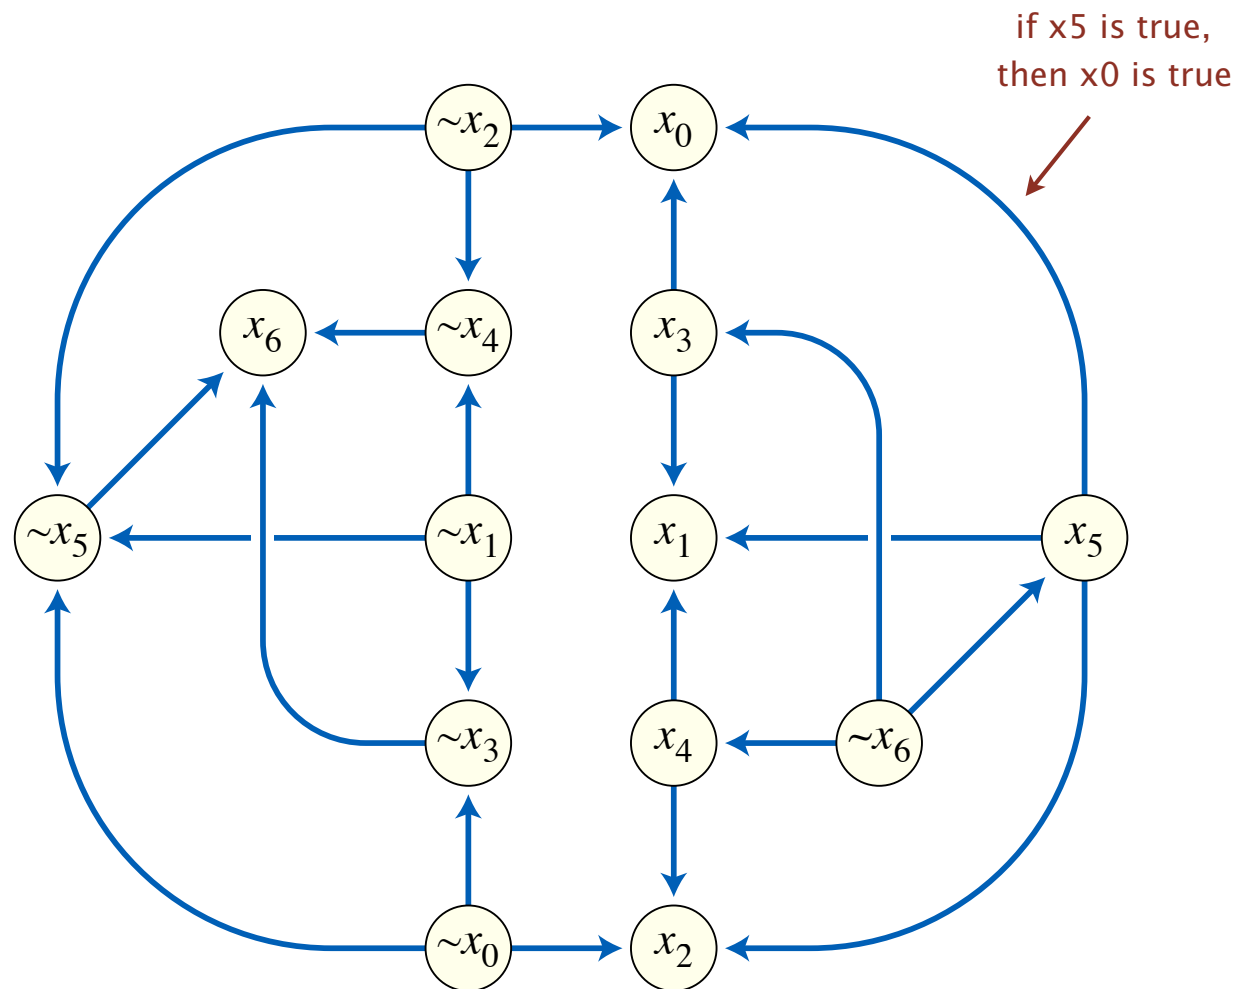


Combinational circuit

Vertex = logical gate; edge = wire.

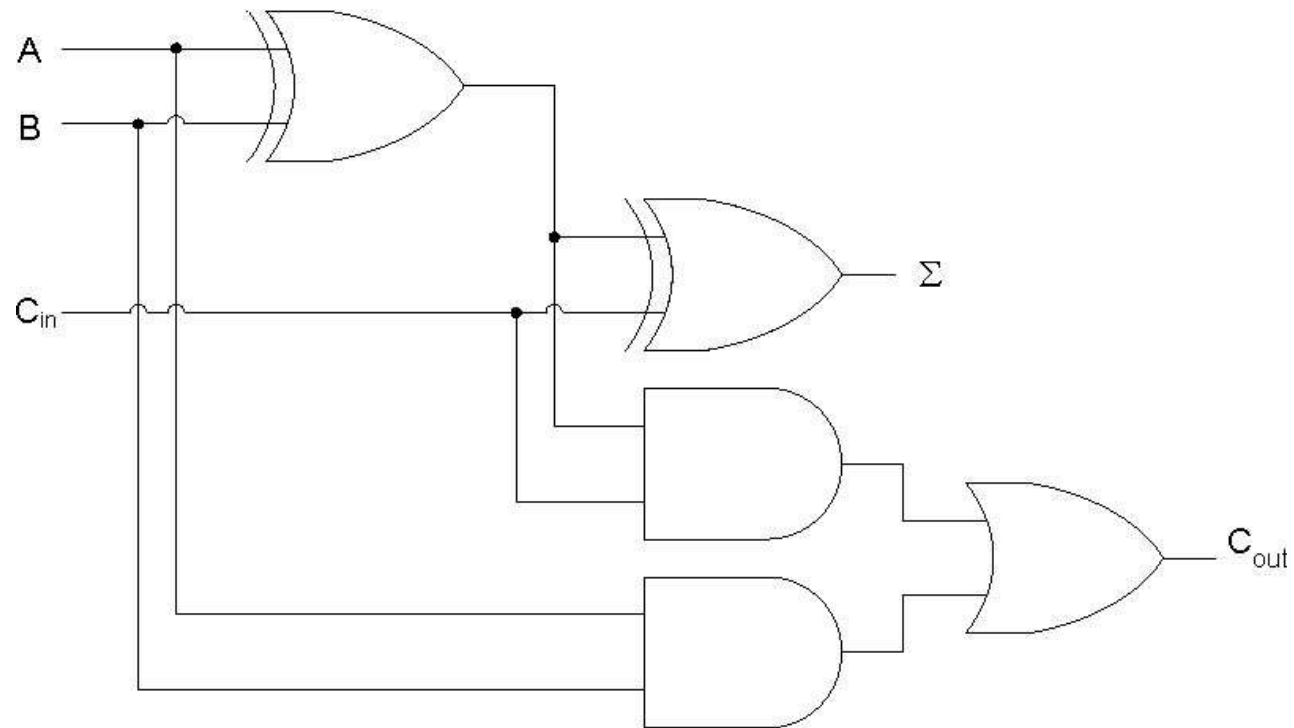

WordNet graph

Vertex = synset; edge = hypernym relationship.

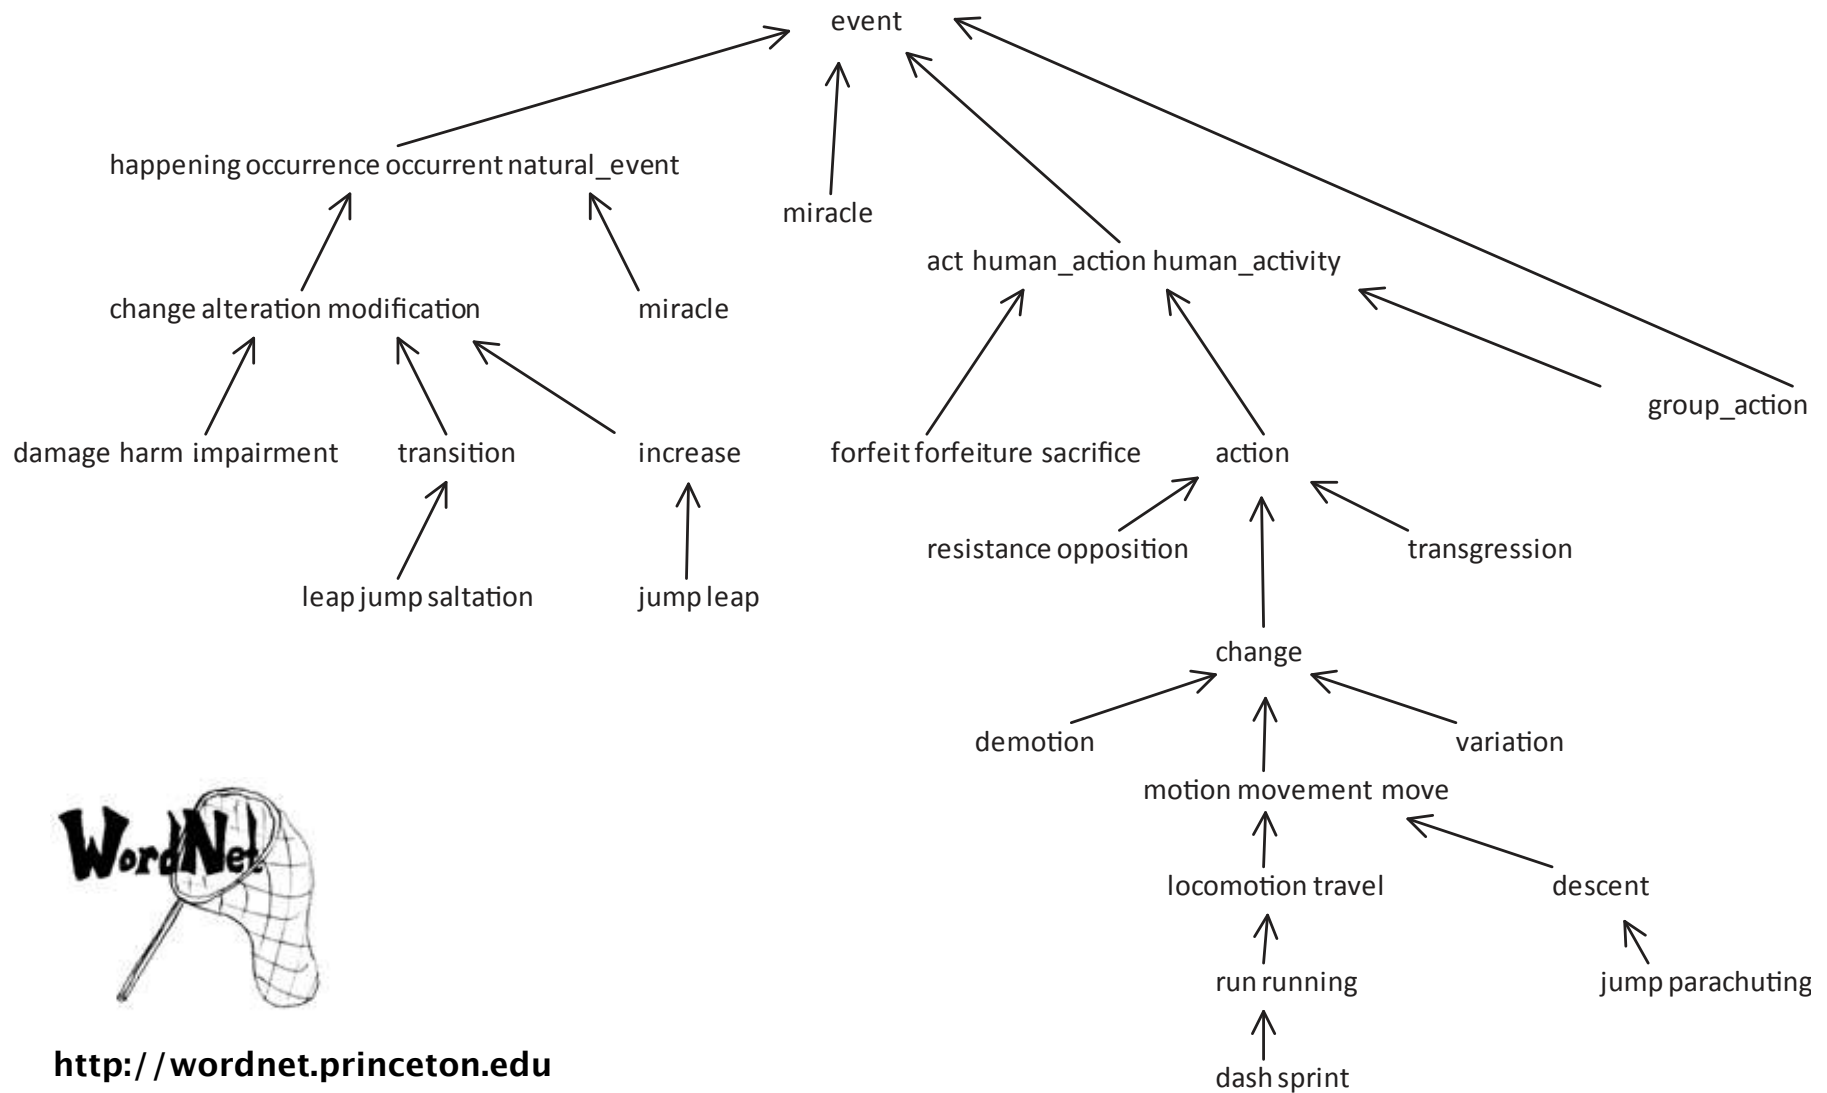

Digraph applications

مثال على Graph

digraph	vertex	directed edge
→ transportation	street intersection	one-way street
→ web	web page	hyperlink
food web	species	predator-prey relationship
→ WordNet	synset	hypernym
→ scheduling	task	<u>precedence constraint</u>
financial	bank	transaction
cell phone	person	placed call
infectious disease	person	infection
game	board position	legal move
citation	journal article	citation
object graph	object	pointer
inheritance hierarchy	class	inherits from
control flow	code block	jump

Some digraph problems

problem	description
s→t path ✓	<i>Is there a path from s to t ?</i>
shortest s→t path ✓	<i>What is the shortest path from s to t ?</i>
directed cycle	<i>Is there a directed cycle in the graph ?</i>
topological sort	<i>Can the digraph be drawn so that all edges point upwards?</i>
strong connectivity	<i>Is there a directed path between all pairs of vertices ?</i>
transitive closure	<i>For which vertices v and w is there a directed path from v to w ?</i>
PageRank ✓	<i>What is the importance of a web page ?</i>



<http://algs4.cs.princeton.edu>

4.2 DIRECTED GRAPHS

- ▶ *introduction*
- ▶ *digraph API*
- ▶ *digraph search*
- ▶ *topological sort*
- ▶ *strong components*

Digraph API

Almost identical to Graph API.

↳ يتكون من vertices

```
public class Digraph
```

```
    Digraph(int V)
```

*create an empty digraph with **V** vertices*

```
    Digraph(In in)
```

create a digraph from input stream

يمكن بقراءة منه

```
    void addEdge(int v, int w)
```

add a directed edge $v \rightarrow w$

```
    Iterable<Integer> adj(int v)
```

vertices pointing from $v \rightarrow$ يرجع لي اي شيء

```
    int V()
```

number of vertices

```
    int E()
```

number of edges

```
    Digraph reverse()
```

العكس

reverse of this digraph

```
    String toString()
```


string representation

Digraph API

Edge list

tinyDG.txt

V → 13
 22 ← E = عدد الحواف التي
 بقراءتهم . و باتجاه واحد
 4 2
 2 3
 3 2
 6 0
 0 1
 2 0
 11 12
 12 9
 9 10
 9 11
 7 9
 10 12
 11 4
 4 3
 3 5
 6 8
 8 6
 :

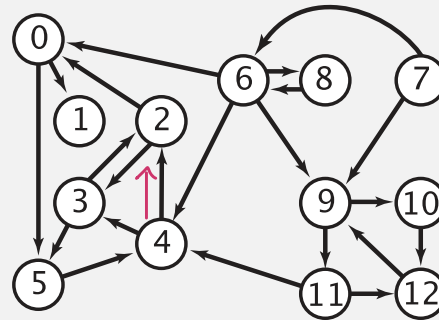

run time : $O(V+E)$

بما أننا نعلم عدد اللاتيات التي أعطيت ايها
 يساعد عدد الخواص التي حلتها واعداد Vertices على يدي
 التي رسمتها . مثلثان ختوف هجينة اوله .

% java Digraph tinyDG.txt

0->5
 0->1
 2->0
 2->3
 3->5
 3->2
 4->3
 4->2
 5->4
 :
 11->4
 11->12
 12->9

```
In in = new In(args[0]);
Digraph G = new Digraph(in);
```

← read digraph from
input stream

```
for (int v = 0; v < G.V(); v++)
    for (int w : G.adj(v))
        StdOut.println(v + "->" + w);
```

← print out each
edge (once)


Digraph representation: adjacency lists one array

Maintain vertex-indexed array of lists.

للم فيضا الى كل ال-vertex الى موجودة بال graph .

لأن الـ (directed) حدد لي العلاقة
مين لمين فابشوفوا مره وحده بين.

Now much time to build
 $O(E)$

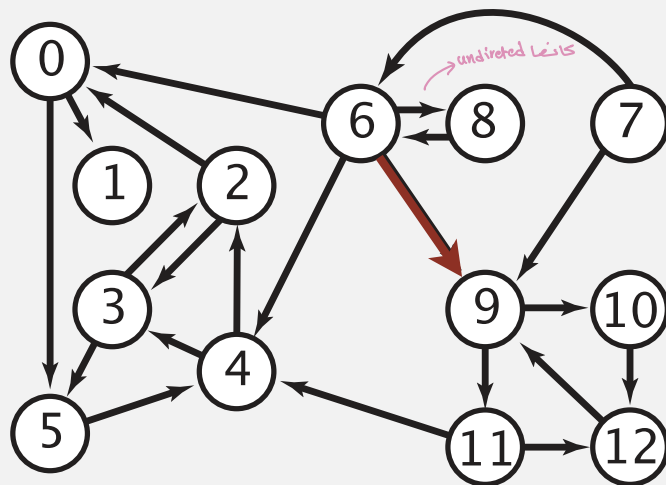


$O(V)$

اول شيء، بجعل كل الارقام
بجدين بمسك لاين لاين واسوي (linked list)
واجمع الايخات الي رايج عليها.

يفضل الترتيب (اجدي)

linked list save address

زي كذا

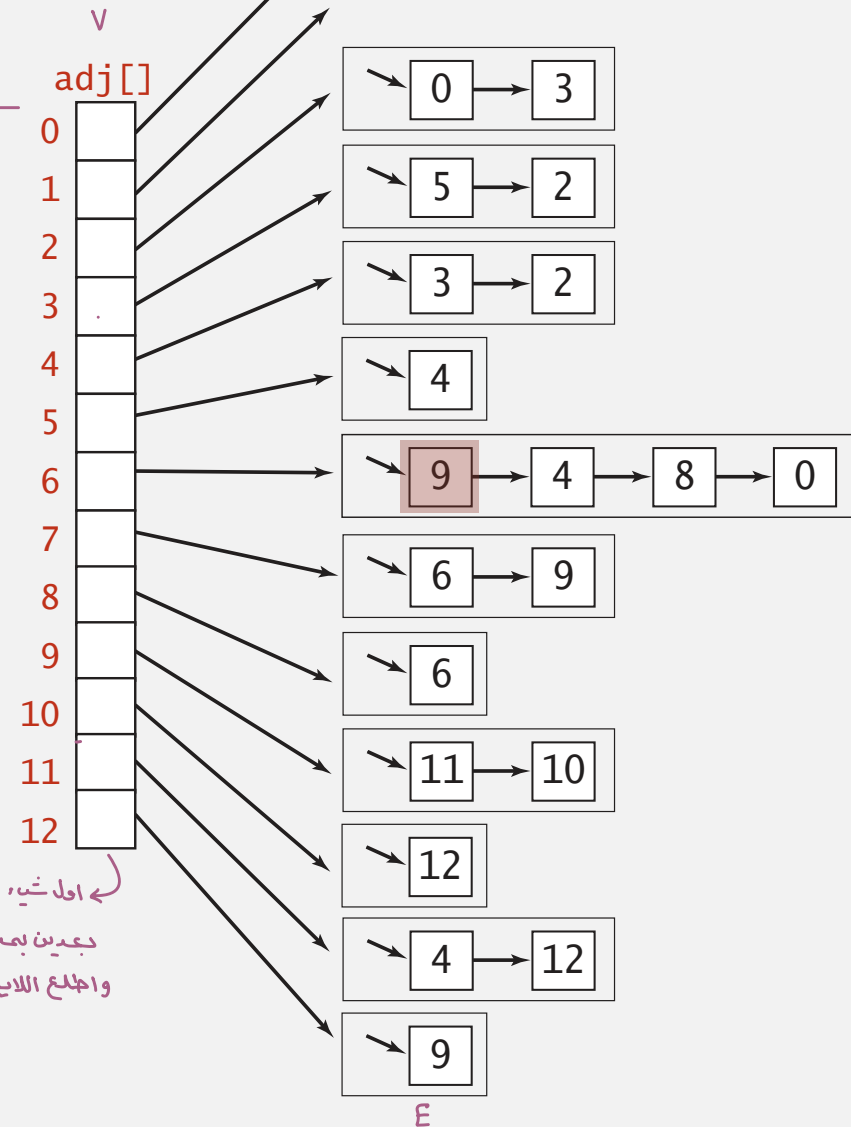

Digraph representations

In practice. Use adjacency-lists representation.

- Algorithms based on iterating over vertices pointing from v .
- Real-world digraphs tend to be sparse.

huge number of vertices,
small average vertex degree

representation	and run time for creation space	insert edge from v to w	edge from v to w ?	iterate over vertices pointing from v ?
list of edges <i>بمجرد التكرار</i>	E المساحة <i>عدد الحواف</i>	1	E	E جلب ادور عليه <i>جلب عدد الحواف</i>
adjacency matrix <i>array من array</i>	V^2 عدد الحواف في كل vertex <i>عدد الحواف في كل vertex</i>	1†	1	V جلب بعدد vertex الى عنى <i>جلب بعدد vertex الى عنى</i>
adjacency lists	$E + V$ لجميع العلاقات المؤشرات. number of vertex	1 array لان عارفه الى array access	$outdegree(v)$ عدد المؤشرات الى حاليين من الى V . لان بمركبه من المؤشرات الى الشيء الثاني . (عدد العلاقات)	$outdegree(v)$ disallows parallel edges <i>لم يمنع التكرار</i>

Adjacency-lists graph representation (review): Java implementation

```
public class Graph  
{
```

```
    private final int V;  
    private final Bag<Integer>[] adj;
```

← adjacency lists

```
    public Graph(int V)
```

```
    {  
        this.V = V;  
        adj = (Bag<Integer>[]) new Bag[V];  
        for (int v = 0; v < V; v++)  
            adj[v] = new Bag<Integer>();  
    }
```

← create empty graph
with V vertices

```
    public void addEdge(int v, int w)
```

```
    {  
        adj[v].add(w);  
        adj[w].add(v);  
    }
```

← add edge v-w

undirected
Graph

❌ directed
بیسوی یکس one

```
    public Iterable<Integer> adj(int v)  
    { return adj[v]; }
```

← iterator for vertices
adjacent to v

```
}
```

Adjacency-lists digraph representation: Java implementation

```
public class Digraph only once  
{
```

```
    private final int V;  
    private final Bag<Integer>[] adj;
```

← adjacency lists

```
    public Digraph(int V)  
    {  
        this.V = V;  
        adj = (Bag<Integer>[]) new Bag[V];  
        for (int v = 0; v < V; v++)  
            adj[v] = new Bag<Integer>();  
    }
```

← create empty digraph
with V vertices

```
    public void addEdge(int v, int w)  
    {  
        adj[v].add(w); directed Graph  
    }
```

← add edge v→w

```
    public Iterable<Integer> adj(int v)  
    { return adj[v]; }  
}
```

← iterator for vertices
pointing from v



<http://algs4.cs.princeton.edu>

4.2 DIRECTED GRAPHS

- ▶ *introduction*
- ▶ *digraph API*
- ▶ *digraph search*
- ▶ *topological sort*
- ▶ *strong components*


DFS

Reachability

Problem. Find all vertices reachable from s along a directed path.

نذرتبه للانتجاهات

s

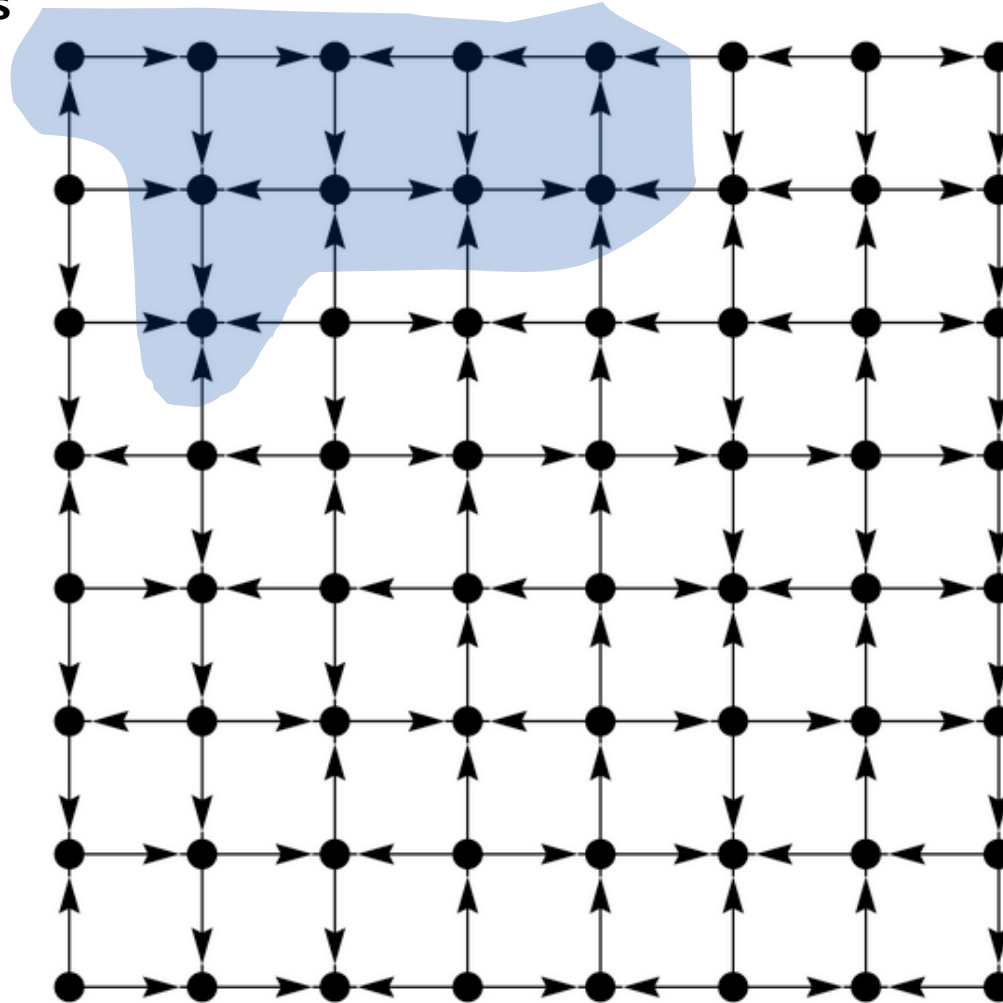

Depth-first search in digraphs

Same method as for undirected graphs.

- Every undirected graph is a digraph (with edges in both directions).
- DFS is a **digraph** algorithm.

 directed and undirected
DFS (to visit a vertex v)

Mark v as visited.

**Recursively visit all unmarked
vertices w pointing from v .**

use Stuck
direction is
Important




- ↳ noting go up
back up by tracking
the top.



1, 3, 2, 4, 5, 0, 8, 12, 10, 11, 9

$4 \rightarrow 2$
 $2 \rightarrow 3$
 $3 \rightarrow 2$
 $6 \rightarrow 0$
 $0 \rightarrow 1$
 $2 \rightarrow 0$
 $11 \rightarrow 12$
 $12 \rightarrow 9$
 $9 \rightarrow 10$
 $9 \rightarrow 11$
 $8 \rightarrow 9$
 $10 \rightarrow 12$
 $11 \rightarrow 4$
 $4 \rightarrow 3$
 $3 \rightarrow 5$
 $6 \rightarrow 8$
 $8 \rightarrow 6$
 $5 \rightarrow 4$
 $0 \rightarrow 5$
 $6 \rightarrow 4$
 $6 \rightarrow 9$
 $7 \rightarrow 6$

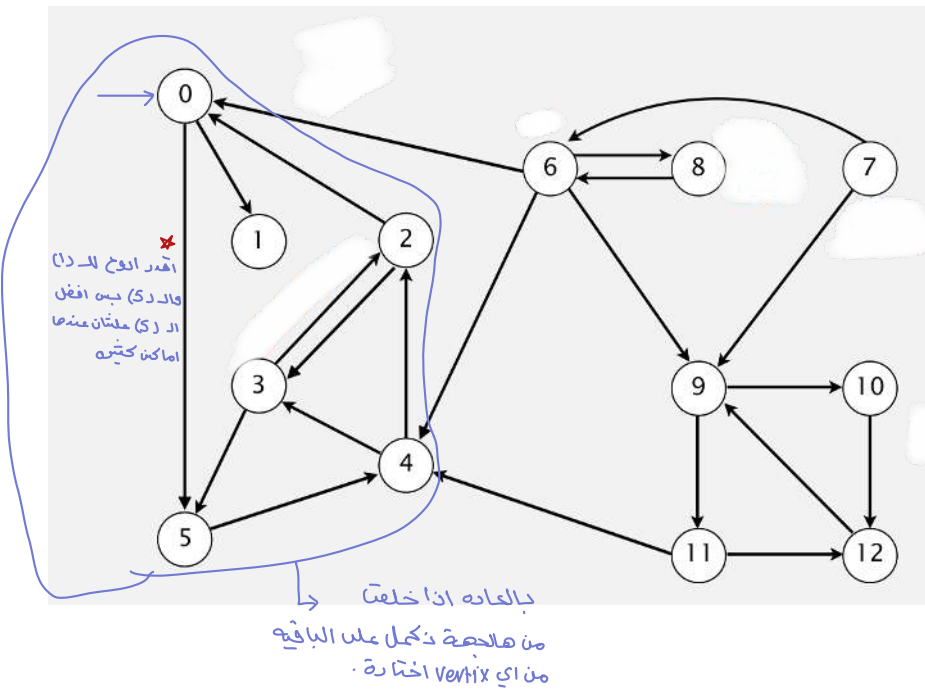

← من حاجة الـ depth الاول

0, 5, 4, 3, 2, 1, 7, 6, 9, 10, 12, 11, 8

اول ما اكتب vertex وجميعه
الكتب الثانيه اكتبهم مع الاول وهكذا


Depth-first search demo → نستخدم الـ stack

To visit a vertex v :

- Mark vertex v as visited.
- Recursively visit all unmarked vertices pointing from v .

2 ← ترجيني له (٥) واجلأ اوديك visited
 3
 4
 5
 1
 0
 back covering
 يرجع للنقطة

0, 1, 5, 4, 3, 2

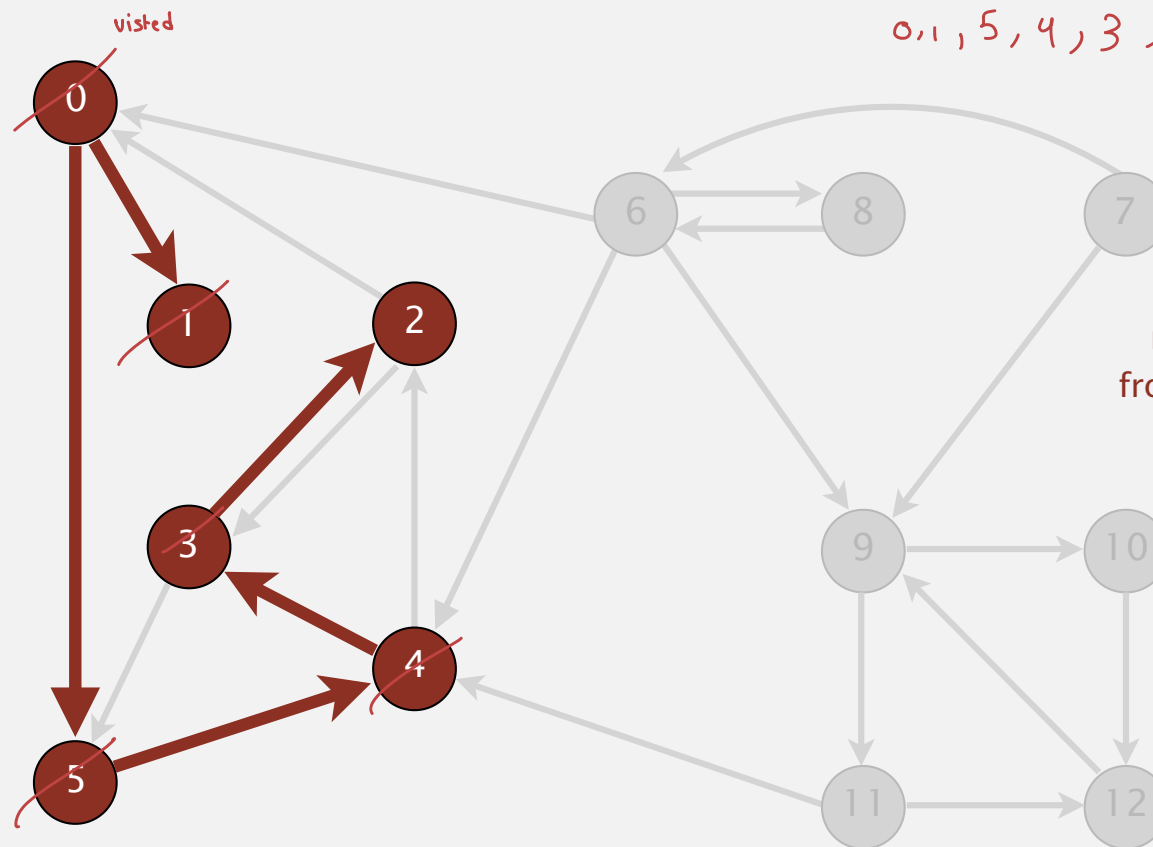

reachable from 0

v	marked[]	edgeTo[]
0	<u>T</u>	—
1	<u>T</u>	0
2	<u>T</u>	3
3	<u>T</u>	4
4	<u>T</u>	<u>5</u>
5	<u>T</u>	<u>0</u>
6	F	—
7	F	—
8	F	—
9	F	—
10	F	—
11	F	—
12	F	—

حلوما بظريقة حبول

Depth-first search (in undirected graphs)

Recall code for **undirected** graphs.

اتجاه الطريق ممكن
استخدم اللابن رايح او اللابن راجع
بانتخابين.

```
public class DepthFirstSearch
{
```

```
    private boolean[] marked;
```

← true if connected to s

```
    public DepthFirstSearch(Graph G, int s)
```

```
    {
```

```
        marked = new boolean[G.V()];
```

← constructor marks
vertices connected to s

```
        dfs(G, s);
```

```
    }
```

```
    private void dfs(Graph G, int v)
```

```
    {
```

```
        marked[v] = true;
```

```
        for (int w : G.adj(v))
```

```
            if (!marked[w]) dfs(G, w);
```

```
    }
```

← recursive DFS does the work

```
    public boolean visited(int v)
```

```
    { return marked[v]; }
```

← client can ask whether any
vertex is connected to s

```
}
```

Depth-first search (in directed graphs)

Code for **directed** graphs identical to undirected one.

[substitute Digraph for Graph]

```
public class DirectedDFS  
{
```

```
    private boolean[] marked;
```

← true if path from s

```
    public DirectedDFS(Digraph G, int s)
```

```
    {
```

```
        marked = new boolean[G.V()];
```

← constructor marks
vertices reachable from s

```
        dfs(G, s);
```

```
    }
```

```
    private void dfs(Digraph G, int v)
```

```
    {
```

```
        marked[v] = true;
```

```
        for (int w : G.adj(v))
```

```
            if (!marked[w]) dfs(G, w);
```

```
    }
```

← recursive DFS does the work

```
    public boolean visited(int v)
```

```
    { return marked[v]; }
```

← client can ask whether any
vertex is reachable from s

```
}
```

Reachability application: program control-flow analysis

Every program is a digraph.


- Vertex = basic block of instructions (straight-line program).
- Edge = jump.

Dead-code elimination.

Find (and remove) unreachable code.

Infinite-loop detection.

Determine whether exit is unreachable.

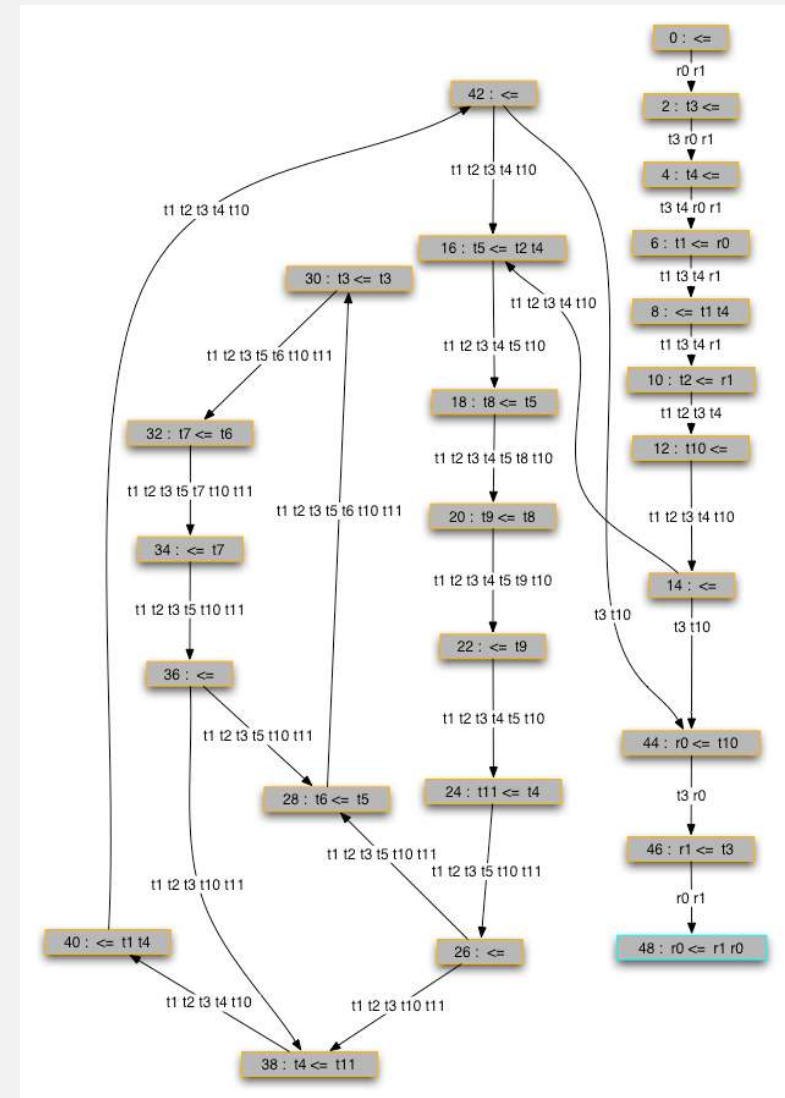


Reachability application: mark-sweep garbage collector

Every data structure is a digraph.

- Vertex = object.
- Edge = reference.

Roots. Objects known to be directly accessible by program (e.g., stack).

Reachable objects. Objects indirectly accessible by program (starting at a root and following a chain of pointers).

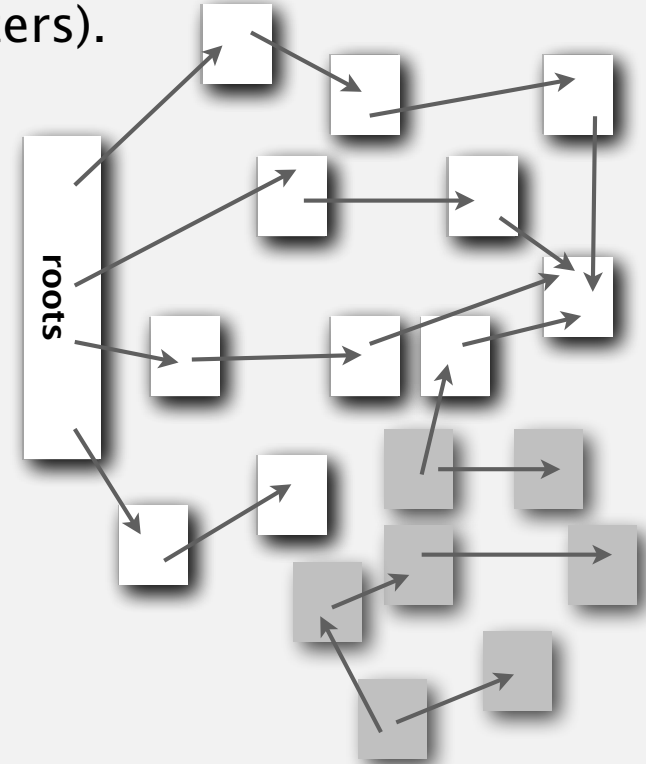


Reachability application: mark-sweep garbage collector

Mark-sweep algorithm. [McCarthy, 1960]

- Mark: mark all reachable objects.
- Sweep: if object is unmarked, it is garbage (so add to free list).

Memory cost. Uses 1 extra mark bit per object (plus DFS stack).

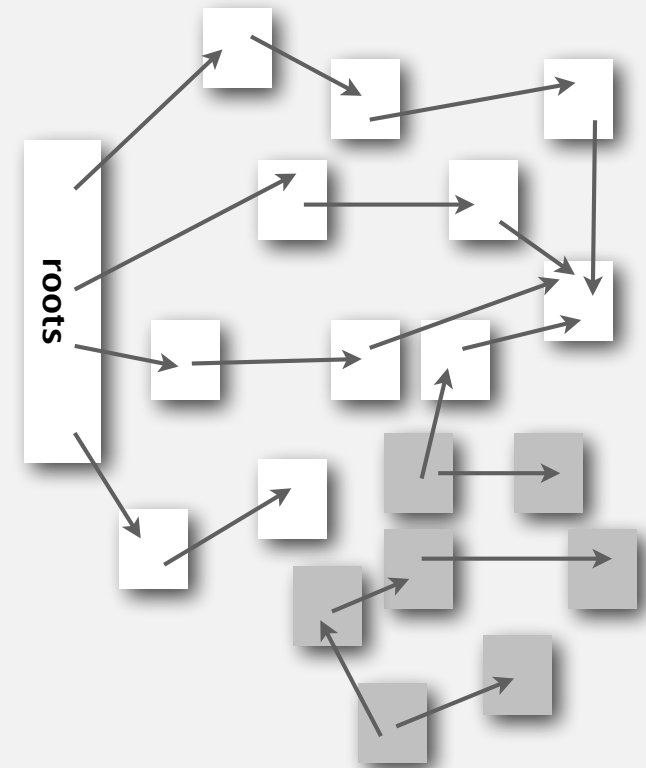

Depth-first search in digraphs summary

DFS enables direct solution of simple digraph problems.

- ✓ • Reachability.
- Path finding. 
- Topological sort.
- Directed cycle detection.

Basis for solving difficult digraph problems.

- 2-satisfiability.
- Directed Euler path.
- Strongly-connected components.

SIAM J. COMPUT.
Vol. 1, No. 2, June 1972

DEPTH-FIRST SEARCH AND LINEAR GRAPH ALGORITHMS*

ROBERT TARJAN†

Abstract. The value of depth-first search or “backtracking” as a technique for solving problems is illustrated by two examples. An improved version of an algorithm for finding the strongly connected components of a directed graph and an algorithm for finding the biconnected components of an undirect graph are presented. The space and time requirements of both algorithms are bounded by $k_1 V + k_2 E + k_3$ for some constants k_1, k_2 , and k_3 , where V is the number of vertices and E is the number of edges of the graph being examined.

Breadth-first search in digraphs

Same method as for undirected graphs.

- Every undirected graph is a digraph (with edges in both directions).
- BFS is a **digraph** algorithm.

كيف بتشتغل ؟ :

بتنظر على الـ Node وبتحطها بالـ Queue :

بعدين بيخده كل الـ (source) الـ لها بالـ Queue يكون Visited .

بتشتغل على الـ Queue

BFS (from source vertex s)

Put s onto a FIFO queue, and mark s as visited.

Repeat until the queue is empty:

- remove the least recently added vertex v
- for each unmarked vertex pointing from v :
add to queue and mark as visited.

Proposition. BFS computes shortest paths (fewest number of edges) from s to all other vertices in a digraph in time proportional to $E + V$.


Directed breadth-first search demo

bfs + use Queue
والاسم يحدد الخيارات

Repeat until queue is empty:



- Remove vertex v from queue.
- Add to queue all unmarked vertices pointing from v and mark them.

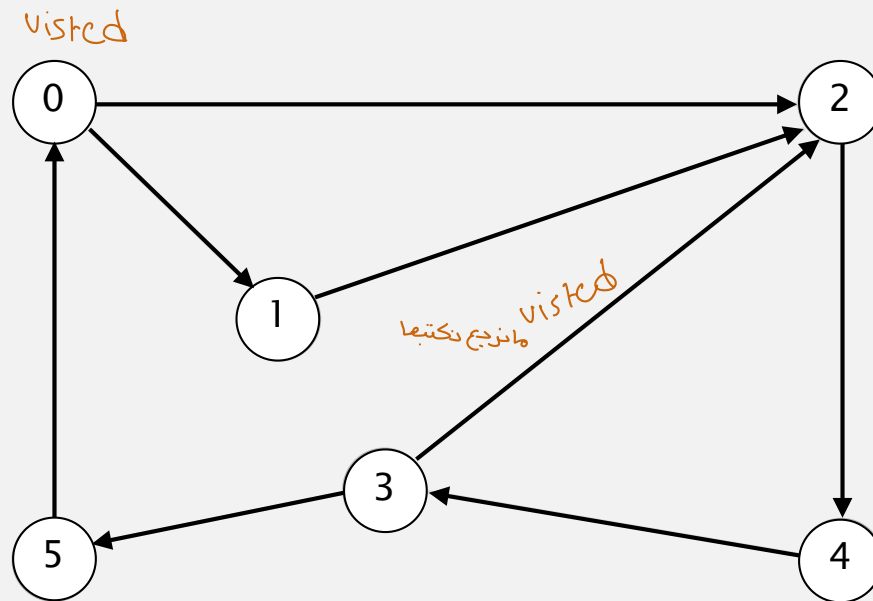

tinyDG2.txt

V → 6

8 ← E

```

5 0
2 4
3 2
1 2
0 1
4 3
3 5
0 2
    
```

graph G


0, 1, 2, 4, 3, 5

0	1	2	4	3	5
---	---	---	---	---	---

Directed breadth-first search demo

Repeat until queue is empty:

- Remove vertex v from queue.
- Add to queue all unmarked vertices pointing from v and mark them.

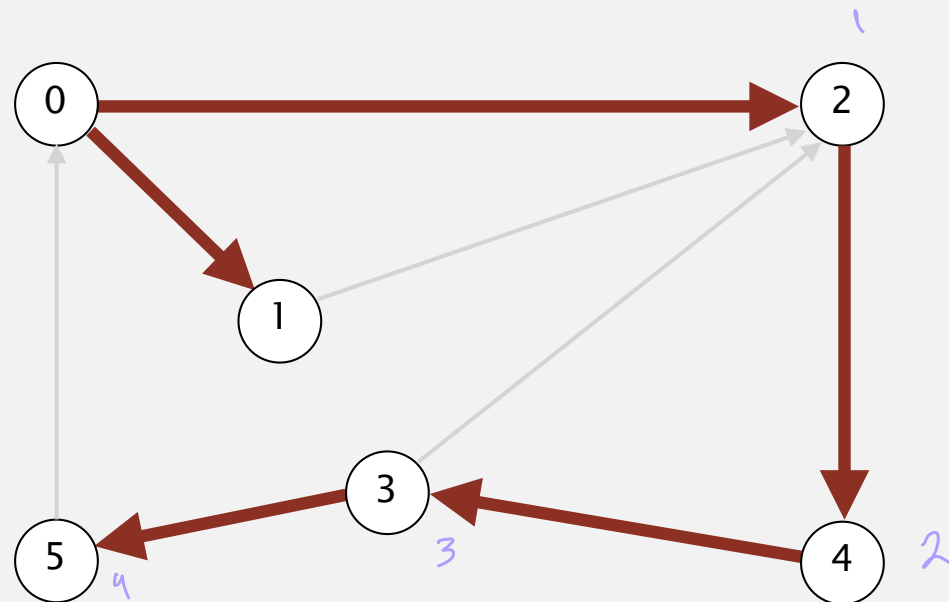

v	edgeTo[]	distTo[]
0	–	0
1	0	1
2	0	1
3	4	3
4	2	2
5	3	4

0, 1, 2, 4, 3, 5

لم يطلعوا وادخل
جيرانها الى هي
الـ (3)

0 1 2 4 3 5
يطلع الصفح
ويدخل كل جيرانها


done

Multiple-source shortest paths

Multiple-source shortest paths. Given a digraph and a **set** of source vertices, find shortest path from any vertex in the set to each other vertex.

Ex. $S = \{ 1, 7, 10 \}$.
مرات يعطيك النقطه الى البدا
منها اكثر من وحدة.

- Shortest path to 4 is $7 \rightarrow 6 \rightarrow 4$.
- Shortest path to 5 is $7 \rightarrow 6 \rightarrow 0 \rightarrow 5$. 3
- Shortest path to 12 is $10 \rightarrow 12$.
- ...

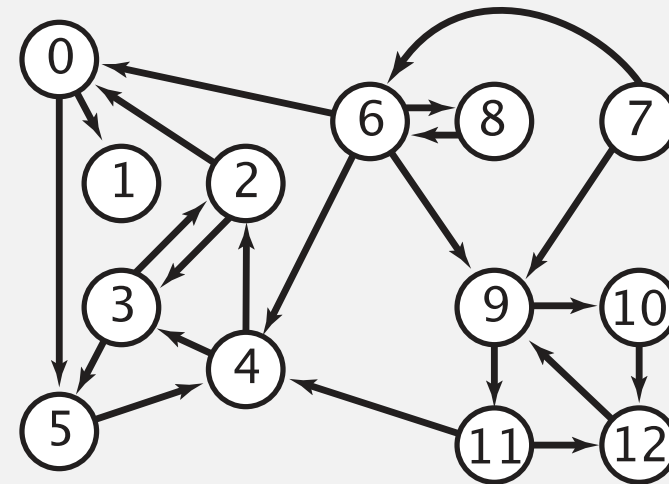


Q. How to implement multi-source shortest paths algorithm?

A. Use BFS, but initialize by enqueueing all source vertices.

Q4. Show the result of **Depth First Search** following directed weighted graph. Consider the **highest weighted edge** for choosing the

بختيار امدن
ثقل او وزن

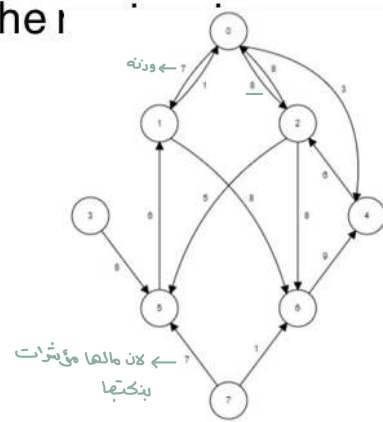

ماحدود بندا من الحفر.

0, 2, 6, 4, 5, 1, 7, 3

3

7 لان عنده وزن اقل

1 لانها خلت الافوكله

5


4

6

2

لان اجي اقول وين خيالات
الحفر

Q5. Show the result of **Breadth First Search** following **directed weighted graph**. Consider the **highest weighted edge** for choosing the next vertex.

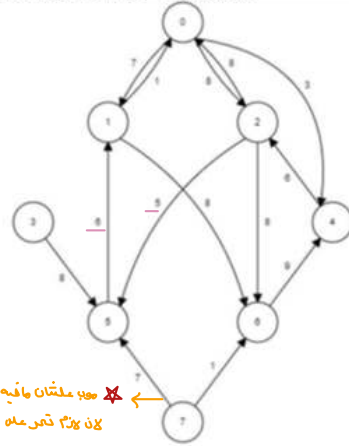

directed weighted :
 تنفیق (صاف و خف)
 صاف و خف (یعنی خف و صاف)
 (یعنی) (صاف و خف)

0, 2, 1, 4, 6, 5, 7, 3

0	2	1	4	6	5	7	3	
---	---	---	---	---	---	---	---	--


Breadth-first search in digraphs application: web crawler

Goal. Crawl web, starting from some root web page, say www.psu.edu.sa

Solution. [BFS with implicit digraph]

- Choose root web page as source s .
- Maintain a Queue of websites to explore.
- Maintain a SET of discovered websites.
- Dequeue the next website and enqueue websites to which it links (provided you haven't done so before).

Q. Why not use DFS?

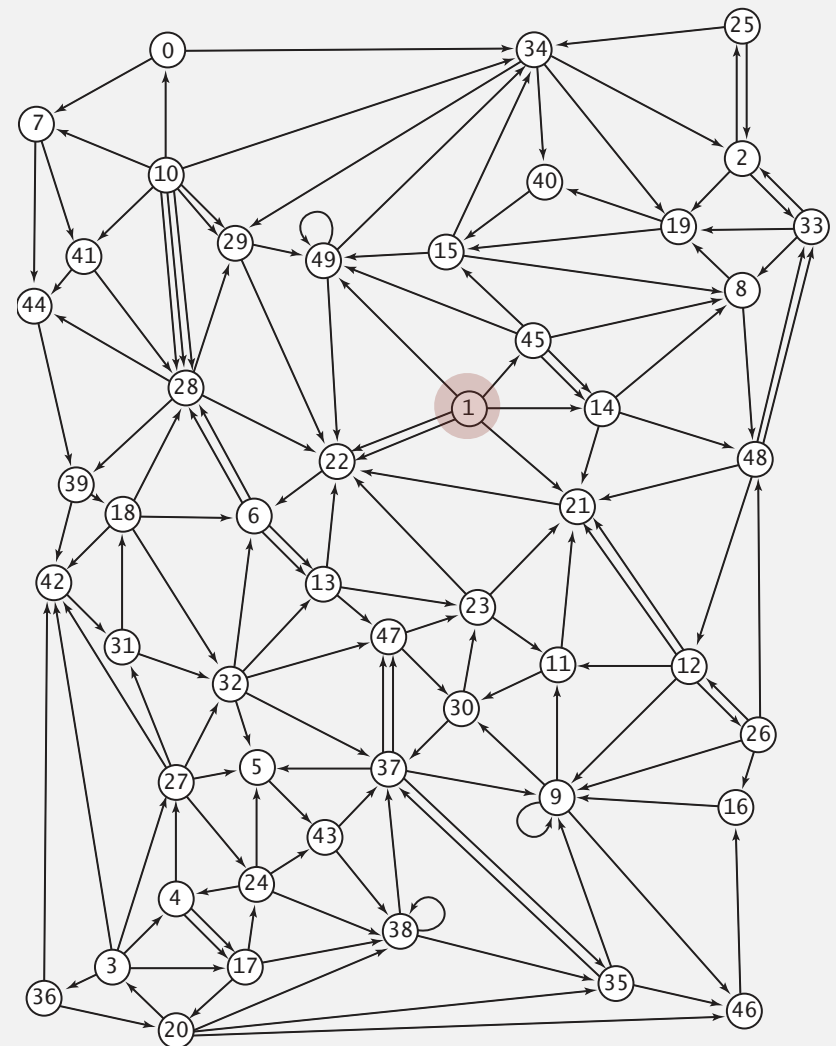

Bare-bones web crawler: Java implementation

```
Queue<String> queue = new Queue<String>();  
SET<String> marked = new SET<String>();
```

← queue of websites to crawl
← set of marked websites

```
String root = "http://www.princeton.edu";  
queue.enqueue(root);  
marked.add(root);
```

← start crawling from root website

```
while (!queue.isEmpty())  
{
```

```
    String v = queue.dequeue();  
    StdOut.println(v);  
    In in = new In(v);  
    String input = in.readAll();
```

← read in raw html from next website in queue

```
    String regexp = "http://(\\w+\\.\\w+)(\\w+)";  
    Pattern pattern = Pattern.compile(regexp);  
    Matcher matcher = pattern.matcher(input);  
    while (matcher.find())  
    {
```

← use regular expression to find all URLs in website of form http://xxx.yyy.zzz [crude pattern misses relative URLs]

```
        String w = matcher.group();  
        if (!marked.contains(w))  
        {  
            marked.add(w);  
            queue.enqueue(w);  
        }
```

← if unmarked, mark it and put on the queue

```
    }  
}
```

Web crawler output

BFS crawl → Queue

```
http://www.princeton.edu
http://www.w3.org
http://ogp.me
http://giving.princeton.edu
http://www.princetonartmuseum.org
http://www.goprincetontigers.com
http://library.princeton.edu
http://helpdesk.princeton.edu
http://tigernet.princeton.edu
http://alumni.princeton.edu
http://gradschool.princeton.edu
http://vimeo.com
http://princetonusg.com
http://artmuseum.princeton.edu
http://jobs.princeton.edu
http://odoc.princeton.edu
http://blogs.princeton.edu
http://www.facebook.com
http://twitter.com
http://www.youtube.com
http://deimos.apple.com
http://qeprize.org
http://en.wikipedia.org
...
```

DFS crawl → Stuck

```
http://www.princeton.edu
http://deimos.apple.com
http://www.youtube.com
http://www.google.com
http://news.google.com
http://csi.gstatic.com
http://googlenewsblog.blogspot.com
http://labs.google.com
http://groups.google.com
http://img1.blogblog.com
http://feeds.feedburner.com
http://buttons.google syndication.com
http://fusion.google.com
http://insidesearch.blogspot.com
http://agoogleaday.com
http://static.googleusercontent.com
http://searchresearch1.blogspot.com
http://feedburner.google.com
http://www.dot.ca.gov
http://www.TahoeRoads.com
http://www.LakeTahoeTransit.com
http://www.laketahoe.com
http://ethel.tahoeguide.com
...
```



<http://algs4.cs.princeton.edu>

4.2 DIRECTED GRAPHS

- *introduction*
- *digraph API*
- *digraph search*
- *topological sort* → يرتب على حسب الزمن
- *strong components*

Precedence scheduling → go inorder


Goal. Given a set of tasks to be completed with precedence constraints, in which order should we schedule the tasks?

أهمية وحدة على وحدة

Digraph model. vertex = task; edge = precedence constraint.


0. Algorithms
1. Complexity Theory
2. Artificial Intelligence
3. Intro to CS
4. Cryptography
5. Scientific Computing
6. Advanced Programming

tasks

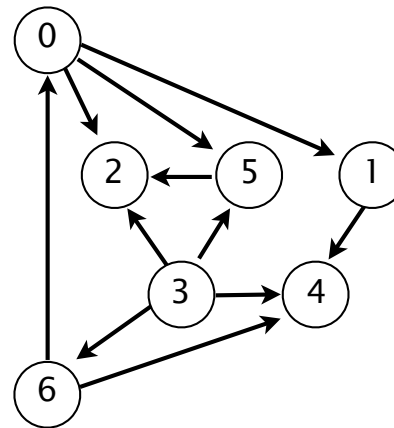

precedence constraint graph

١- ما فيه ولا سم ينزل تحت .
٢- ما فيها (cycle) يضل دويبة .

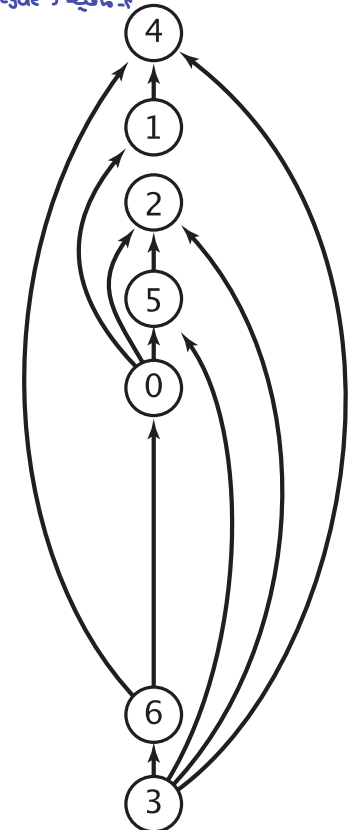

feasible schedule


Topological sort

DAG. Directed ^{no ↗} acyclic graph.


Topological sort. Redraw DAG so all edges ^{كلهم ياتشروا فوق ↗} point upwards.

0→5 0→2
0→1 3→6
3→5 3→4
5→2 6→4
6→0 3→2
1→4

directed edges

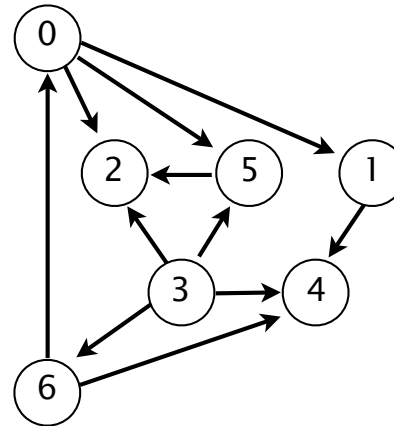

DAG

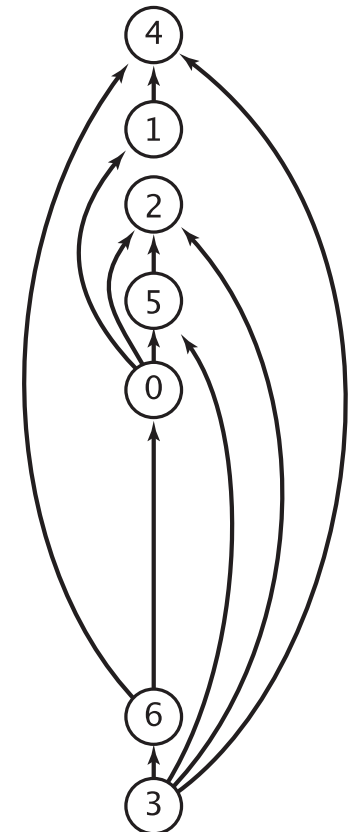

topological order


Solution. ^{how to find it ↗} DFS. What else?

Topological sort demo

- Run depth-first search.
- Return vertices in reverse postorder.



— نبدأ بـ 0 ولا يوجد لها (in)
— بعد ذلك نسير في close
بشكل متكرر.
— ونرجع للرقم التالي قبله خوف فيه
حلق ولا متيعة

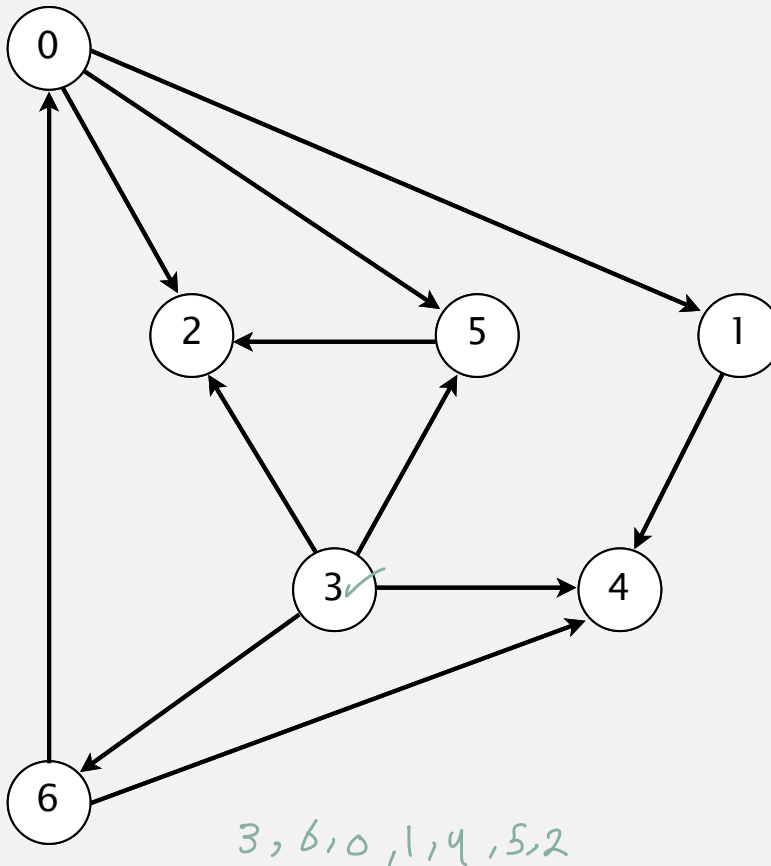

a directed acyclic graph

tinyDAG7.txt

```
7
11
0 5
0 2
0 1
3 6
3 5
3 4
5 2
6 4
6 0
3 2
```


على حسب ال reverse : Post
تبعاً : 4 2 5 0 6 3

← 3 6 0 5 2 1 4 مع بعد على حسب الرقم

2
5
close ← 4
1
0
6
3

Topological sort demo

- Run depth-first search.
- Return vertices in reverse postorder.

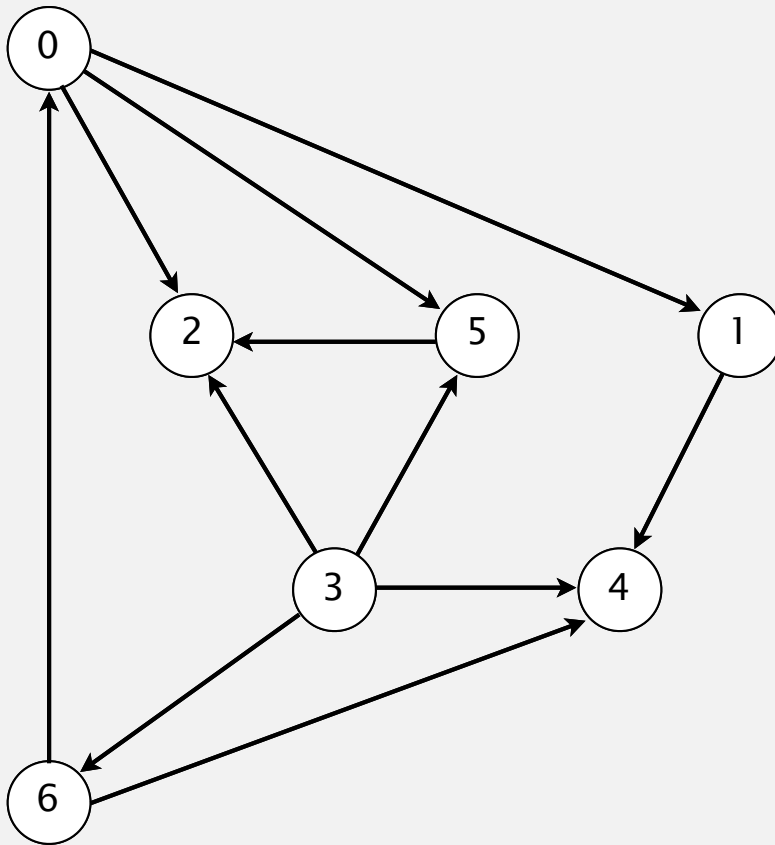

postorder

4 1 2 5 0 6 3

topological order

3 6 0 5 2 1 4

done

Depth-first search order

```
public class DepthFirstOrder
{
    private boolean[] marked;
    private Stack<Integer> reversePostorder;

    public DepthFirstOrder(Digraph G)
    {
        reversePostorder = new Stack<Integer>();
        marked = new boolean[G.V()];
        for (int v = 0; v < G.V(); v++)
            if (!marked[v]) dfs(G, v);
    }

    private void dfs(Digraph G, int v)
    {
        marked[v] = true;
        for (int w : G.adj(v))
            if (!marked[w]) dfs(G, w);
        reversePostorder.push(v);
    }

    public Iterable<Integer> reversePostorder()
    { return reversePostorder; }
}
```


پیکونوا معکوسین باد stack
لازم اقلیم علشان یصلعون مغیوبین

returns all vertices in
"reverse DFS postorder"

Topological sort in a DAG: intuition

Why does topological sort algorithm work?

- First vertex in ^{پہلے گھونٹ} postorder has outdegree 0.
- Second-to-last vertex in postorder can only point to last vertex.
- ...

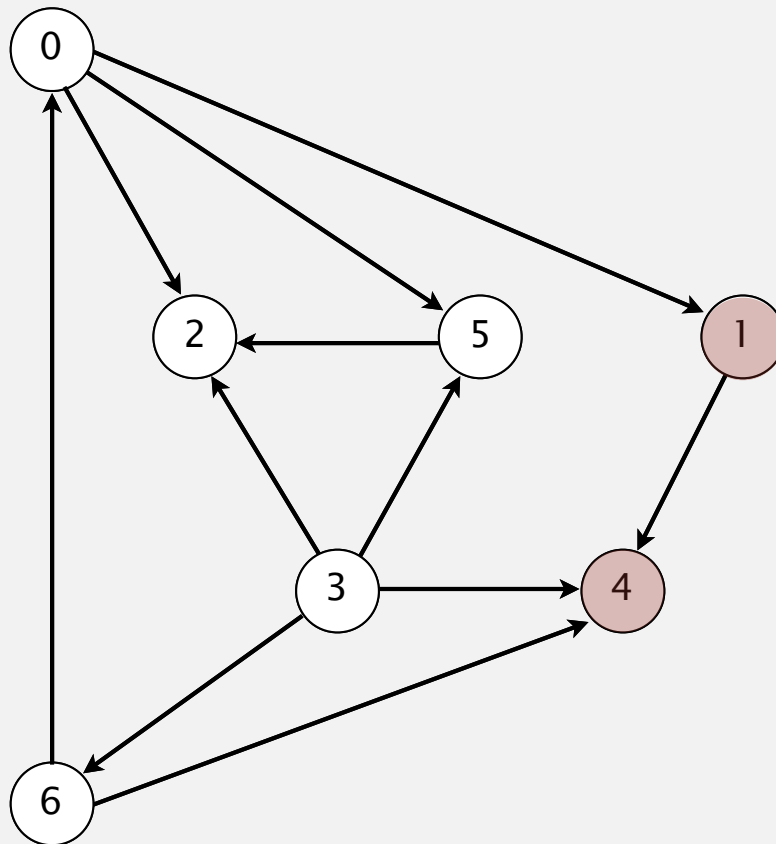

postorder

4 1 2 5 0 6 3

الیکس تمام

topological order


3 6 0 5 2 1 4

Topological sort in a DAG: correctness proof

Proposition. Reverse DFS postorder of a DAG is a topological order.

Pf. Consider any edge $v \rightarrow w$. When $\text{dfs}(v)$ is called:

- Case 1: $\text{dfs}(w)$ has already been called and returned.
Thus, w was done before v .
- Case 2: $\text{dfs}(w)$ has not yet been called.
 $\text{dfs}(w)$ will get called directly or indirectly
by $\text{dfs}(v)$ and will finish before $\text{dfs}(v)$.
Thus, w will be done before v .
- Case 3: $\text{dfs}(w)$ has already been called,
but has not yet returned.
Can't happen in a DAG: function call stack contains
path from w to v , so $v \rightarrow w$ would complete a cycle.

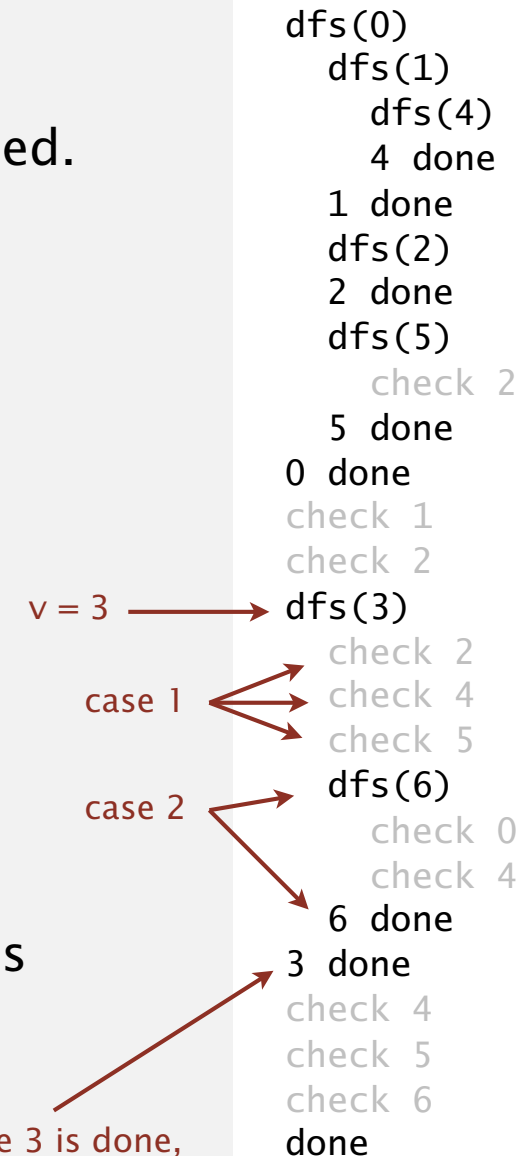

all vertices pointing from 3 are done before 3 is done,
so they appear after 3 in topological order


Directed cycle detection

Proposition. A digraph has a topological order iff no directed cycle.

Pf.

- If directed cycle, topological order impossible.
- If no directed cycle, DFS-based algorithm finds a topological order.

*Same vertex

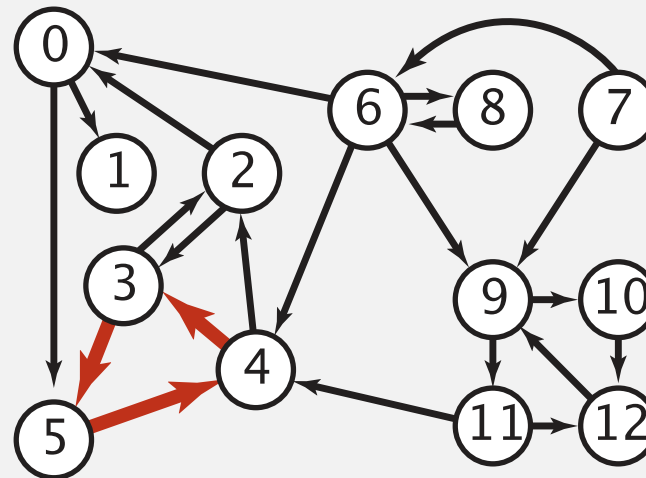

a digraph with a directed cycle

Goal. Given a digraph, find a directed cycle.

Solution. DFS. What else? See textbook.

Directed cycle detection application: precedence scheduling

Scheduling. Given a set of tasks to be completed with precedence constraints, in what order should we schedule the tasks?

PAGE 3

DEPARTMENT	COURSE	DESCRIPTION	PREREQS
COMPUTER SCIENCE	CPSC 432	INTERMEDIATE COMPILER DESIGN, WITH A FOCUS ON DEPENDENCY RESOLUTION.	CPSC 432

<http://xkcd.com/754>

Remark. A directed cycle implies scheduling problem is infeasible.

Directed cycle detection application: cyclic inheritance

The Java compiler does cycle detection.

```
public class A extends B
{
    ...
}
```


```
public class B extends C
{
    ...
}
```

```
public class C extends A
{
    ...
}
```

```
% javac A.java
A.java:1: cyclic inheritance
involving A
public class A extends B { }
                ^
1 error
```

Directed cycle detection application: spreadsheet recalculation

Microsoft Excel does cycle detection (and has a circular reference toolbar!)

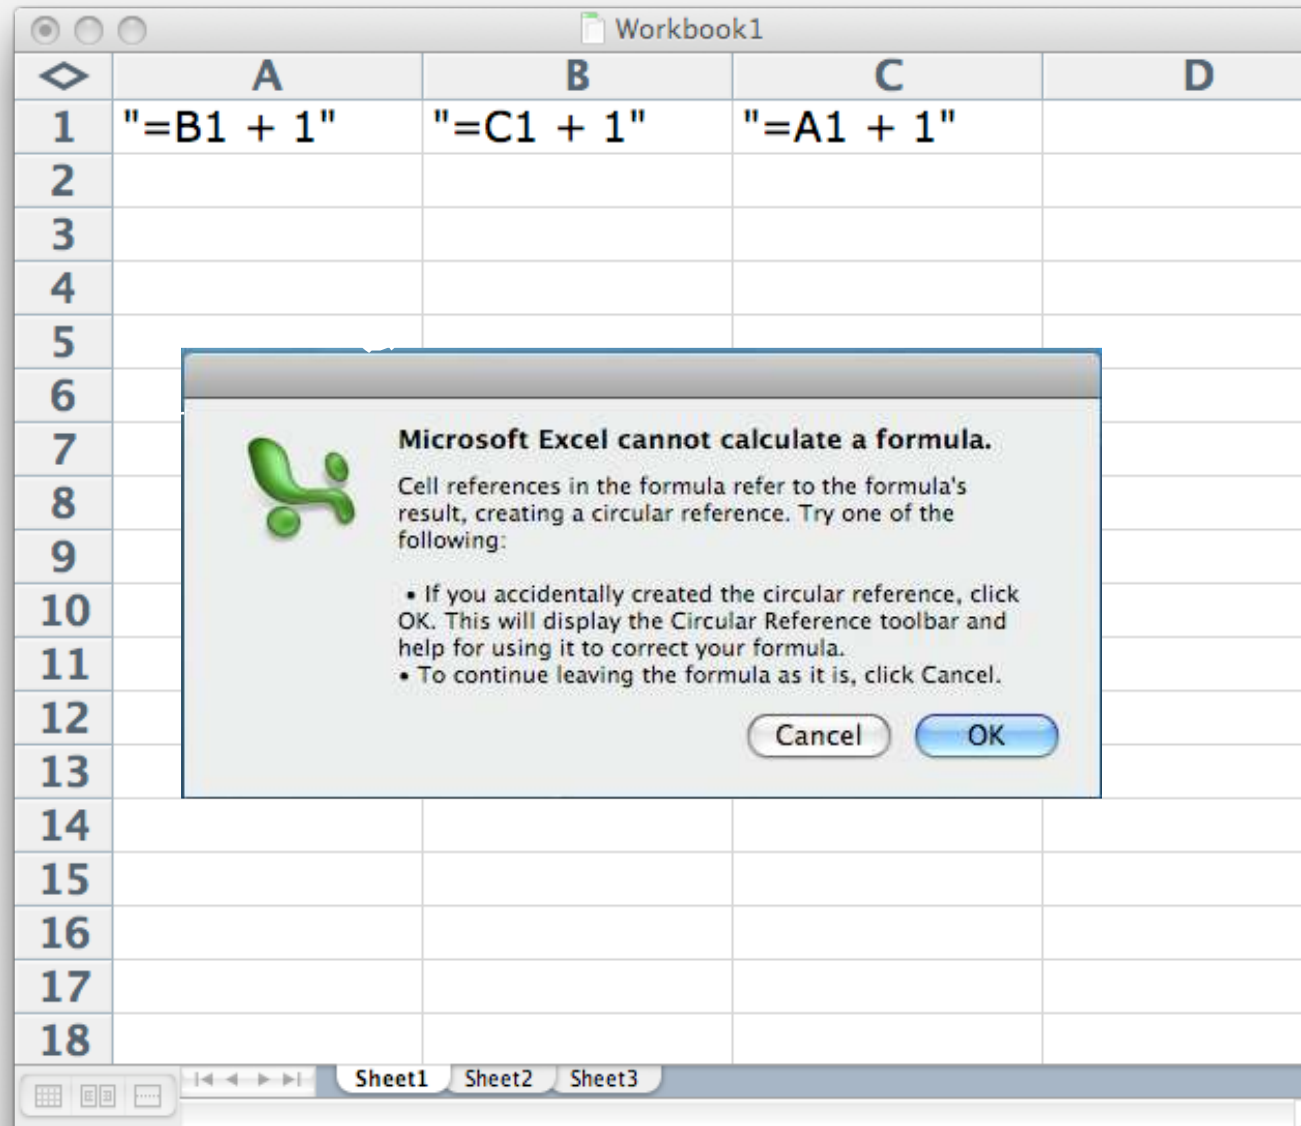

Depth-first search orders

Observation. DFS visits each vertex exactly once. The order in which it does so can be important.

Orderings.

- Preorder: order in which `dfs()` is called.
- Postorder: order in which `dfs()` returns.
- Reverse postorder: reverse order in which `dfs()` returns.

```
private void dfs(Graph G, int v)
{
    marked[v] = true;
    preorder.enqueue(v);
    for (int w : G.adj(v))
        if (!marked[w]) dfs(G, w);
    postorder.enqueue(v);
    reversePostorder.push(v);
}
```



<http://algs4.cs.princeton.edu>

4.2 DIRECTED GRAPHS

- ▶ *introduction*
- ▶ *digraph API*
- ▶ *digraph search*
- ▶ *topological sort*
- ▶ *strong components*

Strongly-connected components كلمة مربوطين ببعض


Def. Vertices v and w are **strongly connected** if there is both a directed path from v to w **and** a directed path from w to v .

Key property. Strong connectivity is an **equivalence relation**:

- v is strongly connected to v .
- If v is strongly connected to w , then w is strongly connected to v .
- If v is strongly connected to w and w to x , then v is strongly connected to x .

Def. A **strong component** is a maximal subset of strongly-connected vertices.

runtime $O(V+E)$

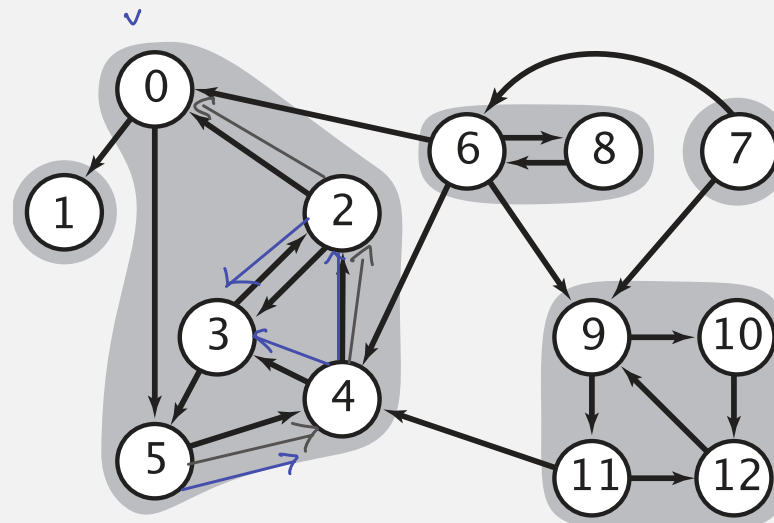


5 strongly-connected components

اي شي
عقبه صوبه معنا

Connected components vs. strongly-connected components

v and w are **connected** if there is a path between v and w

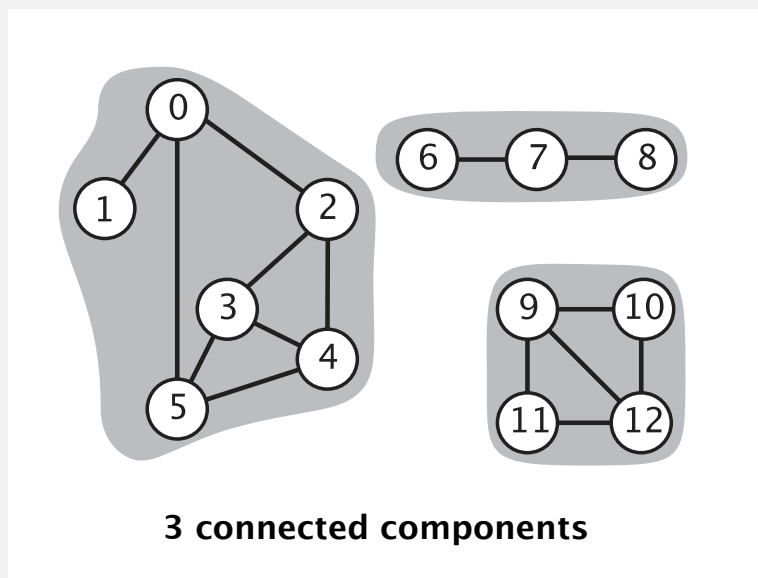

connected component id (easy to compute with DFS)


	0	1	2	3	4	5	6	7	8	9	10	11	12
id[]	0	0	0	0	0	0	1	1	1	2	2	2	2

```
public boolean connected(int v, int w)
{ return id[v] == id[w]; }
```

constant-time client connectivity query

كل وحدة موجوده توصل للثانيه

v and w are **strongly connected** if there is both a directed path from v to w and a directed path from w to v

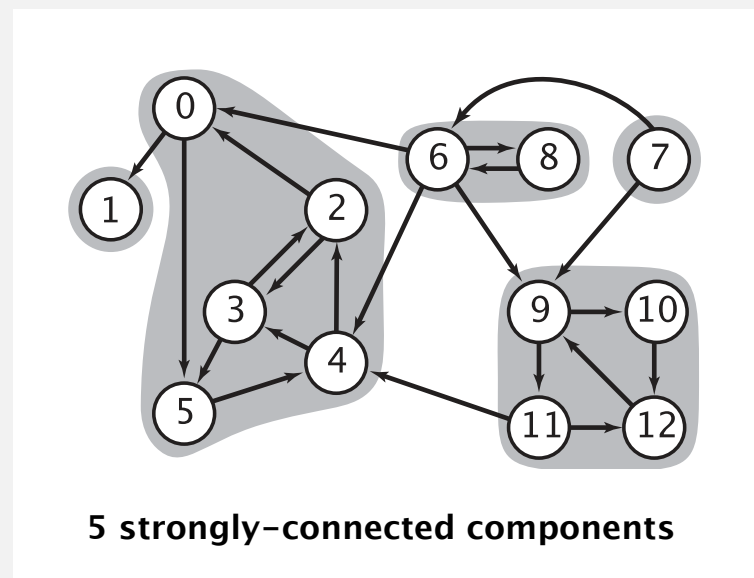

strongly-connected component id (how to compute?)

	0	1	2	3	4	5	6	7	8	9	10	11	12
id[]	1	0	1	1	1	1	3	4	3	2	2	2	2

yes b/c they have same id


no!

```
public boolean stronglyConnected(int v, int w)
{ return id[v] == id[w]; }
```

constant-time client strong-connectivity query

X Strong component application: ecological food webs

Food web graph. Vertex = species; edge = from producer to consumer.

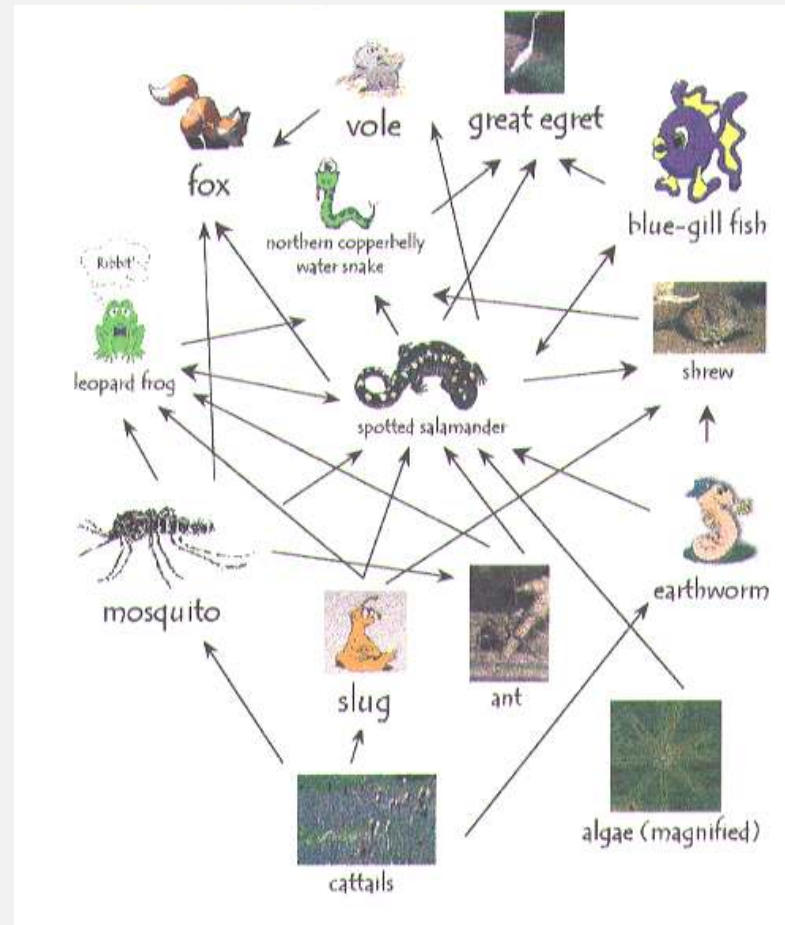

<http://www.twingroves.district96.k12.il.us/Wetlands/Salamander/SalGraphics/salfoodweb.gif>

Strong component. Subset of species with common energy flow.

X Strong components algorithms: brief history

1960s: Core OR problem.

- Widely studied; some practical algorithms.
- Complexity not understood.

1972: linear-time DFS algorithm (Tarjan).

- Classic algorithm.
- Level of difficulty: Algs4++.
- Demonstrated broad applicability and importance of DFS.

1980s: easy two-pass linear-time algorithm (Kosaraju-Sharir).

- Forgot notes for lecture; developed algorithm in order to teach it!
- Later found in Russian scientific literature (1972).

1990s: more easy linear-time algorithms.

- Gabow: fixed old OR algorithm.
- Cheriyan-Mehlhorn: needed one-pass algorithm for LEDA.

X Kosaraju-Sharir algorithm: intuition


Reverse graph. Strong components in G are same as in G^R .

Kernel DAG. Contract each strong component into a single vertex.


Idea.

- Compute topological order (reverse postorder) in kernel DAG.
- Run DFS, considering vertices in reverse topological order.

how to compute?

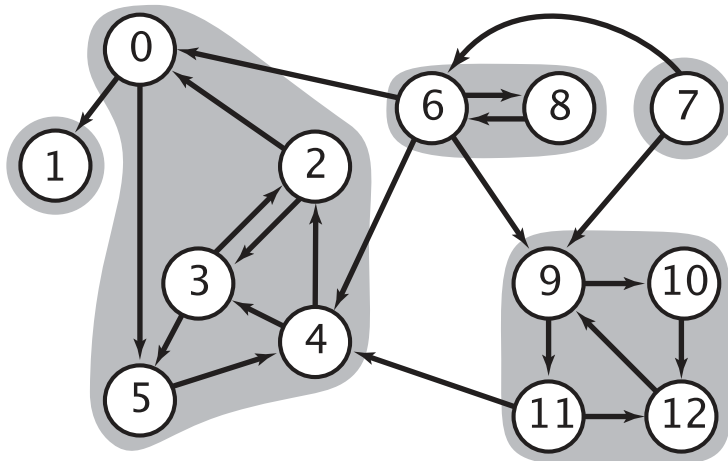

digraph G and its strong components

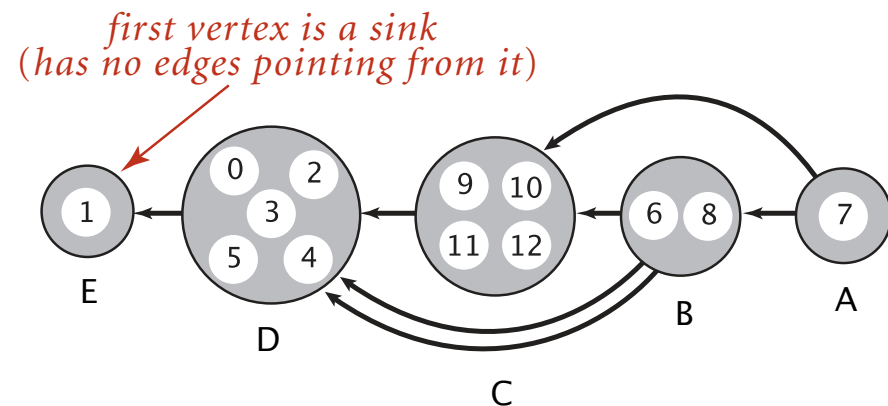


kernel DAG of G (topological order: A B C D E)

X Kosaraju-Sharir algorithm demo

Phase 1. Compute reverse postorder in G^R .

Phase 2. Run DFS in G , visiting unmarked vertices in reverse postorder of G^R .

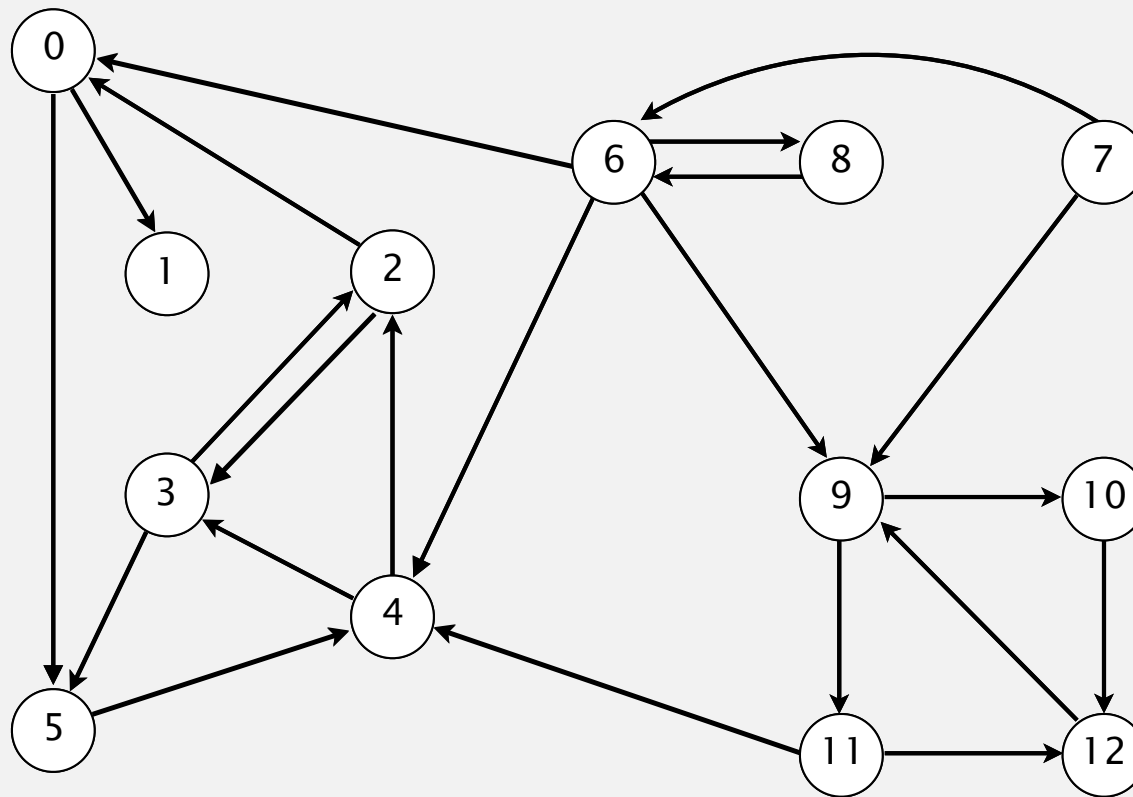


digraph G



X Kosaraju-Sharir algorithm demo

Phase 1. Compute reverse postorder in G^R .

1 0 2 4 5 3 11 9 12 10 6 7 8

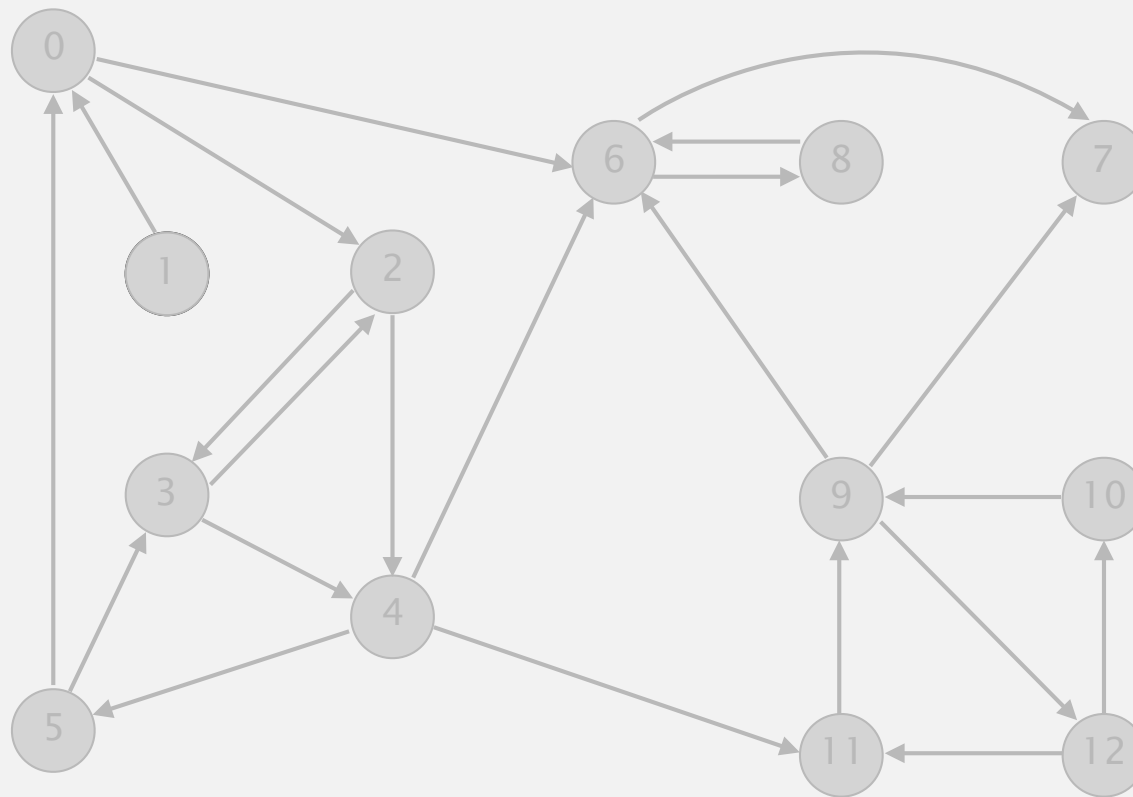


reverse digraph G^R

X Kosaraju-Sharir algorithm demo

Phase 2. Run DFS in G , visiting unmarked vertices in reverse postorder of G^R .

1 0 2 4 5 3 11 9 12 10 6 7 8

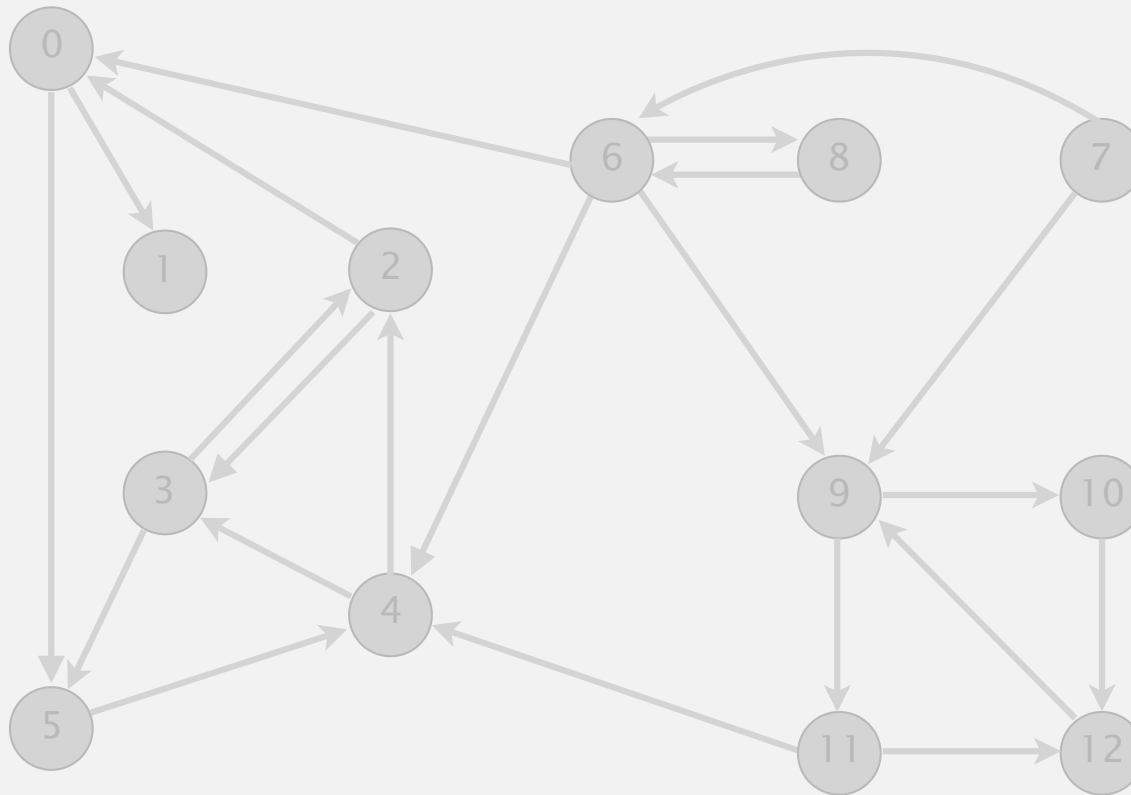

v	id[]
0	1
1	0
2	1
3	1
4	1
5	1
6	3
7	4
8	3
9	2
10	2
11	2
12	2

done




Kosaraju-Sharir algorithm


Simple (but mysterious) algorithm for computing strong components.

- Phase 1: run DFS on G^R to compute reverse postorder.
- Phase 2: run DFS on G , considering vertices in order given by first DFS.

DFS in reverse digraph G^R

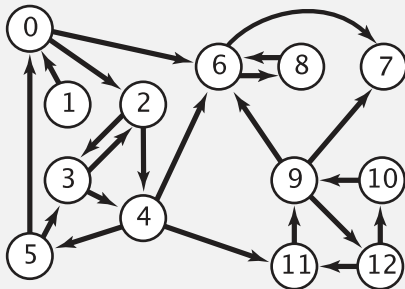

check unmarked vertices in the order
0 1 2 3 4 5 6 7 8 9 10 11 12

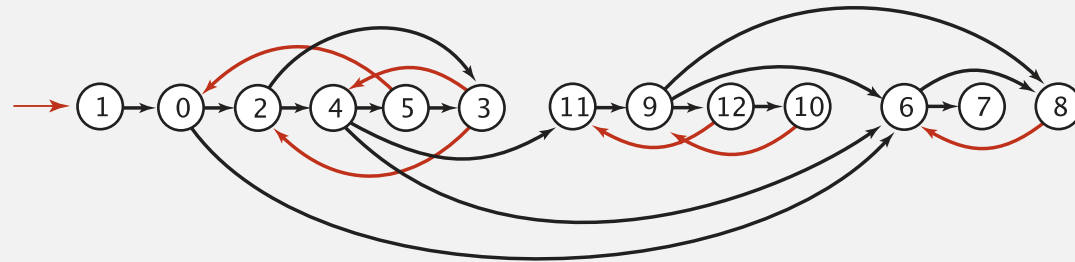

reverse postorder for use in second dfs()
1 0 2 4 5 3 11 9 12 10 6 7 8

```
dfs(0)
|
| dfs(6)
| | dfs(8)
| | | check 6
| | | 8 done
| | | dfs(7)
| | | 7 done
| | 6 done
| | dfs(2)
| | | dfs(4)
| | | | dfs(11)
| | | | | dfs(9)
| | | | | | dfs(12)
| | | | | | | check 11
| | | | | | | dfs(10)
| | | | | | | | check 9
| | | | | | | 10 done
| | | | | 12 done
| | | | check 7
| | | check 6
```


...

X


~~Simple (but mysterious) algorithm for computing strong components.~~

- Phase 1: run DFS on G^R to compute reverse postorder.
- Phase 2: run DFS on G , considering vertices in order given by first DFS.

DFS in original digraph G

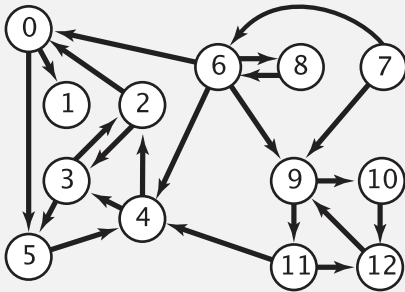

check unmarked vertices in the order
1 0 2 4 5 3 11 9 12 10 6 7 8

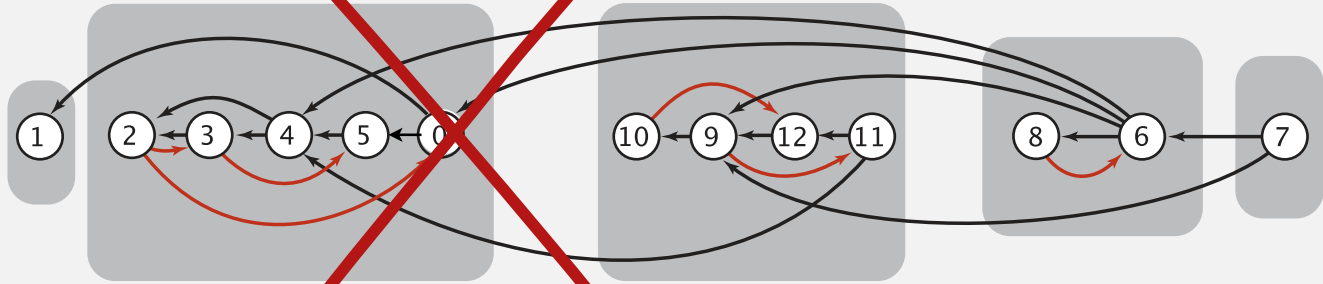

```
dfs(1)
1 done
```

```

dfs(0)
  dfs(5)
    dfs(4)
      dfs(3)
        check 5
        dfs(2)
          check 0
          check 3
          2 done
          3 done
          check 2
          4 done
          5 done
          check 1
        0 done
      check 2
      check 4
      check 5
      check 3

```

```

dfs(11)
|  check 4
|  dfs(12)
|  |  dfs(9)
|  |  |  check 11
|  |  |  |  dfs(10)
|  |  |  |  |  check 12
|  |  |  |  |  10 done
|  |  |  |  9 done
|  |  |  12 done
|  11 done
|  check 9
|  check 12
|  check 10

```

```
dfs(6)
| check 9
| check 4
| dfs(8)
| | check 6
| | 8 done
| | check 0
| 6 done
```

```
dfs(7)
|  check 6
|  check 9
7  done
check 8
```

X Kosaraju-Sharir algorithm

Proposition. Kosaraju-Sharir algorithm computes the strong components of a digraph in time proportional to $E + V$.

Pf.

- Running time: bottleneck is running DFS twice (and computing G^R).
- Correctness: tricky, see textbook (2nd printing).
- Implementation: easy!

Connected components in an undirected graph (with DFS)

```
public class CC
{
    private boolean marked[];
    private int[] id;
    private int count;

    public CC(Graph G)
    {
        marked = new boolean[G.V()];
        id = new int[G.V()];

        for (int v = 0; v < G.V(); v++)
        {
            if (!marked[v])
            {
                dfs(G, v);
                count++;
            }
        }
    }

    private void dfs(Graph G, int v)
    {
        marked[v] = true;
        id[v] = count;
        for (int w : G.adj(v))
            if (!marked[w])
                dfs(G, w);
    }

    public boolean connected(int v, int w)
    { return id[v] == id[w]; }
}
```

Strong components in a digraph (with two DFSs)

```
public class KosarajuSharirSCC
{
    private boolean marked[];
    private int[] id;
    private int count;


    public KosarajuSharirSCC(Digraph G)
    {
        marked = new boolean[G.V()];
        id = new int[G.V()];
        DepthFirstOrder dfs = new DepthFirstOrder(G.reverse());
        for (int v : dfs.reversePostorder())
        {
            if (!marked[v])
            {
                dfs(G, v);
                count++;
            }
        }
    }

    private void dfs(Digraph G, int v)
    {
        marked[v] = true;
        id[v] = count;
        for (int w : G.adj(v))
            if (!marked[w])
                dfs(G, w);
    }

    public boolean stronglyConnected(int v, int w)
    { return id[v] == id[w]; }
}
```


Digraph-processing summary: algorithms of the day

**single-source
reachability
in a digraph**

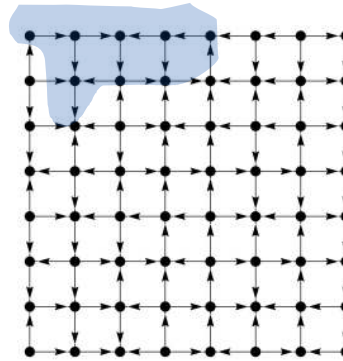


DFS

**topological sort
in a DAG**

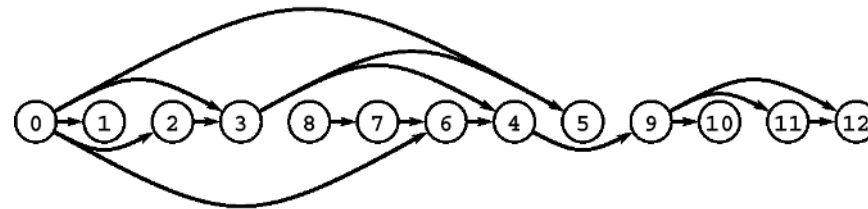

DFS

**strong
components
in a digraph**

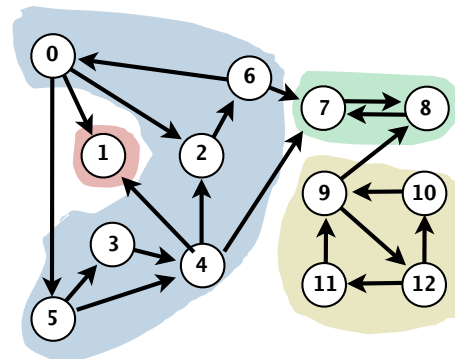

Kosaraju-Sharir
DFS (twice)