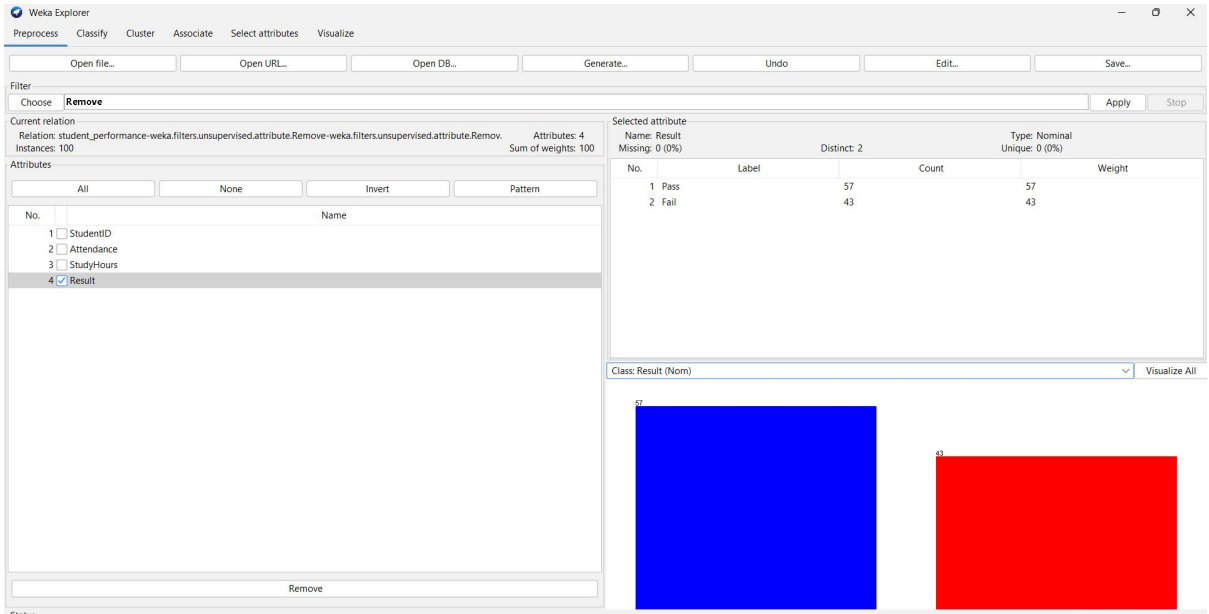
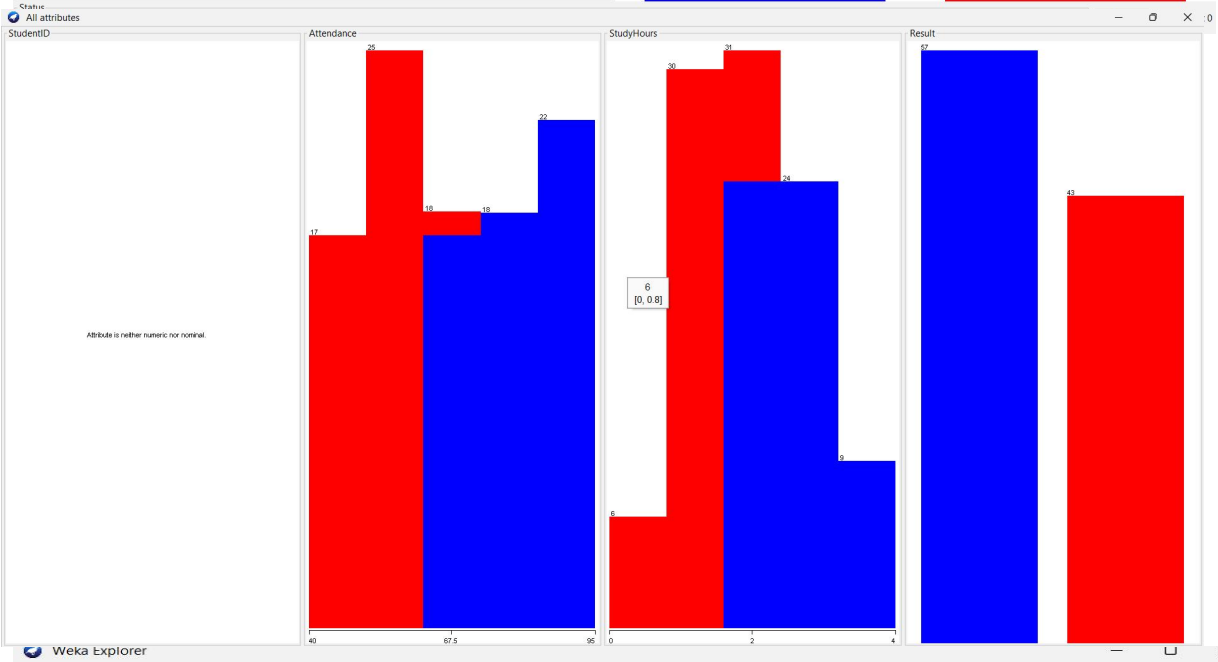
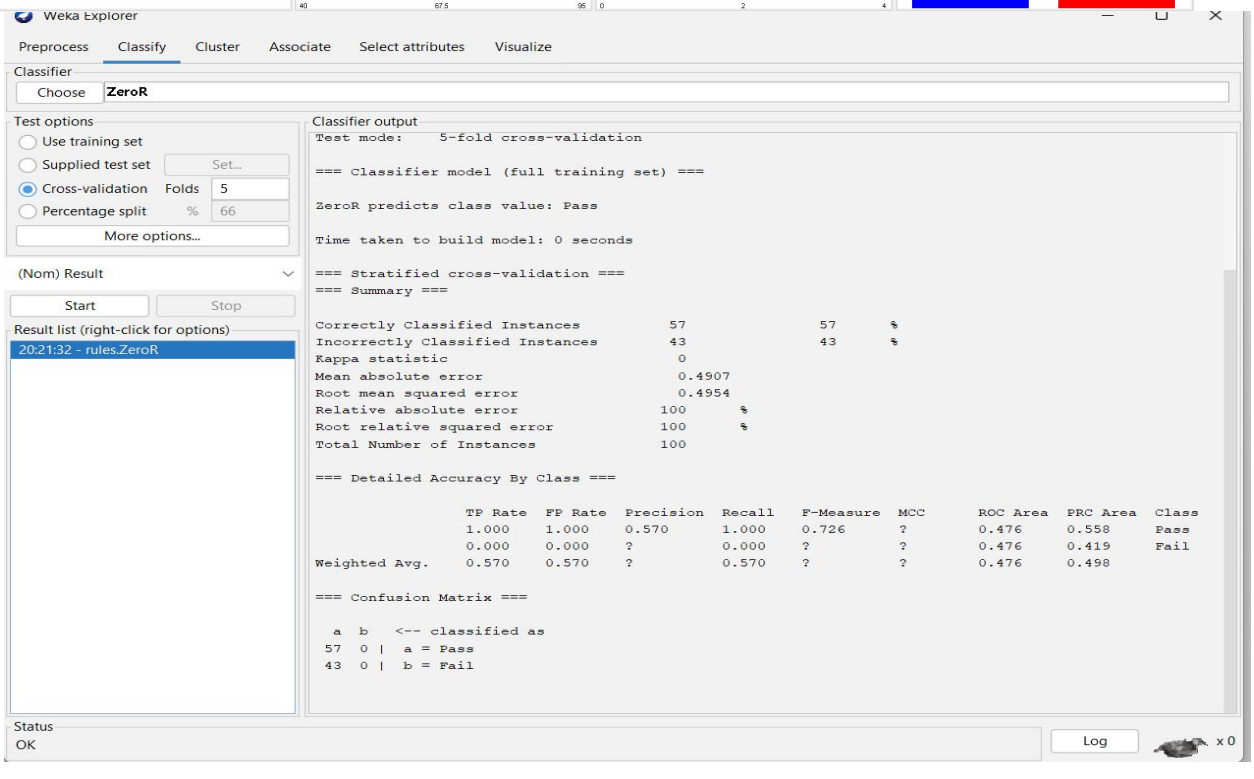

Weka Explorer
Preprocess
Classify
Cluster
Associate
Select attributes
Visualize
Open file...
Open URL...
Open DB...
Generate...
Undo
Edit...
Save...
Filter
Choose
Remove
Apply
Stop
Current relation
Relation: student_performance-weka.filters.unsupervised.attribute.Remove-weka.filters.unsupervised.attribute.Remov.
Instances: 100
Attributes: 4
Sum of weights: 100
Attributes
All
None
Invert
Pattern
No.
Name
1 StudentID
2 Attendance
3 StudyHours
4 Result
Remove
Selected attribute
Name: Result
Missing: 0 (0%)
Distinct: 2
Type: Nominal
Unique: 0 (0%)
No.
Label
Count
Weight
1 Pass
57
57
2 Fail
43
43
Class: Result (Nom)
Visualize All
57
43


All attributes
StudentID
Attendance
StudyHours
Result
Attribute is neither numeric nor nominal.
25
17
18
18
22
40
67.5
95
31
30
24
6
6
[0, 0.8]
0
2
4
57
43


Weka Explorer
Preprocess
Classify
Cluster
Associate
Select attributes
Visualize
Classifier
Choose
ZeroR
Test options
Use training set
Supplied test set
Set...
Cross-validation
Folds
5
Percentage split
%
66
More options...
(Nom) Result
Start
Stop
Result list (right-click for options)
20:21:32 - rules.ZeroR
Classifier output
Test mode: 5-fold cross-validation
=== Classifier model (full training set) ===
ZeroR predicts class value: Pass
Time taken to build model: 0 seconds
=== Stratified cross-validation ===
=== Summary ===
Correctly Classified Instances 57 57 %
Incorrectly Classified Instances 43 43 %
Kappa statistic 0
Mean absolute error 0.4907
Root mean squared error 0.4954
Relative absolute error 100 %
Root relative squared error 100 %
Total Number of Instances 100
=== Detailed Accuracy By Class ===
TP Rate FP Rate Precision Recall F-Measure MCC ROC Area PRC Area Class
1.000 1.000 0.570 1.000 0.726 ? 0.476 0.558 Pass
0.000 0.000 ? 0.000 ? ? 0.476 0.419 Fail
Weighted Avg. 0.570 0.570 ? 0.570 ? ? 0.476 0.498
=== Confusion Matrix ===
a b <-- classified as
57 0 | a = Pass
43 0 | b = Fail
Status
OK
Log
x 0