

Hybrid Images and Image Enhancement

CMPT-888

Shreeasish Kumar

ska196@sfu.ca

Hybrid Images


As described in the [paper](#) by Olivia, Torralba, and Schyns, hybrid images are static images the interpretation of which changes as a function of the viewing distance.

In particular, the high spatial frequencies in an image are more visible to the human eye upclose while the low spatial frequencies take precedence when further away from the image.

I have leveraged this intuition to produce the hybrid images.

The original images (shown below) were selected on the basis of their high frequency and low frequency components.

Starbucks Logo (Low frequency) & Light Through Branches (High Frequency)

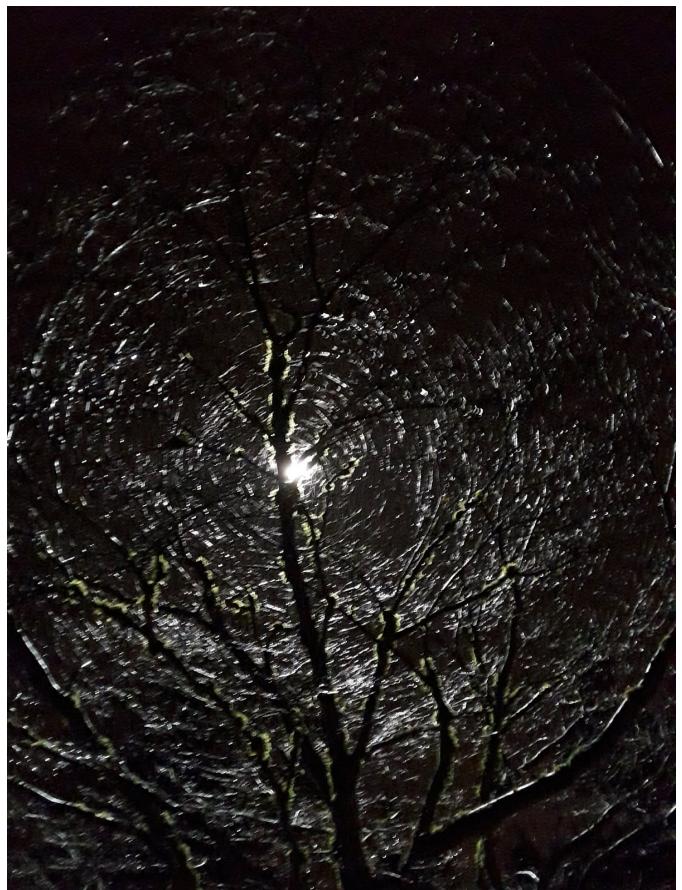

The light from a lamppost photographed through a barren tree provides an image with high frequencies. Notice how it creates a circular pattern.

Two versions of the result are shown below. The process used to produce the result is described further below.

Final Result

Without Color

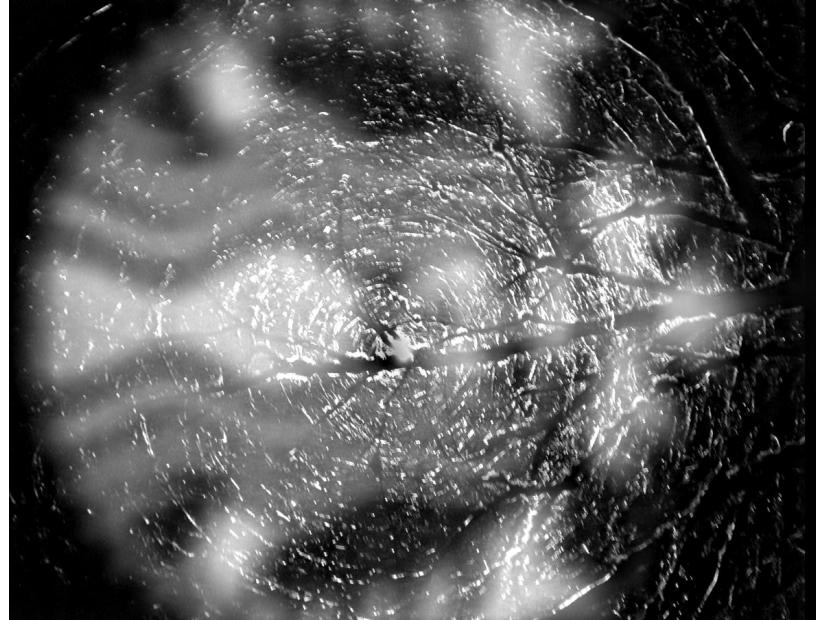


Image 3: The image of the trees is apparent from close and the Starbucks logo becomes evident from a distance

With Color

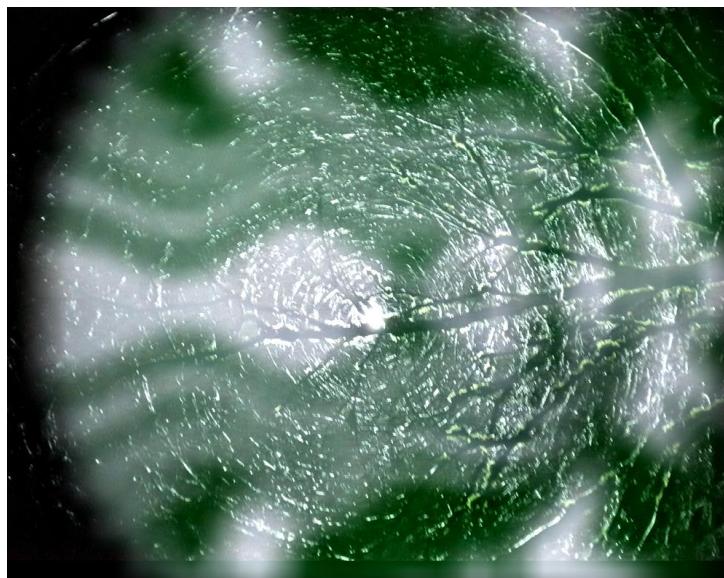


Image 4: The Starbucks logo is more easily recognizable with color



Procedure

Description

- Produce a low pass filtered version of Image 1
- Produce a high pass filtered version of Image 2
- Add the two images in the frequency domain to obtain the hybrid image.

For the first step I computed a gaussian kernel (matlab script `compute_kernel.m`). This gave me flexibility to change the resolution of kernel and the `sigma` value. To produce the low pass filtered image, I used the convolution function provided my Matlab (`conv2`) to produce the gaussian blurred image (low pass filtered) shown below



Low Pass Filtered Image 1

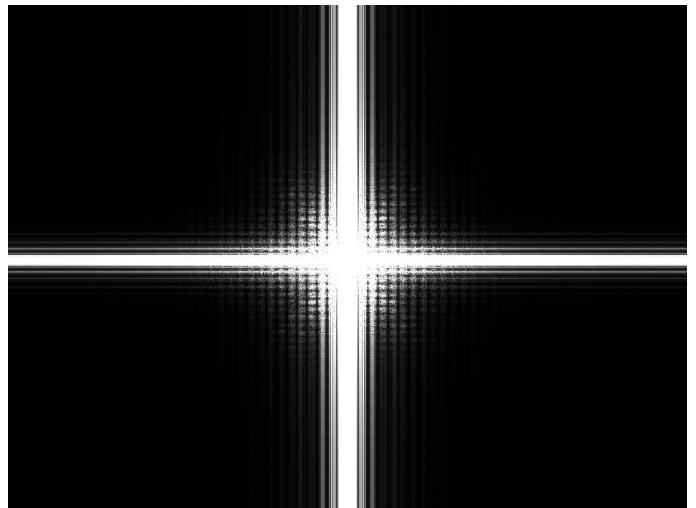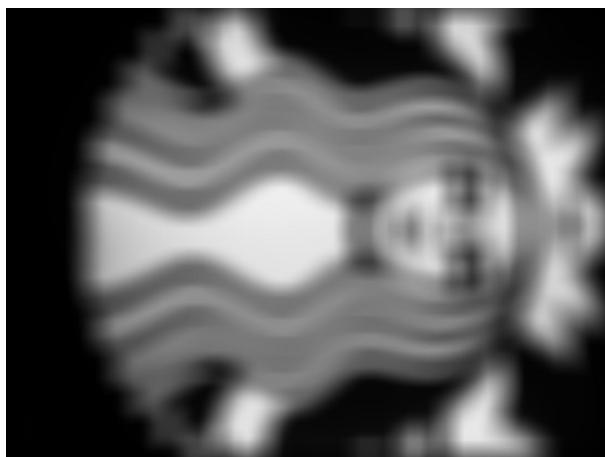

Low pass filtered Starbucks Logo


For the second step in order to produce the high pass filtered version of Image 2, I first created the low pass version of Image 2 using the same process as used on Image 1. Then, I subtracted the low pass version from the original version leaving only the high frequencies

High Pass Filtered Image 2

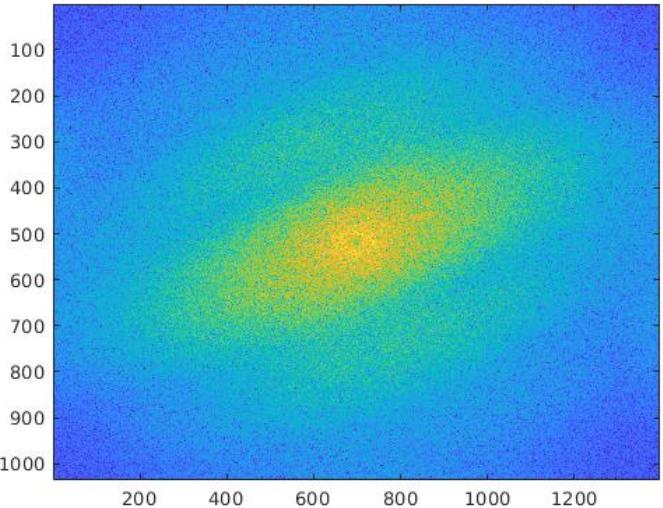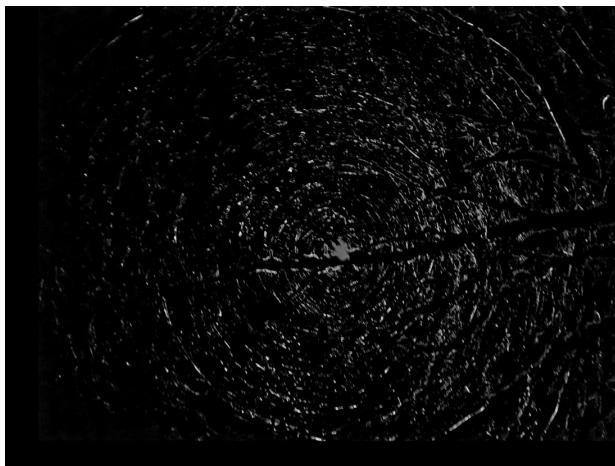

High Pass filter of Image 2. The effect of the high pass filter shows how the edges become more prominent

Combining the two images in the frequency domain I get the result as shown in Image 4. Below is the frequency representation of Image 4 (the result).

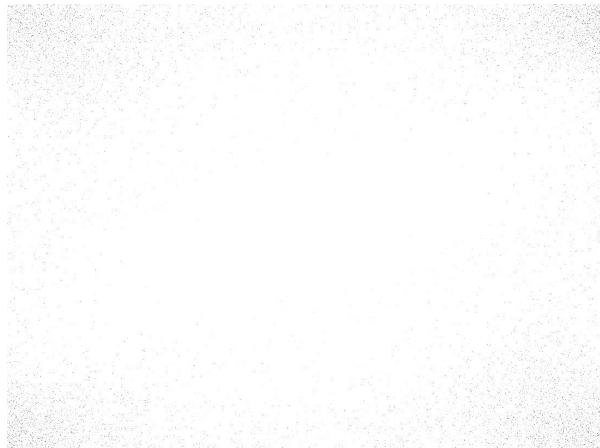

Observations

- The addition of the two images can be performed in spatial domain to get the same result although the paper describes it as an addition in the frequency domain.
- The effect of hybrid images is easier to see in Greyscale images.

Additional Experiments

Watermelon (Low frequency) & Pizza (High Frequency)



PizzaMelon (Hybrid)

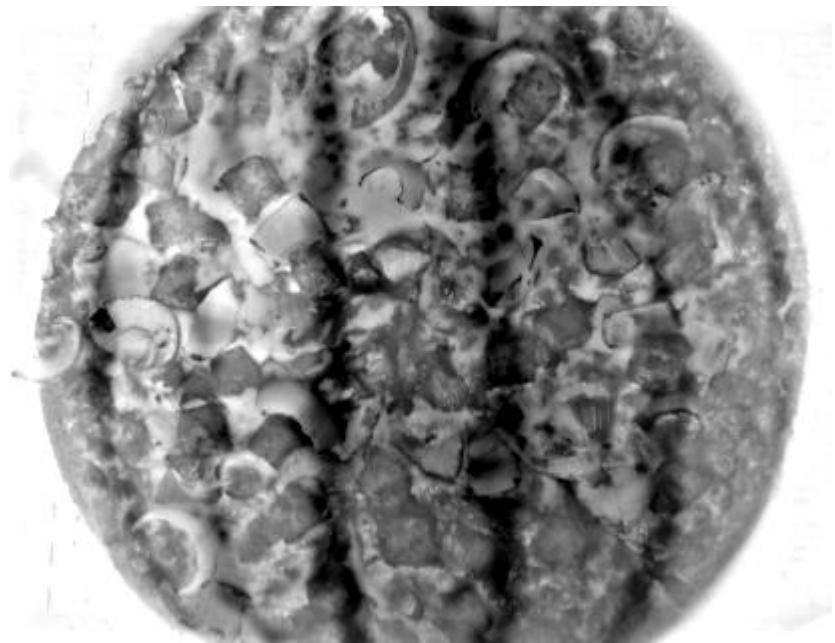


Image 9: Shown in Grayscale as the colors of the pizza ruins the effect

Anakin Skywalker (Low Frequency)



Taken from the internet

Darth Vader (High Frequency)

Taken from the internet

AnaVader (Hybrid)



Image Enhancement

Contrast Enhancement

Contrast enhancement can be done in two ways:



1. Through filters like laplace and laplace of Gaussian.
2. Through histogram equalization. I chose the histogram equalization approach since the filters usually introduce noise into the image. Furthermore, there are different methods of histogram equalization. I used the method shown [here](#)

Mountainside Walkway in Bhutan



Taken in Bhutan (Left: Low Contrast Image, Right: High Contrast)

Notebook doodle

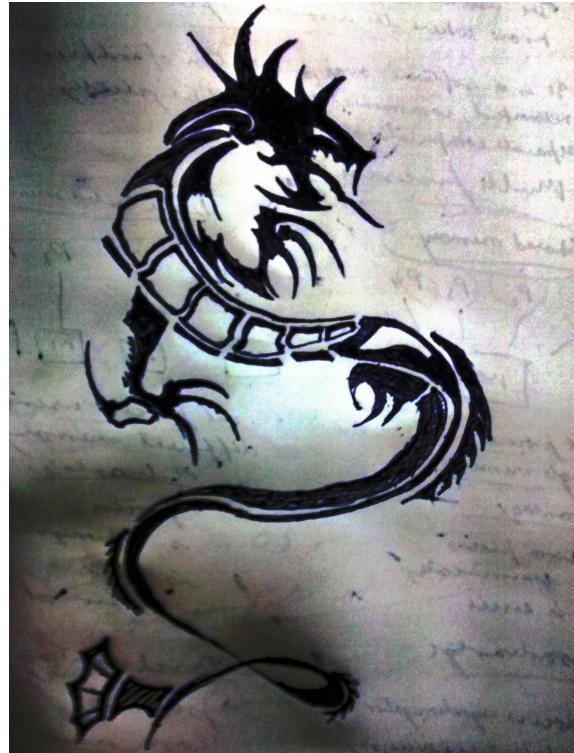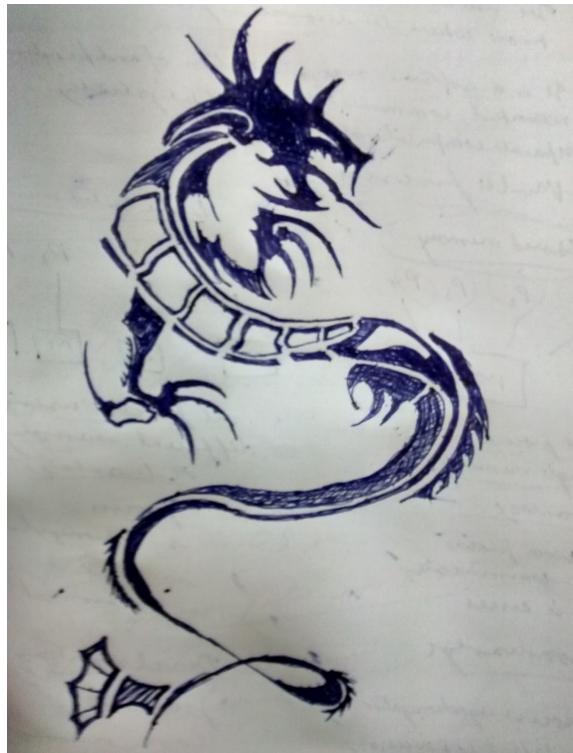


The effect is overdone and we can even see text from the otherside of the page

Procedure

I split the images into each channel and then I performed histogram equalization on each of the channels. The resulting images showed an increase in contrast but the effect was too pronounced in some images (second result)

Third & Fourth Result

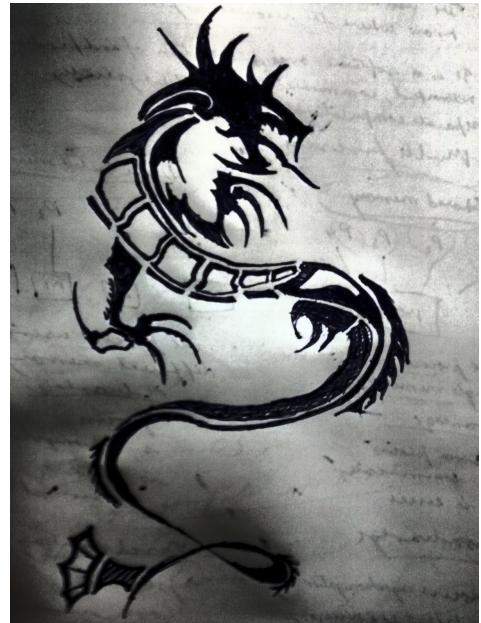

*Image 13: Histogram equalization through the V channel in HSV color space.
The effect is less pronounced*

Procedure (3rd and 4th result)

Rather than working on each channel in RGB, I updated my code to move the images into HSV color space and equalize the histogram of the v or value channel. This produces better results.

Color Enhancement

Book




Unhappy Jimi Hendrix



Procedure

I initially tried to use the saturation channel in HSV color space but that resulted in the image gaining and overall tint. I switched to the CIE L*a*b* color space and increased the a and b channels. However, this is not an automatic process and requires me to set a value to increase it by.

Color-Shift

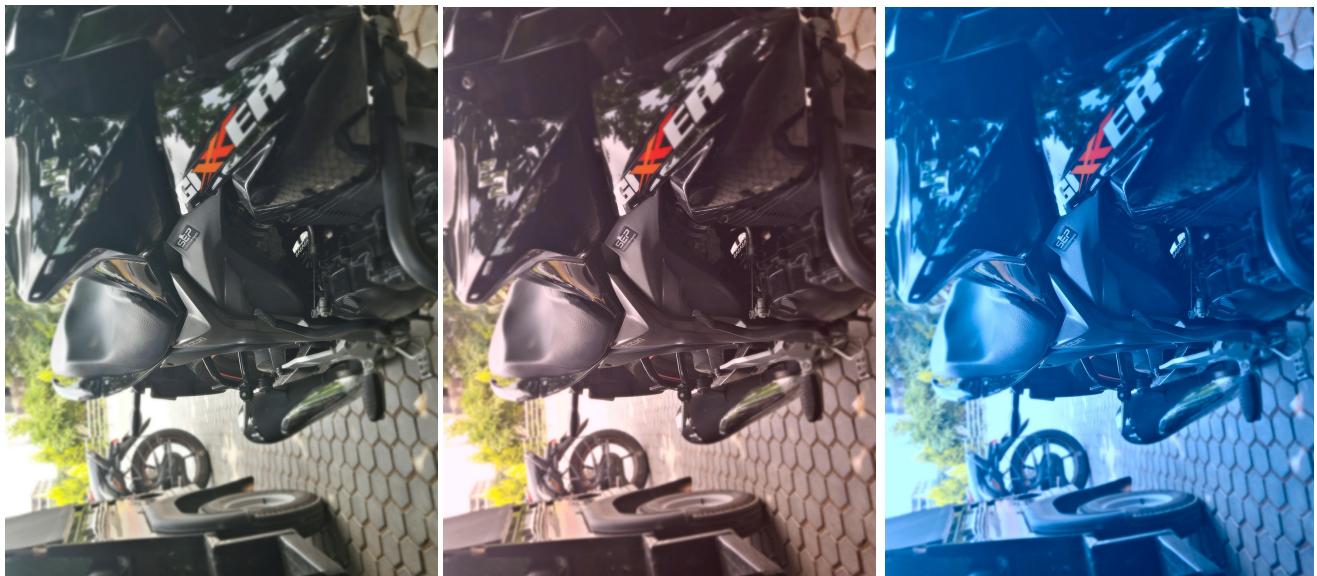

Lights in a bottle



Mountain



Increasing the blue gives the landscape a more colder look while the red makes it look like a surreal movie

Procedure

I used Matlab's `rgb2lab` function from the Image Processing Toolkit, to convert the image into CIE $L^*a^*b^*$ color space. After that it was fairly easy to increase the a channel to make the whole image more red while decreasing the b made it less yellow (more blue). Again this is not an automatic process and requires me to set the value to increase or decrease the channel by.

Bibliography

1. [Adobe's technical guide to the CIE \$L^*a^*b^*\$ color space](#)
2. [Stack Overflow Post which explains filters and their effect in the spatial domain; the question was posted by me](#)
3. [Histogram Equalization](#)