

Lab Exercise 5

Cloud Object Storage Manager Using Python & MinIO

Aim:


To develop a Python-based application that interacts with a local MinIO server (an S3-compatible cloud storage emulator) to understand object storage concepts such as buckets, unique object keys, and metadata tracking.

Problem Statement:

Develop a Python application that mimics cloud object storage behavior using an open-source MinIO server running locally inside a VirtualBox VM, communicating via the official MinIO Python API. The application must implement:

- Create Bucket – initialize a flat container on the MinIO server.
- Upload Object – upload a local file into a bucket with a unique key.
- Download Object – retrieve an object using its unique key.
- List Bucket Contents – display objects with metadata (size, last modified).
- Delete Object – remove an object using its unique key.

Architecture:

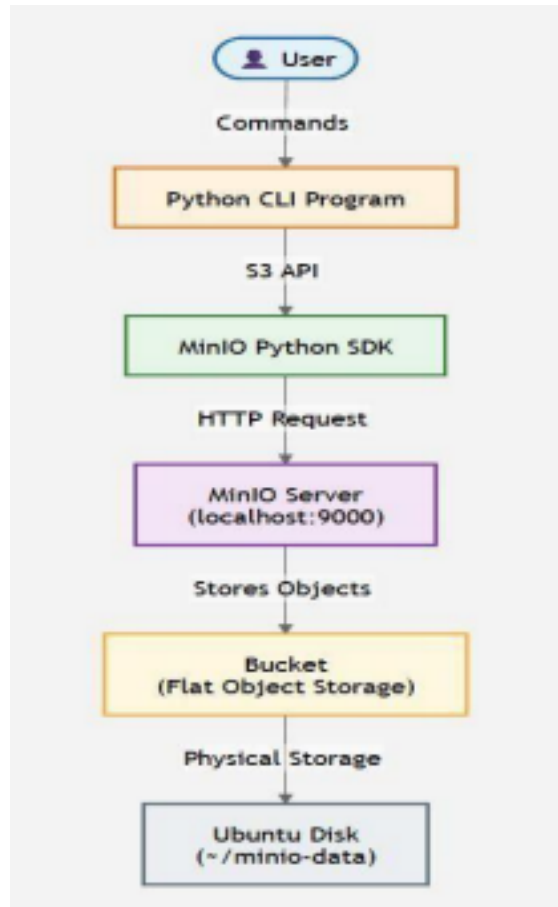

231501159
Sreelayaa S

Procedure:

Step 1-2: Update Ubuntu & Install Python

```
sudo apt upgrade -y  
sudo apt install python3 python3-pip -y  
python3 --version pip3 --version
```

Step 3: Install MinIO Server

```
mkdir ~/minio && cd ~/minio  
wget https://dl.min.io/server/minio/release/linux-amd64/minio  
chmod +x minio sudo mv minio /usr/local/bin/ minio --version
```

Step 4-5: Create Storage Folder & Start Server

```
mkdir ~/minio-data  
export MINIO_ROOT_USER=minioadmin  
export MINIO_ROOT_PASSWORD=minioadmin  
minio server ~/minio-data --console-address ":9001"
```

API: <http://127.0.0.1:9000> | Console: <http://127.0.0.1:9001> | Login: minioadmin / minioadmin

Step 6: Open MinIO Console

Visit <http://localhost:9001> and log in. Initially there are no buckets.

Step 7-8: Create Project & Virtual Environment

`mkdir ObjectStorageSimulator && cd ObjectStorageSimulator`

`python3 -m venv venv source venv/bin/activate`

```
(venv) Ex5@Ex5-VirtualBox:~/objectstoragesimulator$ python3 -m venv venv
Ex5@Ex5-VirtualBox:~/objectstoragesimulator$ source venv/bin/activate
(venv) Ex5@Ex5-VirtualBox:~/objectstoragesimulator$
```

Step 9: Install MinIO Python SDK

`pip install minio`

231501159

Sreelayaa S

```
(venv) Ex5@Ex5-VirtualBox:~/objectstoragesimulator$ pip install minio
Collecting minio
  Using cached minio-7.2.20-py3-none-any.whl.metadata (6.5 kB)
Collecting argon2-cffi (from minio)
  Using cached argon2_cffi-25.1.0-py3-none-any.whl.metadata (4.1 kB)
Collecting certifi (from minio)
  Using cached certifi-2026.7.22-py3-none-any.whl.metadata (2.5 kB)
Collecting pycryptodome (from minio)
  Using cached pycryptodome-3.23.0-cp37-abi3-manylinux_2_17_x86_64.manylinux2014_x86_64.whl.metadata (3.4 kB)
Collecting typing_extensions (from minio)
  Using cached typing_extensions-4.16.0-py3-none-any.whl.metadata (3.3 kB)
Collecting urllib3 (from minio)
  Using cached urllib3-2.7.0-py3-none-any.whl.metadata (6.9 kB)
Collecting argon2-cffi-bindings (from argon2-cffi->minio)
  Using cached argon2_cffi_bindings-25.1.0-cp39-abi3-manylinux_2_26_x86_64.manylinux_2_28_x86_64.whl.metadata (7.4 kB)
Collecting cffi>=2.0.0 (from argon2-cffi-bindings->argon2-cffi->minio)
  Using cached cffi-2.1.0-cp314-cp314-manylinux2014_x86_64.manylinux_2_17_x86_64.whl.metadata (2.5 kB)
Collecting pyparser (from cffi>=2.0.0->argon2-cffi-bindings->argon2-cffi->minio)
  Using cached pyparser-3.0-py3-none-any.whl.metadata (8.2 kB)
Using cached minio-7.2.20-py3-none-any.whl (93 kB)
Using cached argon2_cffi-25.1.0-py3-none-any.whl (34 kB)
Using cached argon2_cffi_bindings-25.1.0-cp39-abi3-manylinux_2_26_x86_64.manylinux_2_28_x86_64.whl (87 kB)
Using cached cffi-2.1.0-cp314-cp314-manylinux2014_x86_64.manylinux_2_17_x86_64.whl (221 kB)
Using cached certifi-2026.7.22-py3-none-any.whl (136 kB)
Using cached pyparser-3.0-py3-none-any.whl (48 kB)
Using cached pycryptodome-3.23.0-cp37-abi3-manylinux_2_17_x86_64.manylinux2014_x86_64.whl (2.3 MB)
Using cached typing_extensions-4.16.0-py3-none-any.whl (45 kB)
Using cached urllib3-2.7.0-py3-none-any.whl (115 kB)
Installing collected packages: urllib3, typing_extensions, pycryptodome, pyparser, certifi, cffi, argon2-cffi-bindings, argon2-cffi, minio
Successfully installed argon2-cffi-25.1.0 argon2-cffi-bindings-25.1.0 certifi-2026.7.22 cffi-2.1.0 minio-7.2.20 pyparser-3.0 pycryptodome-3.23.0 typing_extensions-4.16.0 urllib3-2.7.0
(venv) Ex5@Ex5-VirtualBox:~/objectstoragesimulator$
```

Verify installation: `pip`

`show minio`

```
(venv) Ex5@Ex5-VirtualBox:~/objectstoragesimulator$ pip show minio
Name: minio
Version: 7.2.28
Summary: MinIO Python SDK for Amazon S3 Compatible Cloud Storage
Home-page: https://github.com/minio/minio-py
Author: MinIO, Inc.
Author-email: dev@min.io
License: Apache-2.0
Location: /home/Ex5/objectstoragesimulator/venv/lib/python3.14/site-packages
Requires: argon2-cffi, certifi, pycryptodome, typing-extensions, urllib3
Required-by:
(venv) Ex5@Ex5-VirtualBox:~/objectstoragesimulator$
```

Step 10: Create Sample File & Bucket

echo "Hello this is sample minio project" > sample.txt

Create main.py with the bucket-creation code below and run it:

```
from minio import Minio
```

```
client = Minio("localhost:9000", access_key="minioadmin",
```

```
secret_key="minioadmin", secure=False) bucket_name =
```

```
"studentbucket" if not client.bucket_exists(bucket_name):
```

```
client.make_bucket(bucket_name) print("Bucket
```

```
Created") else:
```


```
print("Bucket Already Exists")
```

231501159

Sreelayaa S

```
(venv) Ex5@Ex5-VirtualBox:~/objectstoragesimulator$ nano main.py
(venv) Ex5@Ex5-VirtualBox:~/objectstoragesimulator$ python main.py
Bucket Created
(venv) Ex5@Ex5-VirtualBox:~/objectstoragesimulator$
```

Verify in the MinIO console — the new bucket appears with no objects yet:

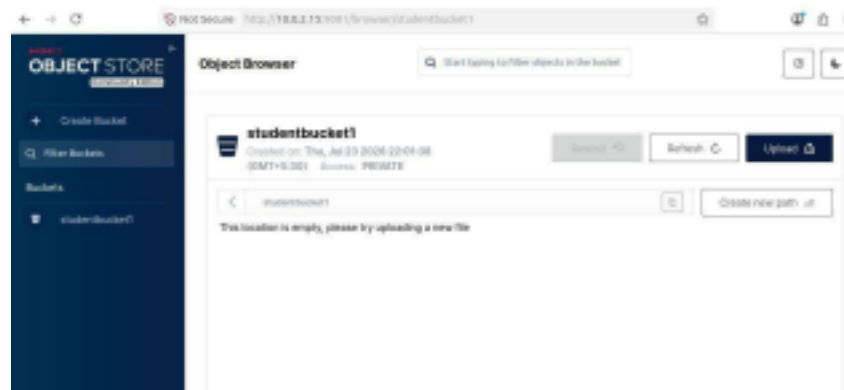

Step 11: Upload an Object

```
client.fput_object("studentbucket", "notes.txt", "sample.txt")
print("Upload Successful")
```

Step 12: Download an Object

Modify main.py to replace the upload code with:

231501159

Sreelayaa S

Replace code.

```
#!/usr/bin/env Python
from minio import Minio

client = Minio(
    "localhost:9000",
    access_key="minioadmin",
    secret_key="minioadmin",
    secure=False
)

client.fget_object(
    "studentbucket1",
    "notes.txt",
    "downloaded.txt"
)

print("Download Successful")
```

Step 13: List Bucket Contents

Modify main.py to replace the previous code with the code below, which lists all objects present in the bucket along with their size and last-modified timestamp:

```
objects = client.list_objects("studentbucket")
for obj in objects:
    print(obj.object_name, obj.size,
          obj.last_modified)
```

Running this script printed the object key, size in bytes, and last-modified timestamp for notes.txt, confirming that metadata tracking works as expected.

Step 14: Delete Object

Modify main.py to replace the previous code with the code below, which removes the uploaded object from the bucket using its unique key:

```
client.remove_object("studentbucket", "notes.txt")
print("Object Deleted")
```

Verifying in the MinIO console confirmed that notes.txt no longer appeared inside studentbucket, showing that the delete operation completed successfully.

Result:

Thus, a Python application was developed to perform bucket creation, object upload, object listing, object download, and object deletion using the MinIO S3-compatible local object storage server.