

```
import pandas as pd
import numpy as np
import matplotlib.pyplot as plt
import seaborn as sns
```

```
df = pd.read_csv('Customer_churn.csv')
df.head()
```

	customerID	gender	SeniorCitizen	Partner	Dependents	tenure
0	7590-VHVEG	Female	0	Yes	No	1
1	5575-GNVDE	Male	0	No	No	34
2	3668-QPYBK	Male	0	No	No	2
3	7795-CF0CW	Male	0	No	No	45
4	9237-HQITU	Female	0	No	No	2

	MultipleLines	InternetService	OnlineSecurity	...
0	No phone service	DSL	No	...
1	No	DSL	Yes	...
2	No	DSL	Yes	...
3	No phone service	DSL	Yes	...
4	No	Fiber optic	No	...

	TechSupport	StreamingTV	StreamingMovies	Contract
0	No	No	No	Month-to-month
1	No	No	No	One year
2	No	No	No	Month-to-month
3	Yes	No	No	One year
4	No	No	No	Month-to-month

	PaymentMethod	MonthlyCharges	TotalCharges	Churn
0	Electronic check	29.85	29.85	No
1	Mailed check	56.95	1889.5	No

2	Mailed check	53.85	108.15	Yes
3	Bank transfer (automatic)	42.30	1840.75	No
4	Electronic check	70.70	151.65	Yes

[5 rows x 21 columns]

df.info()

<class 'pandas.core.frame.DataFrame'>

RangeIndex: 7043 entries, 0 to 7042

Data columns (total 21 columns):

#	Column	Non-Null Count	Dtype
0	customerID	7043 non-null	object
1	gender	7043 non-null	object
2	SeniorCitizen	7043 non-null	int64
3	Partner	7043 non-null	object
4	Dependents	7043 non-null	object
5	tenure	7043 non-null	int64
6	PhoneService	7043 non-null	object
7	MultipleLines	7043 non-null	object
8	InternetService	7043 non-null	object
9	OnlineSecurity	7043 non-null	object
10	OnlineBackup	7043 non-null	object
11	DeviceProtection	7043 non-null	object
12	TechSupport	7043 non-null	object
13	StreamingTV	7043 non-null	object
14	StreamingMovies	7043 non-null	object
15	Contract	7043 non-null	object
16	PaperlessBilling	7043 non-null	object
17	PaymentMethod	7043 non-null	object
18	MonthlyCharges	7043 non-null	float64
19	TotalCharges	7043 non-null	object
20	Churn	7043 non-null	object

dtypes: float64(1), int64(2), object(18)

memory usage: 1.1+ MB

df["TotalCharges"] = df["TotalCharges"].replace(" ", "0")

df["TotalCharges"] = df["TotalCharges"].astype("float")

df.info()

<class 'pandas.core.frame.DataFrame'>

RangeIndex: 7043 entries, 0 to 7042

Data columns (total 21 columns):

#	Column	Non-Null Count	Dtype
0	customerID	7043 non-null	object
1	gender	7043 non-null	object
2	SeniorCitizen	7043 non-null	int64
3	Partner	7043 non-null	object

```

4   Dependents      7043 non-null object
5   tenure          7043 non-null int64
6   PhoneService    7043 non-null object
7   MultipleLines    7043 non-null object
8   InternetService  7043 non-null object
9   OnlineSecurity   7043 non-null object
10  OnlineBackup     7043 non-null object
11  DeviceProtection 7043 non-null object
12  TechSupport      7043 non-null object
13  StreamingTV      7043 non-null object
14  StreamingMovies  7043 non-null object
15  Contract         7043 non-null object
16  PaperlessBilling 7043 non-null object
17  PaymentMethod    7043 non-null object
18  MonthlyCharges   7043 non-null float64
19  TotalCharges     7043 non-null float64
20  Churn            7043 non-null object

```

```
dtypes: float64(2), int64(2), object(17)
```

```
memory usage: 1.1+ MB
```

```
df.isnull().sum().sum()
```

```
np.int64(0)
```

```
df.describe()
```

	SeniorCitizen	tenure	MonthlyCharges	TotalCharges
count	7043.000000	7043.000000	7043.000000	7043.000000
mean	0.162147	32.371149	64.761692	2279.734304
std	0.368612	24.559481	30.090047	2266.794470
min	0.000000	0.000000	18.250000	0.000000
25%	0.000000	9.000000	35.500000	398.550000
50%	0.000000	29.000000	70.350000	1394.550000
75%	0.000000	55.000000	89.850000	3786.600000
max	1.000000	72.000000	118.750000	8684.800000

```
df["customerID"].duplicated().sum()
```

```
np.int64(0)
```

```

def conv(value):
    if value == 1:
        return "yes"
    else:
        return "no"


```

```
df['SeniorCitizen'] = df["SeniorCitizen"].apply(conv)
```

```
ax = sns.countplot(x = 'Churn', data = df)
```


```
ax.bar_label(ax.containers[0])
```

```
plt.title("Count of Customers by Churn")
plt.show()
```

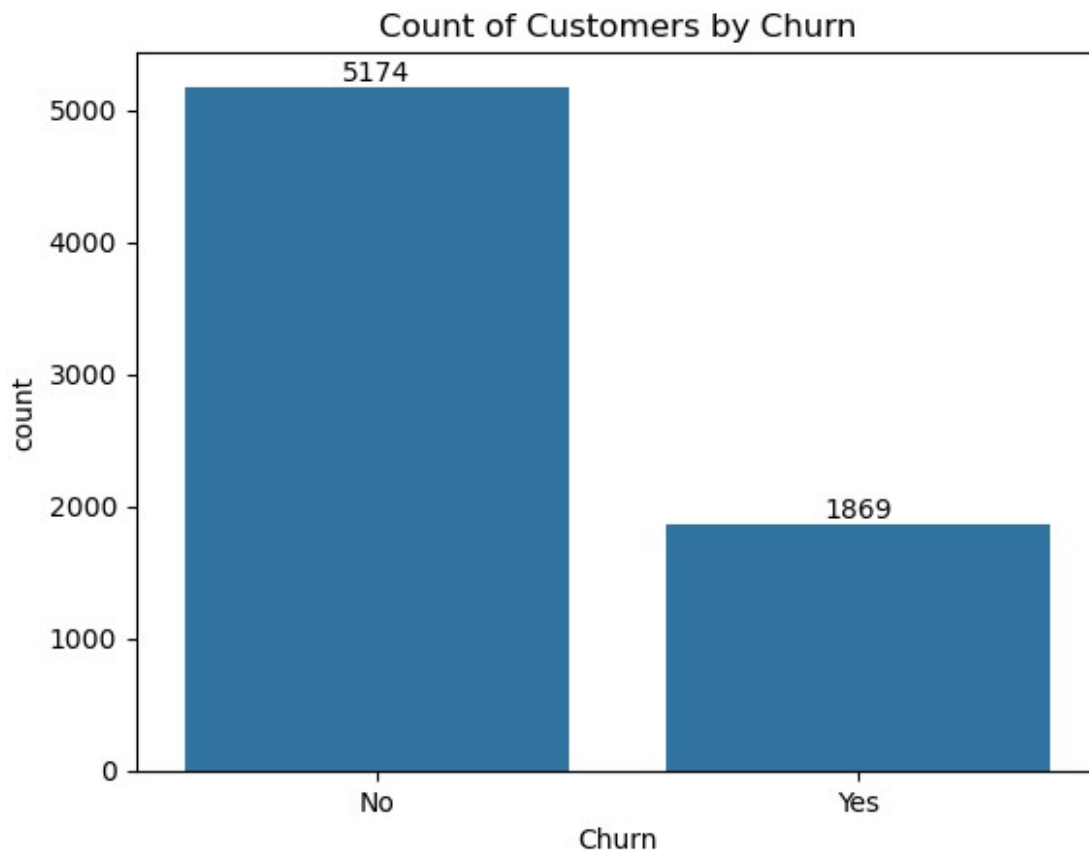


```
plt.figure(figsize = (3,4))
gb = df.groupby("Churn").agg({'Churn':"count"})
plt.pie(gb['Churn'], labels = gb.index, autopct = "%1.2f%%")
plt.title("Percentage of Churned Customeres", fontsize = 10)
plt.show()
```


Percentage of Churned Customeres

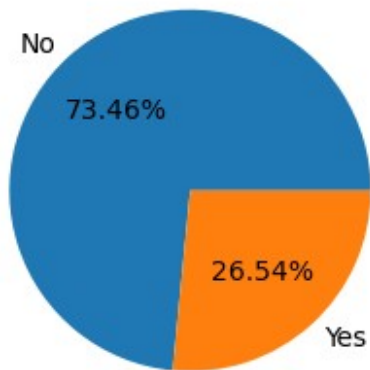

```
plt.figure(figsize = (3,3))
sns.countplot(x = "gender", data = df, hue = "Churn")
plt.title("Churn by Gender")
plt.show()
```

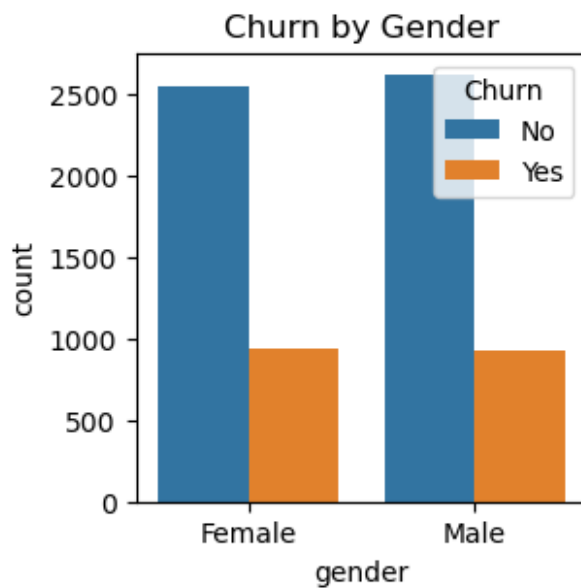

```
plt.figure(figsize = (4,4))
ax = sns.countplot(x = "SeniorCitizen", data = df)
ax.bar_label(ax.containers[0])
plt.title("Count of Customers by Senior Citizen")
plt.show()
```

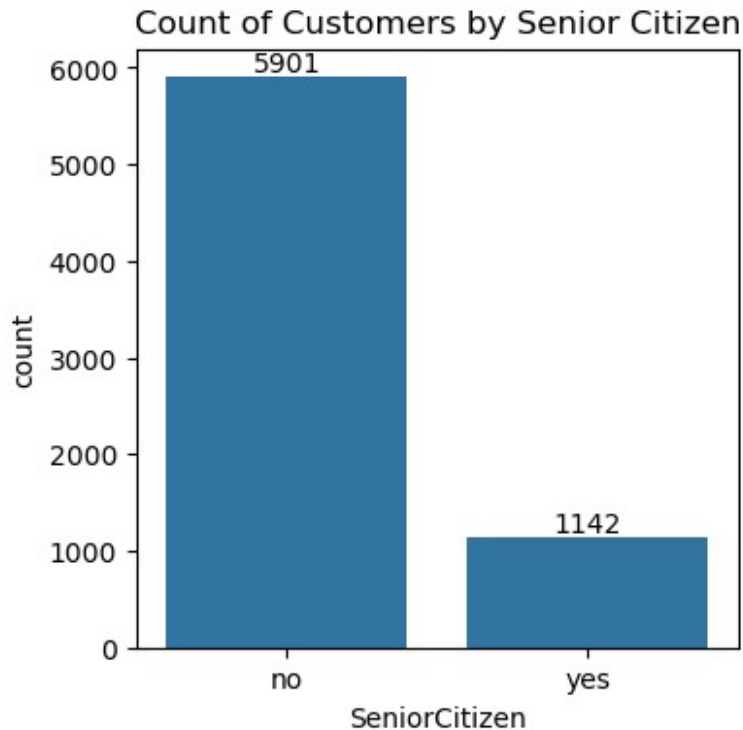

```
total_counts = df.groupby('SeniorCitizen')
['Churn'].value_counts(normalize=True).unstack() * 100


fig, ax = plt.subplots(figsize=(4, 4)) # Adjust figsize for better
visualization

total_counts.plot(kind='bar', stacked=True, ax=ax, color=['#1f77b4',
'#ff7f0e']) # Customize colors if desired


for p in ax.patches:
    width, height = p.get_width(), p.get_height()
    x, y = p.get_xy()
    ax.text(x + width / 2, y + height / 2, f'{height:.1f}%',
ha='center', va='center')

plt.title('Churn by Senior Citizen (Stacked Bar Chart)')
plt.xlabel('SeniorCitizen')
plt.ylabel('Percentage (%)')
plt.xticks(rotation=0)
plt.legend(title='Churn', bbox_to_anchor = (0.9,0.9)) # Customize
legend location

plt.show()
```

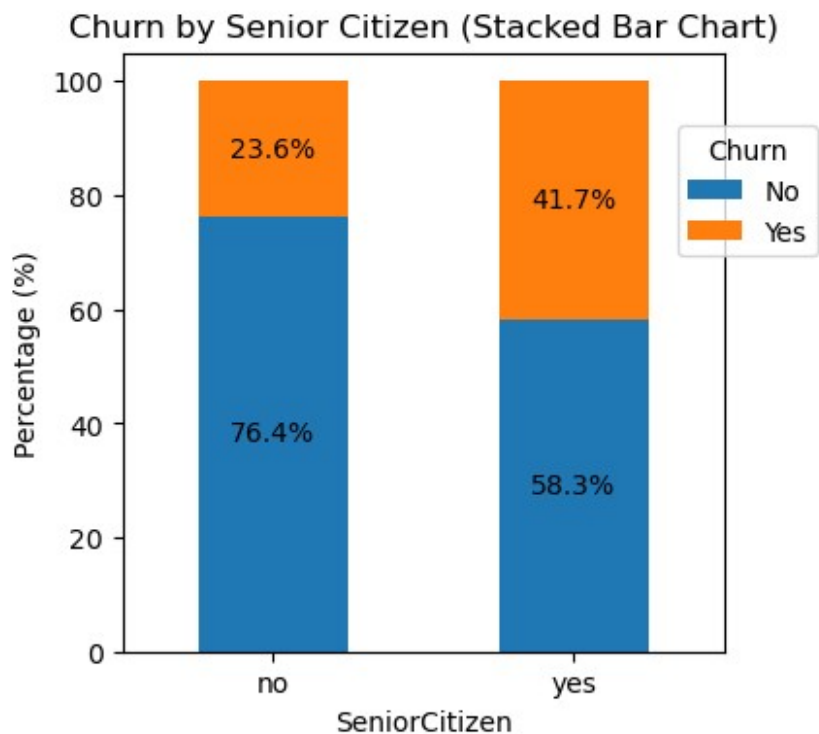


```
plt.figure(figsize = (9,4))
sns.histplot(x = "tenure", data = df, bins = 72, hue = "Churn")
plt.show()
```

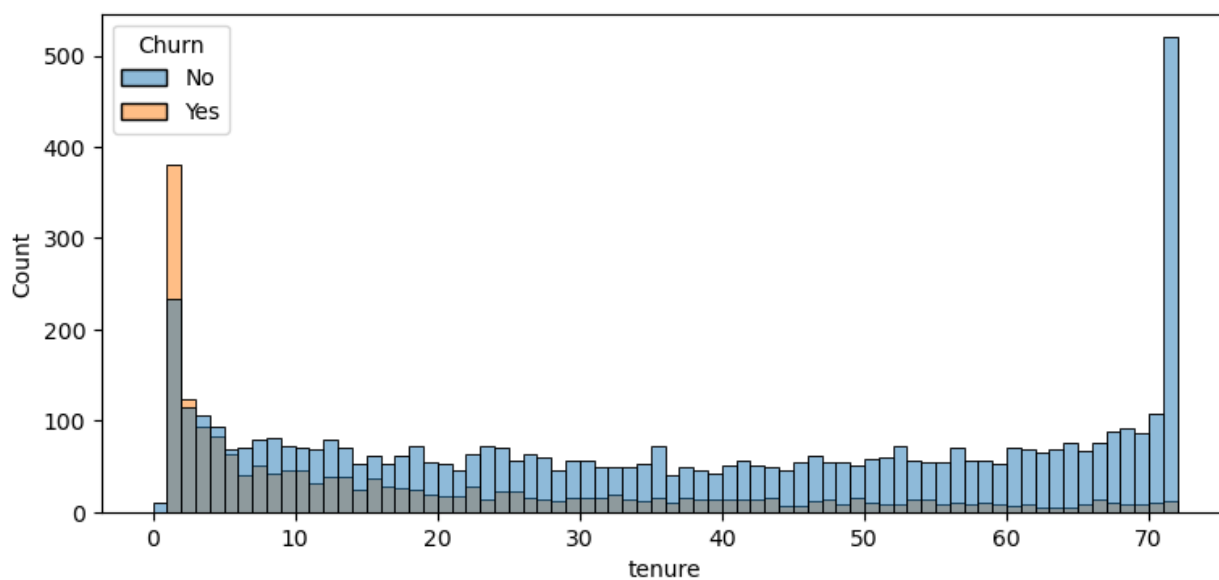

```
plt.figure(figsize = (4,4))
ax = sns.countplot(x = "Contract", data = df, hue = "Churn")
ax.bar_label(ax.containers[0])
```

```
plt.title("Count of Customers by Contract")
plt.show()
```

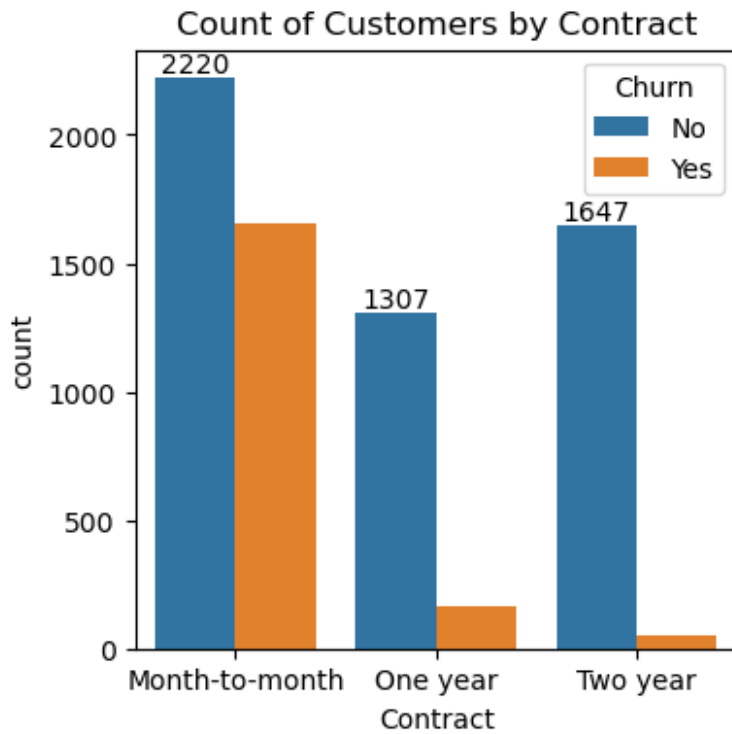

```
df.columns.values
array(['customerID', 'gender', 'SeniorCitizen', 'Partner',
      'Dependents',
      'tenure', 'PhoneService', 'MultipleLines', 'InternetService',
      'OnlineSecurity', 'OnlineBackup', 'DeviceProtection',
      'TechSupport', 'StreamingTV', 'StreamingMovies', 'Contract',
      'PaperlessBilling', 'PaymentMethod', 'MonthlyCharges',
      'TotalCharges', 'Churn'], dtype=object)

columns = ['PhoneService', 'MultipleLines', 'InternetService',
           'OnlineSecurity',
           'OnlineBackup', 'DeviceProtection', 'TechSupport',
           'StreamingTV', 'StreamingMovies']

n_cols = 3
n_rows = (len(columns) + n_cols - 1) // n_cols

# Create subplots
fig, axes = plt.subplots(n_rows, n_cols, figsize=(15, n_rows * 4))

axes = axes.flatten()


for i, col in enumerate(columns):
```



```
sns.countplot(x=col, data=df, ax=axes[i], hue = df["Churn"])
axes[i].set_title(f'Count Plot of {col}')
axes[i].set_xlabel(col)
axes[i].set_ylabel('Count')
```

```
for j in range(i + 1, len(axes)):
    fig.delaxes(axes[j])
```

```
plt.tight_layout()
plt.show()
```

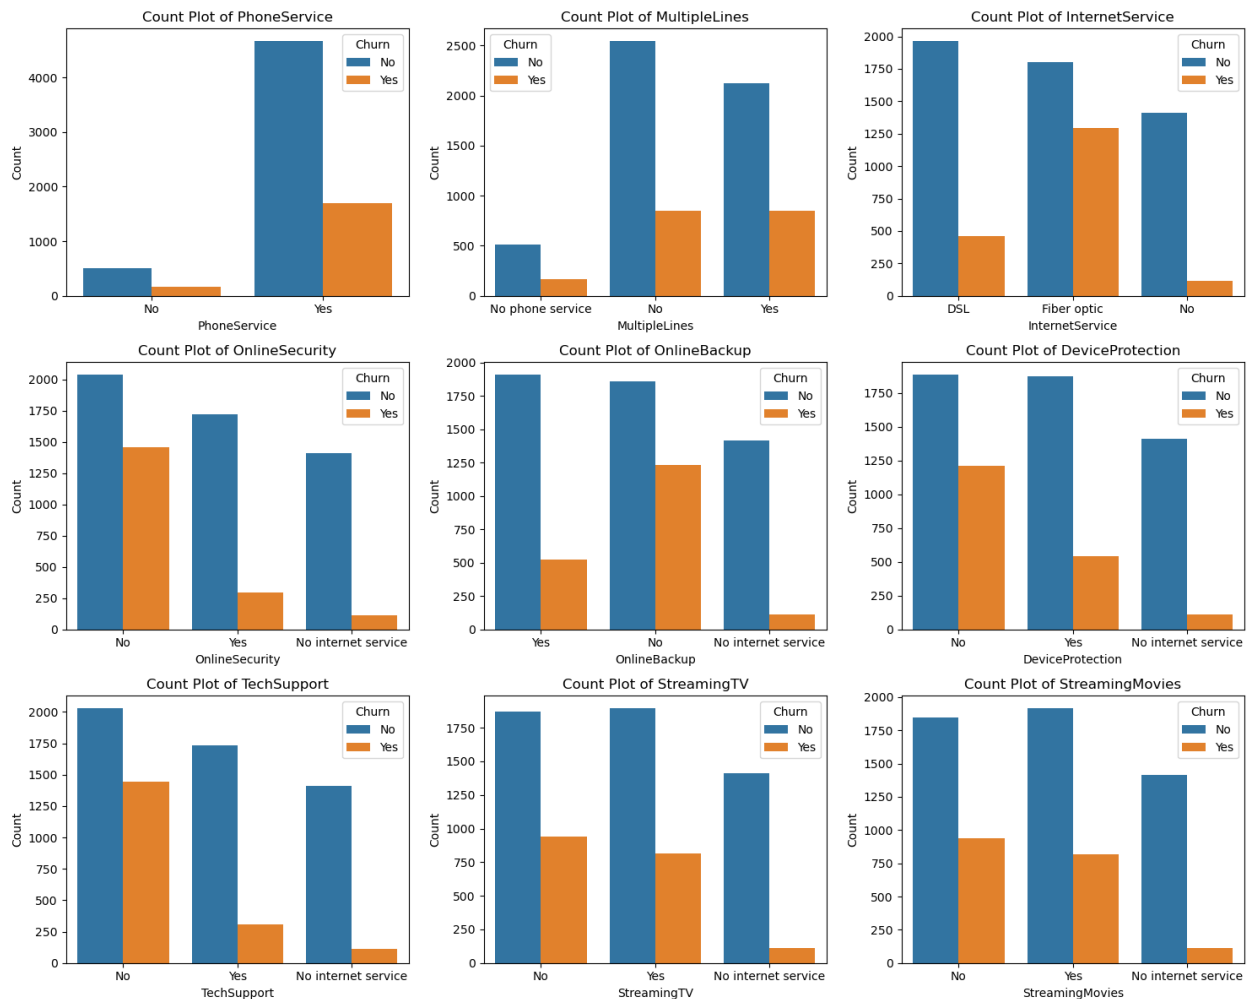

```
plt.figure(figsize = (6,4))
ax = sns.countplot(x = "PaymentMethod", data = df, hue = "Churn")
ax.bar_label(ax.containers[0])
ax.bar_label(ax.containers[1])
plt.title("Churned Customers by Payment Method")
plt.xticks(rotation = 45)
plt.show()
```

