

VISVESVARAYA TECHNOLOGICAL UNIVERSITY

“JnanaSangama”, Belgaum -590014, Karnataka.



LAB REPORT on

Machine Learning

Submitted by

SHRESHTHA AGGARWAL (1BM19CS155)

in partial fulfillment for the award of the degree of
BACHELOR OF ENGINEERING
in
COMPUTER SCIENCE AND ENGINEERING



B.M.S. COLLEGE OF ENGINEERING

(Autonomous Institution under VTU)

BENGALURU-560019

Apr-2022 to Aug-2022

B. M. S. College of Engineering,
Bull Temple Road, Bangalore 560019
(Affiliated To Visvesvaraya Technological University, Belgaum)
Department of Computer Science and Engineering



CERTIFICATE

This is to certify that the Lab work entitled “**Machine Learning**” carried out by **Shreshtha Aggarwal (1BM19CS155)**, who is bonafide student of **B. M. S. College of Engineering**. It is in partial fulfillment for the award of **Bachelor of Engineering in Computer Science and Engineering** of the Visvesvaraya Technological University, Belgaum during the year 2022. The Lab report has been approved as it satisfies the academic requirements in respect of a **Machine Learning - (20CS6PCMAL)** work prescribed for the said degree.

Prof. Saritha A.N.
Assistant Professor
Department of CSE
BMSCE, Bengaluru

Dr. Jyothi S Nayak
Professor and Head
Department of CSE
BMSCE, Bengaluru

Index Sheet

Sl. No.	Experiment Title	Page No.
1.	Implement and demonstrate the FIND-S algorithm for finding the most specific hypothesis based on a given set of training data samples.	4
2.	For a given set of training data examples stored in a .CSV file, implement and demonstrate the Candidate-Elimination algorithm to output a description of the set of all hypotheses consistent with the training examples.	5
3.	Write a program to demonstrate the working of the Decision tree based ID3 algorithm. Use an appropriate data set for building the decision tree and apply this knowledge to classify a new sample	6
4.	Write a program to implement the Naïve Bayesian classifier for a sample training data set stored as a .CSV file. Compute the accuracy of the classifier, considering few test data sets	9
5.	Write a program to construct a Bayesian network considering training data. Use this model to make predictions.	11
6.	Apply k-Means algorithm to cluster a set of data stored in a .CSV file.	13
7.	Apply EM algorithm to cluster a set of data stored in a .CSV file. Compare the results of k-Means algorithm and EM algorithm.	18
8.	Implement the Linear Regression algorithm in order to fit data points. Select appropriate data set for your experiment and draw graphs.	19
9.	Write a program to implement k-Nearest Neighbour algorithm to classify the iris data set. Print both correct and wrong predictions.	20
10.	Implement the non-parametric Locally Weighted Regression algorithm in order to fit data points. Select appropriate data set for your experiment and draw graphs.	22

Course Outcomes:

CO1	Ability to apply the different learning algorithms.
CO2	Ability to analyze the learning techniques for given dataset.
CO3	Ability to design a model using machine learning to solve a problem.
CO4	Ability to conduct practical experiments to solve problems using appropriate machine learning techniques.

1. Implement and demonstrate the FIND-S algorithm for finding the most specific hypothesis based on a given set of training data samples.

```
In [11]: import csv
```

```
In [12]: def updateHypothesis(x, h):
    if h == []:
        return x

    for i in range(0, len(h)):
        if x[i].upper() != h[i].upper():
            h[i] = '?'

    return h
```

```
In [13]: if __name__ == "__main__":
    data = []
    h = []

    with open('data.csv', 'r') as file:
        reader = csv.reader(file)
        print("Data: ")
        for row in reader:
            data.append(row)
            print(row)

    if data:
        for x in data:
            if x[-1].upper() == "YES":
                x.pop() # removing last field
                h = updateHypothesis(x,h)

    print("\nHypothesis: ",h)
```

```
Data:
['sky', 'air temp', 'humidity', 'wind', 'water', 'forecast', 'enjoy sport']
['sunny', 'warm', 'normal', 'strong', 'warm', 'same', 'yes']
['sunny', 'warm', 'high', 'strong', 'warm', 'same', 'yes']
['rainy', 'cold', 'high', 'strong', 'warm', 'change', 'no']
['sunny', 'warm', 'high', 'strong', 'cool', 'change', 'yes']
```

```
Hypothesis: ['sunny', 'warm', '?', 'strong', '?', '?']
```

```
In [ ]:
```

2. For a given set of training data examples stored in a .CSV file, implement and demonstrate the Candidate-Elimination algorithm to output a description of the set of all hypotheses consistent with the training examples.

```
1  import numpy as np
2  import pandas as pd
3
4  data = pd.read_csv('data.csv')
5  concepts = np.array(data.iloc[:,0:-1])
6  print("\nInstances are:\n",concepts)
7  target = np.array(data.iloc[:,-1])
8  print("\nTarget Values are: ",target)
9
10 def learn(concepts, target):
11     specific_h = concepts[0].copy()
12     print("\nInitialization of specific_h and general_h")
13     print("\nSpecific Boundary: ",specific_h)
14     general_h = [['?' for i in range(len(specific_h))] for i in range(len(specific_h))]
15     print("\nGeneric Boundary: ",general_h)
16
17     for i, h in enumerate(concepts):
18         print("\nInstance", i+1, "is ", h)
19         if target[i] == "yes":
20             print("Instance is Positive ")
21             for x in range(len(specific_h)):
22                 if h[x] != specific_h[x]:
23                     specific_h[x] = '?'
24                     general_h[x][x] = '?'
25
26         if target[i] == "no":
27             print("Instance is Negative ")
28             for x in range(len(specific_h)):
29                 if h[x] != specific_h[x]:
30                     general_h[x][x] = specific_h[x]
31             else:
32                 general_h[x][x] = '?'
33
34         print("Specific Boundary after ", i+1, "Instance is ", specific_h)
35         print("Generic Boundary after ", i+1, "Instance is ", general_h)
36         print("\n")
37
38     indices = [i for i, val in enumerate(general_h) if val == ['?', '?', '?', '?', '?', '?']]
39     for i in indices:
40         general_h.remove(['?', '?', '?', '?', '?', '?'])
41     return specific_h, general_h
42
43 s_final, g_final = learn(concepts, target)
44
45 print("Final Specific_h: ", s_final, sep="\n")
46 print("Final General_h: ", g_final, sep="\n")
```

```

> python candidateElimination.py
Concepts: [['sunny' 'warm' 'normal' 'strong' 'warm' 'same']
['sunny' 'warm' 'high' 'strong' 'warm' 'same']
['rainy' 'cold' 'high' 'strong' 'warm' 'change']]
['sunny' 'warm' 'high' 'strong' 'cool' 'change']]
Target: ['yes' 'yes' 'no' 'yes']
Initialization of specific_h and general_h
specific_h: ['sunny' 'warm' 'normal' 'strong' 'warm' 'same']
general_h: [['?', '?', '?', '?', '?', '?'], ['?', '?', '?', '?', '?', '?'], ['?', '?', '?', '?', '?', '?'], ['?', '?', '?', '?', '?', '?'], ['?', '?', '?', '?', '?', '?']]

Steps of Candidate Elimination Algorithm 1
specific_h: ['sunny' 'warm' 'normal' 'strong' 'warm' 'same']
general_h: [['?', '?', '?', '?', '?', '?'], ['?', '?', '?', '?', '?', '?'], ['?', '?', '?', '?', '?', '?'], ['?', '?', '?', '?', '?', '?'], ['?', '?', '?', '?', '?', '?']]

Steps of Candidate Elimination Algorithm 2
specific_h: ['sunny' 'warm' '?' 'strong' 'warm' 'same']
general_h: [['?', '?', '?', '?', '?', '?'], ['?', '?', '?', '?', '?', '?'], ['?', '?', '?', '?', '?', '?'], ['?', '?', '?', '?', '?', '?'], ['?', '?', '?', '?', '?', '?']]

Steps of Candidate Elimination Algorithm 3
specific_h: ['sunny' 'warm' '?' 'strong' 'warm' 'same']
general_h: [['sunny', '?', '?', '?', '?', '?'], ['?', '?', '?', '?', '?', '?'], ['?', '?', '?', '?', '?', '?'], ['?', '?', '?', '?', '?', '?'], ['?', '?', '?', '?', '?', 'same']]

Steps of Candidate Elimination Algorithm 4
specific_h: ['sunny' 'warm' '?' 'strong' '?' '?']
general_h: [['sunny', '?', '?', '?', '?', '?'], ['?', 'warm', '?', '?', '?', '?'], ['?', '?', '?', '?', '?', '?'], ['?', '?', '?', '?', '?', '?'], ['?', '?', '?', '?', '?', '?']]

Final specific_h:
['sunny' 'warm' '?' 'strong' '?' '?']

Final general_h:
[['sunny', '?', '?', '?', '?', '?'], ['?', 'warm', '?', '?', '?', '?']]

```

3. Write a program to demonstrate the working of the Decision tree based ID3 algorithm. Use an appropriate data set for building the decision tree and apply this knowledge to classify a new sample

```
1  import pandas as pd
2  import math
3  import numpy as np
4
5  data = pd.read_csv('id.csv')
6  features = [feat for feat in data]
7  features.pop()
8
9  class Node:
10     def __init__(self):
11         self.children = []
12         self.value = ""
13         self.isLeaf = False
14         self.pred = ""
15
16     def entropy(examples):
17         pos = 0.0
18         neg = 0.0
19         for _, row in examples.iterrows():
20             if row["Answer"] == "yes":
21                 pos += 1
22             else:
23                 neg += 1
24         if pos == 0.0 or neg == 0.0:
25             return 0.0
26         else:
27             p = pos / (pos + neg)
28             n = neg / (pos + neg)
29             return -(p * math.log(p, 2) + n * math.log(n, 2))
30
31     def info_gain(examples, attr):
32         uniq = np.unique(examples[attr])
33         gain = entropy(examples)
34         for u in uniq:
35             subdata = examples[examples[attr] == u]
36             #print ("\n",subdata)
37             sub_e = entropy(subdata)
38             gain -= (float(len(subdata)) / float(len(examples))) * sub_e
39         return gain
40
```

```

40
41 def ID3(examples, attrs):
42     root = Node()
43     max_gain = 0
44     max_feat = ""
45     for feature in attrs:
46         gain = info_gain(examples, feature)
47         if gain > max_gain:
48             max_gain = gain
49             max_feat = feature
50     root.value = max_feat
51     uniq = np.unique(examples[max_feat])
52     for u in uniq:
53         subdata = examples[examples[max_feat] == u]
54         if entropy(subdata) == 0.0:
55             newNode = Node()
56             newNode.isLeaf = True
57             newNode.value = u
58             newNode.pred = np.unique(subdata["Answer"])
59             root.children.append(newNode)
60         else:
61             dummyNode = Node()
62             dummyNode.value = u
63             new_attrs = attrs.copy()
64             new_attrs.remove(max_feat)
65             child = ID3(subdata, new_attrs)
66             dummyNode.children.append(child)
67             root.children.append(dummyNode)
68     return root
69
70 def printTree(root: Node, depth=0):
71     for i in range(depth):
72         print("\t", end="")
73     print(root.value, end="")
74     if root.isLeaf:
75         print(" -> ", root.pred)
76     print()
77     for child in root.children:
78         printTree(child, depth + 1)
79
80 root = ID3(data, features)
81 printTree(root)

```


4. Write a program to implement the Naïve Bayesian classifier for a sample training data set stored as a .CSV file. Compute the accuracy of the classifier, considering few test data sets.

```
1  import pandas as pd
2  from sklearn.model_selection import train_test_split
3  from sklearn.naive_bayes import GaussianNB
4  from sklearn import metrics
5
6  df = pd.read_csv("diabetes.csv")
7  feature_col_names = ['num_preg', 'glucose_conc', 'diastolic_bp', 'thickness', 'insulin', 'bmi', 'diab_pred', 'age']
8  predicted_class_names = ['diabetes']
9
10 X = df[feature_col_names].values
11 y = df[predicted_class_names].values
12
13 print(df.head)
14 xtrain,xtest,ytrain,ytest=train_test_split(X,y,test_size=0.40)
15
16 print ('\n the total number of Training Data :',ytrain.shape)
17 print ('\n the total number of Test Data :',ytest.shape)
18
19 clf = GaussianNB().fit(xtrain,ytrain.ravel())
20 predicted = clf.predict(xtest)
21 predictTestData= clf.predict([[6,148,72,35,0,33.6,0.627,50]])
22
23 print('\n Confusion matrix')
24 print(metrics.confusion_matrix(ytest,predicted))
25
26 print('\n Accuracy of the classifier is',metrics.accuracy_score(ytest,predicted))
27
28 print('\n The value of Precision', metrics.precision_score(ytest,predicted))
29
30 print('\n The value of Recall', metrics.recall_score(ytest,predicted))
31
32 print("Predicted Value for individual Test Data:", predictTestData)
```

```

<bound method NDFrame.head of      num_preg  glucose_conc  diastolic_bp  thickness  insulin  bmi  \
0          6          148          72          35          0  33.6
1          1          85          66          29          0  26.6
2          8         183          64          0          0  23.3
3          1          89          66          23          94  28.1
4          0         137          40          35         168  43.1
..      ...      ...      ...      ...      ...      ...
140         3         128          78          0          0  21.1
141         5         106          82          30          0  39.5
142         2         108          52          26          63  32.5
143        10         108          66          0          0  32.4
144         4         154          62          31         284  32.8

      diab_pred  age  diabetes
0          0.627  50          1
1          0.351  31          0
2          0.672  32          1
3          0.167  21          0
4          2.288  33          1
..      ...  ...      ...
140         0.268  55          0
141         0.286  38          0
142         0.318  22          0
143         0.272  42          1
144         0.237  23          0

[145 rows x 9 columns]>

the total number of Training Data : (87, 1)

the total number of Test Data : (58, 1)

Confusion matrix
[[30 12]
 [ 8  8]]

Accuracy of the classifier is 0.6551724137931034


The value of Precision 0.4


The value of Recall 0.5
Predicted Value for individual Test Data: [1]

```


5. Write a program to construct a Bayesian network considering training data. Use this model to make predictions.


```
1
2  get_ipython().system('pip install pgmpy')
3
4
5  from pgmpy.models import BayesianModel
6  from pgmpy.factors.discrete import TabularCPD
7  from pgmpy.inference import VariableElimination
8  import numpy as np
9
10 #bayesNet = BayesianModel([("M", "R"),("U", "R"),("B", "R"),("R", "S")])
11 bayesNet.add_node("M")
12 bayesNet.add_node("U")
13 bayesNet.add_node("R")
14 bayesNet.add_node("B")
15 bayesNet.add_node("S")
16
17 bayesNet.add_edge("M", "R")
18 bayesNet.add_edge("U", "R")
19 bayesNet.add_edge("B", "R")
20 bayesNet.add_edge("B", "S")
21 bayesNet.add_edge("R", "S")
22
23 cpd_A = TabularCPD('M', 2, values=[[.95], [.05]])
24 cpd_U = TabularCPD('U', 2, values=[[.85], [.15]])
25 cpd_H = TabularCPD('B', 2, values=[[.90], [.10]])
26
27 cpd_S = TabularCPD('S', 2, values=[[0.98, .88, .95, .6], [.02, .12, .05, .40]],
28                               evidence=['R', 'B'], evidence_card=[2, 2])
29
30 cpd_R = TabularCPD('R', 2,
31                   values=[[0.96, .86, .94, .82, .24, .15, .10, .05], [.04, .14, .06, .18, .76, .85, .90, .95]],
32                   evidence=['M', 'B', 'U'], evidence_card=[2, 2, 2])
33 bayesNet.add_cpds(cpd_A, cpd_U, cpd_H, cpd_S, cpd_R)
34
35 bayesNet.check_model()
36 print("Model is correct.")
```

```
Model is correct.
/usr/local/lib/python3.7/dist-packages/pgmpy/models/BayesianModel.py:10: FutureWarning: BayesianModel has been renamed to BayesianNetwork. Please use BayesianNetwork class, BayesianModel will be removed in
FutureWarning,
Finding Elimination Order: 0%  0/3 [00:00<7, 76s]


Eliminating M: 100%  3/3 [00:00<00:00, 43.940s]


R +-----+
| R | phi(R) |
+-----+
| R(0) | 0.9062 |
+-----+
| R(1) | 0.0938 |
+-----+

Finding Elimination Order: 100%  2/2 [00:00<00:00, 18.536s]

Eliminating B: 100%  2/2 [00:00<00:00, 32.174s]

R| M +-----+
| R | phi(R) |
+-----+
| R(0) | 0.2131 |
+-----+
| R(1) | 0.7869 |
+-----+

Finding Elimination Order: 100%  3/3 [00:00<00:00, 17.636s]


Eliminating M: 100%  3/3 [00:00<00:00, 43.050s]

S| B +-----+
| S | phi(S) |
+-----+
| S(0) | 0.8465 |
+-----+
| S(1) | 0.1535 |
+-----+

<TabularCPD representing P(R:2 | M:2, B:2, U:2) at 0x7f578998c6d0>
```

6. Apply k-Means algorithm to cluster a set of data stored in a .CSV file.


```
import matplotlib.pyplot as plt
import numpy as np
from sklearn.cluster import KMeans
from sklearn.datasets import make_blobs
X, y_true = make_blobs(n_samples=550, centers=4, cluster_std=0.60, random_state=0)
import plotly.express as px
fig = px.scatter(x=X[:, 0], y=X[:, 1], width=800, height=500)
fig.show()
```

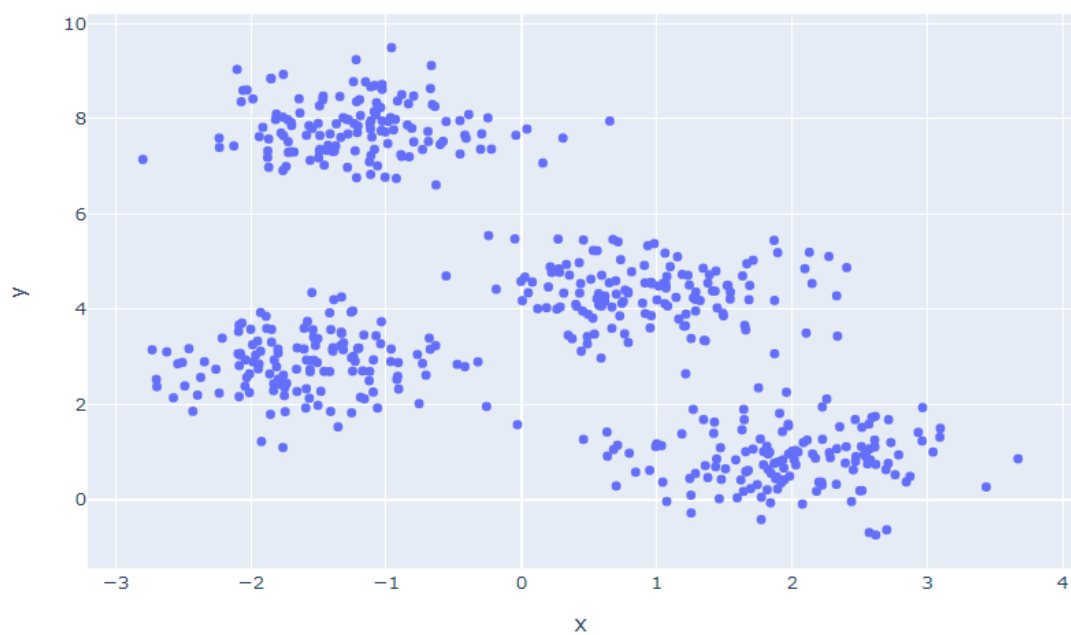


```
cost = []
for i in range(1, 11):
    KM = KMeans(n_clusters = i, max_iter = 500)
    KM.fit(X)

    cost.append(KM.inertia_)


# plot the cost against K values
fig = px.line(x=range(1, 11), y=cost, width=600, height=400)
fig.show()
```

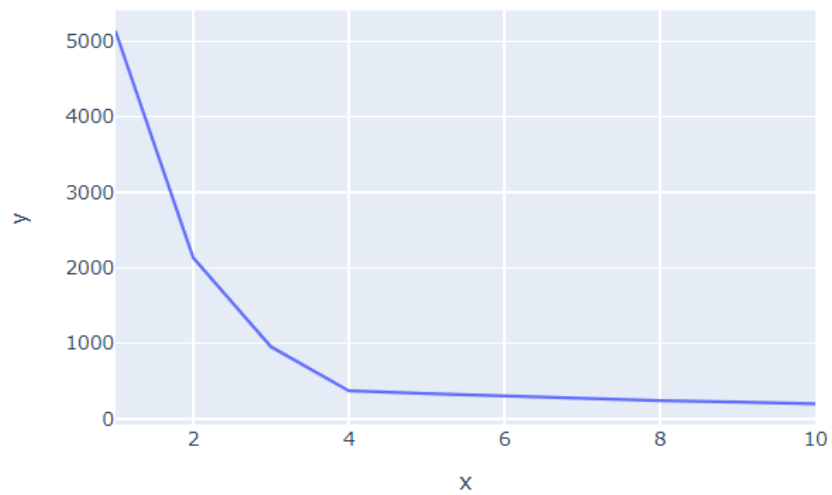

```
kmeans = KMeans(n_clusters=4)
kmeans.fit(X)
y_kmeans = kmeans.predict(X)
fig = px.scatter(x=X[:, 0], y=X[:, 1], color=y_kmeans, width=700, height=400)
trace = px.scatter(x=X[:, 0], y=X[:, 1], width=700, height=400)
fig.show()
```

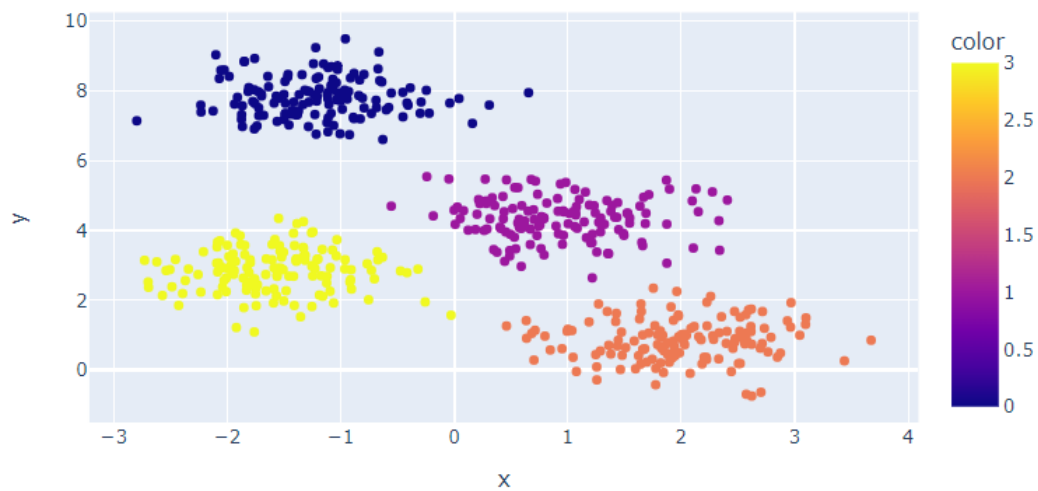

```
plt.scatter(X[:, 0], X[:, 1], c=y_kmeans, s=20)
centers = kmeans.cluster_centers_
plt.scatter(centers[:, 0], centers[:, 1], c='blue', s=100, alpha=0.9);
plt.show()
```

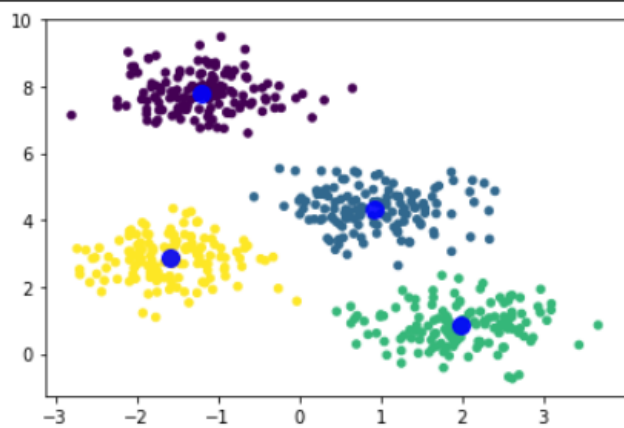

```

import pandas as pd
import seaborn as sns
import matplotlib.pyplot as plt
from sklearn import datasets
iris = datasets.load_iris()
df = pd.DataFrame(iris.data)
df['class']=iris.target
df.columns=['sepal_len', 'sepal_wid', 'petal_len', 'petal_wid', 'class']
df.info()

```

```

<class 'pandas.core.frame.DataFrame'>
RangeIndex: 150 entries, 0 to 149
Data columns (total 5 columns):
#   Column      Non-Null Count  Dtype
---  -
0   sepal_len    150 non-null    float64
1   sepal_wid    150 non-null    float64
2   petal_len    150 non-null    float64
3   petal_wid    150 non-null    float64
4   class        150 non-null    int64
dtypes: float64(4), int64(1)
memory usage: 6.0 KB

```

```

px.histogram(df, x='class', color='class')
from sklearn.preprocessing import StandardScaler
scaler = StandardScaler()
X = df.iloc[:,0:4].values
scaled_x = scaler.fit_transform(X)
model = KMeans(n_clusters=3,init='k-means++',random_state=0)
labels = model.fit_predict(scaled_x)

```

```

px.histogram(df, x='class', color='class')
from sklearn.preprocessing import StandardScaler
scaler = StandardScaler()
X = df.iloc[:,0:4].values
scaled_x = scaler.fit_transform(X)
model = KMeans(n_clusters=3,init='k-means++',random_state=0)
labels = model.fit_predict(scaled_x)

```

```

import plotly.graph_objects as go
fig = go.Figure()

# Add trace
fig.add_trace(go.Histogram(x=labels,name="Predicted Labels"))
fig.add_trace(go.Histogram(x=df['class'],name="True Labels"))

# Overlay both histograms
fig.update_layout(barmode='overlay')
# Reduce opacity to see both histograms
fig.update_traces(opacity=0.75)
fig.show()

```




```

labels =[]
for i in range(2, 5):
    model = KMeans(n_clusters = i, max_iter = 500)
    model.fit(scaled_x)
    labels.append(model.fit_predict(scaled_x))
from plotly.subplots import make_subplots
import plotly.graph_objects as go
fig = make_subplots(rows=2, cols=2)
for i in range(0, 3):
    fig.add_trace(go.Histogram(x=labels[i],name="{} Clusters".format(i+2)),
        row=(i//2 + 1), col=(i%2 + 1))
fig.add_trace(go.Histogram(x=df['class'],name="True Classification"),
    row=(2), col=(2))
fig.update_layout(height=700, width=1000, title_text="Side By Side Subplots")
fig.show()

```

Side By Side Subplots

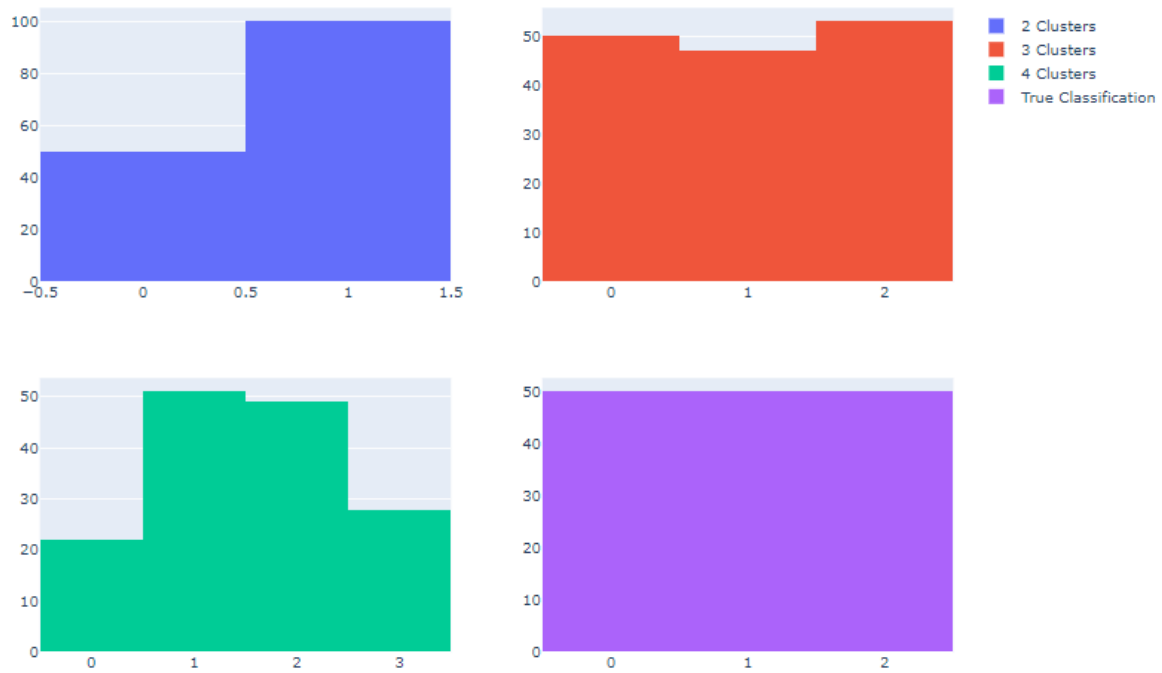

7. Apply EM algorithm to cluster a set of data stored in a .CSV file. Compare the results of k-Means algorithm and EM algorithm.

```
import pandas as pd
import plotly.express as px
from sklearn.metrics import confusion_matrix
df = px.data.iris()
df.info()
```

```
<class 'pandas.core.frame.DataFrame'>
RangeIndex: 150 entries, 0 to 149
Data columns (total 6 columns):
#   Column          Non-Null Count  Dtype
---  -
0   sepal_length    150 non-null   float64
1   sepal_width     150 non-null   float64
2   petal_length    150 non-null   float64
3   petal_width     150 non-null   float64
4   species         150 non-null   object
5   species_id      150 non-null   int64
dtypes: float64(4), int64(1), object(1)
memory usage: 7.2+ KB
```

```
from sklearn.mixture import GaussianMixture
from sklearn.model_selection import train_test_split as tts
X = df.iloc[:,0:4].values
gm = GaussianMixture(n_components=3, random_state=0).fit(X)
gm.means_
```

```
array([[5.006      , 3.418      , 1.464      , 0.244      ],
       [6.54639415, 2.94946365, 5.48364578, 1.98726565],
       [5.9170732 , 2.77804839, 4.20540364, 1.29848217]])
```

```
def feature(x):
    species = ['setosa','versicolor','virginica']
    return species[x]

pred = gm.predict(X)
pred_features = list(map(feature,pred))
fig1 = px.scatter(df, x="sepal_width", y="sepal_length", color=pred_features,
                  size='petal_length', hover_data=['petal_width'])
fig1.show()
```



8. Implement the Linear Regression algorithm in order to fit data points. Select appropriate data set for your experiment and draw graphs.

```
In [27]: import numpy as np
import matplotlib.pyplot as mtp
import pandas as pd
```

```
In [28]: dataset = pd.read_csv("kc_house_data.csv")
```


```
In [29]: space=dataset['sqft_living']
price=dataset['price']

x = np.array(space).reshape(-1, 1)
y = np.array(price)
from sklearn.model_selection import train_test_split
x_train, x_test, y_train, y_test = train_test_split(x, y, test_size= 1/3, random_state=0)
```

```
In [30]: from sklearn.linear_model import LinearRegression
regressor= LinearRegression()
regressor.fit(x_train, y_train)
```

```
Out[30]: LinearRegression()
```

```
In [31]: y_pred= regressor.predict(x_test)
x_pred= regressor.predict(x_train)
mtp.scatter(x_train, y_train, color="green")
mtp.plot(x_train, x_pred, color="red")
mtp.title("space VS price")
mtp.xlabel("space")
mtp.ylabel("price")
mtp.show()
```

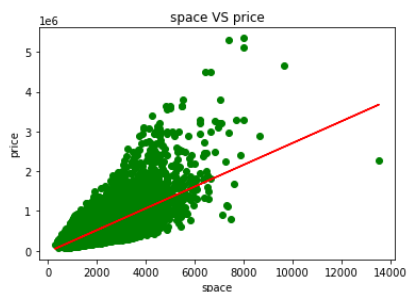

9. Write a program to implement k-Nearest Neighbour algorithm to classify the iris data set. Print both correct and wrong predictions.

```
import pandas as pd
from sklearn.neighbors import KNeighborsClassifier
from sklearn.model_selection import train_test_split as tts
from mlxtend.plotting import plot_decision_regions
import matplotlib.pyplot as plt
import seaborn as sns

df = pd.read_csv("https://raw.githubusercontent.com/Derek-Stanley/6A_ML/main/LAB%208/iris.csv")
df.info()

<class 'pandas.core.frame.DataFrame'>
RangeIndex: 150 entries, 0 to 149
Data columns (total 6 columns):
#   Column          Non-Null Count  Dtype
---  ---
0   Id              150 non-null    int64
1   SepalLengthCm   150 non-null    float64
2   SepalWidthCm    150 non-null    float64
3   PetalLengthCm   150 non-null    float64
4   PetalWidthCm    150 non-null    float64
5   Species         150 non-null    object
dtypes: float64(4), int64(1), object(1)
memory usage: 7.2+ KB

X = df.iloc[:,[1,2,3,4]].values
y = df.iloc[:,5].values
X_train, X_test, y_train, y_test = tts(X,y,test_size=0.3)

import math, numpy as np
math.sqrt(len(df))

12.24744871391589

model = KNeighborsClassifier(n_neighbors = 13, metric = 'euclidean')
model.fit(X_train,y_train)

KNeighborsClassifier(metric='euclidean', n_neighbors=13)

y_pred = model.predict(X_test)
```


```
y_pred = model.predict(X_test)
```

```
from sklearn.metrics import classification_report, confusion_matrix
print('Accuracy Metrics')
print(classification_report(y_test,y_pred))
```

Accuracy Metrics

	precision	recall	f1-score	support
Iris-setosa	1.00	1.00	1.00	15
Iris-versicolor	1.00	1.00	1.00	16
Iris-virginica	1.00	1.00	1.00	14
accuracy			1.00	45
macro avg	1.00	1.00	1.00	45
weighted avg	1.00	1.00	1.00	45

```
import plotly.express as px
pred = model.predict(X)
fig1 = px.scatter(df, x="SepalWidthCm", y="SepalLengthCm", color=pred,
                  size='PetalLengthCm', hover_data=['PetalWidthCm'])
fig1.show()
```

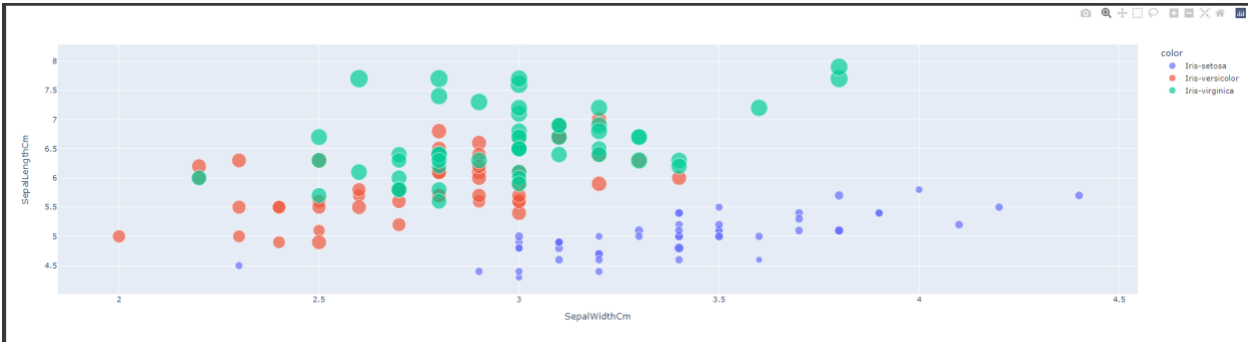

```
cm = confusion_matrix(df['Species'], pred, labels=pred)
px.imshow(cm, text_auto=True, labels=dict(x="Predicted Label", y="True Label", color="No of classification"),
          x=pred,y=pred,title="Confusion Matrix",color_continuous_scale="agg")
```

Confusion Matrix



10. Implement the non-parametric Locally Weighted Regression algorithm in order to fit data points. Select appropriate data set for your experiment and draw graphs.

```
from numpy import *
from os import listdir
import matplotlib
import matplotlib.pyplot as plt
import pandas as pd
import numpy as np
import numpy.linalg as np
import seaborn as sn
from scipy.stats.stats import pearsonr
```

```
data = sn.load_dataset('tips')
```

```
def kernel(point,xmat, k):
    m,n = np1.shape(xmat)
    weights = np1.mat(np1.eye((m)))
    for j in range(m):
        diff = point - X[j]
        weights[j,j] = np1.exp(diff*diff.T/(-2.0*k**2))
    return weights

def localWeight(point,xmat,yamat,k):
    wei = kernel(point,xmat,k)
    W = (X.T*(wei*X)).I*(X.T*(wei*yamat.T))
    return W

def localWeightRegression(xmat,yamat,k):
    m,n = np1.shape(xmat)
    ypred = np1.zeros(m)

    for i in range(m):
        ypred[i] = xmat[i]*localWeight(xmat[i],xmat,yamat,k)
    return ypred
```

```
#Load data points

bill = np1.array(data.total_bill)
tip = np1.array(data.tip)
#preparing and add 1 in bill
mbill = np1.mat(bill)
mtip = np1.mat(tip)
# mat is used to convert to n dimesiona to 2 dimensional array form
m= np1.shape(mbill)[1] # print(m) 244 data is stored in m
one = np1.mat(np1.ones(m))
X= np1.hstack((one.T,mbill.T)) # create a stack of bill from ONE
# print(X)
#set k here
ypred = localWeightRegression(X,mtip,2)
SortIndex = X[:,1].argsort(0)
xsrt = X[SortIndex][:,0]
fig = plt.figure()
ax = fig.add_subplot(1,1,1)
ax.scatter(bill,tip, color='blue')
ax.plot(xsrt[:,1],ypred[SortIndex], color = 'red', linewidth=5)
plt.xlabel('Total bill')
plt.ylabel('Tip')
plt.show();
```

