Experiment 15.1.1: Car Dealership Sales System

1. Aim

To design and implement a Python program to model a car dealership sales system using object-oriented programming. The task involves creating a base class Car and two derived classes Car1 and Car2 to represent different car types, demonstrating inheritance and method overriding.

2. Pseudocode

1. **START**
2. **DEFINE** a base class Car:
    - **METHOD** __init__(self, brand, price, model, color):
        - Initialize the attributes self.brand, self.price, self.model, and self.color.
    - **METHOD** display_details(self):
        - Print the attributes of the car.
3. **DEFINE** derived classes Car1 and Car2 inheriting from Car:
    - **OVERRIDE** the display_details(self) method in both classes to print car information (brand, price, model, and color) each on a separate line.
4. **MAIN PROGRAM**:
    - **READ** the input for Car1 (brand, price, model, color) from a single line.
    - **READ** the input for Car2 (brand, price, model, color) from a second line.
    - **INSTANTIATE** objects for Car1 and Car2 with the provided inputs.
    - **CALL** the display_details() method for the Car1 instance.
    - **CALL** the display_details() method for the Car2 instance.
5. **END**

3. Flowchart

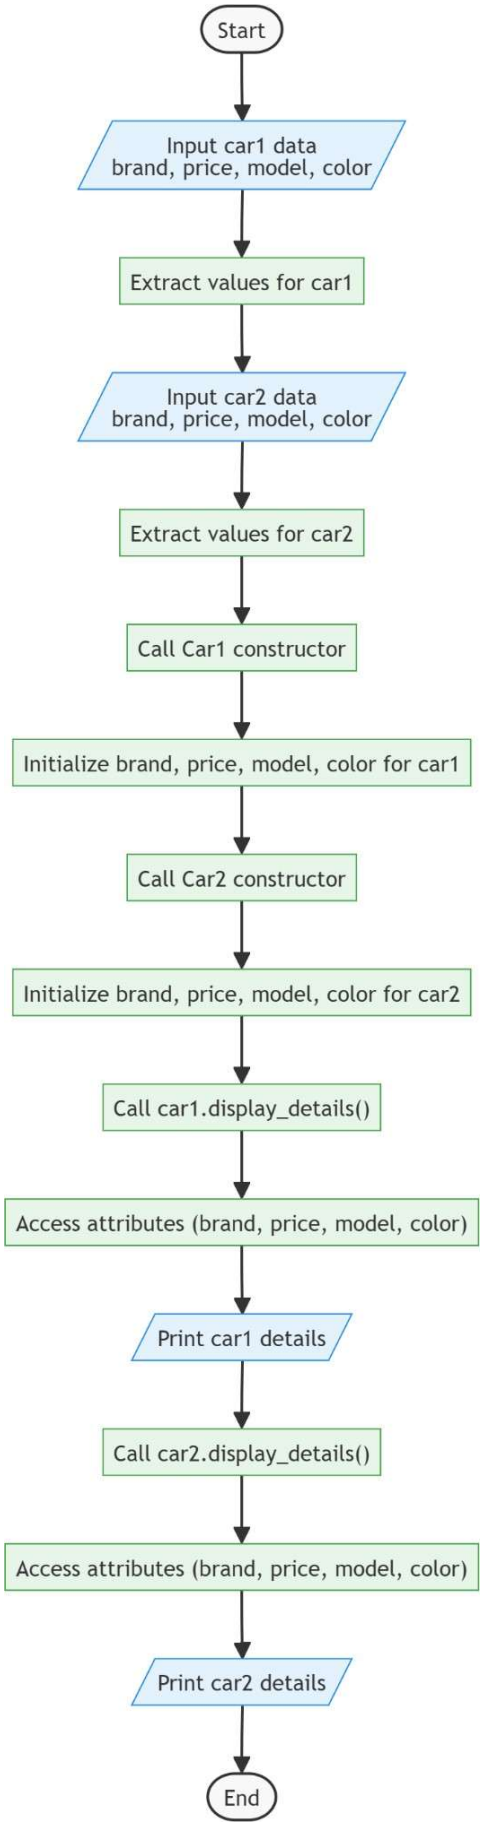
Start
Input car1 data
brand, price, model, color
Extract values for car1
Input car2 data
brand, price, model, color
Extract values for car2
Call Car1 constructor
Initialize brand, price, model, color for car1
Call Car2 constructor
Initialize brand, price, model, color for car2
Call car1.display_details()
Access attributes (brand, price, model, color)
Print car1 details
Call car2.display_details()
Access attributes (brand, price, model, color)
Print car2 details
End
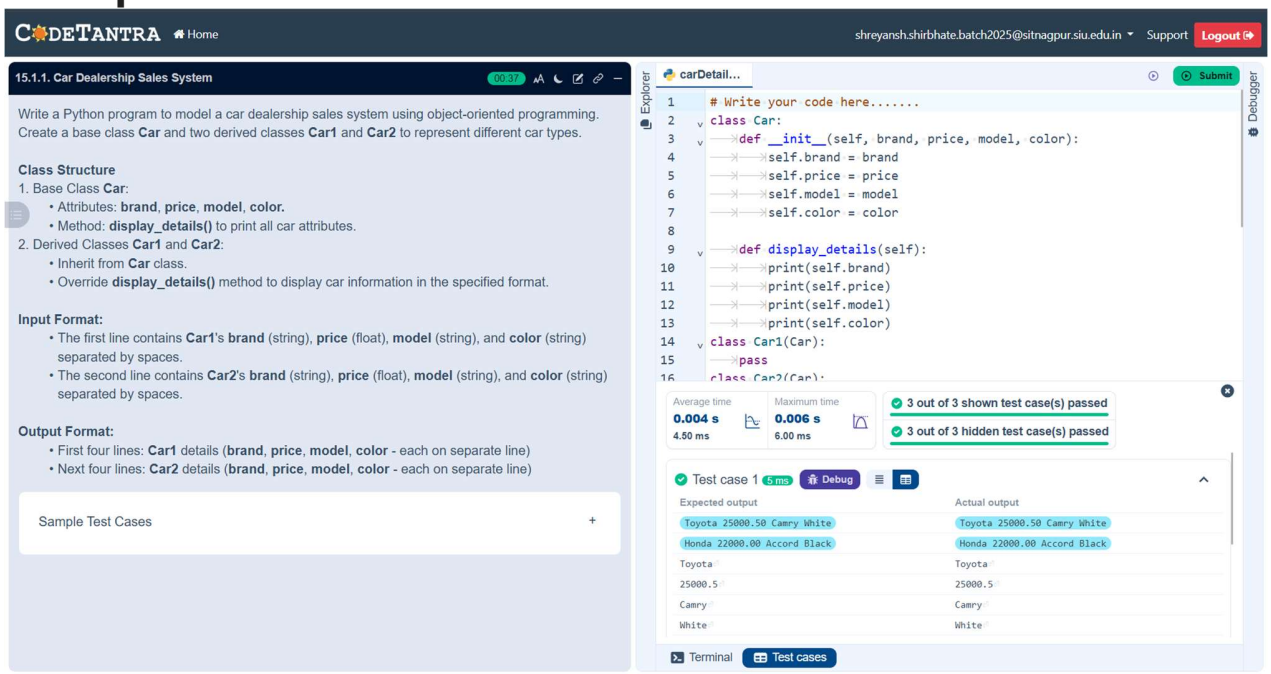
4. Experiment Screenshot