


NAME: SHREYA KS

AIM:

COMMANDS:

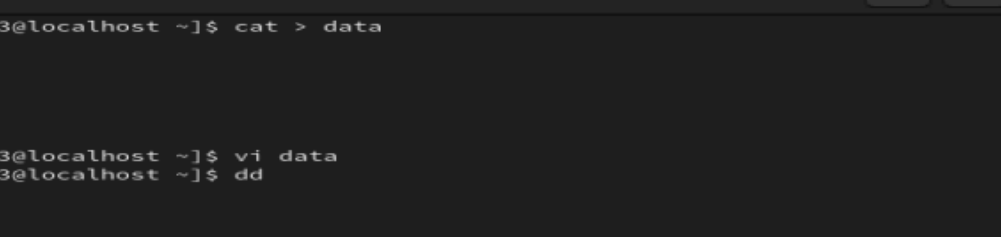


A terminal window titled "user123@localhost:~ — dd" with search, menu, and close icons. The terminal shows the following commands and output:

```
[user123@localhost ~]$ cat > data
INDIA
USA
INDIA
UK
INDIA
CANADA
[user123@localhost ~]$ vi data
[user123@localhost ~]$ dd
```

A vertical scrollbar is visible on the right side of the terminal window.

[illegible]

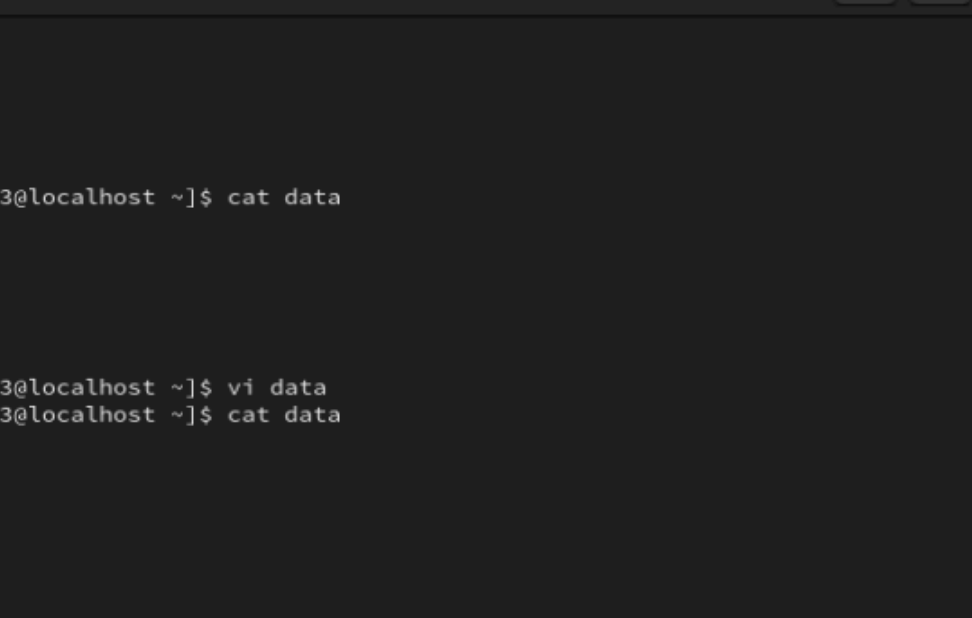

```
user123@localhost:~  
INDIA  
USA  
INDIA  
UK  
INDIA  
CANADA  
[user123@localhost ~]$ cat data  
INDIA  
USA  
INDIA  
UK  
INDIA  
CANADA  
[user123@localhost ~]$ vi data  
[user123@localhost ~]$ cat data  
INDIA  
USA  
INDIA  
UK  
INDIA  
CANADA  
JAPAN  
[user123@localhost ~]$
```

```

1 INDIA
2 USA
3 INDIA
4 UK
5 INDIA
6 CANADA
7
8

```

user123@localhost:~ — /usr/bin/vim data

:set nu 7,0-1 All

RESULT:

Thus, the VI Editor and SED commands were executed successfully in Linux environment and the expected outputs were obtained.