

Simple Artificial Neural Networks

Practice Quiz, 5 questions

5/5 points (100%)



Congratulations! You passed!

Next Item



1 / 1
point


1.

Recall from the video the structure of one of the simplest neural networks,

Simple Artificial Neural Networks

Practice Quiz, 5 questions

5/5 points (100%)

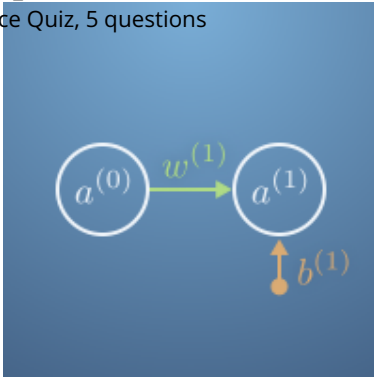

Here there are only two neurons (or nodes), and they are linked by a single edge.

The *activation* of neurons in the final layer, (1), is determined by the activation of neurons in the previous layer, (0),

$$a^{(1)} = \sigma(w^{(1)}a^{(0)} + b^{(1)}),$$

where $w^{(1)}$ is the *weight* of the connection between Neuron (0) and Neuron (1), and $b^{(1)}$ is the bias of the Neuron (1). These are then subject to the *activation function*, σ to give the activation of Neuron (1)

Our small neural network won't be able to do a lot - it's far too simple. It is however worth plugging a few numbers into it to get a feel for the parts.

Let's assume we want to train the network to give a *NOT function*, that is if you input 1 it returns 0, and if you input 0 it returns 1.

For simplicity, let's use, $\sigma(z) = \tanh(z)$, for our activation function, and *randomly* initialise our weight and bias to $w^{(1)} = 1.3$ and $b^{(1)} = -0.1$.

Use the code block below to see what output values the neural network initially returns for training data.

```
1 # First we set the state of the network
2 sigma = np.tanh
3 w1 = -5
4 b1 = 5
5
6 # Then we define the neuron activation.
7 def a1(a0):
8     return sigma(w1 * a0 + b1)
9
10 # Finally let's try the network out!
11 # Replace x with 0 or 1 below,
12 a1(1)
13
```

Run

Reset

It's not very good! But it's not trained yet; experiment by changing the weight and bias and see what happens.

Choose the weight and bias that gives the best result for a *NOT function* out of all the options presented.

- ☐ $w^{(1)} = 0, b^{(1)} = 5$
- ☐ $w^{(1)} = 10, b^{(1)} = 0$
- ☒ $w^{(1)} = -5, b^{(1)} = 5$

Simple Artificial Neural Networks

Correct. This is the best of all the options presented. We can do better with (for example) $w^{(1)} = -15, b^{(1)} = 10$. **5/5 points (100%)**

Practice Quiz, 5 questions

☐ $w^{(1)} = -3, b^{(1)} = 0$

☐ $w^{(1)} = 3, b^{(1)} = 1$



1 / 1
point


2.

Let's extend our simple network to include more neurons.

Simple Artificial Neural Networks

Practice Quiz, 5 questions

5/5 points (100%)

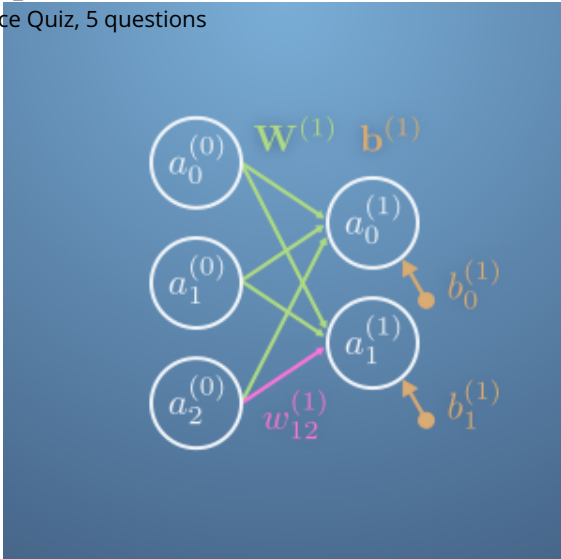

We now have a slightly changed notation. The neurons which are labelled by their layer with a superscript in brackets, are now also labelled with their number in that layer as a subscript, and form vectors $\mathbf{a}^{(0)}$ and $\mathbf{a}^{(1)}$.

The weights now form a matrix $\mathbf{W}^{(1)}$, where each element, $w_{ij}^{(1)}$, is the link between the neuron j in the previous layer and neuron i in the current layer. For example $w_{12}^{(1)}$ is highlighted linking $a_2^{(0)}$ to $a_1^{(1)}$.

The biases similarly form a vector $\mathbf{b}^{(1)}$.

We can update our activation function to give,

$$\mathbf{a}^{(1)} = \sigma(\mathbf{W}^{(1)}\mathbf{a}^{(0)} + \mathbf{b}^{(1)}),$$

where all the quantities of interest have been *upgraded* to their vector and matrix form and σ acts upon each element of the resulting weighted sum vector separately.

For a network with weights, $\mathbf{W}^{(1)} = \begin{bmatrix} -2 & 4 & -1 \\ 6 & 0 & -3 \end{bmatrix}$, and bias $\mathbf{b} = \begin{bmatrix} 0.1 \\ -2.5 \end{bmatrix}$,

calculate the output, $\mathbf{a}^{(1)}$, given an input vector,

$$\mathbf{a}^{(0)} = \begin{bmatrix} 0.3 \\ 0.4 \\ 0.1 \end{bmatrix}$$

You may do this calculation either by hand (to 2 decimal places), or by writing python code. Input your answer into the code block below.

(If you chose to code, remember that you can use the @ operator in Python to perform operate a matrix on a vector.)

```
1 # First set up the network.
2 sigma = np.tanh
3 W = np.array([[ -2,  4, -1], [ 6,  0, -3]])
4 b = np.array([0.1, -2.5])
5
6 # Define our input vector
7 x = np.array([0.3, 0.4, 0.1])
8
9 # Calculate the values by hand,
10 # and replace a1_0 and a1_1 here (to 2 decimal places)
```

```

11 # (Or if you feel adventurous, find the values with code!)
12 def value(w, a, b, sigma):
13     ans = sigma(np.dot(w, a) + b)
14     # print(ans)
15     return ans
16
17
18 a1 = value(x, W, b, sigma)
19 print(a1)
20 # a1 = np.array([a1_0, a1_1])
21

```

Simple Artificial Neural Networks

Practice Quiz, 5 questions

5/5 points (100%)

Run

Reset

Correct Response


Well done. Why not try again using the other method.



1 / 1
point

3.

Now let's look at a network with a *hidden layer*.

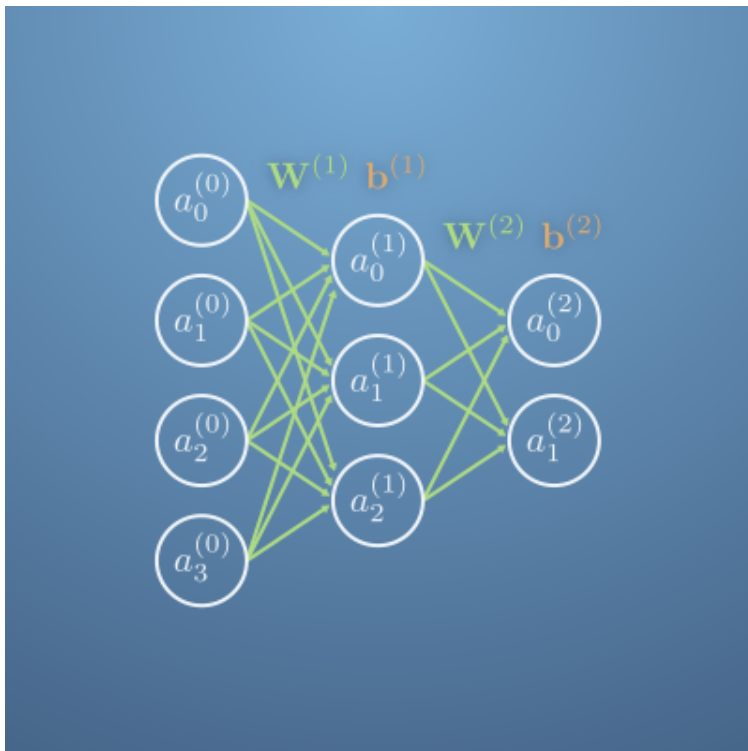

Here, data is input at layer (0), this activates neurons in layer (1), which become the inputs for neurons in layer (2).

(We've stopped explicitly drawing the biases here.)

Which of the following statements are true?



The number of weights in a layer is the product of the input and output neurons to that layer.

Correct

This gives us 12 weights in the first layer, and 6 weights in the second.

Simple Artificial Neural Networks

Practice Quiz, 5 questions

5/5 points (100%)



None of the other statements.

Un-selected is correct



This neural network has 5 biases.

**Correct**

In general there are as many biases as there are output and hidden neurons.



This neural network has 9 biases.



Un-selected is correct



This network can always be replaced with another one with the same amount of input and output neurons, but no hidden layers.



Un-selected is correct



The number of weights in a layer is the sum of the input and output neurons to that layer plus 1.



Un-selected is correct

1 / 1
point

4.

Which of the following statements about the neural network from the previous question are true?

 $\mathbf{a}^{(2)} = \sigma(\mathbf{W}^{(1)}\mathbf{a}^{(1)} + \mathbf{b}^{(2)}),$ 

Un-selected is correct

 $\mathbf{a}^{(2)} = \sigma(\mathbf{W}^{(2)}\sigma(\mathbf{W}^{(1)}\mathbf{a}^{(0)} + \mathbf{b}^{(1)}) + \mathbf{b}^{(2)}),$ **Correct**

In this form, the entire function of the neural network is shown, with each layer chained together. This is the same as,

$$\mathbf{a}^{(2)} = \sigma(\mathbf{W}^{(2)}\mathbf{a}^{(1)} + \mathbf{b}^{(2)})$$

$$\mathbf{a}^{(1)} = \sigma(\mathbf{W}^{(1)}\mathbf{a}^{(0)} + \mathbf{b}^{(1)}).$$

but in a single statement.

Simple Artificial Neural Networks

Practice Quiz, 5 questions

5/5 points (100%)



None of the other statements.

Un-selected is correct



$$\mathbf{a}^{(2)} = \sigma(\mathbf{W}^{(2)}\mathbf{W}^{(1)}\mathbf{a}^{(0)} + \mathbf{W}^{(2)}\mathbf{b}^{(1)} + \mathbf{b}^{(2)})$$

Un-selected is correct



1 / 1
point

5.

So far, we have concentrated mainly on the *structure* of neural networks, let's look a bit closer at the *function*, and what the parts actually do.

We'll introduce another network, this time with a one dimensional input, a one dimensional output, and a hidden layer with two neurons.

Use the tool below to change the values of the four weights and three biases, and observe what effect this has on the network's function.

With the weights and biases set here, observe how $a_0^{(1)}$ activates when $a_0^{(0)}$ is active, and $a_1^{(1)}$ activates when $a_0^{(0)}$ is inactive. Then the output neuron, $a_0^{(2)}$, activates when neither $a_0^{(1)}$ nor $a_1^{(1)}$ are too active.

(Interact with the plugin below to score the point for this question.)

Simple Artificial Neural Networks

Practice Quiz, 5 questions

5/5 points (100%)

