


Name: Sopariwala Shreya H.
Course: M.Sc.(ICT) Sem 3
Roll No: 60
Subject: Open Source Web Development
Practical Assignment 4

Q: CRUD with EJS, Express, mongoose for Students marksheet data


Output:

Student marksheet List:

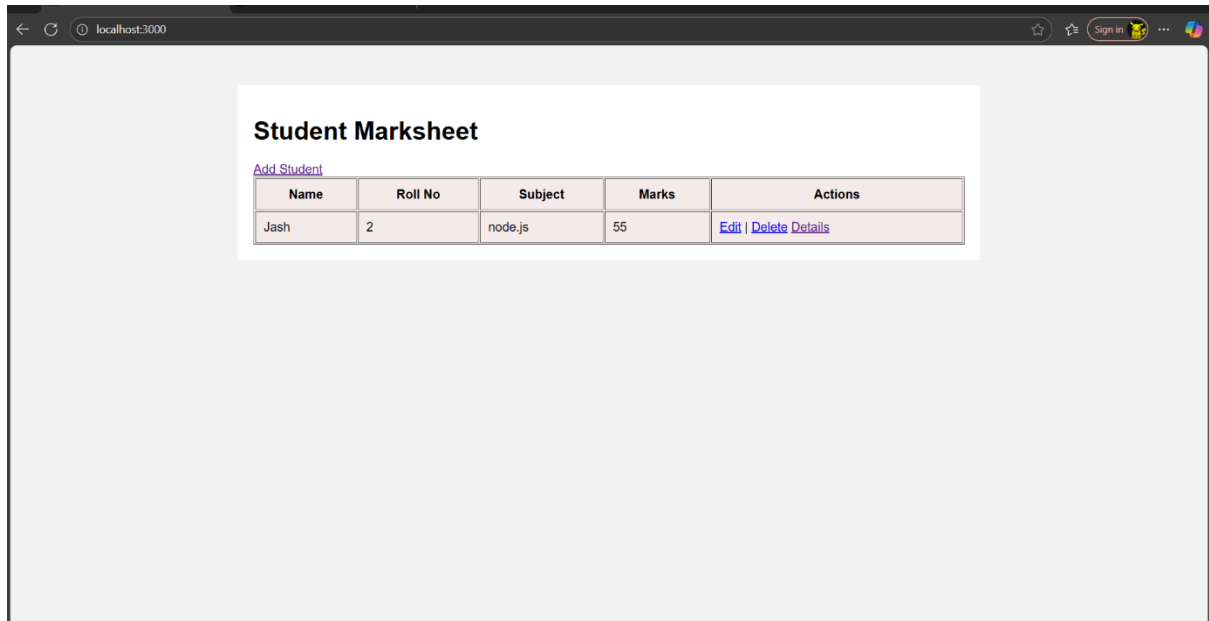


Name	Roll No	Subject	Marks	Actions
Jash	2	node.js	55	Edit Delete Details

Add new Student marksheet:

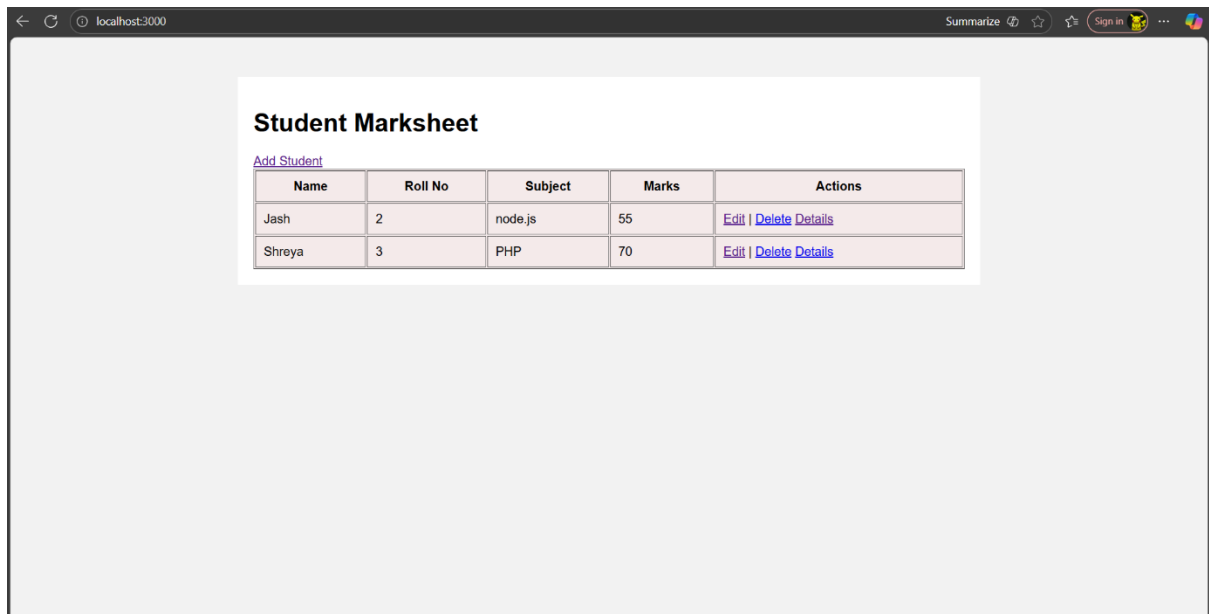

Name	Roll No	Subject	Marks	Actions
Jash	2	node.js	55	Edit Delete Details
Shreya	3	PHP	70	Edit Delete Details

Update Student marksheet:

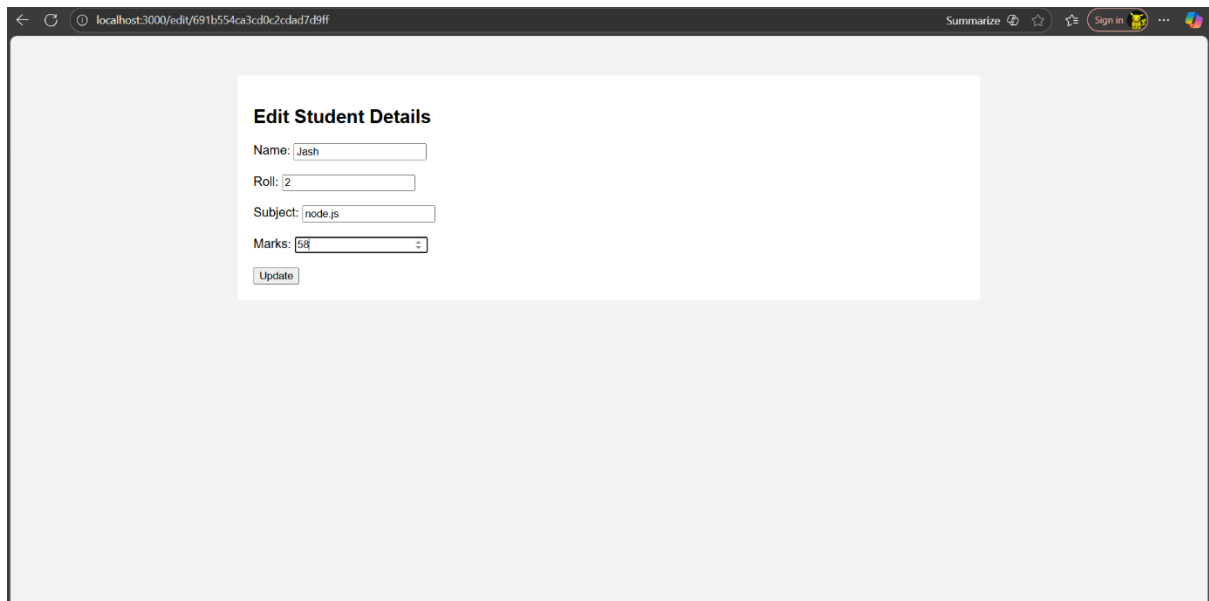

The screenshot shows a web browser window with the address bar displaying 'localhost:3000/edit/691b554ca3cd0c2cdad7d9ff'. The page contains a form titled 'Edit Student Details'. The form has four input fields: 'Name' with the value 'Jash', 'Roll' with the value '2', 'Subject' with the value 'node.js', and 'Marks' with the value '58'. Below the 'Marks' field is an 'Update' button.

Edit Student Details


Name:

Roll:

Subject:

Marks:

Full Student Details:

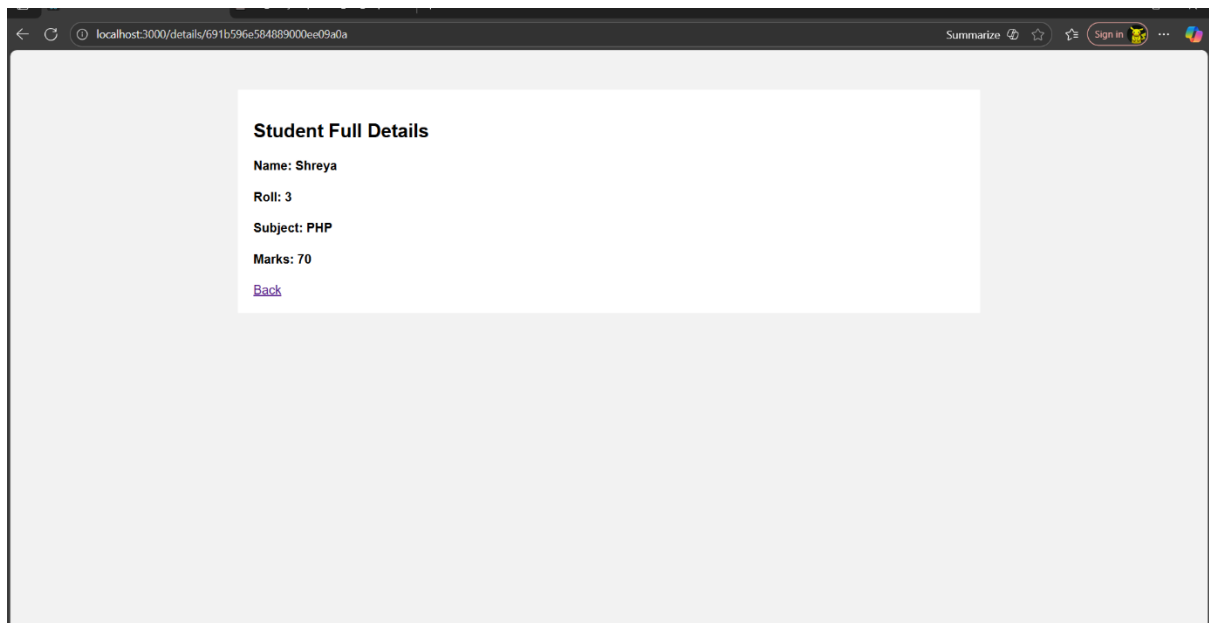

The screenshot shows a web browser window with the address bar displaying 'localhost:3000/details/691b596e584889000ee09a0a'. The page contains a form titled 'Student Full Details'. The form displays the following information: 'Name: Shreya', 'Roll: 3', 'Subject: PHP', and 'Marks: 70'. Below the 'Marks' field is a 'Back' link.

Student Full Details

Name: Shreya

Roll: 3

Subject: PHP

Marks: 70

[Back](#)