Do Perturbation Models Compose Under Their Own Output?

Midterm Report, GenAI in Biomedicine, Fall 2026

Shreyan Nalwad (snalwad) **Sri Datta Bandreddi** (sbandred)
Carnegie Mellon University
{snalwad, sbandred}@andrew.cmu.edu
Shreyan-A0I/perturb-doubletake

Abstract

Perturbation models predict a cell's expression after a genetic perturbation, and their output lives in the same space as their input. We ask whether feeding a prediction back in, $f(f(x, A), B)$, reproduces the measured double perturbation $A{+}B$, a property a virtual-cell "world model" would require. On the Norman et al. Perturb-seq dataset, with all singles in training and all 131 doubles held out, the additive baseline (control + effect of A + effect of B) reaches Pearson δ 0.873. GEARS, trained only on singles, reaches 0.673 and has more than twice the additive error on the top-20 genes (0.181 vs. 0.082 on the same 128 doubles). A split-half design shows that non-additivity is a reproducible property of each pair (Spearman 0.94 across disjoint cells), and additive error rises fivefold from the least to the most non-additive tertile, though part of this trend reflects perturbation size. Finally, GEARS's predicted shift does not depend on its input cell, so its rollouts are fixed sums of its one-step predictions and it cannot test composition. scGPT takes input expression by design; we are now fine-tuning it on the singles to test composition directly.

1. Introduction

Perturbation response models such as GEARS [8], scGPT [4] and State [1] predict how a cell's expression changes after a genetic perturbation. A control cell goes in; a predicted perturbed profile comes out. Because input and output share one expression space, a prediction can in principle be fed back in and perturbed again: predict(predict(x, A), B). If a model has learned a reusable representation of cell state, that rollout should approximate the measured double perturbation $A{+}B$. If it is only a one-step map from control cells, it should not. As far as we know, no published work has tested which is the case.

The question matters because of where the field is heading. Proposals for virtual-cell world models [11] envision simulating cells under sequences of interventions, which needs a model whose output is a valid input. The starting point is sobering: Ahlmann-Eltze et al. [2] showed that on the Norman et al. [7] doubles, deep models do not beat simple addition of the two single effects. They evaluated only the joint prediction.

We ask the complementary question: do models compose under their own output? We train on single perturbations only, hold out every double, and compare three predictions per pair: the model's joint prediction of $A+B$, its sequential rollout A then B, and simple baselines, mainly addition. We do not build a virtual cell; we test whether current models meet this precondition on the one dataset where it can be checked against measured combinations.

The contributions of this midterm are as follows:

- A singles-only evaluation of perturbation models on all 131 Norman doubles, with a split-half cell design that keeps the noise used to group pairs out of the targets they are scored on.
- Evidence that non-additivity is a reproducible property of each pair, and that the additive baseline, the bar every model must clear, fails mainly on strongly non-additive pairs, though this trend partly reflects perturbation size.
- GEARS joint predictions under two training regimes, both clearly worse than addition, and an analysis showing that GEARS's prediction ignores its input state, so GEARS cannot test composition and scGPT, now being fine-tuned, carries that question.

Changes since the proposal, in response to the review.

1. **Two rollout arms.** Norman's doubles keep guide A active throughout, which neither rollout reproduces exactly. We report both *carried* (the second step gets label B only) and *restated* (it gets $A+B$).
2. **Round-trip gate.** No model enters the comparison until it passes a full input $\rightarrow$ output $\rightarrow$ input check on real and generated inputs.
3. **Split-half cells.** Each condition's cells are split into two random halves: one only for measuring non-additivity, the other for everything else.
4. **Two GEARS training regimes.** GEARS is trained on its own standard split as a diagnostic and on our strict singles-only split for the experiment.

We also narrowed scope to fit a 4.5-week calendar: the ComboSciPlex and Replogle experiment is cut, Geneformer is excluded (it outputs an embedding shift with no expression decoder), and State and CPA are out for time. All code is public in the repository linked above.

2. Related Work

The closest prior work shows that simple addition beats deep models on Norman doubles; ours differs by testing rollout, using a singles-only split, and controlling for measurement noise.

Predicting doubles from singles. Norman et al. [7] measured 131 pairwise CRISPRa perturbations and all their singles in K562 cells. Most pairs combine roughly additively, with a minority showing synergy, buffering or new behaviour. The dataset is the standard benchmark for combinatorial prediction.

Deep perturbation models. GEARS [8] encodes each perturbed gene through a gene-ontology graph and predicts the perturbed expression of a control cell. scGPT [4] fine-tunes a pretrained transformer for the same task. CPA [6] and scGen [5] represent perturbations as vectors in a learned latent space. State [1] is a recent large transition model. All are trained and evaluated as one-step maps, control $\rightarrow$ perturbed.

Simple baselines beat deep models. Ahlmann-Eltze et al. [2] showed that adding the two single shifts beats GEARS, scGPT and other deep models on Norman doubles. Related benchmarks [3, 9, 10] found that much apparent accuracy comes from shifts shared by all perturbations. Table 1 summarises how our study differs.

	Prior benchmarks	This work
What is scored	Joint prediction $f(x, A{+}B)$ only	Joint and rollout $f(f(x, A), B)$, both arms
Training split	GEARS default; some doubles in training	All singles train, all 131 doubles test
Noise control	Strata and scores from the same cells	Strata from cell half 1, scores from half 2

Table 1 | How this work differs from the closest prior benchmarks.

Latent-space composition. scGen and CPA add perturbation vectors inside a latent space, the closest prior idea to rollout. There, composition is an assumption built into the architecture, not a property tested on measured doubles, and it happens in latent space rather than by re-entering the model through its expression input.

Virtual cells and world models. Xing & Song [11] argue for virtual cells that can be rolled forward under sequences of interventions. Such a model needs its outputs to be valid inputs, which is the precondition we test.

3. Methodology

We train on single perturbations only, score every held-out double on cells never used to select it, and compare models with the additive baseline pair by pair.

Research questions.

- **RQ1, joint.** Trained on singles only, does a model predict held-out doubles better than addition, and is any advantage concentrated in measurably non-additive pairs?
- **RQ2, composition.** Does the rollout $f(f(x, A), B)$ approach the measured double as well as the joint prediction?
- **RQ3, diagnosis.** When rollout fails, is it because the model cannot accept non-control input, or because its own predictions drift away from real cells?

Data. Norman et al. [7] CRISPRa Perturb-seq in K562 cells, GEARS-processed: 91,205 cells $\times$ 5,045 genes, 105 singles and 131 doubles. Every double has both of its singles measured.

Strict split. All singles and control are training conditions; all 131 doubles are test. GEARS's default split instead trains on some doubles. Under ours, a model and the additive baseline see the same information. For GEARS, 10 singles (10% of all singles), drawn only from those in no double, are held out for validation.

Split-half design. Each condition's cells are split at random into two halves, repeated over 5 seeds. Half 1 is for measurement only: the non-additivity score η and the top-20 differentially expressed genes (DEGs) used for scoring. Half 2 is for everything else: inputs to baselines and models, and the targets they are scored against. The noise that puts a pair in a "highly non-additive" group

therefore never appears in its scoring target. With Δ the pseudobulk shift from control in half h,

$$r_h = \Delta_{AB} - \Delta_A - \Delta_B, \qquad \eta_h = \|r_h\|. \tag{1}$$

Because the halves have independent noise, $r_1 \cdot r_2$ is an unbiased estimate of the true squared residual, which tells us how much of η is signal. Pairs are grouped into η tertiles using half 1.

Baselines. All are built from half-2 pseudobulks of training conditions: *no change* (control), *train mean* (control + average single shift), *additive* (control + $\Delta_A + \Delta_B$) and *low-rank additive* (control + rank-10 SVD-denoised $\Delta_A + \Delta_B$). Low-rank additive is the singles-only analogue of the linear baseline of Ahlmann-Eltze et al. [2].

Models. Each model sits behind one interface, predict$(X, \text{pert}) \rightarrow X$, which takes cells and returns cells in the same gene space. GEARS's own `predict()` samples control cells internally, so our adapter builds its input graph from the expression we pass. Predictions are anchored to the pseudobulk of their input condition, so models are not penalised for sampling noise in the $\sim$300 input cells. For each held-out pair we compute the *joint* prediction $f(x_0, \{A, B\})$. The full experiment adds the *carried* rollout $f(f(x_0, A), B)$; the *restated* rollout $f(f(x_0, A), \{A, B\})$; and the *measured-input* rollout $f(x_A, B)$, which starts from real A-perturbed cells and so separates a failure to compose from a failure on generated input (RQ3). Rollouts will be run in both orders; this midterm reports joint predictions only. For GEARS on its standard split, doubles seen in training are excluded from scoring.

Round-trip gate. Before joining the comparison, a model must pass a check on singles. Real A-perturbed cells passed through with no new perturbation should come back nearly unchanged ($r > 0.95$), and so should the model's own predicted A state. Failure on real input means composition cannot be tested for that model; failure only on generated input means distribution shift. Order dependence and saturation (applying A twice) are reported as computational consistency checks only, since Norman measures joint perturbations and cannot validate either biologically.

Metrics and inference. MSE on the top-20 DEGs, and Pearson correlation of predicted vs. observed shift from control (Pearson δ), over all genes and over the top-20 DEGs. Per-pair results are averaged over the 5 seeds. All 95% intervals come from 2,000 bootstrap resamples over pairs, never cells, because the pair is the unit of inference.

4. Experiments: Preliminary Results

Addition is the strongest predictor of held-out doubles, and GEARS trained on singles has more than twice its error. All results use the 131 held-out doubles (GEARS: 128 and 71, explained below) and 5 random half-splits, with per-pair results averaged over splits. GEARS used seed 1 and 20 epochs in each regime.

Baselines and GEARS joint prediction. Addition wins on every metric (Table 2 and Figure 1). Denoising the singles makes it worse: low-rank addition beats plain addition on only 23 of 131 pairs.

GEARS is scored on fewer pairs for two reasons. Three doubles contain a gene outside GEARS's gene-ontology graph (IER5L+LYL1, RHOXF2BB+SET, RHOXF2BB+ZBTB25), and on its standard split GEARS also trains on 57 doubles, which are excluded. On the same pairs, addition scores 0.082

Predictor	Pairs	MSE, top-20 DEGs ↓	Pearson δ, all genes ↑	Pearson δ, top-20 DEGs ↑
Additive	131	**0.081** [0.067, 0.096]	**0.873** [0.857, 0.886]	**0.959** [0.952, 0.964]
Low-rank additive	131	0.140 [0.123, 0.158]	0.789 [0.766, 0.810]	0.870 [0.847, 0.891]
GEARS, strict split	128	0.181 [0.161, 0.204]	0.673 [0.645, 0.700]	0.862 [0.833, 0.888]
GEARS, standard split	71	0.232 [0.194, 0.271]	0.605 [0.558, 0.653]	0.798 [0.740, 0.851]
Train mean	131	0.575 [0.494, 0.656]	0.533 [0.488, 0.575]	0.644 [0.582, 0.700]
No change	131	0.734 [0.643, 0.824]	undefined	undefined

Table 2 | Main result on held-out doubles, mean [95% bootstrap CI over pairs]. The additive baseline beats every other predictor on every metric, and GEARS has more than twice its error. No-change predicts zero shift, so its correlation is undefined.

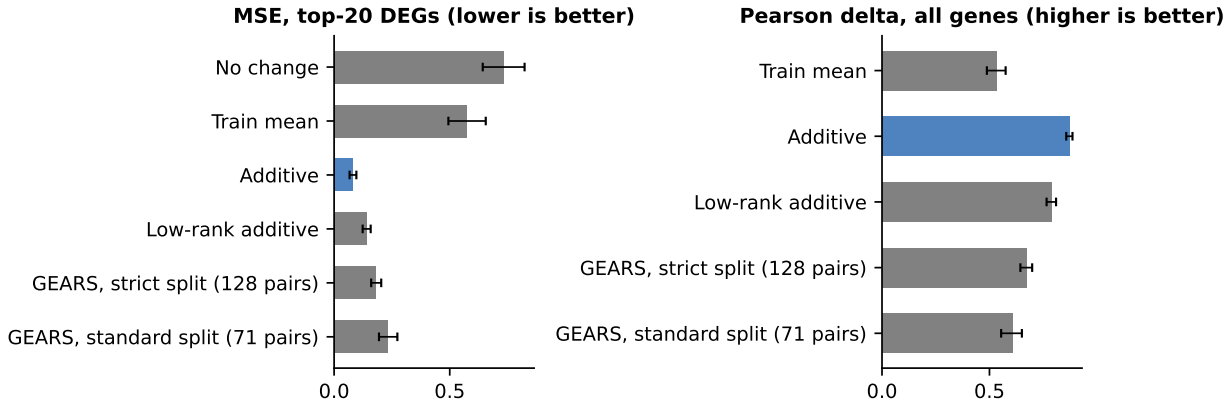


Figure 1 | Baselines and GEARS joint prediction on held-out doubles, with 95% bootstrap intervals. Addition (blue) has the lowest error and the highest Pearson δ.

(128 pairs) and 0.085 (71 pairs), so the gap is not a pair-set artefact. On the strict split, GEARS's MSE exceeds addition's by 0.100 [0.077, 0.122], and GEARS is better on only 14% of pairs; on the standard split the gap is 0.148 [0.106, 0.187], with GEARS better on 13%. The two GEARS rows are not directly comparable, because the standard set includes pairs with a single never seen in training.

Non-additivity is a reproducible property of each pair. η measured on two disjoint cell halves agrees with Spearman 0.944 (per seed 0.932 to 0.955; Figure 2). The cross-half estimate of true η^2 is positive for 99.5% of pairs and accounts for 61% of measured η^2, so η is mostly signal, with a noise share of about 40%.

Additive error rises with non-additivity. With η from half 1 and error from half 2, η and additive MSE correlate with Spearman 0.82 across pairs (Figure 3). Additive error rises about fivefold from the low to the high tertile; GEARS stays above it throughout, and the gap narrows only where interactions are strongest (Table 3). The most non-additive pairs are dominated by the CEBP family (CEBPA+CEBPB, CEBPA+CEBPE, CEBPE+SET, CEBPA+KLF1), consistent with the redundant differentiation programmes Norman et al. described.

Round-trip gate. Strict GEARS passes on the 5 singles with the most cells (KLF1, BAK1, CEBPE,

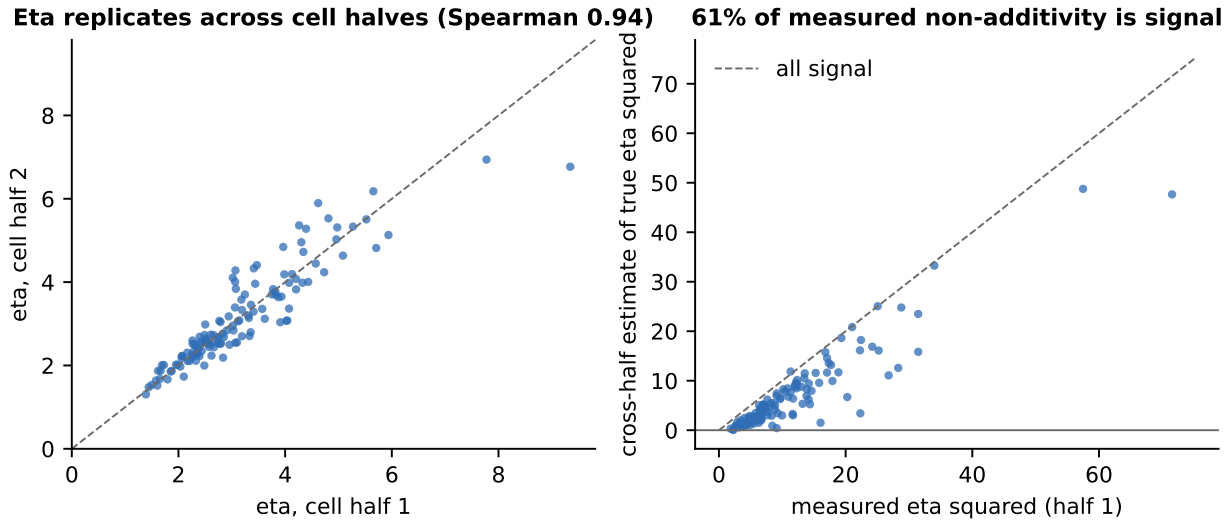


Figure 2 | Non-additivity replicates across disjoint cells. Left: η on cell half 1 vs. half 2. Right: cross-half estimate of true η^2 vs. measured η^2; the dashed line is "all signal".

ETS2, UBASH3B). Real A-perturbed cells passed through with no new perturbation come back with $r = 0.999$ on expression and 0.80 to 0.99 on shifts from control, and its own predicted states behave the same. The pass is structural, not learned: a second application of A moves the cell exactly as far as the first, so the shift simply doubles (saturation ratio 1.0 for all five genes). The GEARS source explains why: input expression enters only as a final residual, out $= x + g(\text{pert})$, and g ignores the input cell.

5. Analysis and Ablations

The midterm results already answer RQ1 for GEARS (it does not beat addition) and reduce RQ2 for GEARS to a comparison of two additive constructions.

η is reproducible across cells. The worry was that "highly non-additive" pairs might just be the noisiest ones, making their high error a regression-to-the-mean artefact. The split-half design rules this out: η replicates across disjoint cells (Spearman 0.94), and every error is scored on the half not used to define the groups. Reproducibility alone does not show that η measures interaction rather than perturbation size; the caveat at the end of this section addresses that. The high-η tertile is where a model with real interaction knowledge has room to beat addition.

Addition is a hard bar, and the room above it is concentrated. Most of addition's error sits in the top η tertile, five times the low tertile's. An overall average therefore mostly reflects easy, near-additive pairs, so the rollout analysis will report advantage over addition as a function of η, not as one average.

Ablation: smoothing the singles does not help. Low-rank addition is worse than plain addition on 82% of pairs. With pseudobulks from roughly 100 to 300 cells, the single effects are already precise, so the rank-10 projection removes more real signal than noise. A singles-only model must

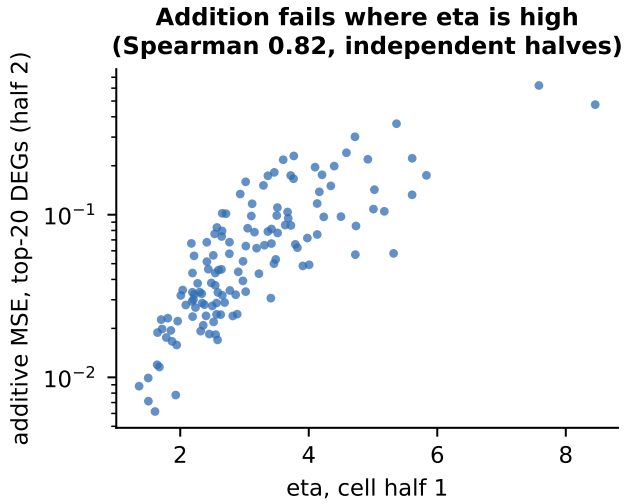


Figure 3 | Additive error (half 2) against η (half 1), one point per double.

η tertile	Additive	GEARS strict
Low	0.028	0.140
Mid	0.064	0.210
High	0.153	0.194

Table 3 | MSE on the top-20 DEGs by η tertile, same 128 doubles. GEARS is worse than addition in every tertile.

know something about how effects interact to beat addition.

GEARS has not learned interactions, and it cannot carry state. On the strict split, GEARS's error exceeds addition's in every tertile; its gap narrows in the high tertile (0.194 vs. 0.153) but does not reverse. Its predicted shift also ignores the input cell, so its rollouts are fixed by construction:

$$\text{carried: } x + g(A) + g(B), \qquad \text{restated: } x + g(A) + g(A, B). \tag{2}$$

The carried rollout cannot depend on order, since $g(A) + g(B)$ is symmetric. The restated rollout can: it equals the joint prediction plus an extra $g(A)$, so it counts A twice and should overshoot GEARS's joint prediction by exactly $g(A)$. Applying A twice simply doubles its shift. For GEARS, the remaining empirical question is whether its own singles, $g(A) + g(B)$, land closer to the measured double than its joint $g(A, B)$. Because $g(A)$ is trained to match each measured single, we expect the carried rollout to score close to the additive baseline, and so better than GEARS's joint prediction; that would reflect addition, not composition. scGPT takes input expression by design, so composition is an open question for it; the round-trip gate will test whether its output actually depends on its input.

Caveat: η partly tracks effect size. η correlates with the size of the double's shift (Spearman 0.54), and shift size alone predicts additive error about as well (0.58). η relative to the shift barely predicts it (0.15), and the scale-free Pearson δ hardly falls across tertiles (0.880 to 0.862). Part of the trend is "bigger perturbations have bigger absolute errors". For the final report we will compare models with addition within tertiles, which cancels scale, and check conclusions with relative η or effect size as a covariate.

6. Timeline for Remaining Work

Because GEARS cannot test composition (Section 5), scGPT is now required rather than optional. Fine-tuning scGPT on the Norman singles under our strict split, starting from the pretrained whole-human checkpoint, is already under way. Its round-trip gate result is due November 15 (Table 4).

By	Owner	Work
In progress	Shreyan	Fine-tune pretrained scGPT on Norman singles (strict split)
Nov 15	Shreyan	Full rollout on strict GEARS: both arms, both orders, measured-input control
Nov 15	Shreyan	Standard-split GEARS rollout as the diagnostic comparison
Nov 15	Shreyan	scGPT adapter and round-trip gate, then joint and rollout predictions
Nov 15	Datta	Rollout analysis: advantage over addition vs. η (slope + CI), order dependence, arm comparison
Nov 15	Both	**Checkpoint: scGPT round-trip result. A failure is itself a result (RQ3) and we diagnose its cause**
After Nov 15	Datta	Stability: saturation ratio and drift from real cells over 1 to 10 steps
After Nov 15	Datta	Effect-size checks: within-tertile comparisons and relative η
Nov 22	Both	Draft final-report figures
Dec 3	Both	Final report and presentation

Table 4 | Plan for the remaining work. If time runs short we cut, in order: the discriminator-based drift metric, five split seeds down to three, and the stability experiment. scGPT is not on the cut list: it is the only model in the study whose prediction can depend on its input cell.

7. Limitations

The midterm results rest on one dataset, one GEARS seed and joint predictions only.

- **One dataset.** Norman is the only public set with doubles and all their singles, so we cannot test generality on another cell type or perturbation modality.
- **Biology of rollout.** Norman's guides act together for the whole experiment. Neither rollout arm matches that exactly, and order and saturation cannot be validated biologically.
- **One GEARS run.** Each regime was trained once (seed 1, 20 epochs, default hyperparameters); seed-to-seed variation and tuning are untested.
- **Unpredictable pairs.** GEARS cannot perturb RHOXF2BB, KIAA1804 or IER5L, so 3 of 131 doubles are missing from its scores.
- **Effect-size confound.** η partly measures the size of the perturbation, not only its non-additivity (Section 5).
- **One model can test composition.** GEARS's rollouts are fixed sums of its one-step predictions, so the composition question (RQ2) rests on scGPT alone.
- **Rollout not yet run.** The midterm reports joint predictions only; the composition results are still to come.

References

[1] Abhinav K. Adduri et al. *Predicting cellular responses to perturbation across diverse contexts with State*. bioRxiv. 2025.

[2] Constantin Ahlmann-Eltze, Wolfgang Huber, and Simon Anders. "Deep-learning-based gene perturbation effect prediction does not yet outperform simple linear baselines". In: *Nature Methods* 22.8 (2025), pp. 1657–1661.

[3] Gerold Csendes et al. "Benchmarking foundation cell models for post-perturbation RNA-seq prediction". In: *BMC Genomics* (2025).

[4] Haotian Cui et al. "scGPT: toward building a foundation model for single-cell multi-omics using generative AI". In: *Nature Methods* (2024).

[5] Mohammad Lotfollahi, F. Alexander Wolf, and Fabian J. Theis. "scGen predicts single-cell perturbation responses". In: *Nature Methods* 16.8 (2019), pp. 715–721.

[6] Mohammad Lotfollahi et al. "Predicting cellular responses to complex perturbations in high-throughput screens". In: *Molecular Systems Biology* 19.6 (2023), e11517.

[7] Thomas M. Norman et al. "Exploring genetic interaction manifolds constructed from rich single-cell phenotypes". In: *Science* (2019).

[8] Yusuf Roohani, Kexin Huang, and Jure Leskovec. "Predicting transcriptional outcomes of novel multigene perturbations with GEARS". In: *Nature Biotechnology* (2024).

[9] Ramon Viñas Torné et al. "Systema: a framework for evaluating genetic perturbation response prediction beyond systematic variation". In: *Nature Biotechnology* (2025).

[10] Aaron Wenteler, Martina Occhetta, et al. "PertEval-scFM: benchmarking single-cell foundation models for perturbation effect prediction". In: *Proceedings of the 42nd International Conference on Machine Learning*. Vol. 267. PMLR. 2025.

[11] Eric Xing and Le Song. "A world model of the virtual cell". In: *Cell* 189.19 (2026), pp. 5831–5844.