

AWS S3 Static Website Hosting


Objective: To create an Amazon S3 bucket, upload static website files, configure website hosting, apply a public-read bucket policy, and verify that the website is accessible.

Bucket Name Used: merlin-test-web

AWS Region: Asia Pacific (Mumbai) ap-south-1


Step 1: Login to AWS Console

Navigate to the AWS Management Console and sign in using the account credentials. After successful login, the Console Home page appears, from where AWS services can be searched and accessed.

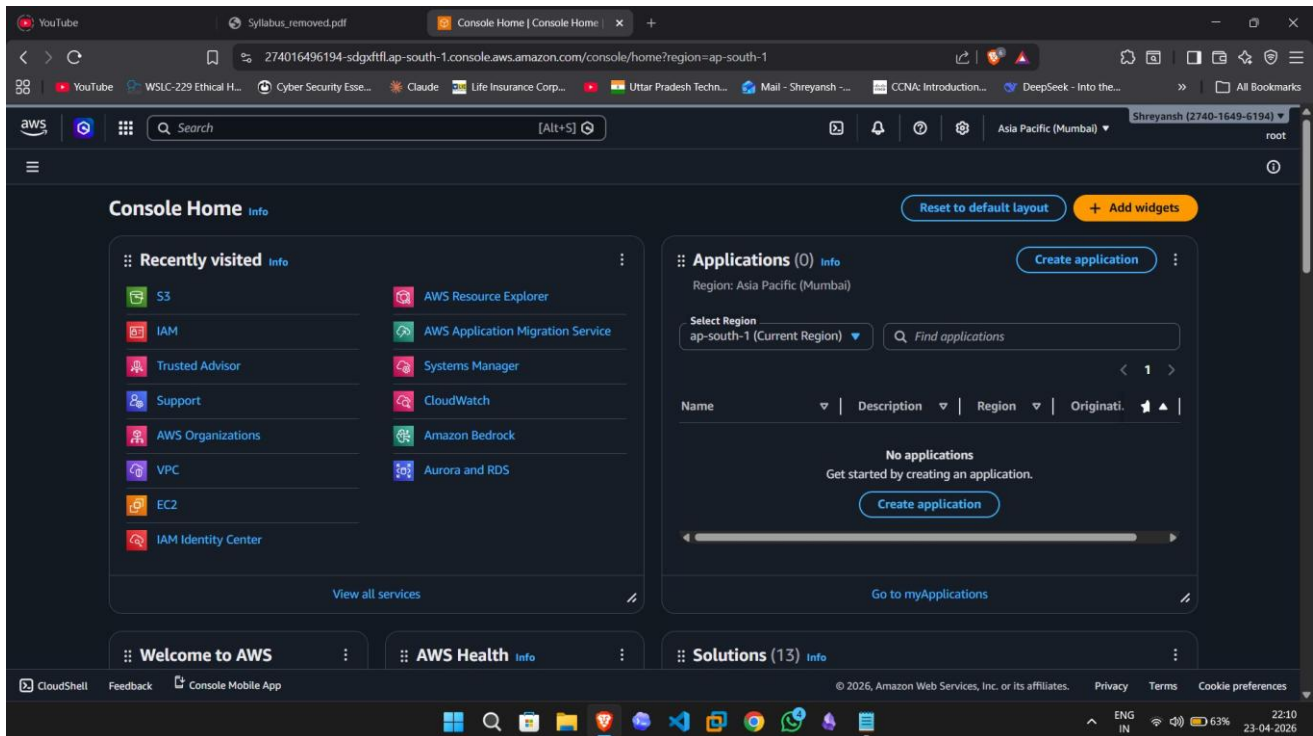


Step 2: Open Amazon S3

From the AWS Console, search for Amazon S3 and open the service dashboard. The S3 landing page provides options to create a new bucket and manage stored objects.

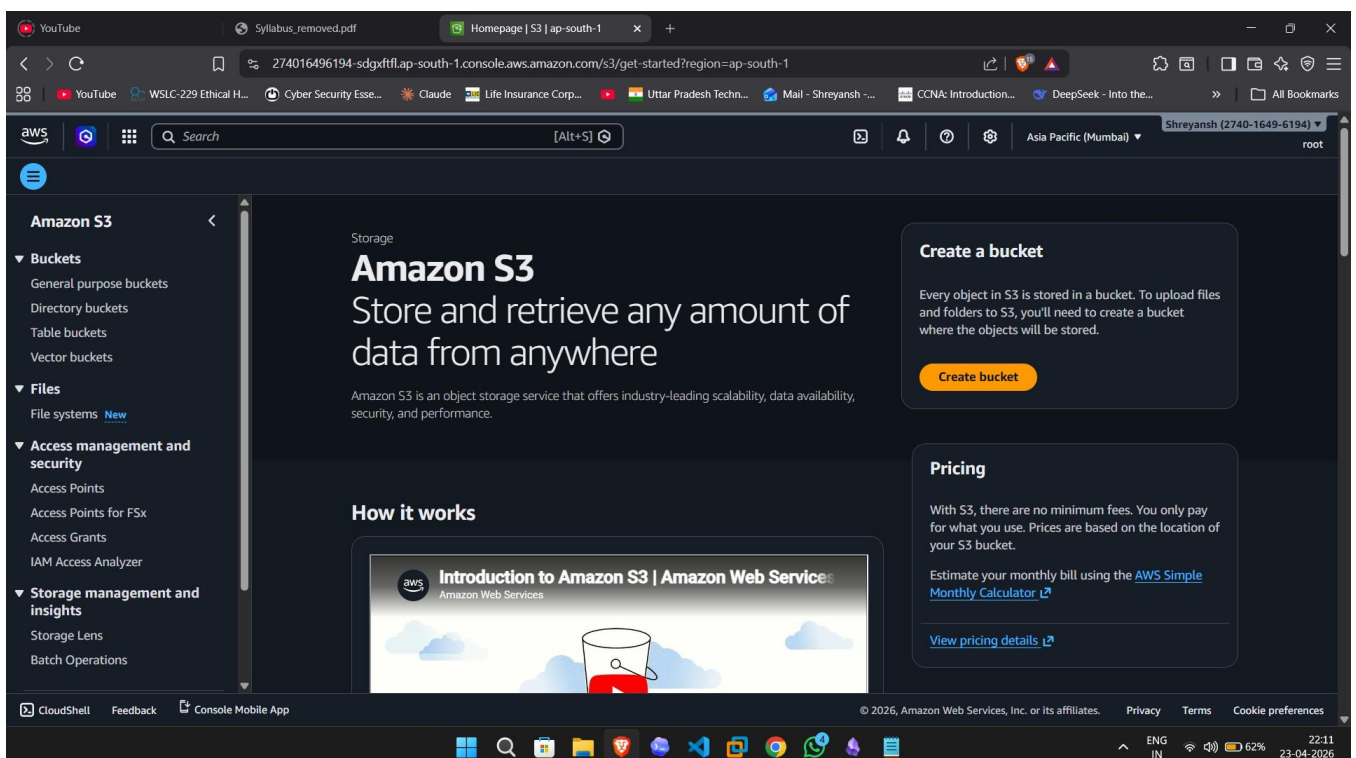


Step 3: Start Bucket Creation


Click on Create bucket to begin provisioning a new S3 bucket for static website hosting. In this practical, a general purpose bucket was selected in the Asia Pacific (Mumbai) region.

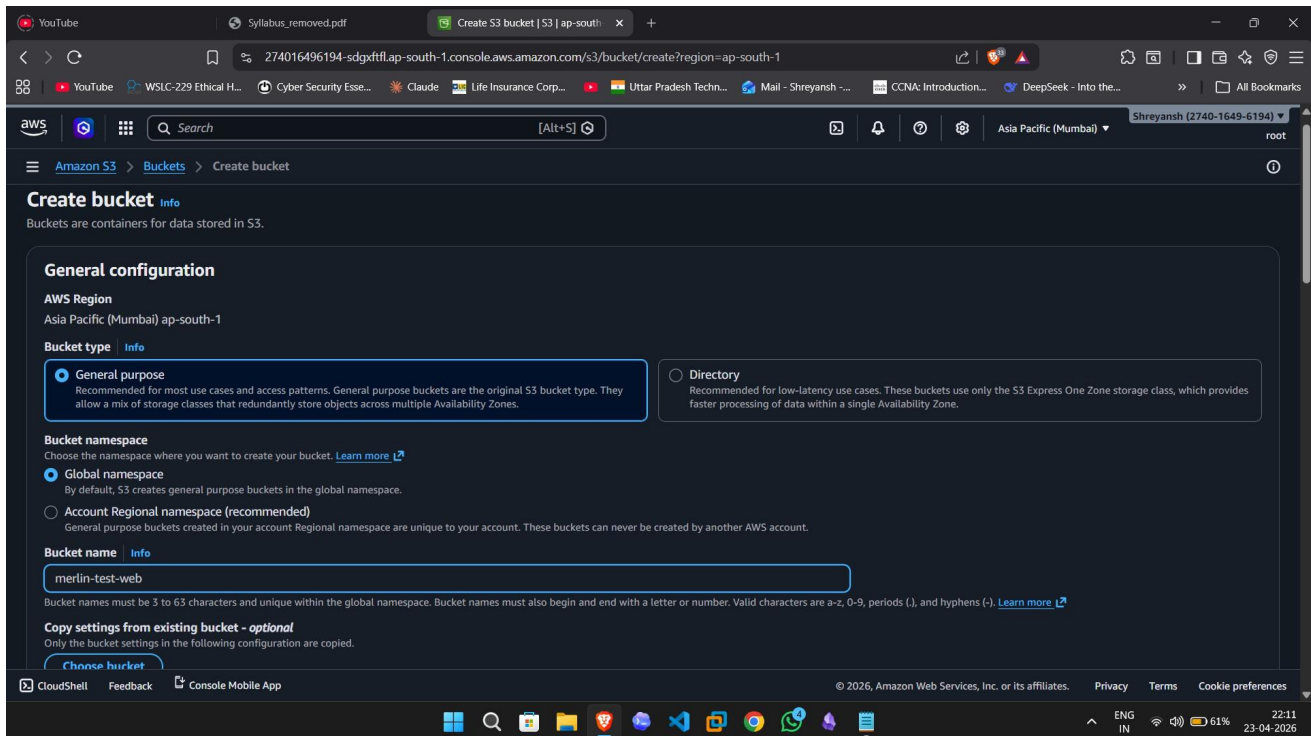

Step 4: Configure Bucket Name and Public Access


Enter a unique bucket name and review the public access configuration. Because static website content must be publicly readable, the block public access settings were adjusted and acknowledged.

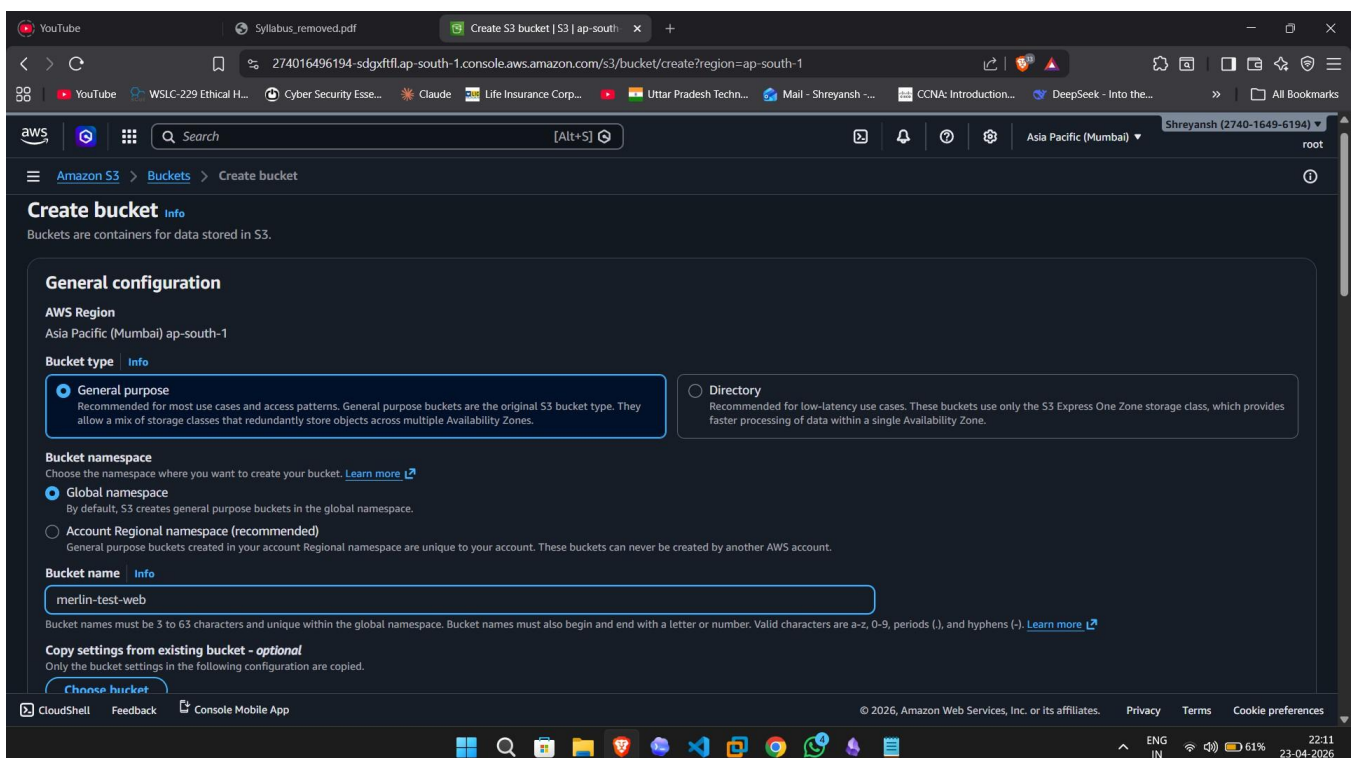


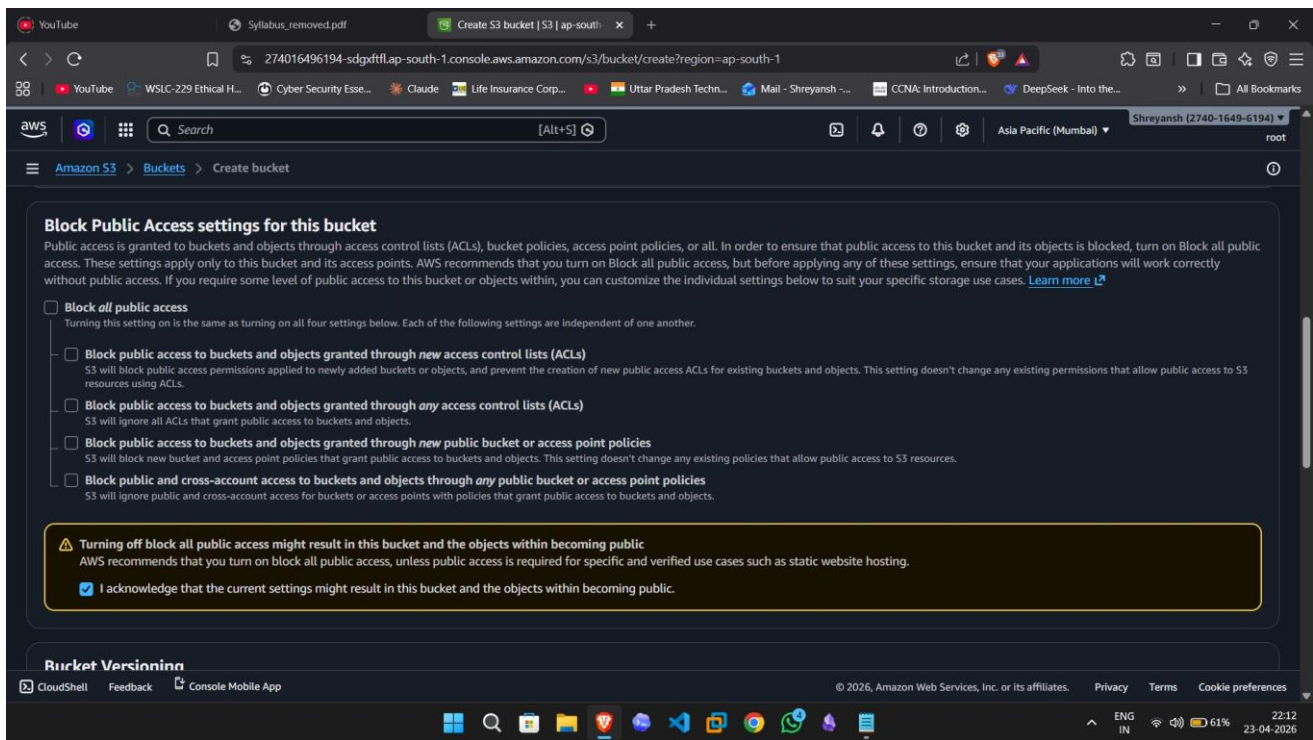

Step 5: Review Versioning, Tags, and Encryption


Before finalizing the bucket, the remaining settings such as versioning, tags, and default encryption were reviewed. The default options were kept, and the bucket was then created.

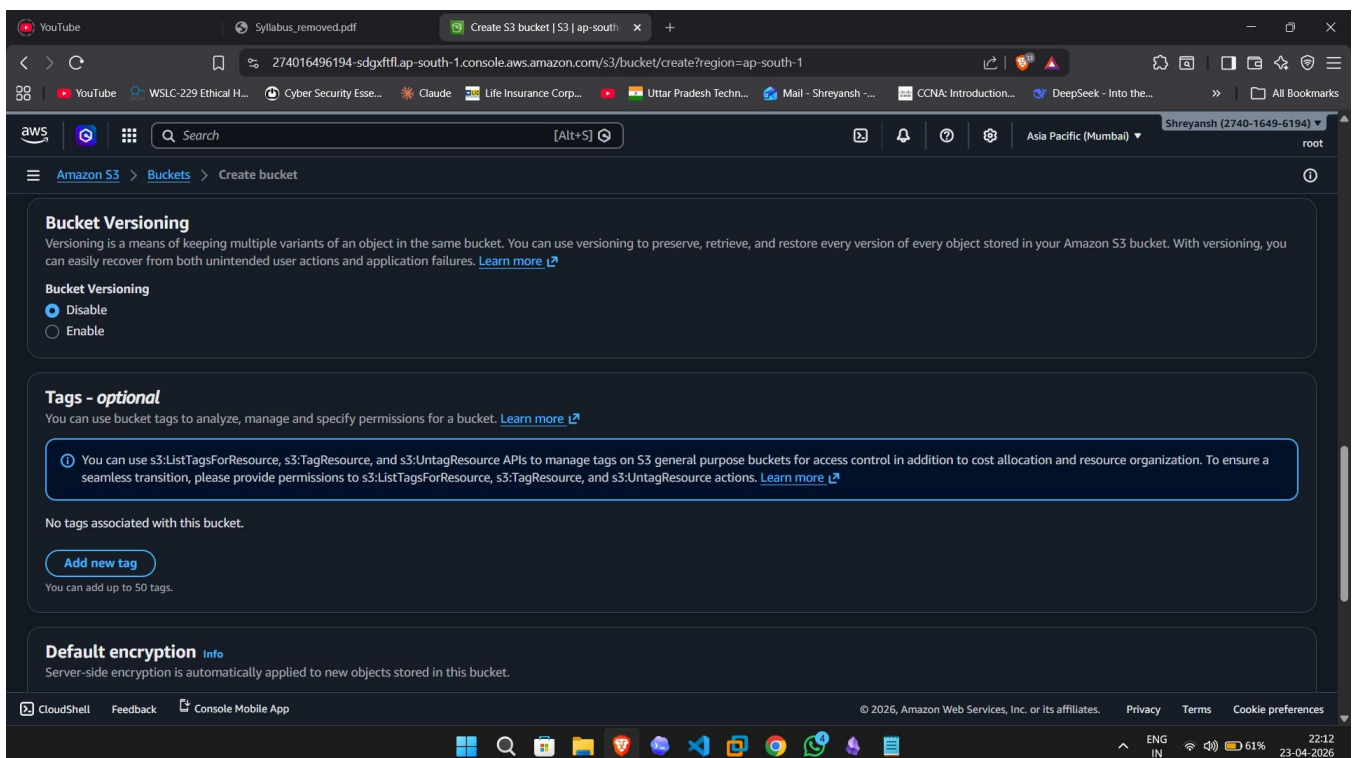

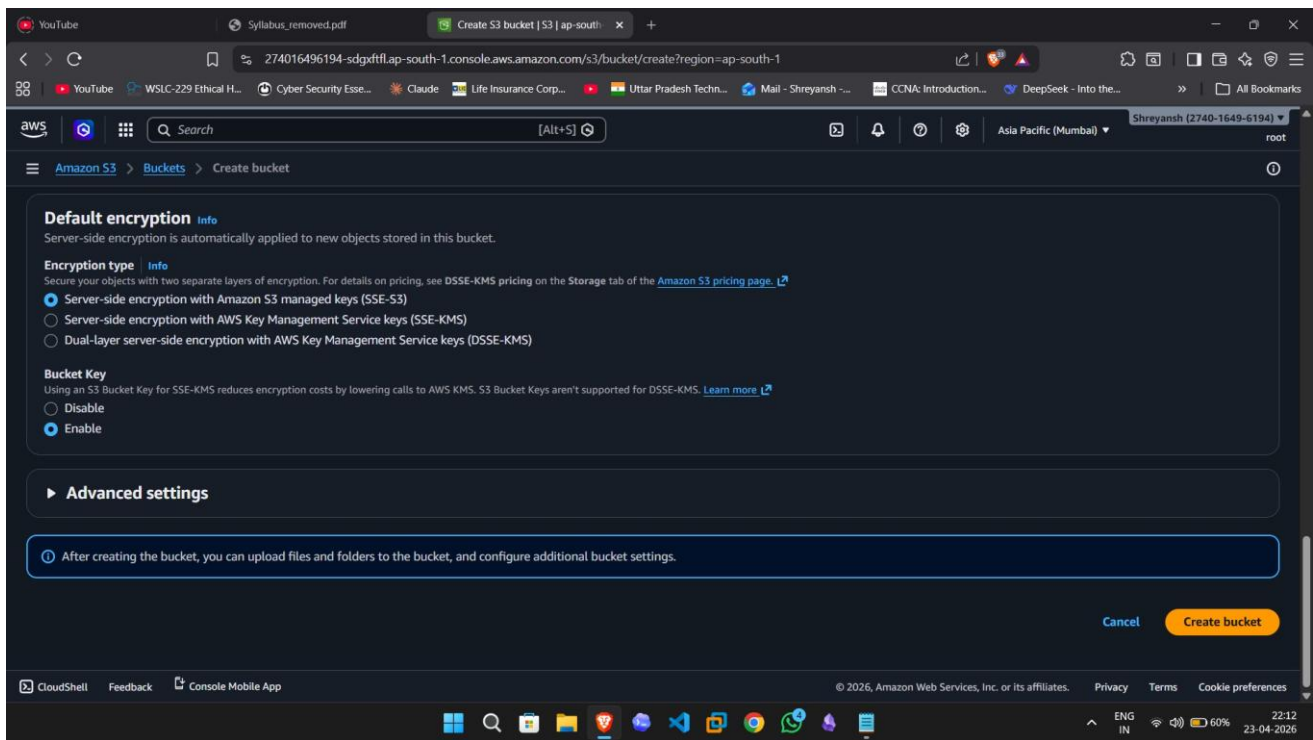


Step 6: Create the Bucket Successfully

After clicking Create bucket, AWS displayed a success message confirming that the bucket **merlin-test-web** had been created successfully.

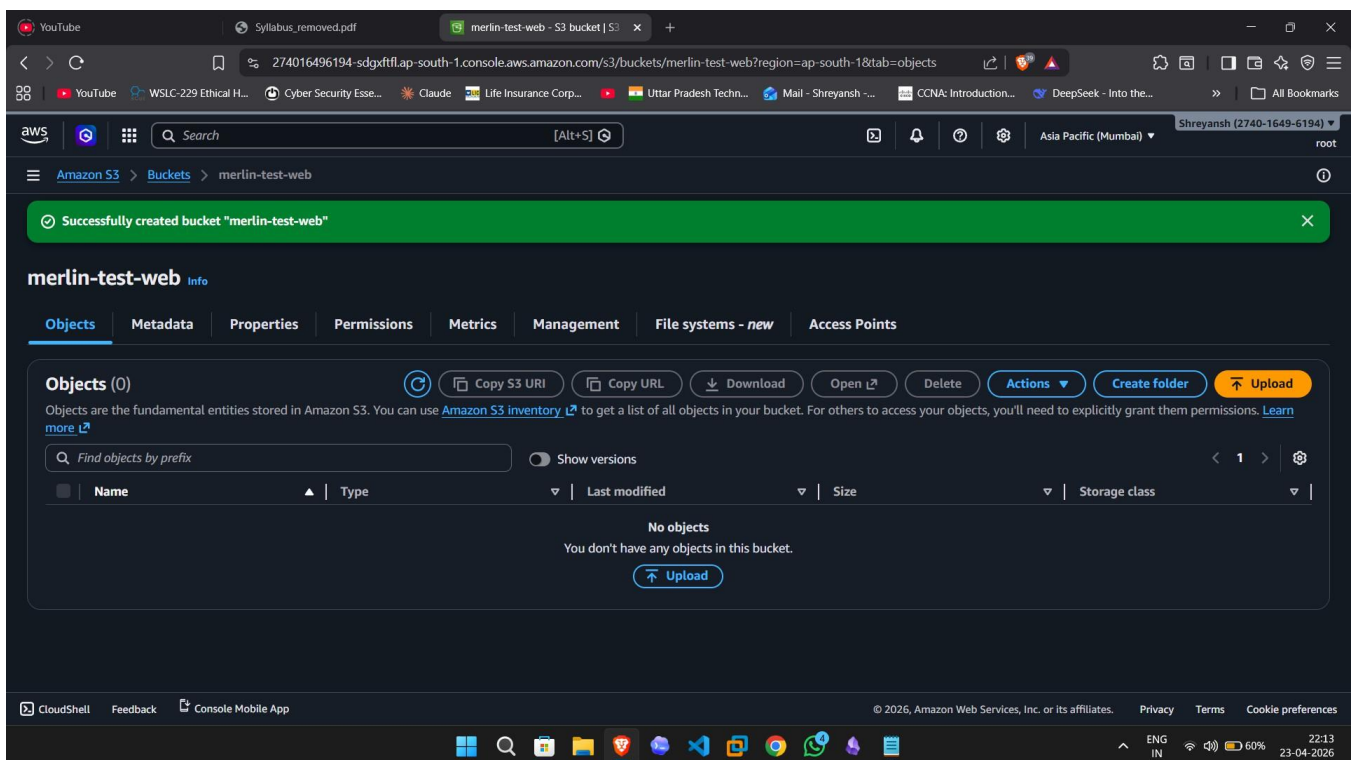


Step 7: Verify Bucket in the S3 Bucket List


Return to the S3 Buckets page and verify that the newly created bucket appears in the general purpose bucket list. This confirms that the bucket has been provisioned in the selected region.

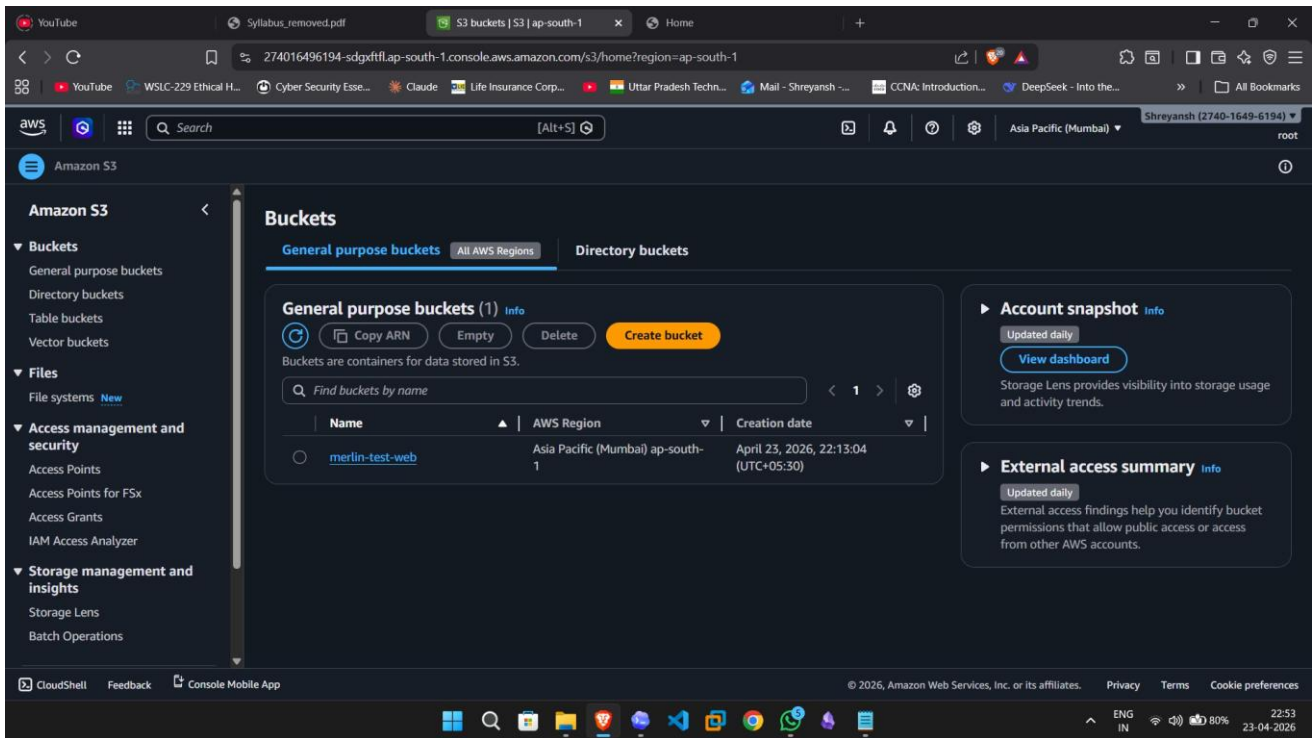

Step 8: Upload Static Website Files


The website files and supporting folders were uploaded into the bucket. The object list shows HTML pages, CSS, JavaScript, images, and the index document required for rendering the website.

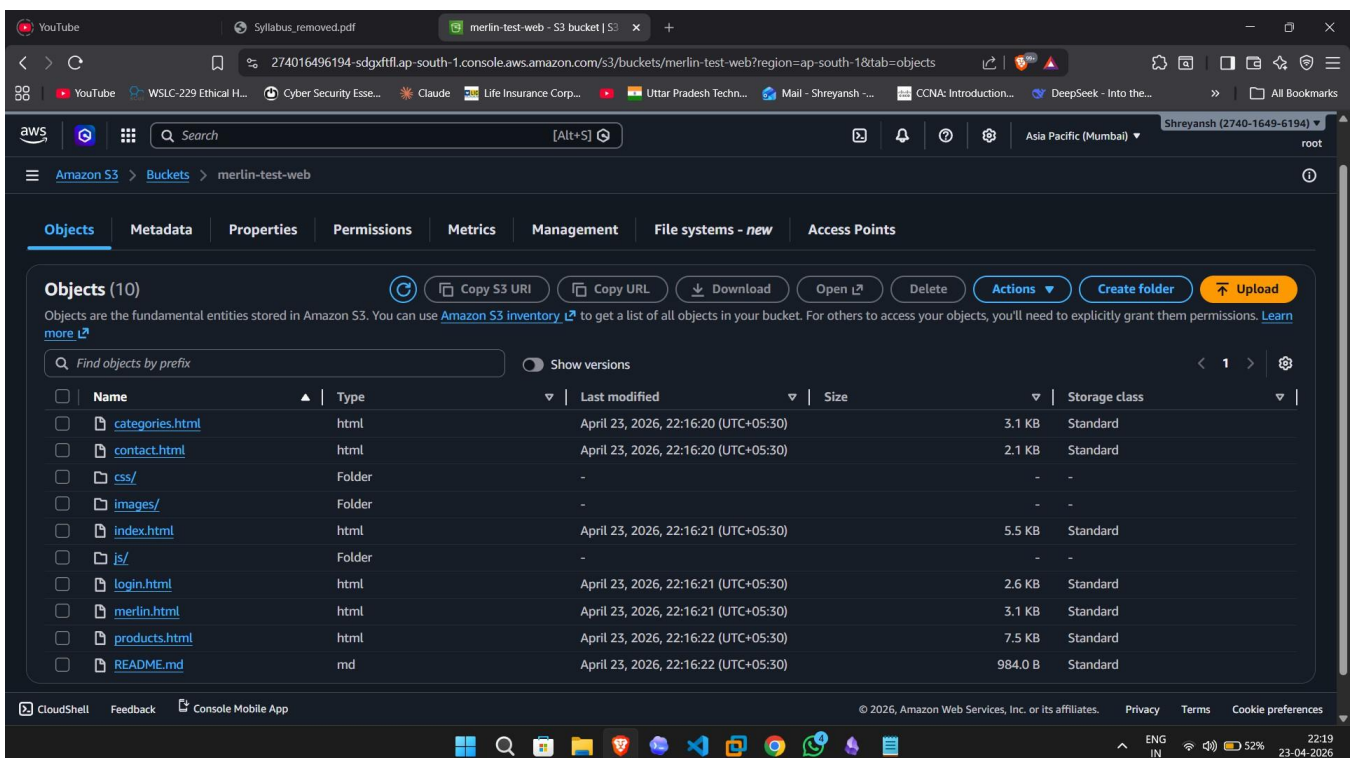

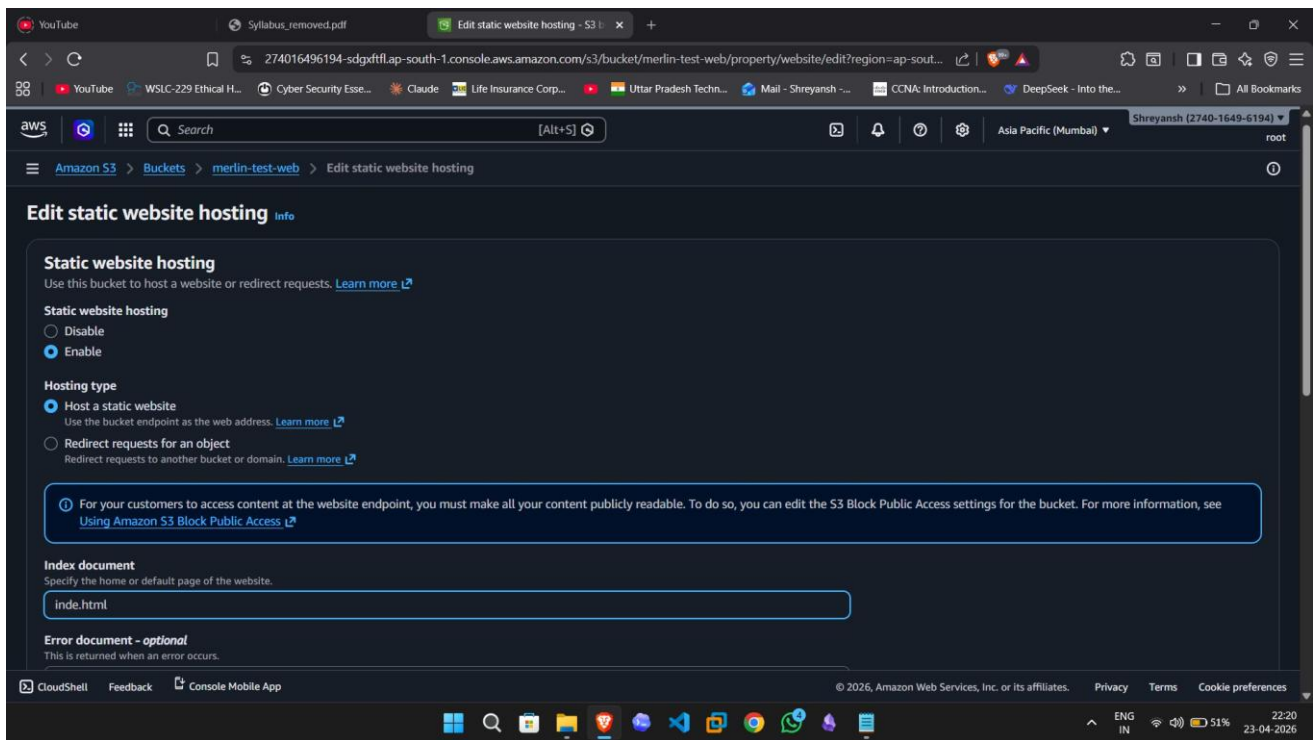

Step 9: Enable Static Website Hosting

Open the bucket Properties tab and enable static website hosting. The bucket was configured to host a static website with the home page document specified in the website hosting configuration.

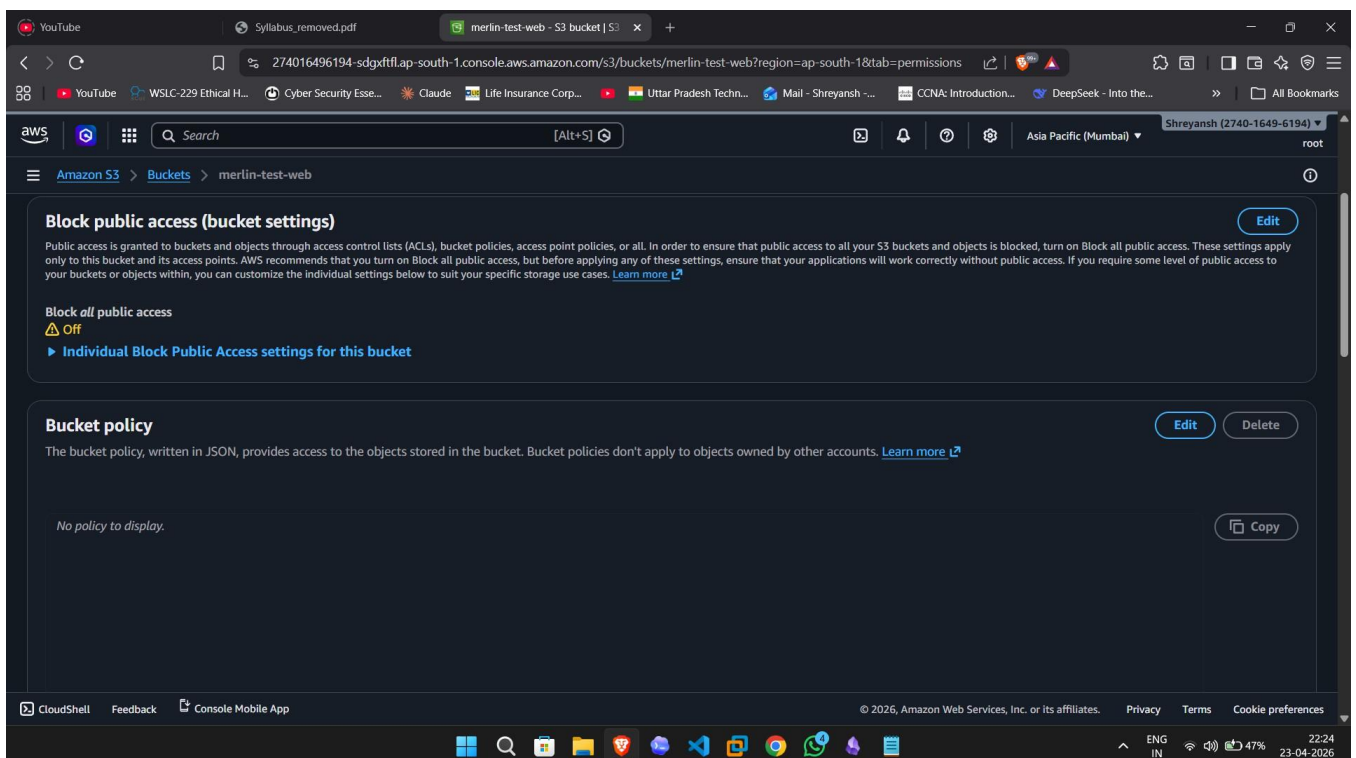



Step 10: Review Permissions and Add Bucket Policy

Next, open the Permissions tab and verify that block public access is turned off for this bucket. Then create a bucket policy to allow public read access to all objects stored in the bucket.

```



{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Sid": "PublicReadGetObject",
      "Effect": "Allow",
      "Principal": "*",
      "Action": "s3:GetObject",
      "Resource": "arn:aws:s3::merlin-test-web/*"
    }
  ]
}

```

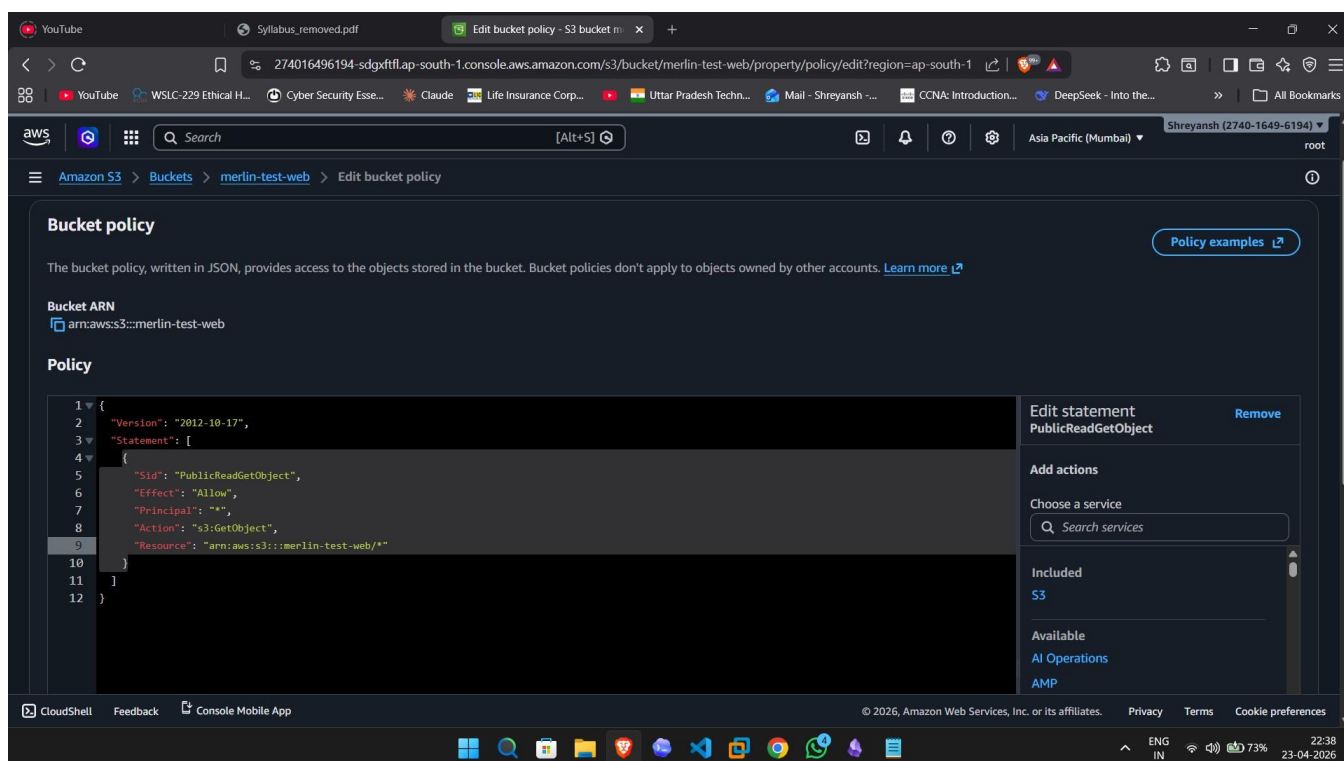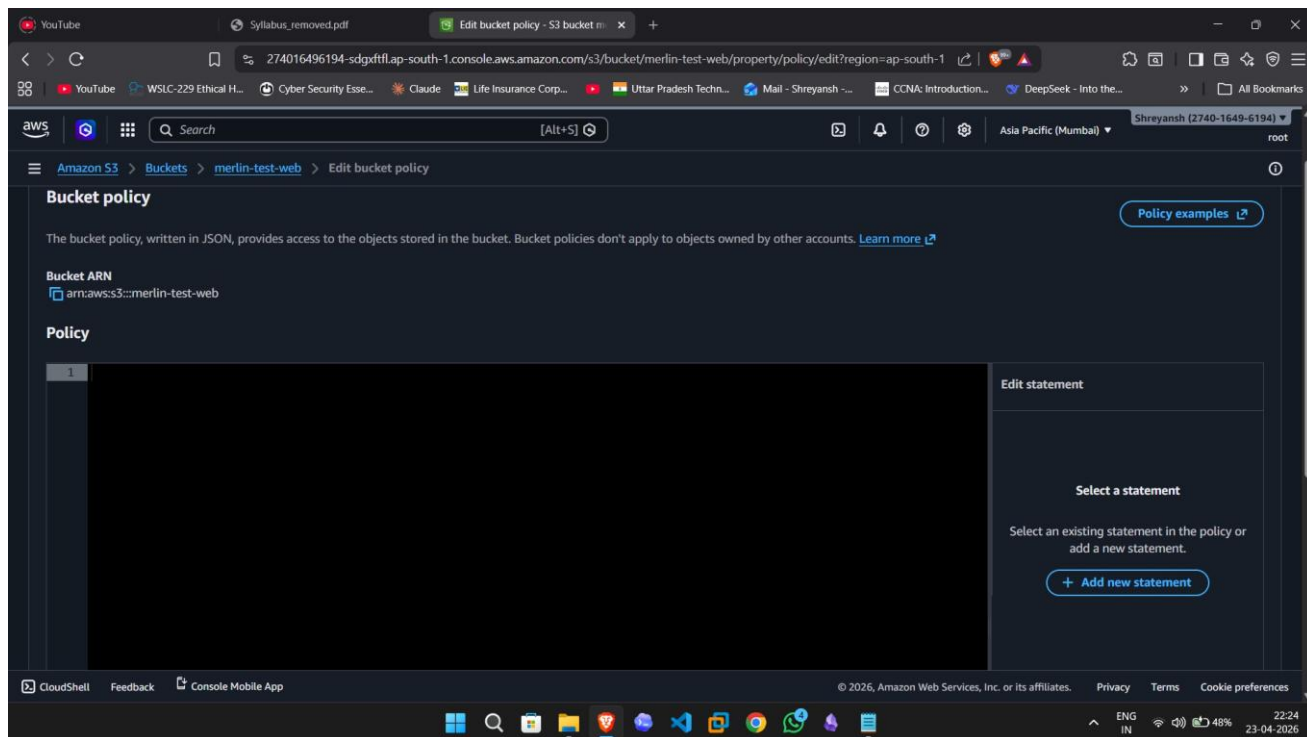

Step 11: Verify Public Access and Open the Website

Finally, select the **index.html** object, copy or open its public URL, and verify that the website loads correctly in the browser. The deployed Merlin Fashion landing page opened successfully, confirming that the static files were accessible.

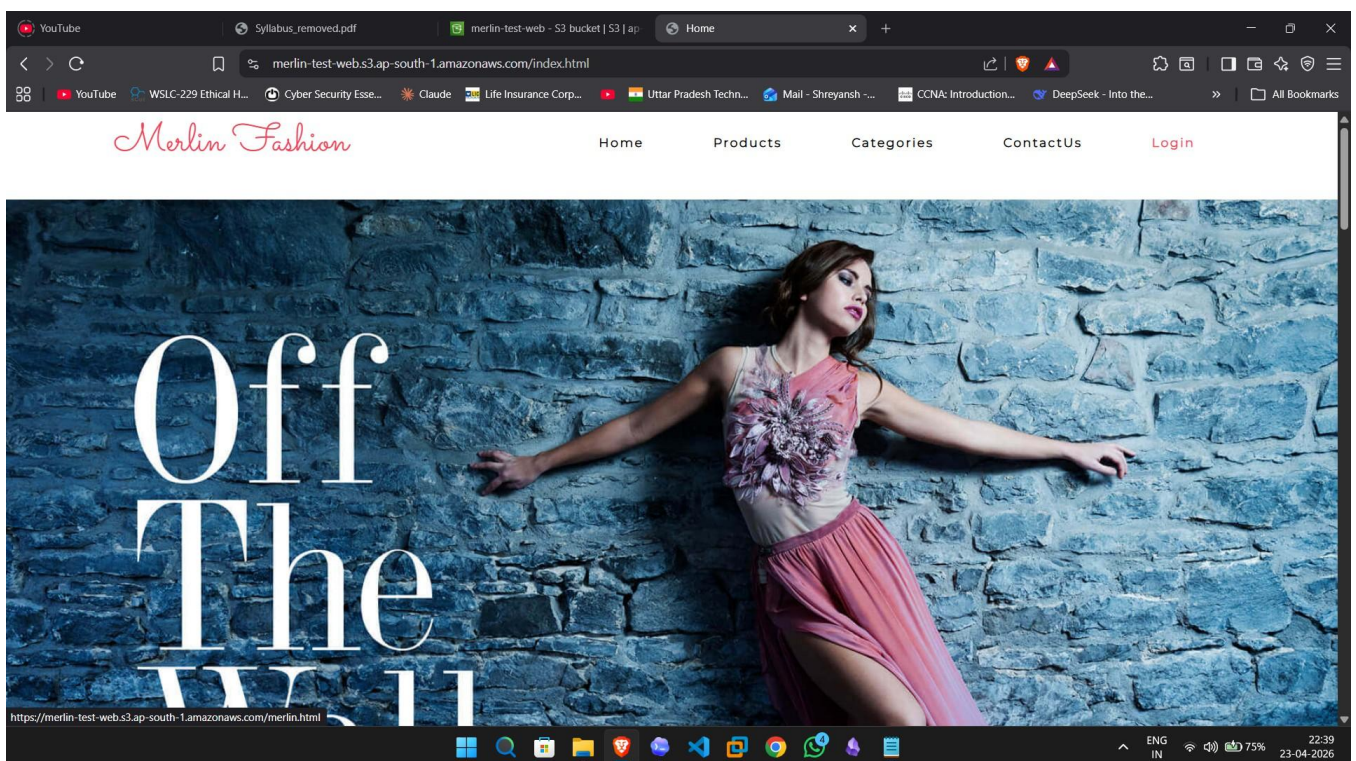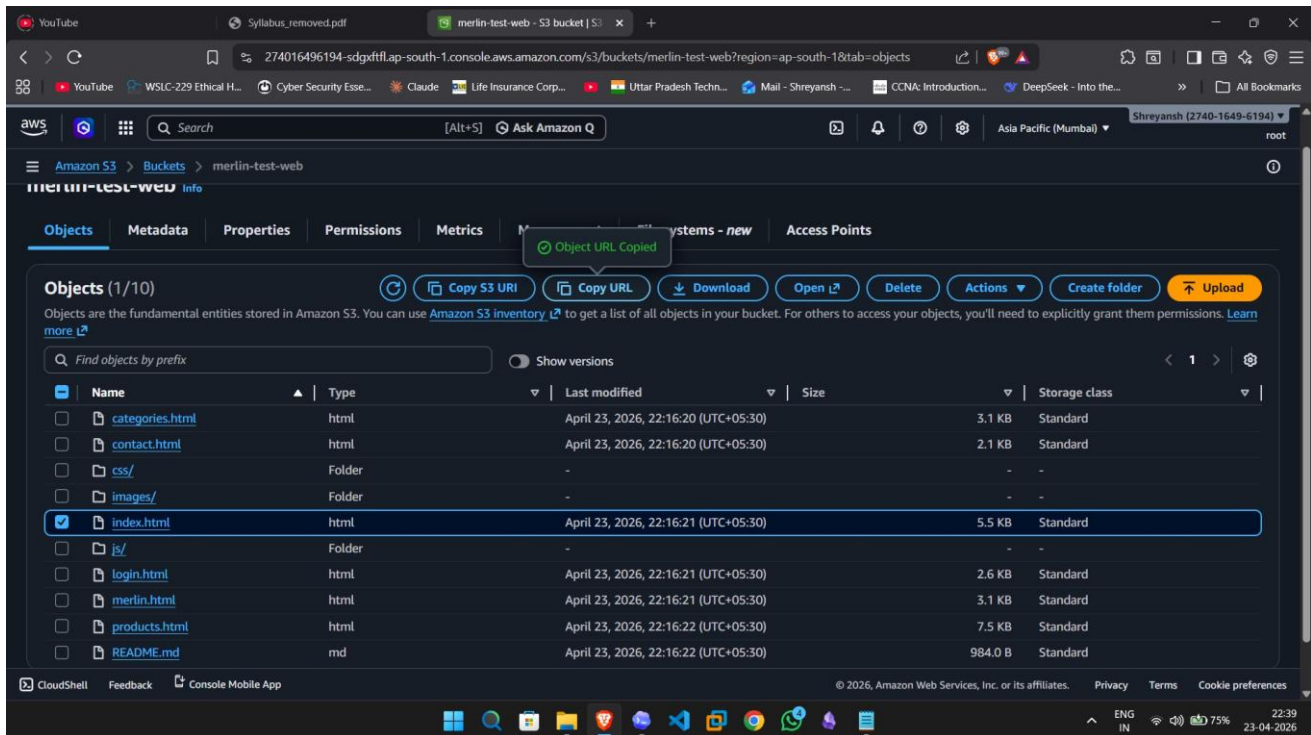

Result

The AWS S3 bucket for static website hosting was created successfully. Website files were uploaded, permissions were configured using a public-read bucket policy, and the application homepage was

accessed successfully through the public object URL.