

NAME: Shreyas B Patil SRN:PES2UG24CS488 SEC:H DATE: 27/08/2026

The below screenshot shows that I have created a new space for my webhook assignment

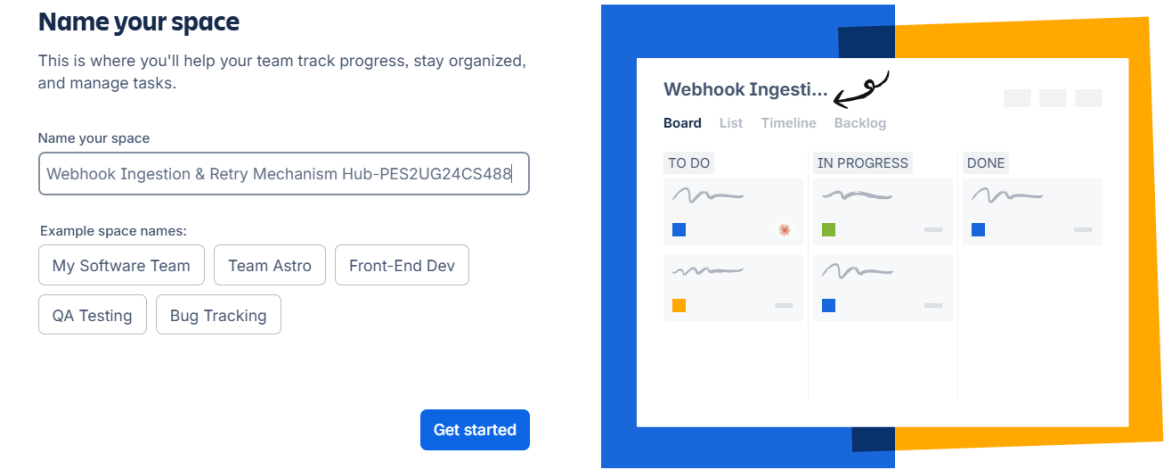

As you can see I have created two epics:

1) Webhook ingestion delivery
2) Delivery reliability and failure recovery

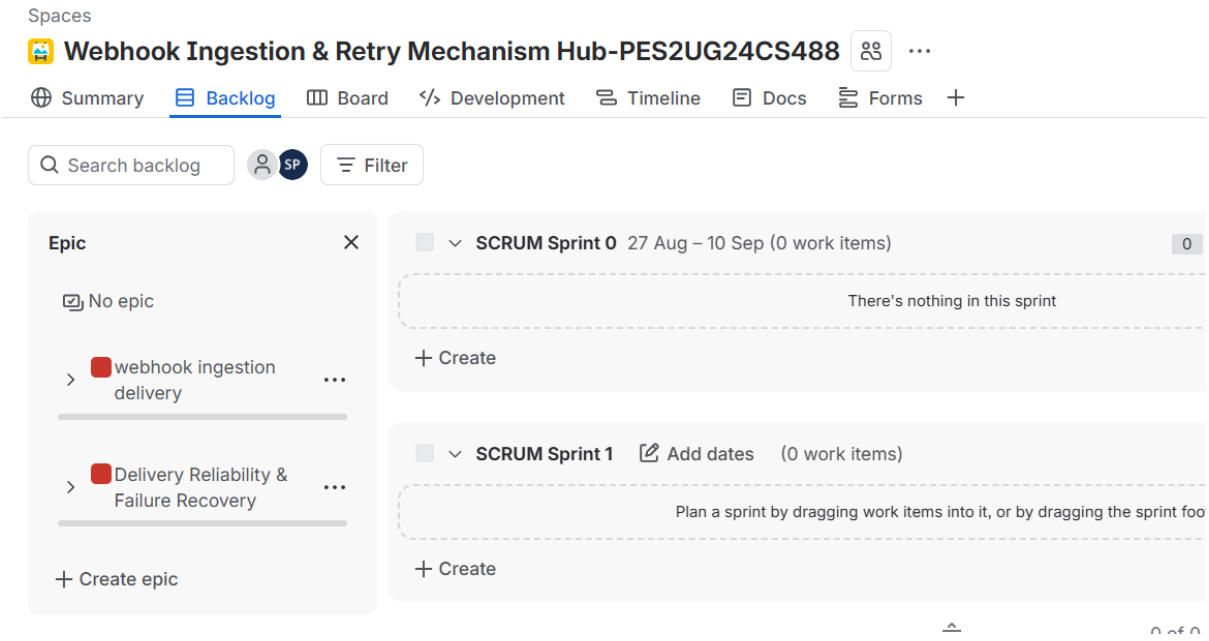


The main purpose of epic 1 is to receive webhook events from third party users , log the webhook information and forward it to the right endpoint.

The main purpose of epic 2 is to handle any abnormal cases where the delivery of the webhook to the endpoint failed or if the webhook creation itself failed.

In the below screenshot you can see that I have created a user story whose parent is epic 1(webhook ingestion delivery). The story point assigned is 8 which mean the resources required to complete this requirement is very high.

User story 1: ingest webhook


As an **Integration Developer**,
I want the system to accept webhook events from registered third-party providers,
so that incoming events can be processed by the webhook hub

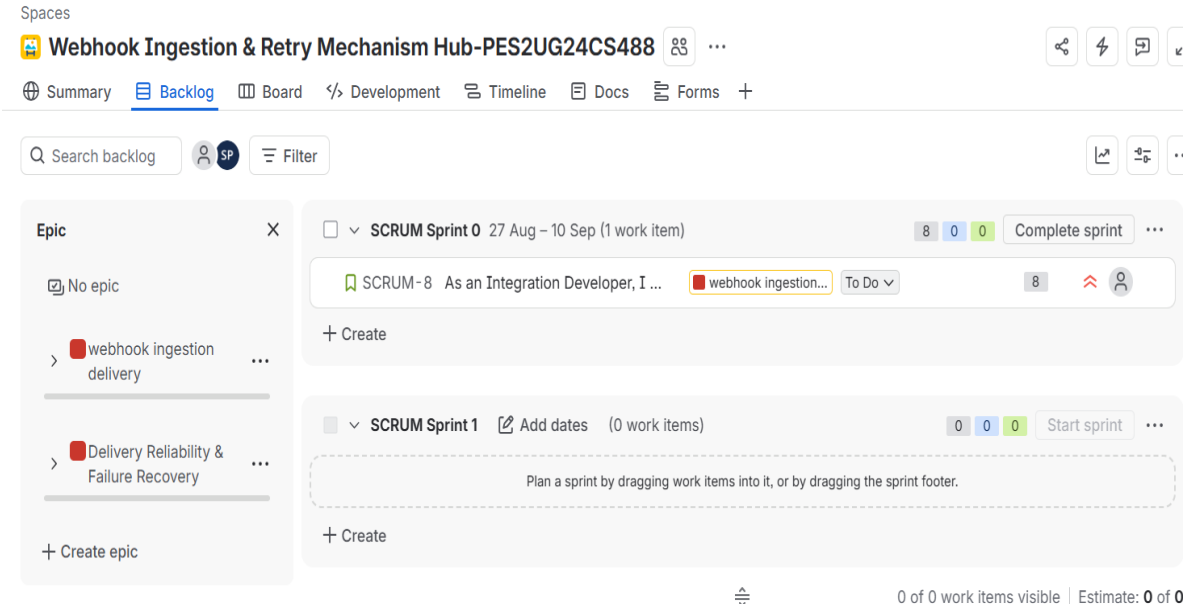

In the below screenshot you can see that I have created a user story whose parent is epic 1(webhook ingestion delivery). The story point assigned is 6 which mean the resources required to complete this user story is less as compared to user story 1.


User story 2: log webhook

As an **Integration Developer**,
I want the system to log webhook payloads and delivery information,
so that I can track and troubleshoot webhook events.

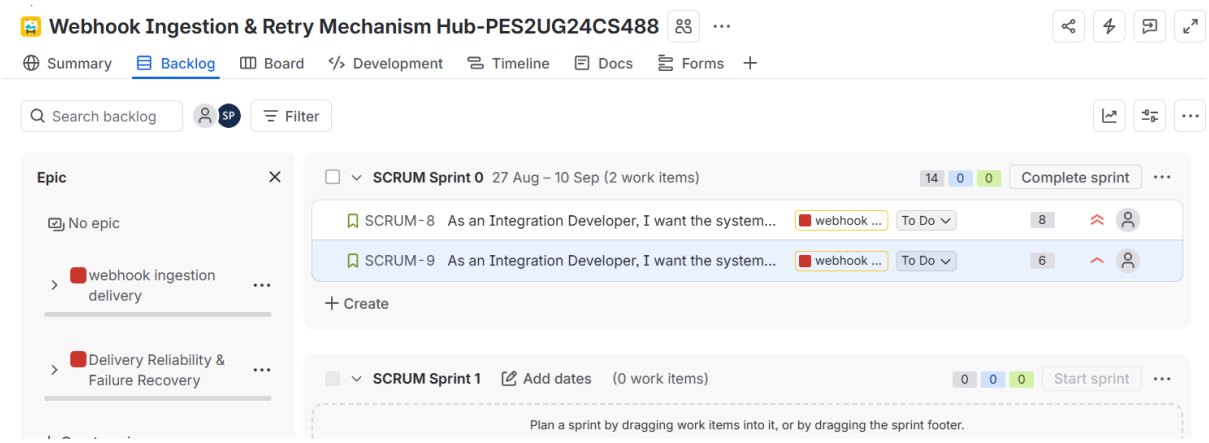

In the below screenshot I have added the third user story under webhook ingestion epic. The story points is the least


User story 3: Deliver Webhook
As an **Integration Developer**,
I want the system to forward webhook payloads to configured target endpoints,
so that the appropriate internal services receive the events.

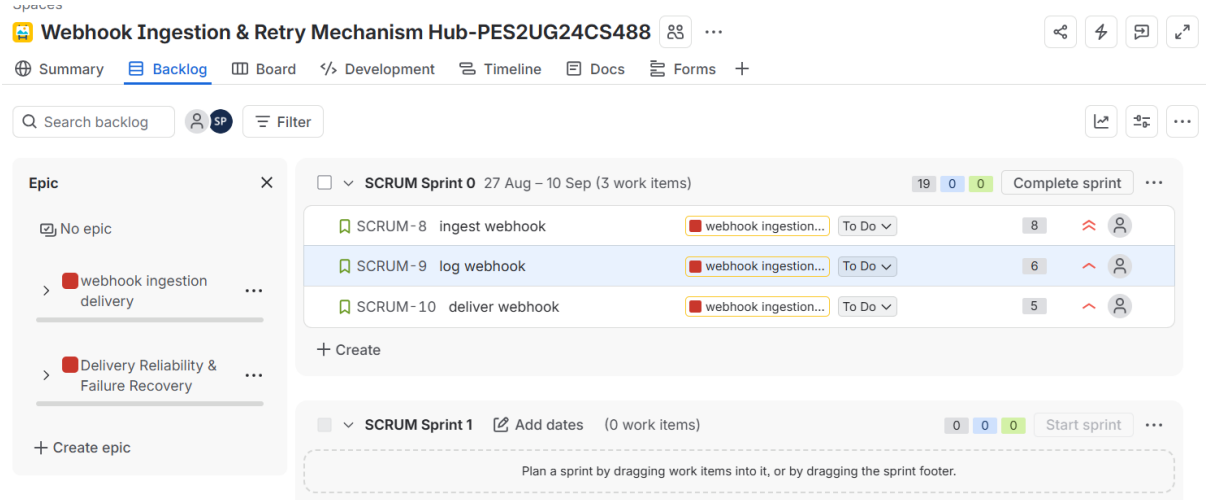

In the below screenshot I have added user story 4 which is under epic 2 (Delivery reliability and failure recovery). the story points is assigned as 5

User story 4: Retry Failed Delivery


As an **Integration Developer**,
I want the system to automatically retry failed webhook deliveries using exponential backoff,
so that temporary delivery failures do not result in lost events.

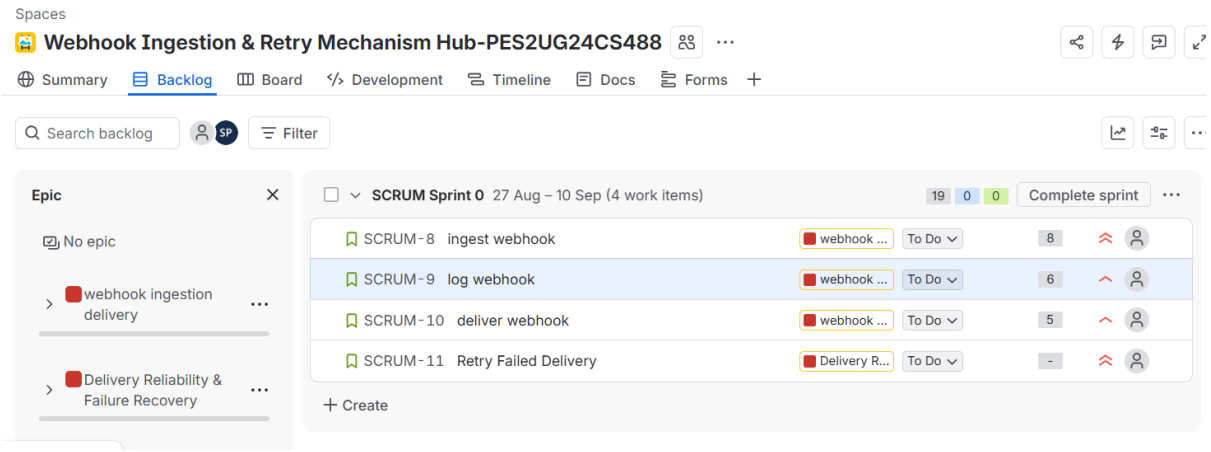


In the below screenshot I have added user story 5 which is under epic 2 (Delivery reliability and failure recovery). the story points is assigned as 4. You can see the story point in the later screenshots

Use story 5: Dead-Letter Queue


As a System Operator,
I want repeatedly failed webhook events to be stored in the dead-letter queue,
so that I can inspect and manage events that could not be delivered.

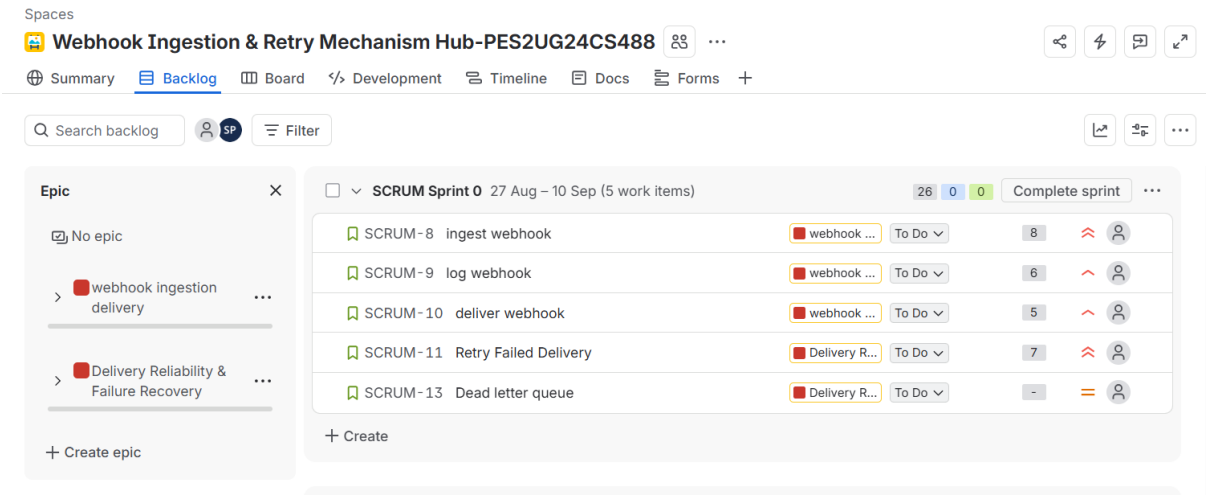


The below screenshot shows that I have moved some of the user stories from **to do section** to **in progress.** This change is done after few minutes

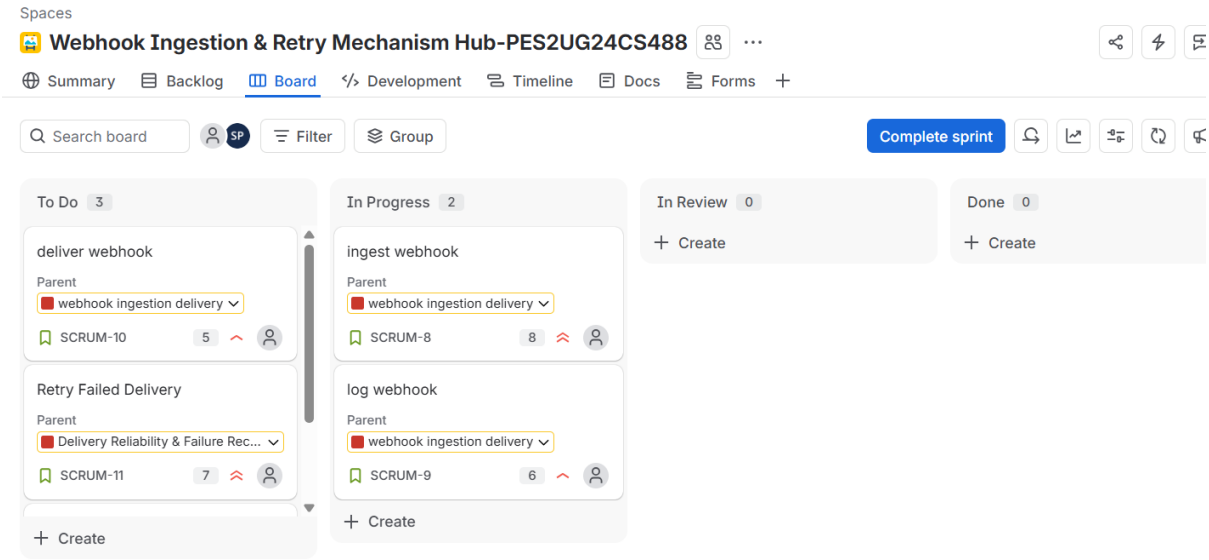


The below screenshot shows that I have moved some of the user stories from **to do section** to **in progress and from in progress to in review.** This change is done after few minutes

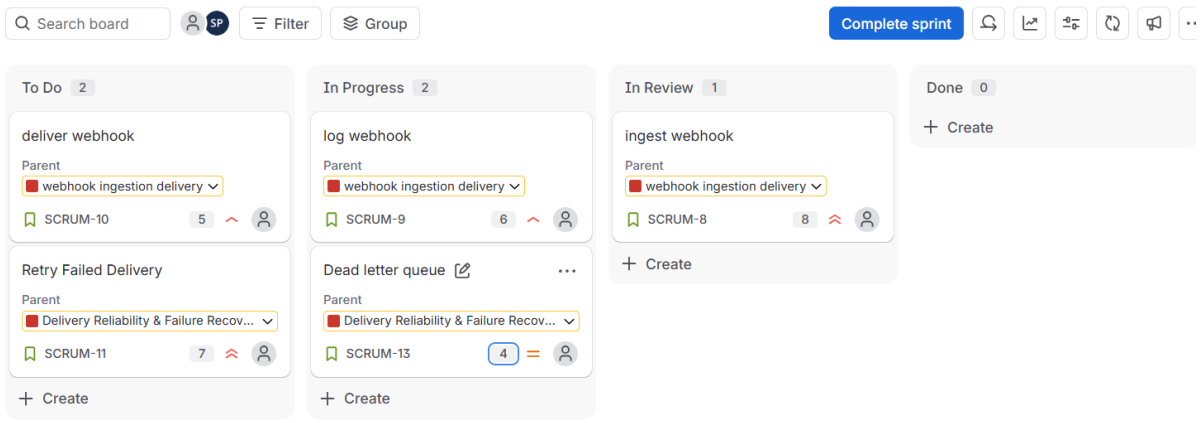


The below screenshot shows that I have moved some of the user stories from **to do section** to **in progress and from in progress to in review and from in review to done.** This change is done after few minutes

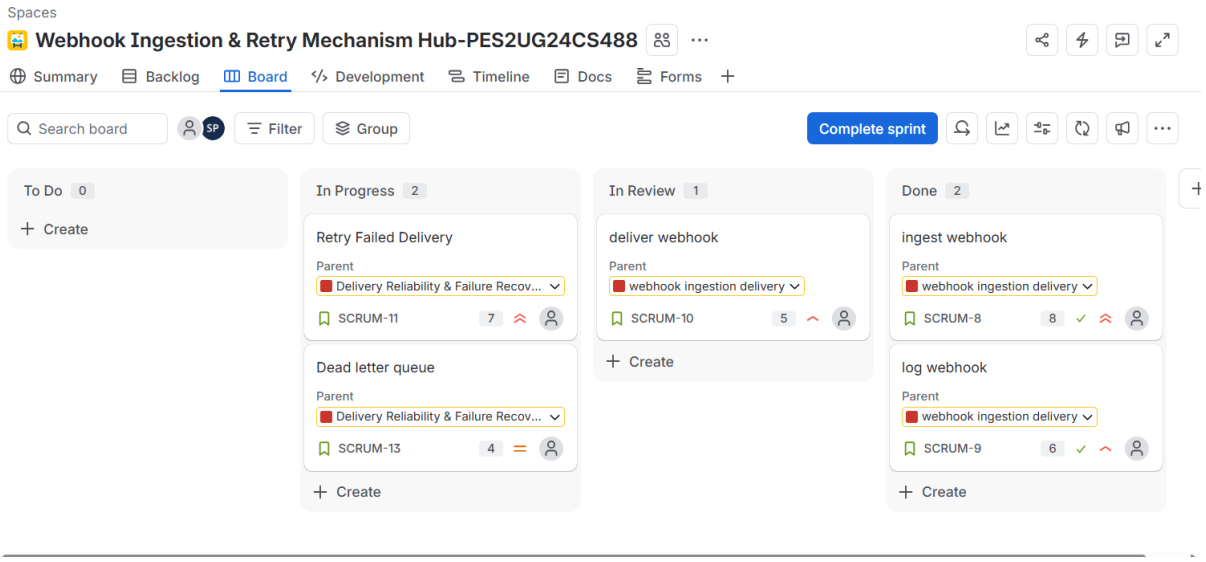

In this screenshot all the user stories have been completed.

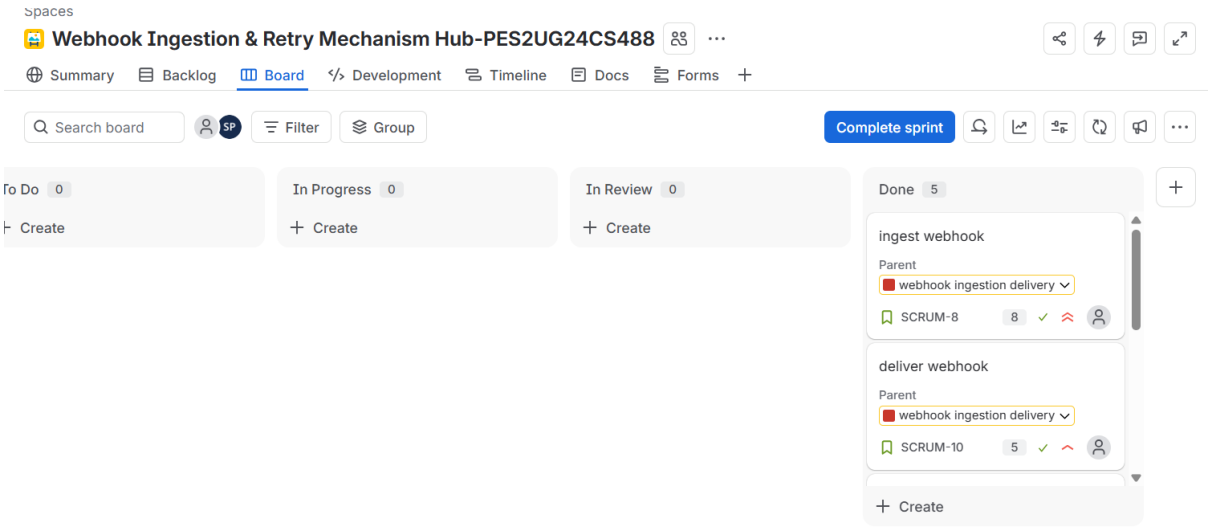

The burn down chart depicts a straight line as all the user stories were done on the same day. You can see points/ dots on the line indicating that they were done at different times within the same day

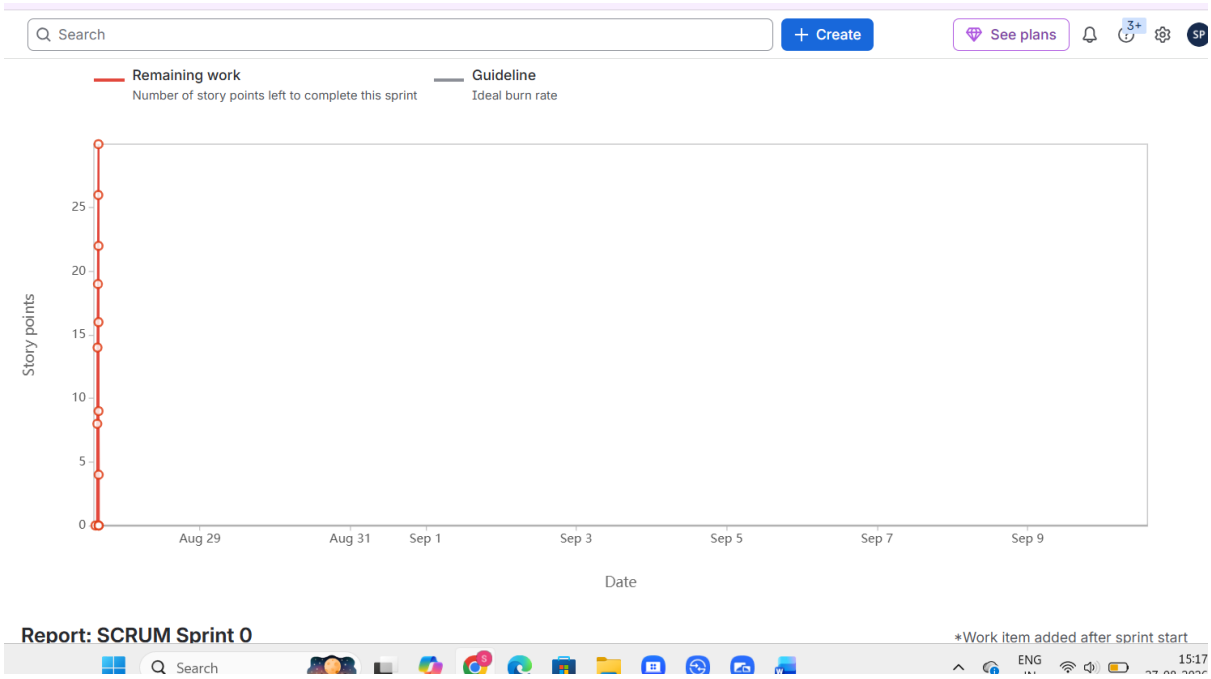

Statistics from sprint 0

