

Practice Assignments


API Fundamentals & Postman Mastery

Complete every task in Postman using the JSONPlaceholder API. Read each instruction carefully — later tasks build on what you did in earlier ones.

Before you start: you only need a browser and Postman. Base URL for every task: <https://jsonplaceholder.typicode.com> — no signup or API key required.

TASK 1 Reading Data Without Headers

a) Send a GET request to /posts/1 — leave the Headers and Body tabs completely empty.
Output:

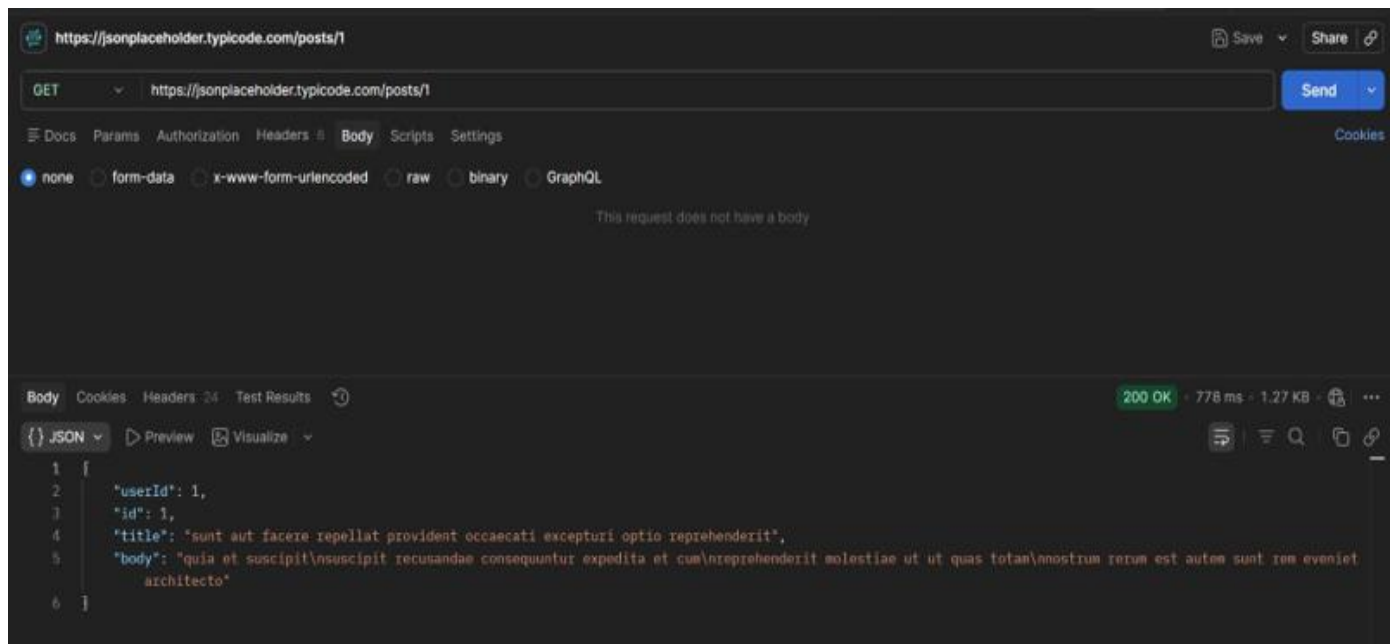

b) Record the status code you get back.

Output:


200 k

c) In one sentence, explain why this request works even with nothing in the Headers tab.

The request works without headers because this GET request only retrieves public data and does not require authentication or additional information.

TASK 2 Filtering With Query Parameter

a) Send a GET request to /comments, and add a query parameter in the Params tab: postId = 1.
Output:

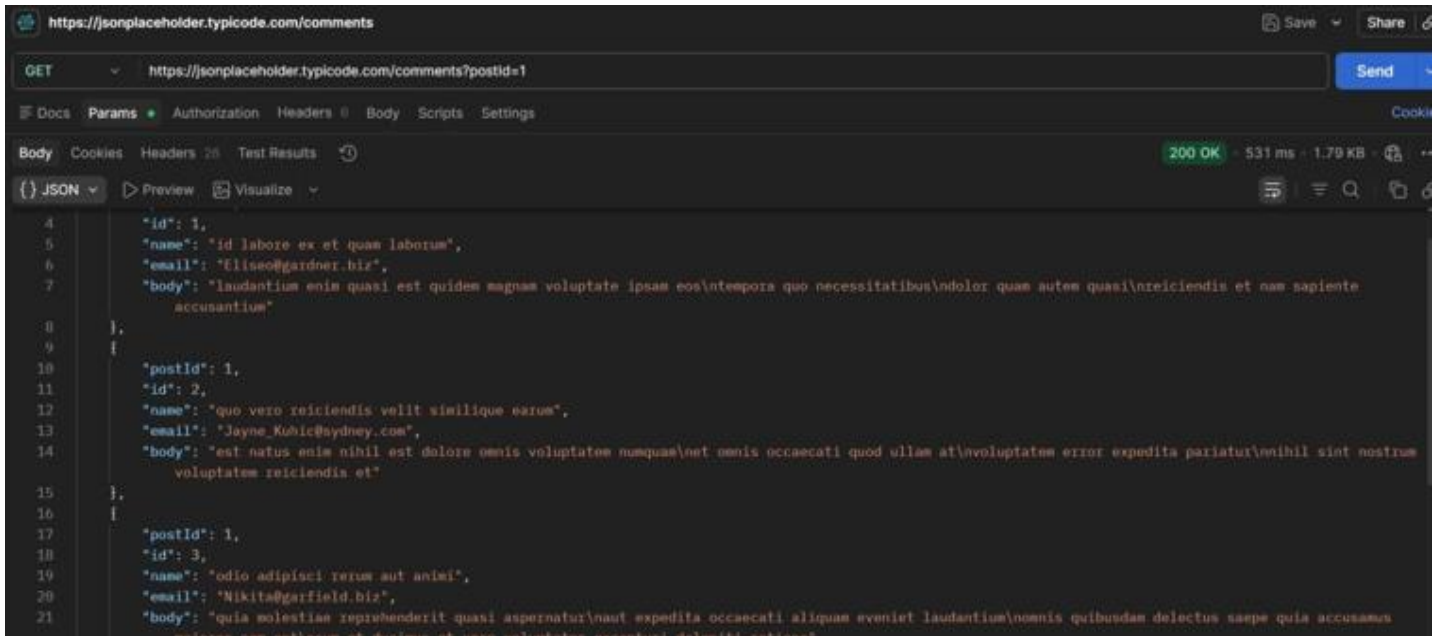


```
GET https://jsonplaceholder.typicode.com/comments?postId=1

200 OK 531 ms 1.79 KB

[{"id": 1, "name": "id labore ex et quam laborum", "email": "eliseo@gardner.biz", "body": "laudantium enim quasi est quidem magnam voluptate ipsam eos\ntempora quo necessitatibus\ndolor quam autem quasi\nreiciendis et nam sapiente accusantium"}, {"postId": 1, "id": 2, "name": "quo vero reiciendis velit similique earum", "email": "Jayne_Kuhic@sydney.com", "body": "est natus enim nihil est dolore omnis voluptatem numquam\nnet omnis occaecati quod ullam at\nvolutatem error expedita pariatur\nnihil sint nostrum voluptatem reiciendis et"}, {"postId": 1, "id": 3, "name": "odio adipisci rerum aut animi", "email": "Nikita@garfield.biz", "body": "quia molestiae reprehenderit quasi aspernatur\nnam expedita occaecati aliquam eveniet laudantium\nomnis quibusdam delectus saepe quia accusamus maiores con est enim\net dictum et vero voluptates exantur\ndelectus ratione"}]
```

b) Confirm the URL automatically updates to include ?postId=1.


Yes the postman automatically updated the URL to include ?postId=1 when the query parameter and value was added.

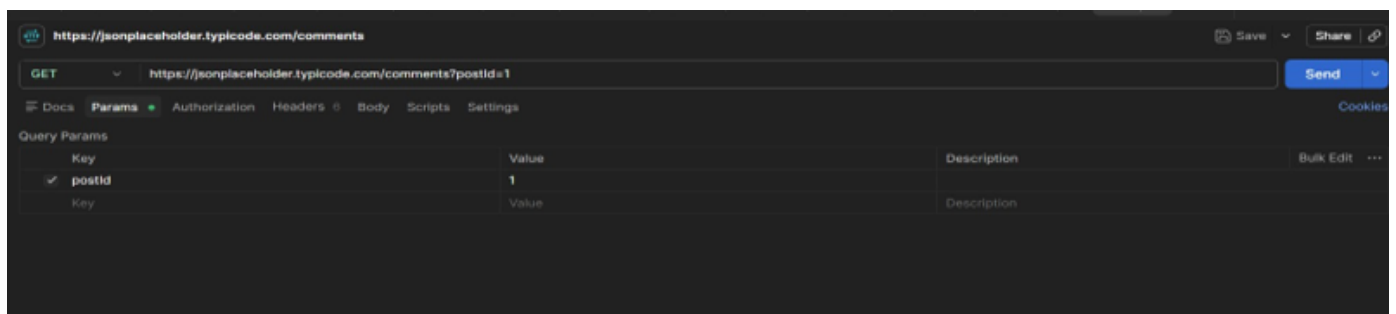

Key	Value	Description
✓ postId	1	

c) Now combine two filters at once on /todos: `userId = 1` and `completed = false`.

Output:

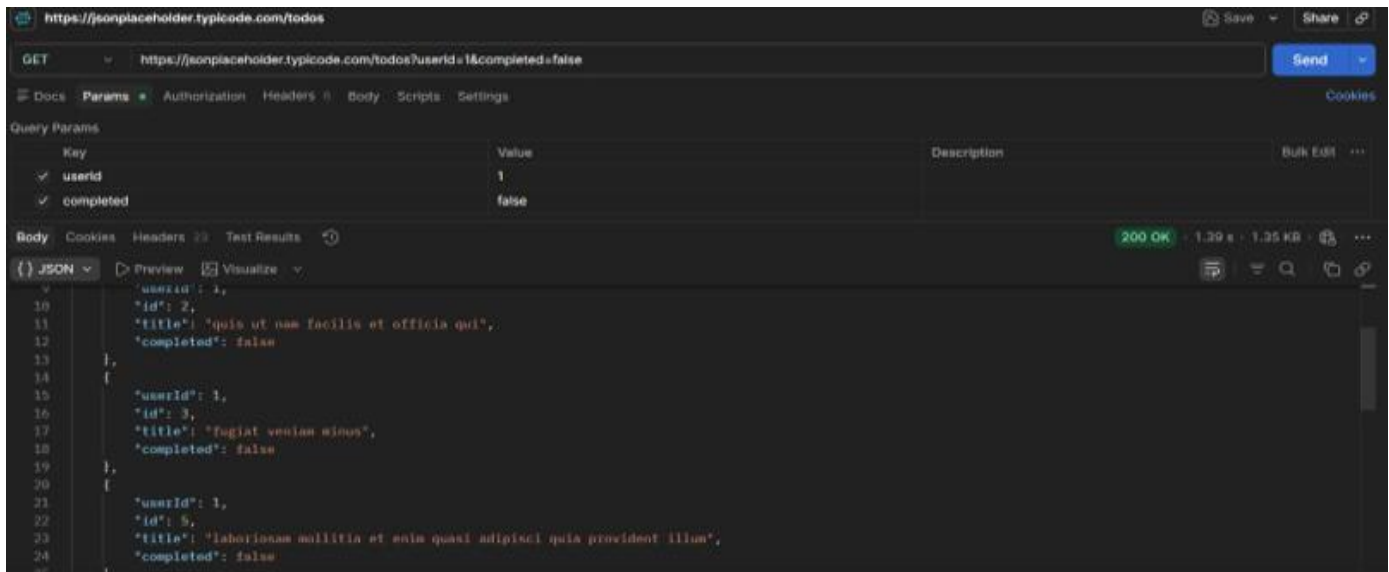


d) In one sentence, explain what changed in the results compared to not using any params.

Using query parameters filters the results, so only records matching the specified conditions are returned instead of all records.

TASK 3 Sending Data With Headers & a Body


a) Send a POST request to /posts.

Output:

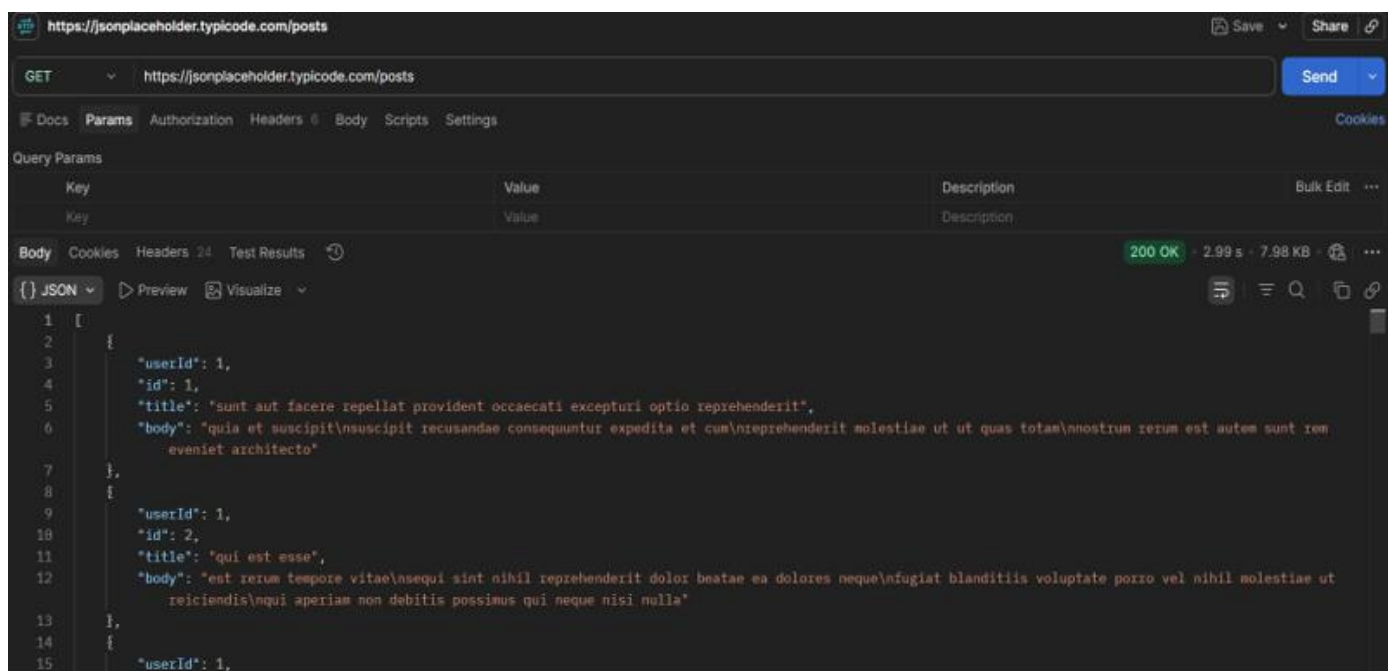


b) In the Headers tab, add: Content-Type: application/json

Output:

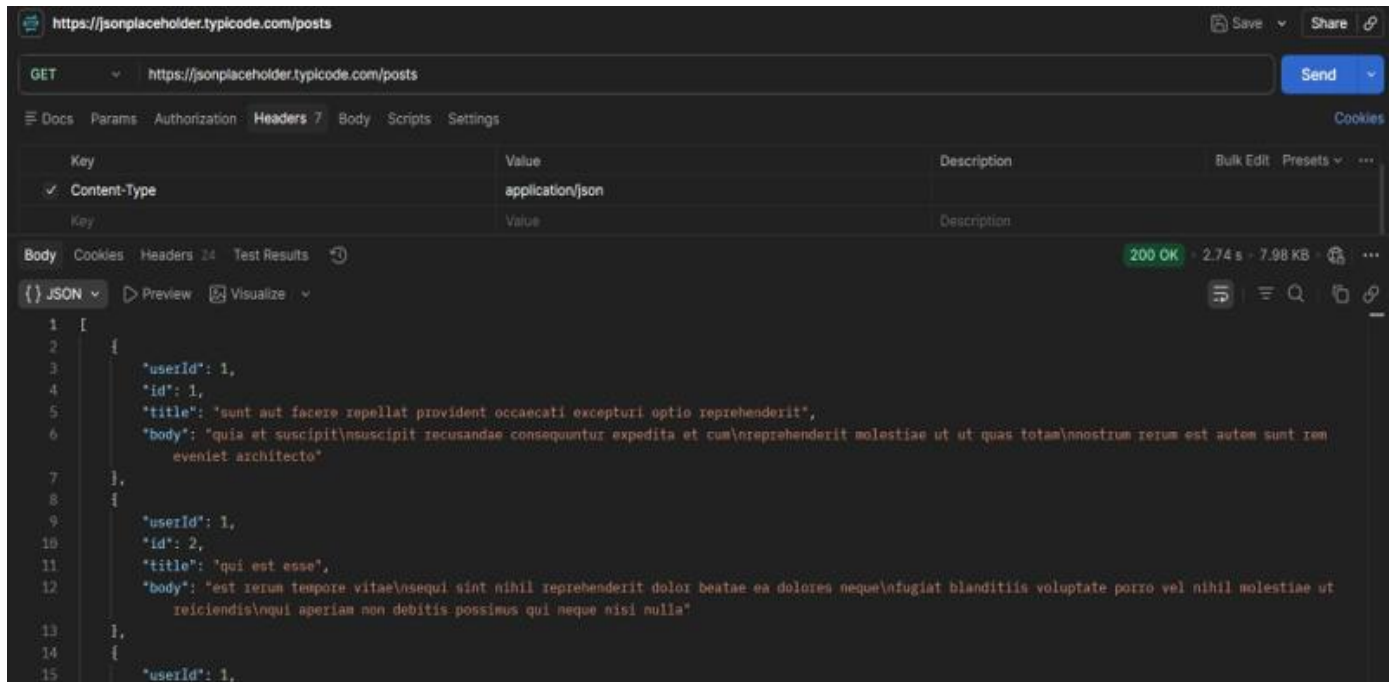


c) In the Body tab (raw, JSON), send a new post with a title, body, and userId of your choice.

Output:

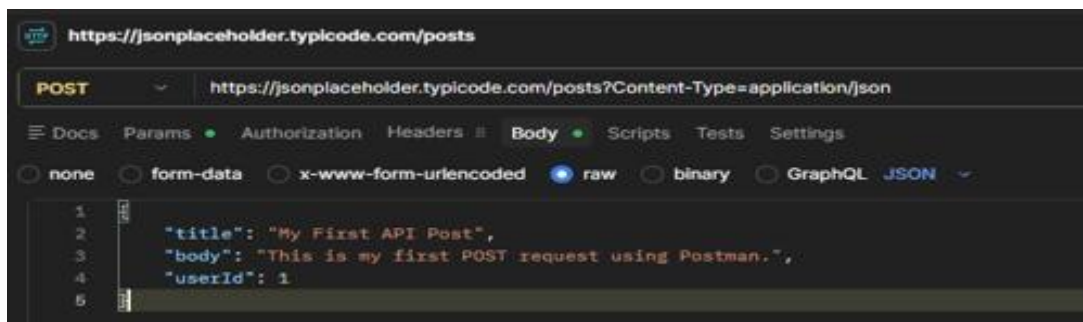

d)Record the status code and the new id the server assigned.


Output:

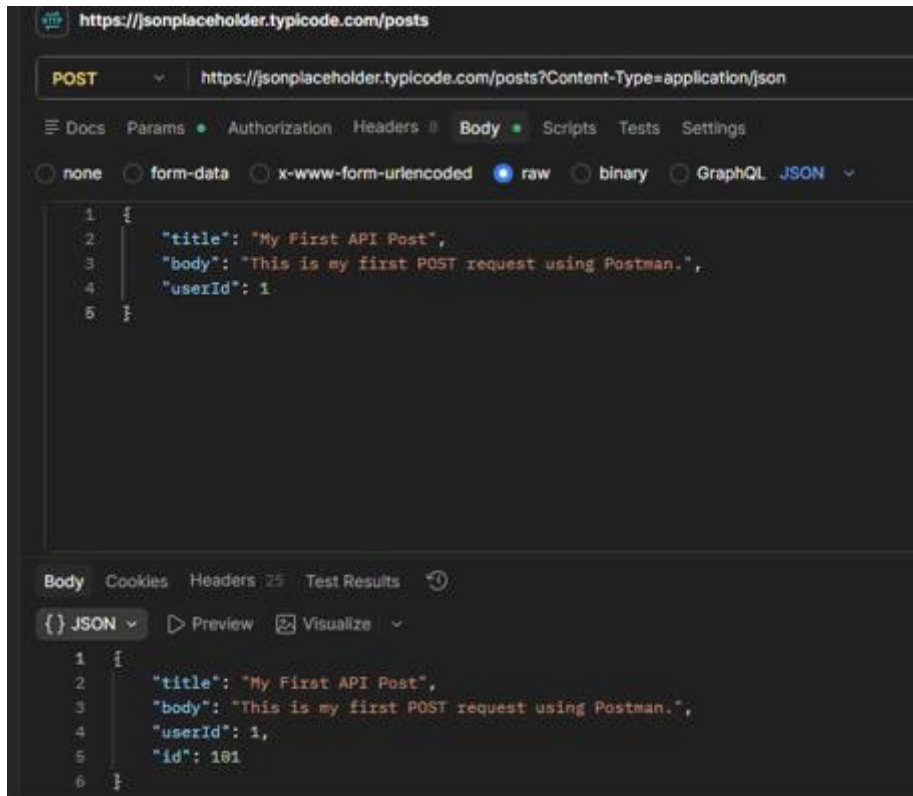

TASK 4 Headers vs. No Headers


a) Repeat Task 3's POST request, but this time remove the Content-Type header before sending.

Output:

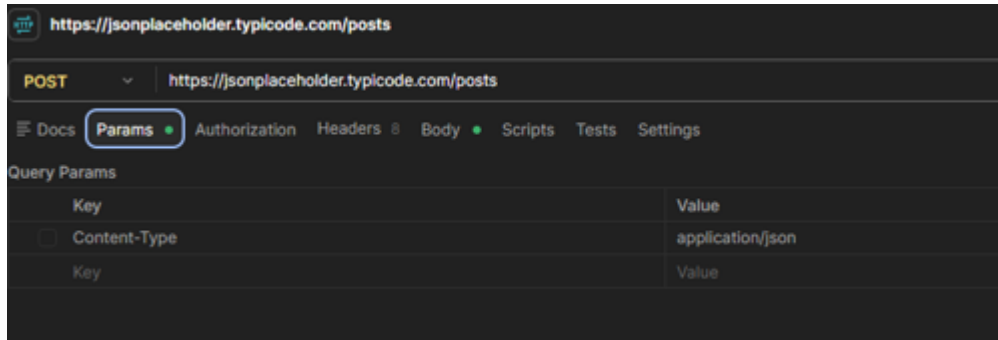

b) Compare the response to Task 3 — is it different? Record what you observe.

Output:

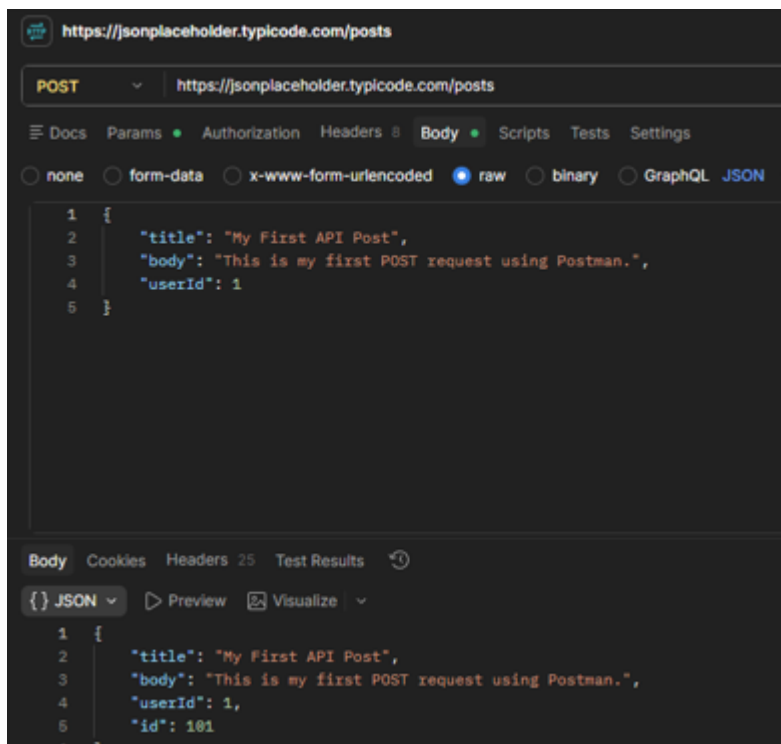

The response was almost the same as Task 3. JSONPlaceholder accepted the request even without the Content-Type header because it is a practice API and is designed to be flexible.


c) In 2–3 sentences, explain why headers matter for a request like this, even though this practice API is forgiving about it.

Headers tell the server important information about the request, such as the format of the data being sent. The Content-Type: application/json header lets the server know that the request body contains JSON. Although JSONPlaceholder accepts requests without this header, most real-world APIs require it to correctly process the request.

TASK 5 PUT vs. PATCH


a) Send a PUT request to /posts/1 that replaces the entire post (include id, title, body, and userId in the body).

Output:

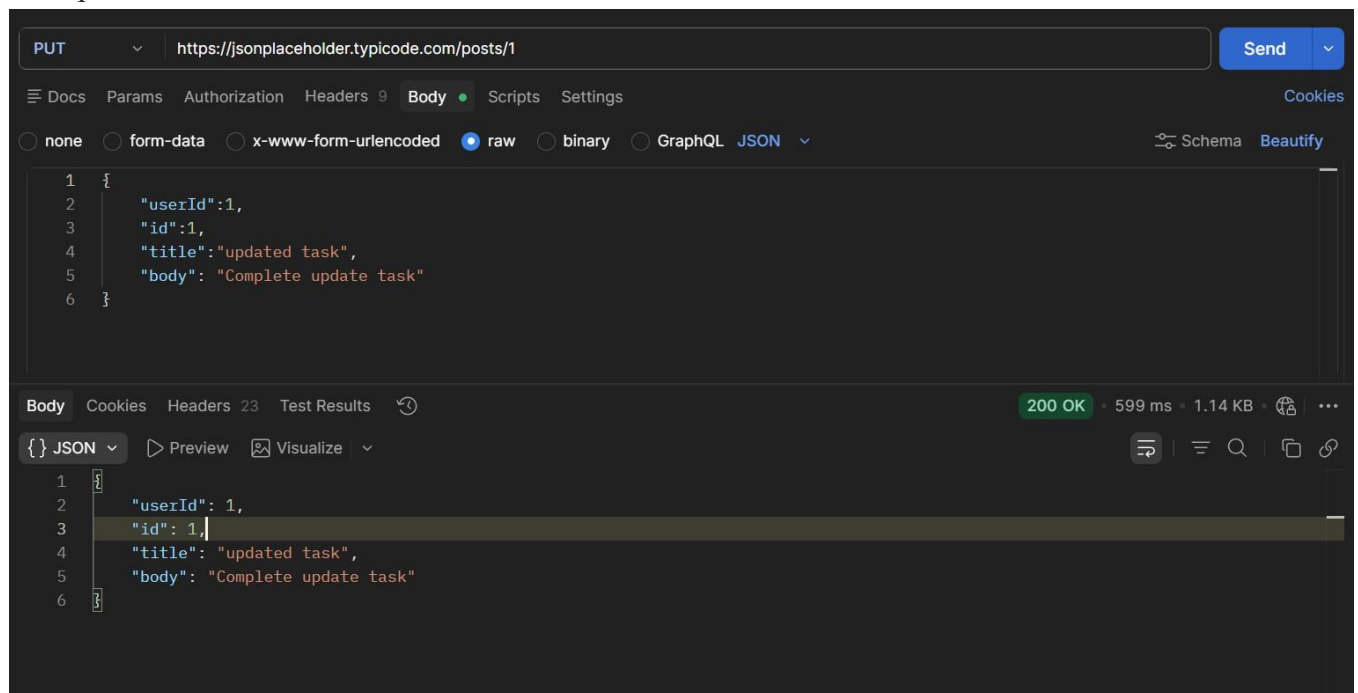

b) Send a PATCH request to the same /posts/1 that changes only the title.

Output:

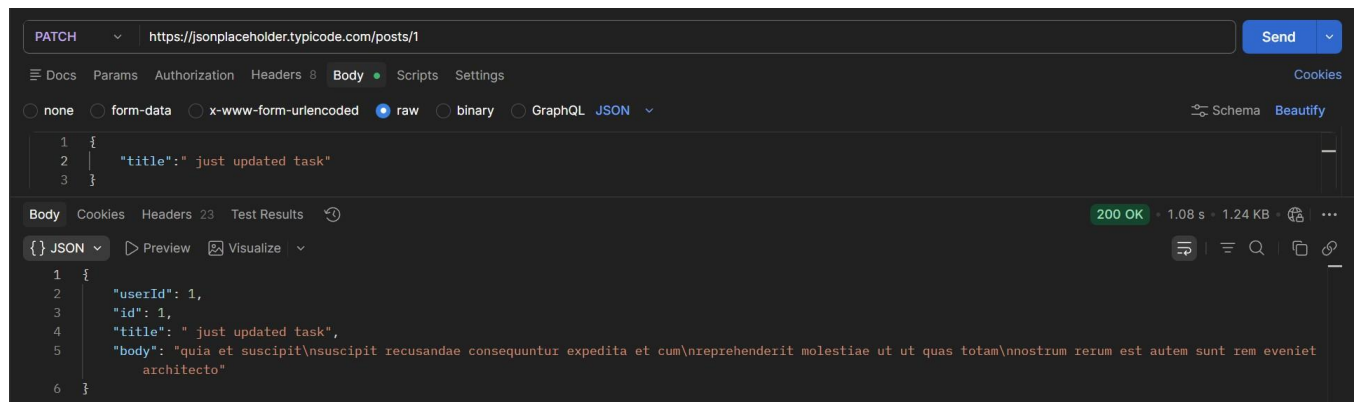

c) In one sentence, explain the difference between what PUT sent and what PATCH sent.

A PUT request replaces the entire resource, while a PATCH request updates only the specified field(s) without replacing the whole resource.

Final Challenge — A Realistic Request Flow

Concepts used: this task combines query params, headers (with and without), and the request body — everything from Tasks 1 through 4 — in one flow.


TASK 6 The Mini Feedback System

Scenario: you're testing the backend for a simple feedback form, where users read existing comments on a post and can leave their own.

Complete the following steps, in order:



a) Send a GET request to /comments, using a query parameter to fetch only the comments for postId = 1.

Output:

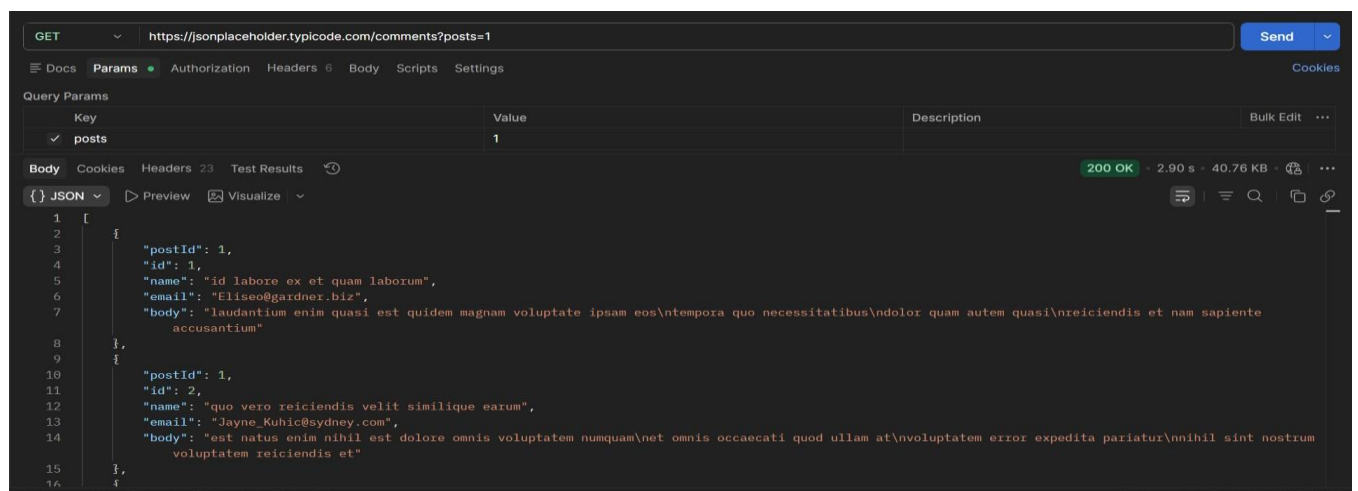


b) Send a POST request to /comments to add a new comment — with no headers at all. Record the status code.

Output:

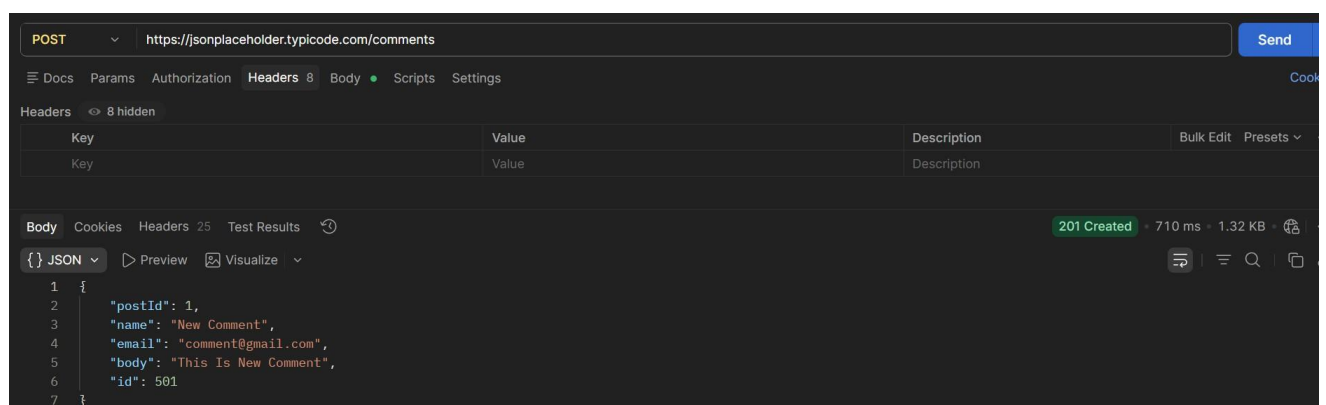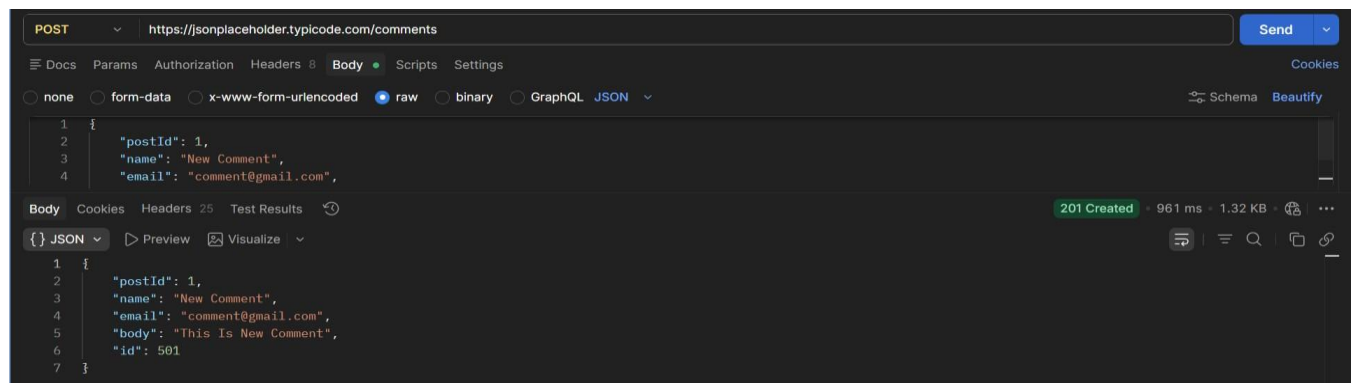


c) Resend the same POST from step (b), this time with the Content-Type header included. Compare the two responses.

Output:

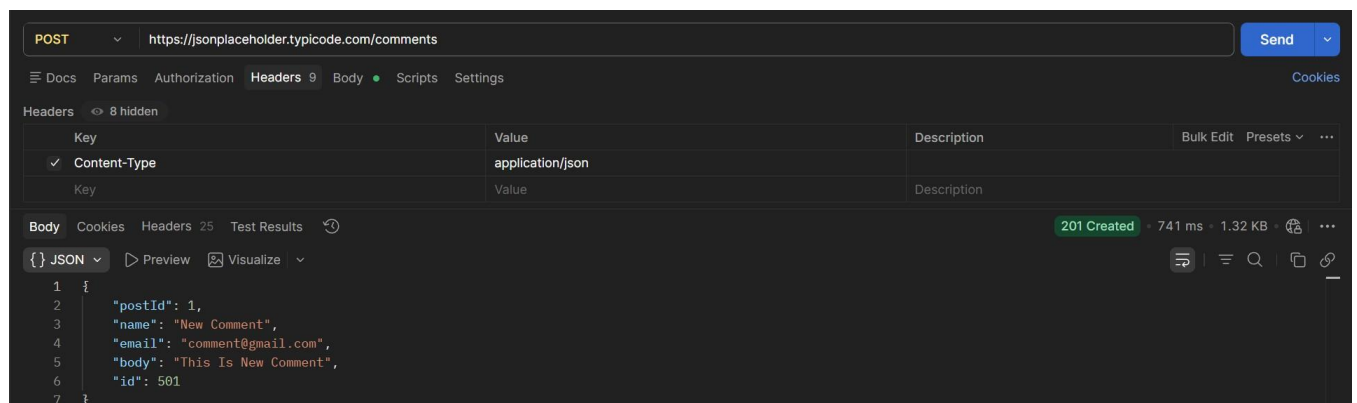

d) Add one more header to this request: Authorization: Bearer demo-token — to simulate a login-protected submission, even though this practice API won't actually check it.

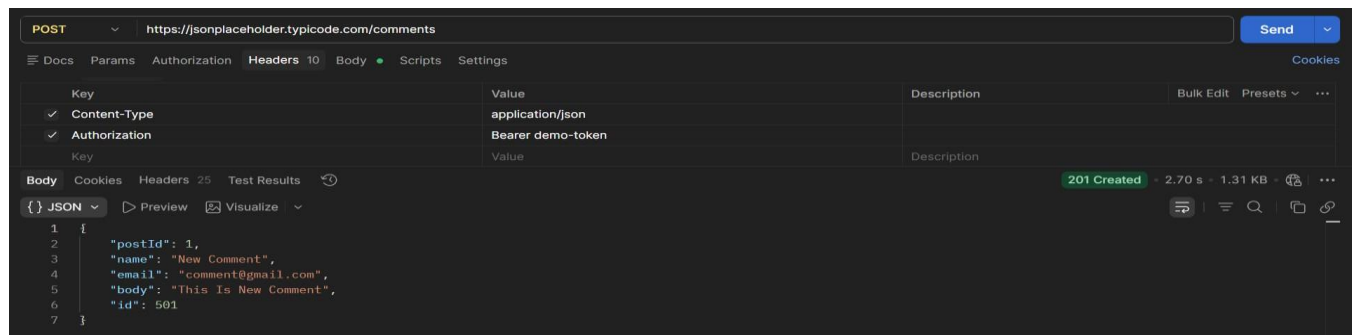

e) Record the status code for every step above (a–d) in a short table or list.

Ans:

Step	Request	Status Code
a	GET /comments?postId=1	200 OK
b	POST /comments (No Header)	201 Created
c	POST /comments (Content-Type)	201 Created
d	POST /comments (Content-Type + Authorization)	201 Created

f) In 2–3 sentences, explain what would happen differently at step (d) if this were a real API that actually required authentication.

In a real API, the Authorization header would be checked to verify the user's identity before allowing access to protected resources. If the token were missing or invalid, the server would return an error such as 401 Unauthorized or 403 Forbidden. JSONPlaceholder ignores the header because it is only a practice API and does not perform authentication.

This helps protect sensitive data and ensures that only authorized users can access or modify protected resources.