


API POSTMAN PRACTISE

Tasks

TASK 1 Reading Data Without Headers


- Send a GET request to /posts/1 — leave the Headers and Body tabs completely empty.
- Record the status code you get back.
- In one sentence, explain why this request works even with nothing in the Headers tab.

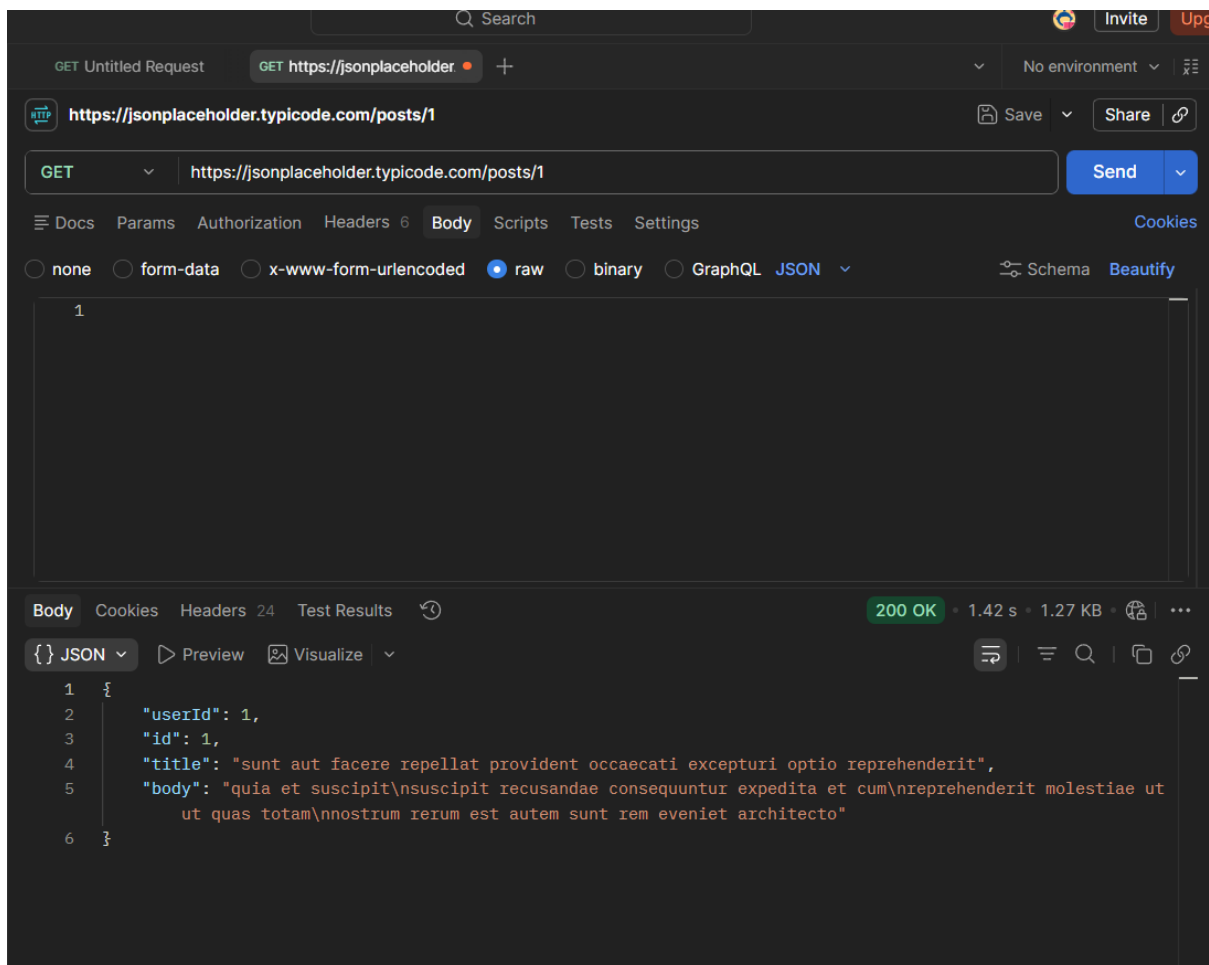

C. This request works without headers because it is a simple GET request, and the API does not require any additional information to return the requested data.

TASK 2 Filtering With Query Parameters

- Send a GET request to /comments, and add a query parameter in the Params tab: postId = 1.
- Confirm the URL automatically updates to include ?postId=1.
- Now combine two filters at once on /todos: userId = 1 and completed = false.
- In one sentence, explain what changed in the results compared to not using any params.

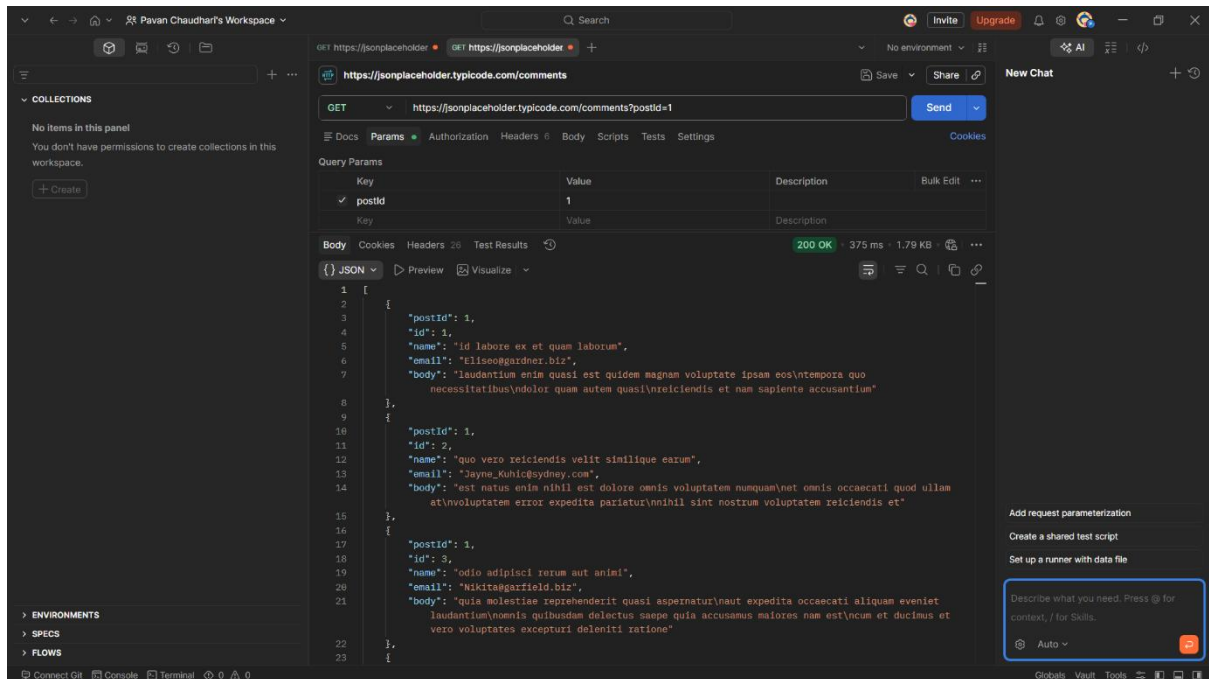

- Now combine two filters at once on /todos: userId = 1 and completed = false.

The screenshot displays a REST client interface with the following components:

- URL Bar:** Shows the URL `https://jsonplaceholder.typicode.com/todos` and the method `GET`.
- Query Params:** A table showing the query parameters used in the request.
- Body:** A tab showing the JSON response, which is a list of 8 todo items for user 1.

Query Params Table:

Key	Value	Description	Bulk Edit	...
☒ <code>userId</code>	<code>1</code>			
☒ <code>completed</code>	<code>false</code>			
Key	Value	Description		


Body (JSON) Table:

	<code>userId</code>	<code>id</code>	<code>title</code>	<code>completed</code>
0	1	1	delectus aut autem	false
1	1	2	quis ut nam facilis et officia qui	false
2	1	3	fugiat veniam minus	false
3	1	5	laboriosam mollitia et enim quasi adipisci quia provident illum	false
4	1	6	qui ullam ratione quibusdam voluptatem quia omnis	false
5	1	7	illo expedita consequatur quia in	false
6	1	9	molestiae perspiciatis ipsa	false
7	1	13	et doloremque nulla	false
8	1	18	dolorum est consequatur ea mollitia in culpa	false

d.) Using query parameters filters the data, so the API returns only the records that match the specified conditions instead of returning all records.

TASK 3 Sending Data With Headers & a Body

- Send a POST request to /posts.
- In the Headers tab, add: Content-Type: application/json
- In the Body tab (raw, JSON), send a new post with a title, body, and userId of your choice.
- Record the status code and the new id the server assigned.

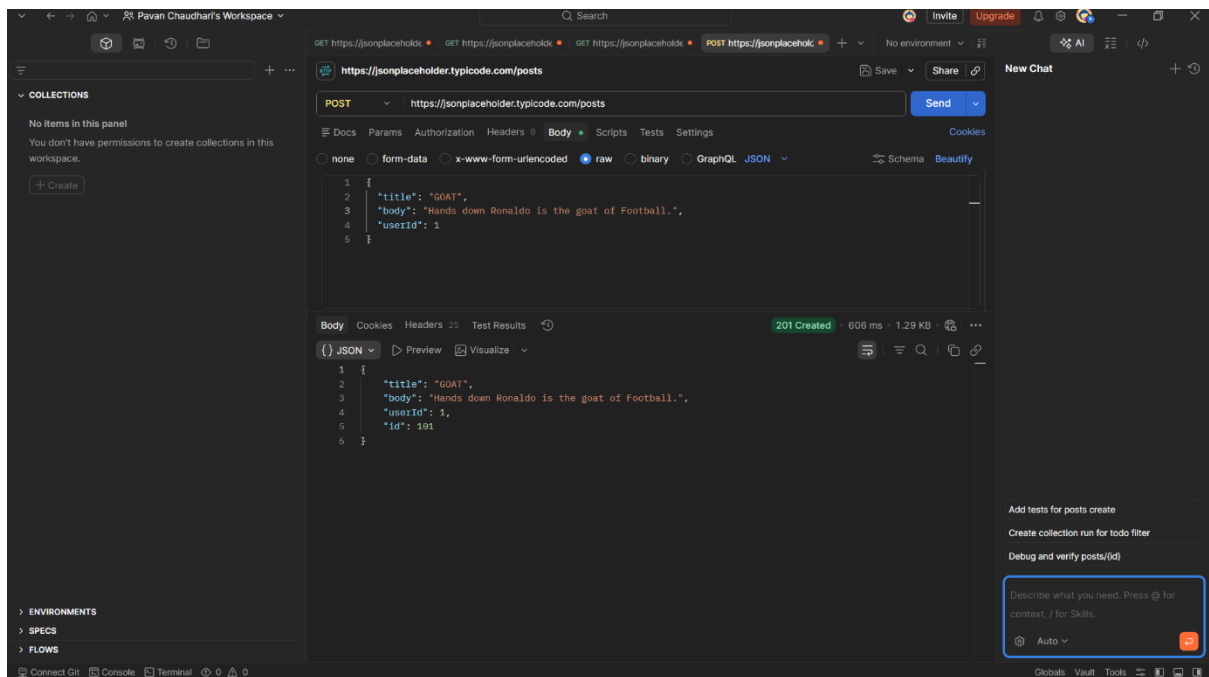


Status code: 201 Created

New id the server assigned: 101

TASK 4 Headers vs. No Headers

- Repeat Task 3's POST request, but this time remove the Content-Type header before sending.
- Compare the response to Task 3 — is it different? Record what you observe.
- In 2–3 sentences, explain why headers matter for a request like this, even though this practice API is forgiving about it.

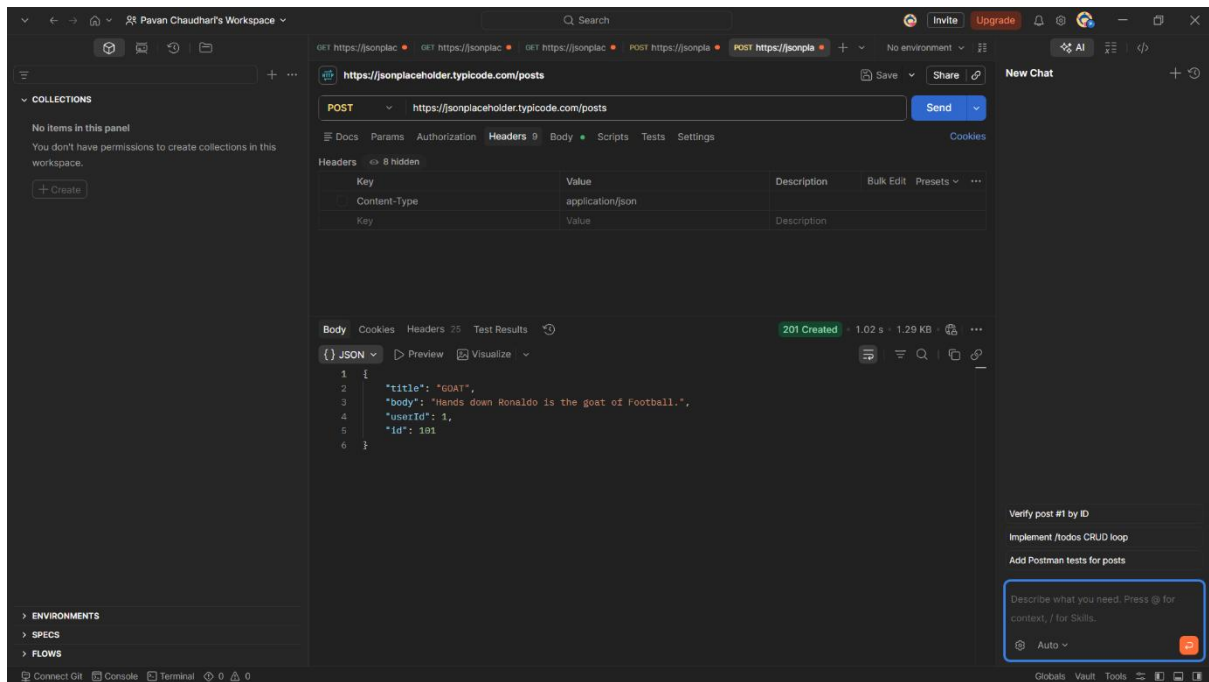


b.) The response was the same as Task 3. The API still returned 201 Created and generated a new id.

c.) Headers tell the server how to interpret the request data. The Content-Type: application/json header indicates that the body contains json. Although JSON Placeholder accepts the request without it, a real API may reject the request or fail to process the data correctly if the header is missing.


TASK 5 PUT vs. PATCH

- Send a PUT request to /posts/1 that replaces the entire post (include id, title, body, and userId in the body).
- Send a PATCH request to the same /posts/1 that changes only the title.
- In one sentence, explain the difference between what PUT sent and what PATCH sent.

a.) PUT:

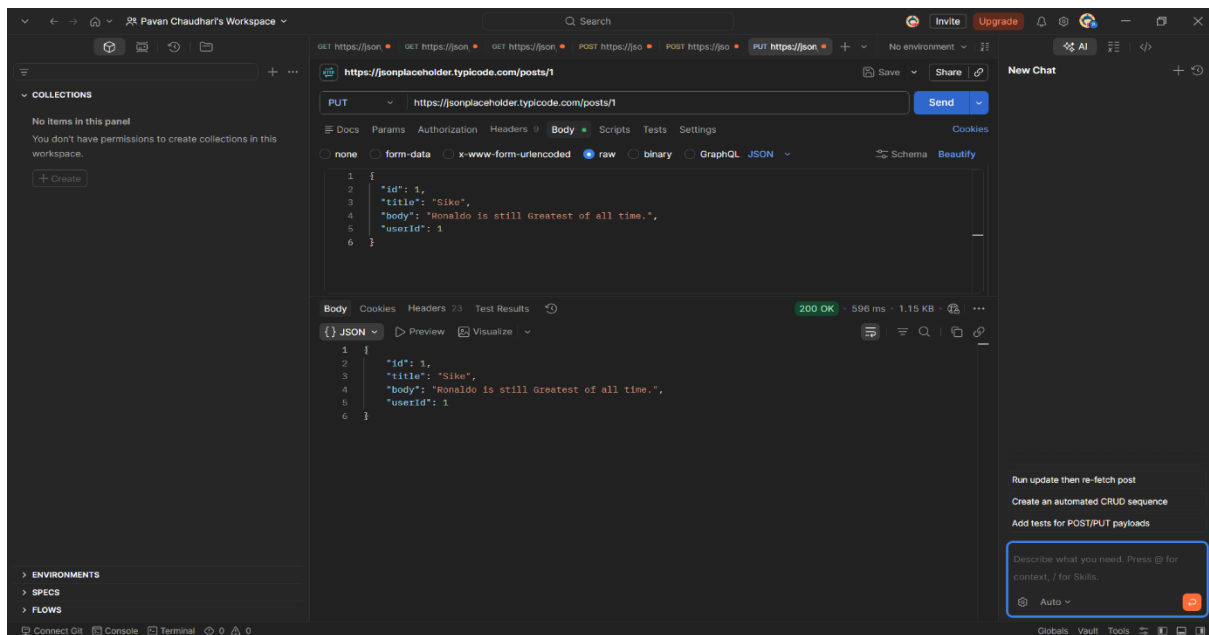

b.) PATCH:

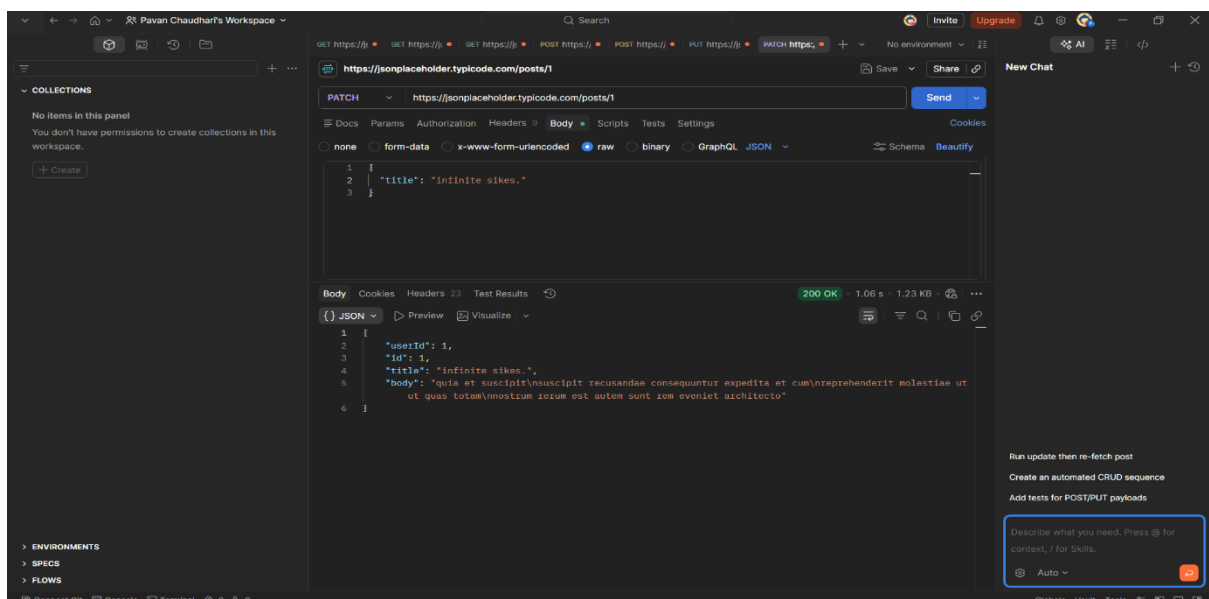

c.) PUT changes everything, while PATCH changes only what you specify.

Final Challenge — A Realistic Request Flow

Concepts used: *this task combines query params, headers (with and without), and the request body — everything from Tasks 1 through 4 — in one flow.*

TASK 6 The Mini Feedback System

Scenario: you're testing the backend for a simple feedback form, where users read existing comments on a post and can leave their own.

Complete the following steps, in order:

- a) Send a GET request to /comments, using a query parameter to fetch only the comments for postId = 1.
- b) Send a POST request to /comments to add a new comment — with no headers at all. Record the status code.
- c) Resend the same POST from step (b), this time with the Content-Type header included. Compare the two responses.
- d) Add one more header to this request: Authorization: Bearer demo-token — to simulate a login-protected submission, even though this practice API won't actually check it.
- e) Record the status code for every step above (a–d) in a short table or list.
- f) In 2–3 sentences, explain what would happen differently at step (d) if this were a real API that actually required authentication.

a.)

GET https://jsonplaceholder.typicode.com/comments?postId=1

Query Params

Key	Value	Description	Bulk Edit
postId	1		

Body

```
200 OK - 390 ms - 1.79 KB
```

```
1 [{
2   {
3     "postId": 1,
4     "id": 1,
5     "name": "id labore ex et quam laborum",
6     "email": "Eliseo@gardner.biz",
7     "body": "laudantium enim quasi est quidem magnam voluptate ipsam eos\ntempora quo
8       necessitatibus\ndolor quam autem quasi\nreiciendis et nam sapiente accusantium"
9   },
10  {
11    "postId": 1,
12    "id": 2,
13    "name": "quo vero reiciendis velit similique earum",
14    "email": "Jayne_Kuhic@sydney.com",
15    "body": "est natus enim nihil est dolore omnis voluptatem numquam\nnet omnis occaecati quod ullam
16      at\nevolutatem error expedita pariatur\nnnihil sint nostrum voluptatem reiciendis et"
17  },
18  {
19    "postId": 1,
20    "id": 3,
21    "name": "odio adipisci rerum aut animi",
22  }
23 }]
```

b.)

POST https://jsonplaceholder.typicode.com/comments

Body


```
1 {
2   "name": "Pavan",
3   "email": "pavanchaudhari33@gmail.com",
4   "body": "Great internship! I learned how to use Postman.",
5   "postId": 1
6 }
```

Body

```
201 Created - 563 ms - 1.34 KB
```


```
1 {
2   "name": "Pavan",
3   "email": "pavanchaudhari33@gmail.com",
4   "body": "Great internship! I learned how to use Postman.",
5   "postId": 1,
6   "id": 501
7 }
```


c.)

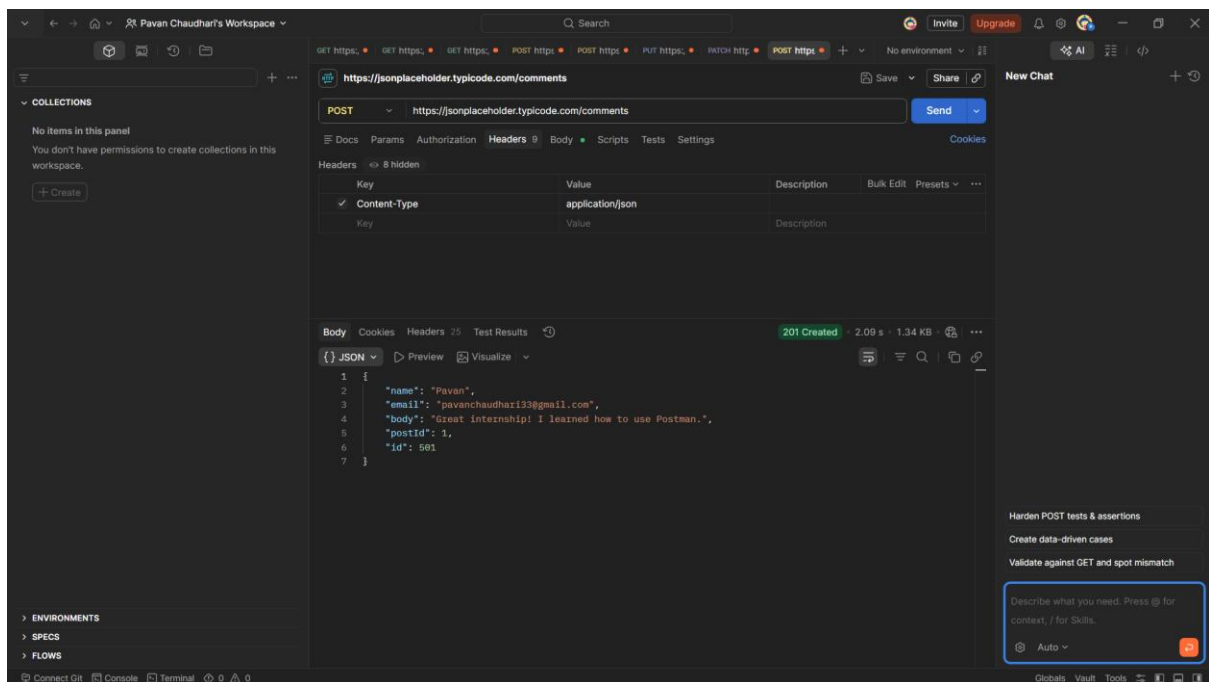

The response was the same with and without the Content-Type header because JSON Placeholder accepts both requests.

d.)

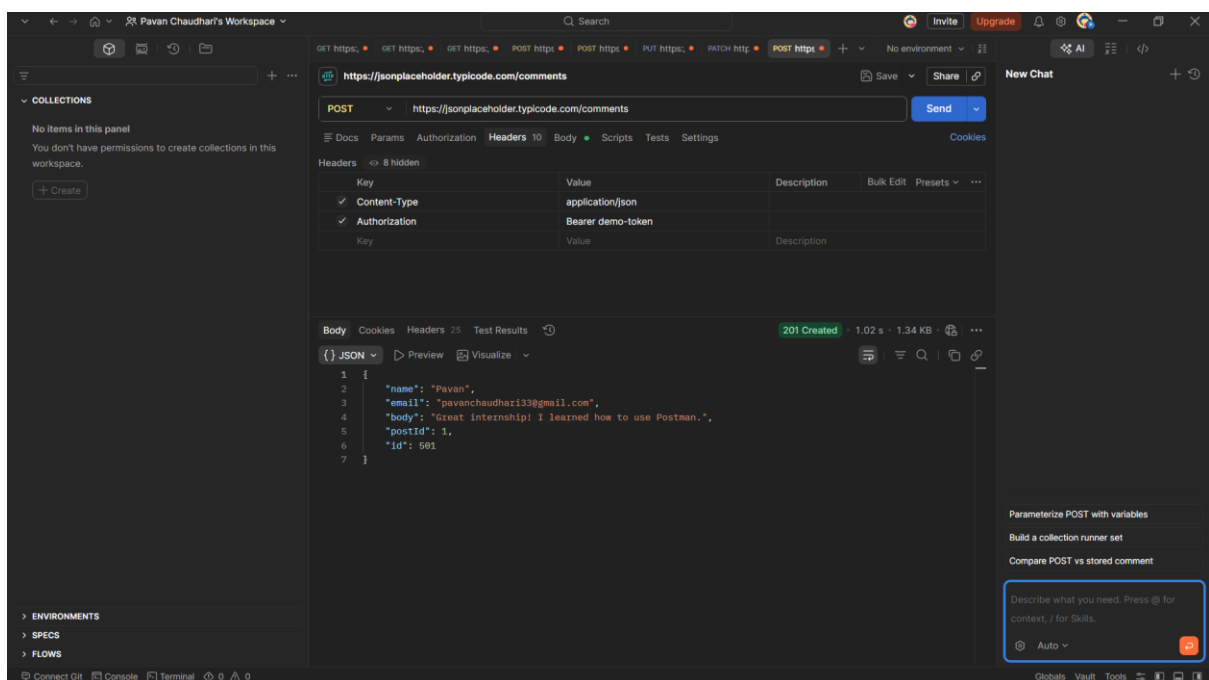

e.)

Step	Status Code
(a) GET /comments?postId=1	200 OK
(b) POST /comments (No Headers)	201 Created
(c) POST /comments (With Content-Type)	201 Created
(d) POST /comments (With Content-Type + Authorization)	201 Created

f.) Agar yeh ek real API hoti, to server **Authorization** header check karta ki user login hai ya nahi. Agar token missing ya invalid hota, to server request reject kar deta aur **401 Unauthorized** error return karta..