

Business Case: Yulu - Hypothesis Testing

About Yulu

Yulu is India's leading *micro-mobility service provider*, which *offers unique vehicles for the daily commute*. Starting off as a *mission to eliminate traffic congestion in India*, Yulu provides the safest commute solution through a *user-friendly mobile app to enable shared, solo and sustainable commuting*.

Yulu zones are located at all the appropriate locations (including *metro stations, bus stands, office spaces, residential areas, corporate offices, etc*) to make those first and last miles smooth, affordable, and convenient!

Yulu has recently suffered considerable dips in its revenues. They have contracted a consulting company to understand the factors on which the demand for these shared electric cycles depends. Specifically, they want *to understand the factors affecting the demand for these shared electric cycles in the Indian market*.

Problem Statement

The company wants to know:

- **Which variables are significant in predicting the demand for shared electric cycles in the Indian market?**
- **How well those variables describe the electric cycle demands**

Importing Libraries

```
import numpy as np
import pandas as pd
import matplotlib.pyplot as plt
import seaborn as sns
import datetime as dt
import scipy.stats as spy
```

Reading the dataset

```
df = pd.read_csv("yulu_testing.csv")
```

Shape of the dataset

```
df.shape
```

```
(10886, 12)
```

Columns in the Dataset

```
df.columns
```

```
Index(['datetime', 'season', 'holiday', 'workingday', 'weather',  
      'temp',  
      'atemp', 'humidity', 'windspeed', 'casual', 'registered',  
      'count'],  
      dtype='object')
```

Basic information about the values present in the dataset

```
df.head()
```

```
{"summary":{"\n  \"name\": \"df\",\n  \"rows\": 10886,\n  \"fields\": [\n    {\n      \"column\": \"datetime\",\n      \"properties\": {\n        \"dtype\": \"object\",\n        \"num_unique_values\": 10886,\n        \"samples\": [\n          \"2011-07-19 11:00:00\",\n          \"2012-01-16 06:00:00\",\n          \"2011-12-11 18:00:00\"\n        ],\n        \"semantic_type\": \"\",\n        \"description\": \"\"\n      }\n    },\n    {\n      \"column\": \"season\",\n      \"properties\": {\n        \"dtype\": \"number\",\n        \"std\": 1,\n        \"min\": 1,\n        \"max\": 4,\n        \"num_unique_values\": 4,\n        \"samples\": [\n          2,\n          4,\n          1\n        ],\n        \"semantic_type\": \"\",\n        \"description\": \"\"\n      }\n    },\n    {\n      \"column\": \"holiday\",\n      \"properties\": {\n        \"dtype\": \"number\",\n        \"std\": 0,\n        \"min\": 0,\n        \"max\": 1,\n        \"num_unique_values\": 2,\n        \"samples\": [\n          1,\n          0\n        ],\n        \"semantic_type\": \"\",\n        \"description\": \"\"\n      }\n    },\n    {\n      \"column\": \"workingday\",\n      \"properties\": {\n        \"dtype\": \"number\",\n        \"std\": 0,\n        \"min\": 0,\n        \"max\": 1,\n        \"num_unique_values\": 2,\n        \"samples\": [\n          1,\n          0\n        ],\n        \"semantic_type\": \"\",\n        \"description\": \"\"\n      }\n    },\n    {\n      \"column\": \"weather\",\n      \"properties\": {\n        \"dtype\": \"number\",\n        \"std\": 0,\n        \"min\": 1,\n        \"max\": 4,\n        \"num_unique_values\": 4,\n        \"samples\": [\n          2,\n          4\n        ],\n        \"semantic_type\": \"\",\n        \"description\": \"\"\n      }\n    },\n    {\n      \"column\": \"temp\",\n      \"properties\": {\n        \"dtype\": \"number\",\n        \"std\": 7.791589843987567,\n        \"min\": 0.82,\n        \"max\": 41.0,\n        \"num_unique_values\": 49,\n        \"samples\": [\n          6.56,\n          1.64\n        ],\n        \"semantic_type\": \"\",\n        \"description\": \"\"\n      }\n    },\n    {\n      \"column\": \"atemp\",\n      \"properties\": {\n        \"dtype\": \"number\",\n        \"std\": 8.474600626484948,\n        \"min\": 0.76,\n        \"max\":
```

```

45.455,\n          \"num_unique_values\": 60,\n          \"samples\": [\n
14.395,\n          16.665\n          ],\n          \"semantic_type\":\n
\\\",,\n          \"description\": \\\"\\\"\\n          }\\n          },\n          {\\n
\\\"column\": \"humidity\",,\n          \"properties\": {\\n          \"dtype\":\n
\\\"number\",,\n          \"std\": 19,\n          \"min\": 0,\n
\\\"max\": 100,\n          \"num_unique_values\": 89,\n
\\\"samples\": [\n          29,\n          61\n          ],\n
\\\"semantic_type\": \\\"\\\",,\n          \"description\": \\\"\\\"\\n          }\\n
          },\n          {\\n          \"column\": \"windspeed\",,\n
\\\"properties\": {\\n          \"dtype\": \"number\",,\n          \"std\":\n
8.164537326838689,\n          \"min\": 0.0,\n          \"max\": 56.9969,\n
\\\"num_unique_values\": 28,\n          \"samples\": [\n
22.0028,\n          43.0006\n          ],\n          \"semantic_type\":\n
\\\"\\\",,\n          \"description\": \\\"\\\"\\n          }\\n          },\n          {\\n
\\\"column\": \"casual\",,\n          \"properties\": {\\n          \"dtype\":\n
\\\"number\",,\n          \"std\": 49,\n          \"min\": 0,\n
\\\"max\": 367,\n          \"num_unique_values\": 309,\n
\\\"samples\": [\n          287,\n          47\n          ],\n
\\\"semantic_type\": \\\"\\\",,\n          \"description\": \\\"\\\"\\n          }\\n
          },\n          {\\n          \"column\": \"registered\",,\n
\\\"properties\": {\\n          \"dtype\": \"number\",,\n          \"std\":\n
151,\n          \"min\": 0,\n          \"max\": 886,\n
\\\"num_unique_values\": 731,\n          \"samples\": [\n          566,\n
9\n          ],\n          \"semantic_type\": \\\"\\\",,\n
\\\"description\": \\\"\\\"\\n          }\\n          },\n          {\\n          \"column\":\n
\\\"count\",,\n          \"properties\": {\\n          \"dtype\": \"number\",,\n
\\\"std\": 181,\n          \"min\": 1,\n          \"max\": 977,\n
\\\"num_unique_values\": 822,\n          \"samples\": [\n          626,\n
256\n          ],\n          \"semantic_type\": \\\"\\\",,\n
\\\"description\": \\\"\\\"\\n          }\\n          }\\n          ]\\n
n}\" , \"type\": \"dataframe\", \"variable_name\": \"df\"}

df.tail()

{ \"repr_error\": \"0\", \"type\": \"dataframe\" }

```

Column Profiling:

- **datetime:** datetime
- **season:** season (1: spring, 2: summer, 3: fall, 4: winter)
- **holiday:** whether day is a holiday or not (extracted from <http://dchr.dc.gov/page/holiday-schedule>)
- **workingday:** if day is neither weekend nor holiday is 1, otherwise is 0.
- **weather:**
 - 1: Clear, Few clouds, partly cloudy, partly cloudy
 - 2: Mist + Cloudy, Mist + Broken clouds, Mist + Few clouds, Mist
 - 3: Light Snow, Light Rain + Thunderstorm + Scattered clouds, Light Rain + Scattered clouds
 - 4: Heavy Rain + Ice Pallets + Thunderstorm + Mist, Snow + Fog

- **temp**: temperature in Celsius
- **atemp**: feeling temperature in Celsius
- **humidity**: humidity
- **windspeed**: wind speed
- **casual**: count of casual users
- **registered**: count of registered users
- **count**: count of total rental bikes including both casual and registered

Is there any null value in the dataset ?

```
np.any(df.isna())
```

False

Is there any duplicated values in the dataset ?

```
np.any(df.duplicated())
```

False

Datatype of the columns

```
df.dtypes
```

```
datetime      object
season        int64
holiday        int64
workingday     int64
weather        int64
temp          float64
atemp         float64
humidity       int64
windspeed     float64
casual         int64
registered     int64
count         int64
dtype: object
```

Converting the datatype of datetime column from object to datetime

```
df['datetime'] = pd.to_datetime(df['datetime'])
```

What is the time period for which the data is given ?

```
df['datetime'].min()
```

```
Timestamp('2011-01-01 00:00:00')
```

```
df['datetime'].max()
```

```
Timestamp('2012-12-19 23:00:00')
```

```

df['datetime'].max() - df['datetime'].min()
Timedelta('718 days 23:00:00')

df['day'] = df['datetime'].dt.day_name()

# setting the 'datetime' column as the index of the DataFrame 'df'
df.set_index('datetime', inplace = True)

# By setting the 'datetime' column as the index, it allows for easier
and more efficient access,
    # filtering, and manipulation of the data based on the datetime
values.
# It enables operations such as resampling, slicing by specific time
periods, and
    # applying time-based calculations.

```

Slicing Data by Time

```


# The below code visualizes the trend of the monthly average values
for the 'casual', 'registered',
    # and 'count' variables, allowing for easy comparison and
analysis of their patterns over time

plt.figure(figsize = (16, 8))

# plotting a lineplot by resampling the data on a monthly basis, and
calculating the mean value
    # of 'casual', 'registered' and 'count' users for each month
df.resample('M')['casual'].mean().plot(kind = 'line', legend =
'casual', marker = 'o')
df.resample('M')['registered'].mean().plot(kind = 'line', legend =
'registered', marker = 'o')
df.resample('M')['count'].mean().plot(kind = 'line', legend = 'count',
marker = 'o')

plt.grid(axis = 'y', linestyle = '--')    # adding gridlines only
along the y-axis
plt.yticks(np.arange(0, 301, 20))
plt.ylim(0,)    # setting the lower y-axis limit to 0
plt.show()    # displaying the plot

```

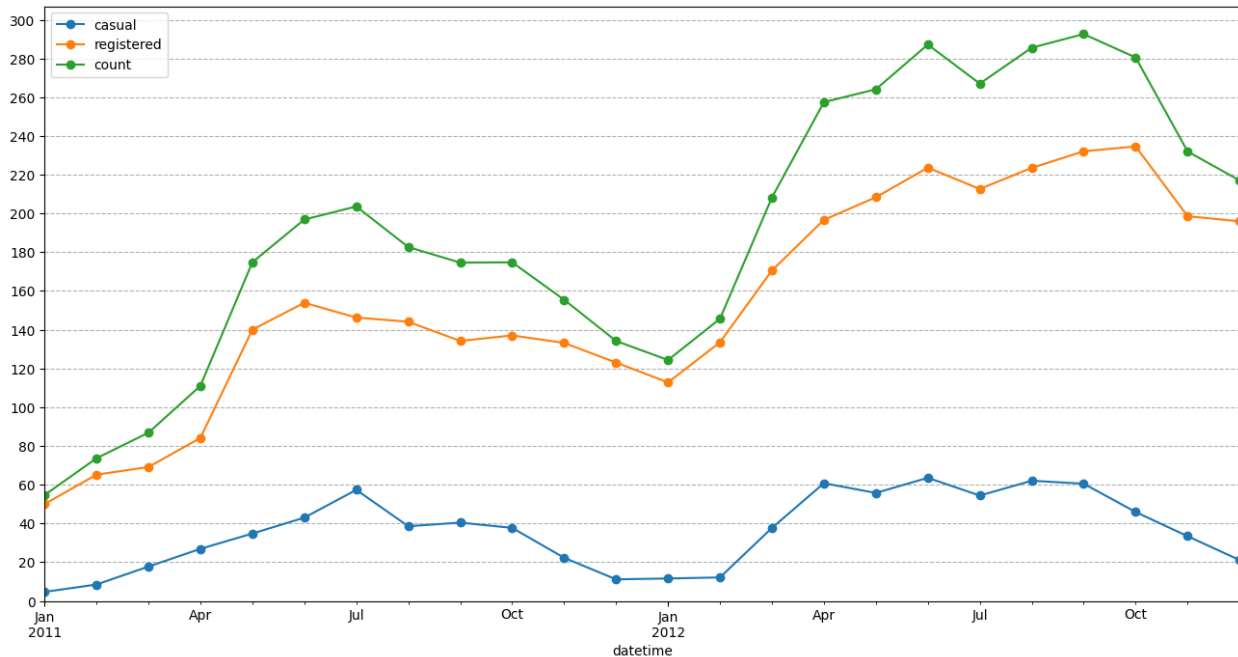

```
# The below code visualizes the trend of the monthly total values for
the 'casual', 'registered',
# and 'count' variables, allowing for easy comparison and
analysis of their patterns over time
```

```
plt.figure(figsize = (16, 8))
```

```
# plotting a lineplot by resampling the data on a monthly basis, and
calculating the sum
```

```
# of 'casual', 'registered' and 'count' users for each month
df.resample('M')['casual'].sum().plot(kind = 'line', legend =
'casual', marker = 'o')
```

```
df.resample('M')['registered'].sum().plot(kind = 'line', legend =
'registered', marker = 'o')
```


```
df.resample('M')['count'].sum().plot(kind = 'line', legend = 'count',
marker = 'o')
```

```
plt.grid(axis = 'y', linestyle = '--') # adding gridlines only
along the y-axis
```

```
plt.yticks(np.arange(0, 130001, 10000))
```

```
plt.ylim(0,) # setting the lower y-axis limit to 0
```

```
plt.show() # displaying the plot
```

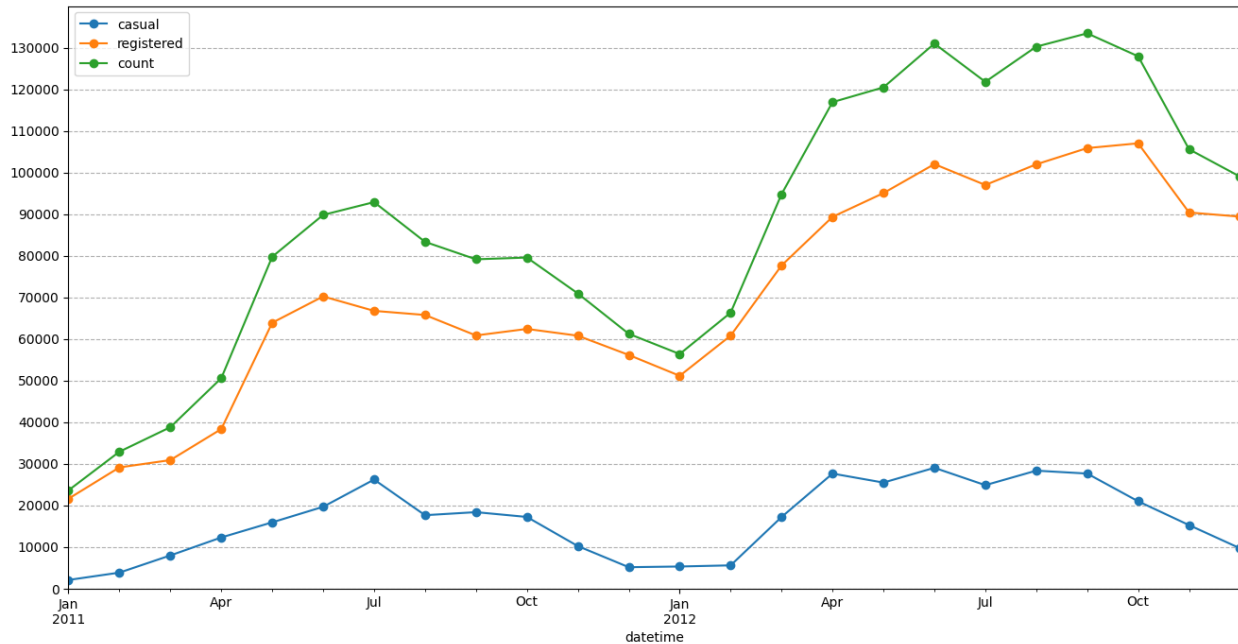

I want to know if there is an increase in the average hourly count of rental bikes from the year 2011 to 2012

```
# resampling the DataFrame by the year
df1 = df.resample('Y')['count'].mean().to_frame().reset_index()

# Create a new column 'prev_count' by shifting the 'count' column one
# position up
# to compare the previous year's count with the current year's
count
df1['prev_count'] = df1['count'].shift(1)

# Calculating the growth percentage of 'count' with respect to the
'count' of previous year
df1['growth_percent'] = (df1['count'] - df1['prev_count']) * 100 /
df1['prev_count']
df1

{"summary": "{\n  \"name\": \"df1\",\n  \"rows\": 2,\n  \"fields\": [\n    {\n      \"column\": \"datetime\",\n      \"properties\": {\n        \"dtype\": \"date\",\n        \"min\": \"2011-12-31 00:00:00\",\n        \"max\": \"2012-12-31 00:00:00\",\n        \"num_unique_values\": 2,\n        \"samples\": [\n          \"2012-12-31 00:00:00\",\n          \"2011-12-31 00:00:00\"\n        ],\n        \"semantic_type\": \"\",\n        \"description\": \"\"\n      },\n      \"column\": \"count\",\n      \"properties\": {\n        \"dtype\": \"number\",\n        \"std\": 66.70675317750982,\n        \"min\": 144.223349317595,\n        \"max\": 238.56094436310394,\n        \"num_unique_values\": 2,\n        \"samples\": [\n          238.56094436310394,\n          144.223349317595\n        ],\n        \"semantic_type\": \"\"
    }
  ]
}
```



```

n      \"semantic_type\": \"\", \n      \"description\": \"\" \n
}\n    }, \n    { \n      \"column\": \"count\", \n      \"properties\":
{ \n      \"dtype\": \"number\", \n      \"std\":
51.54824348509813, \n      \"min\": 90.36651583710407, \n
\"max\": 242.03179824561403, \n      \"num_unique_values\": 12, \n
\"samples\": [ \n      193.67727771679472, \n
227.6992316136114, \n      90.36651583710407 \n      ], \n
\"semantic_type\": \"\", \n      \"description\": \"\" \n    } \n
n    }, \n    { \n      \"column\": \"prev_count\", \n
\"properties\": { \n      \"dtype\": \"number\", \n      \"std\":
53.81852870496405, \n      \"min\": 90.36651583710407, \n
\"max\": 242.03179824561403, \n      \"num_unique_values\": 11, \n
\"samples\": [ \n      242.03179824561403, \n
90.36651583710407, \n      227.6992316136114 \n      ], \n
\"semantic_type\": \"\", \n      \"description\": \"\" \n    } \n
n    }, \n    { \n      \"column\": \"growth_percent\", \n
\"properties\": { \n      \"dtype\": \"number\", \n      \"std\":
15.761504330004792, \n      \"min\": -14.941619985151904, \n
\"max\": 34.69575131415657, \n      \"num_unique_values\": 11, \n
\"samples\": [ \n      -2.7707683037878277, \n
21.73018801790899, \n      -14.941619985151904 \n      ], \n
\"semantic_type\": \"\", \n      \"description\": \"\" \n    } \n
n    } \n  ] \n }\", \"type\": \"dataframe\", \"variable_name\": \"df1\"}

```

- The count of rental bikes shows an increasing trend from January to March, with a significant growth rate of 34.70% between February and March.
- The growth rate starts to stabilize from April to June, with a relatively smaller growth rate.
- From July to September, there is a slight decrease in the count of rental bikes, with negative growth rates.
- The count further declines from October to December, with the largest drop observed between October and November (-14.94%).

The resulting plot visualizes the average hourly distribution of the count of rental bikes for each

month, allowing for comparison and identification of any patterns or trends throughout the year.

Setting the figure size for the plot

```
plt.figure(figsize = (12, 6))
```

Setting the title for the plot

```
plt.title("The average hourly distribution of count of rental bikes across different months")
```

Grouping the DataFrame by the month and calculating the mean of the 'count' column for each month.

Plotting the line graph using markers ('o') to represent the average count per month.


```

df.groupby(by = df['datetime'].dt.month)['count'].mean().plot(kind =
'line', marker = 'o')

plt.ylim(0,)      # Setting the y-axis limits to start from zero
plt.xticks(np.arange(1, 13))  # Setting the x-ticks to represent the
months from 1 to 12
plt.legend('count')  # Adding a legend to the plot for the 'count'
line.
plt.yticks(np.arange(0, 400, 50))
# Adding gridlines to both the x and y axes with a dashed line style
plt.grid(axis = 'both', linestyle = '--')
plt.plot()        # Displaying the plot.

[]

```

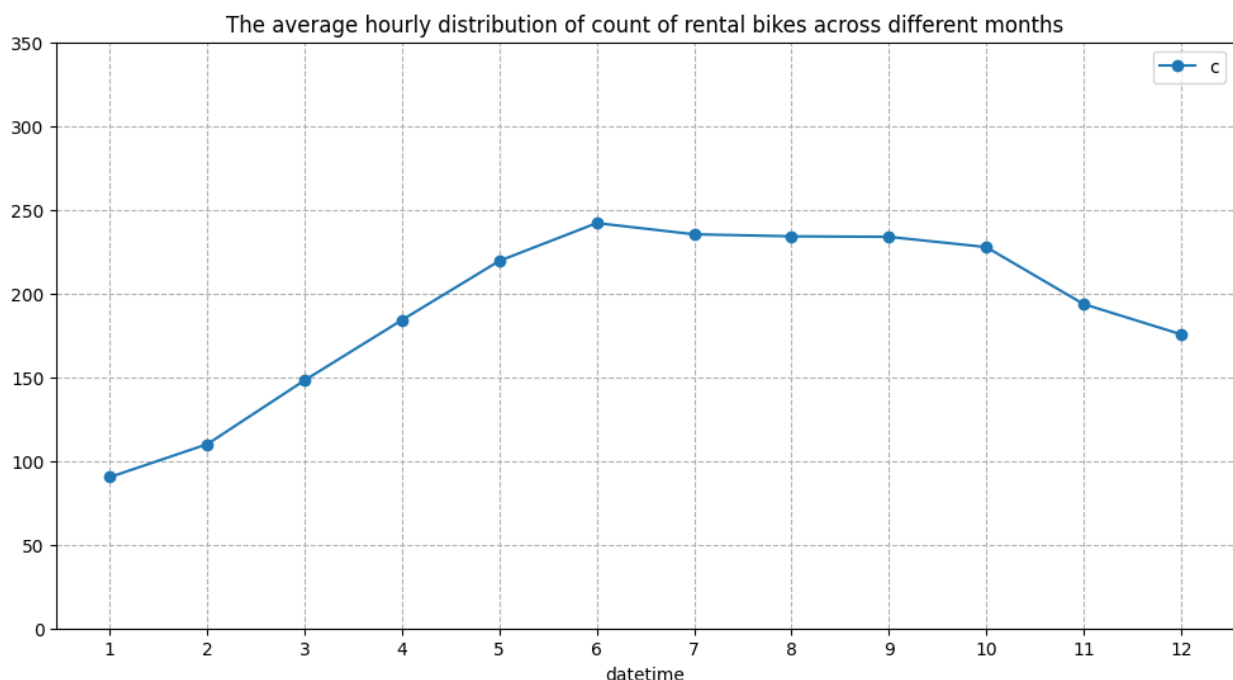

- The average hourly count of rental bikes is the highest in the month of June followed by July and August.
- The average hourly count of rental bikes is the lowest in the month of January followed by February and March.

Overall, these trends suggest a seasonal pattern in the count of rental bikes, with higher demand during the spring and summer months, a slight decline in the fall, and a further decrease in the winter months. It could be useful for the rental bike company to consider these patterns for resource allocation, marketing strategies, and operational planning throughout the year.

What is the distribution of average count of rental bikes on an hourly basis in a single day?

```
# Grouping the DataFrame by the hour
df1 = df.groupby(by = df['datetime'].dt.hour)
['count'].mean().reset_index()
df1.rename(columns = {'datetime' : 'hour'}, inplace = True)

# Create a new column 'prev_count' by shifting the 'count' column one
position up
# to compare the previous hour's count with the current hour's
count
df1['prev_count'] = df1['count'].shift(1)

# Calculating the growth percentage of 'count' with respect to the
'count' of previous hour
df1['growth_percent'] = (df1['count'] - df1['prev_count']) * 100 /
df1['prev_count']
df1.set_index('hour', inplace = True)
df1


{"summary":{"\n  \"name\": \"df1\",\n  \"rows\": 24,\n  \"fields\": [\n    {\n      \"column\": \"hour\",\n      \"properties\": {\n        \"dtype\": \"int32\",\n        \"num_unique_values\": 24,\n        \"samples\": [\n          8,\n          16,\n          0\n        ],\n        \"semantic_type\": \"\",\n        \"description\": \"\"\n      }\n    },\n    {\n      \"column\": \"count\",\n      \"properties\": {\n        \"dtype\": \"number\",\n        \"std\": 133.24582163120547,\n        \"min\": 6.407239819004525,\n        \"max\": 468.765350877193,\n        \"num_unique_values\": 24,\n        \"samples\": [\n          362.7692307692308,\n          316.37280701754383,\n          55.13846153846154\n        ],\n        \"semantic_type\": \"\",\n        \"description\": \"\"\n      }\n    },\n    {\n      \"column\": \"prev_count\",\n      \"properties\": {\n        \"dtype\": \"number\",\n        \"std\": 134.44474670604328,\n        \"min\": 6.407239819004525,\n        \"max\": 468.765350877193,\n        \"num_unique_values\": 23,\n        \"samples\": [\n          254.2982456140351,\n          221.78021978021977,\n          55.13846153846154\n        ],\n        \"semantic_type\": \"\",\n        \"description\": \"\"\n      }\n    },\n    {\n      \"column\": \"growth_percent\",\n      \"properties\": {\n        \"dtype\": \"number\",\n        \"std\": 87.47730477156162,\n        \"min\": -48.656179095378874,\n        \"max\": 285.77752633488507,\n        \"num_unique_values\": 23,\n        \"samples\": [\n          24.410141428078635,\n          21.051431969081356,\n          -38.59271751101322\n        ],\n        \"semantic_type\": \"\",\n        \"description\": \"\"\n      }\n    }\n  ]\n}, \"type\": \"dataframe\", \"variable_name\": \"df1\"}
```

- During the early morning hours (hours 0 to 5), there is a significant decrease in the count, with negative growth percentages ranging from -38.59% to -48.66%.

- However, starting from hour 5, there is a sudden increase in count, with a sharp positive growth percentage of 208.52% observed from hour 4 to hour 5.
- The count continues to rise significantly until reaching its peak at hour 17, with a growth percentage of 48.17% compared to the previous hour.
- After hour 17, there is a gradual decrease in count, with negative growth percentages ranging from -8.08% to -32.99% during the late evening and nighttime hours.

```
plt.figure(figsize = (12, 6))
plt.title("The distribution of average count of rental bikes on an hourly basis in a single day")
df.groupby(by = df['datetime'].dt.hour)['count'].mean().plot(kind = 'line', marker = 'o')
plt.ylim(0,)
plt.xticks(np.arange(0, 24))
plt.legend('count')
plt.grid(axis = 'both', linestyle = '--')
plt.plot()
```

[]

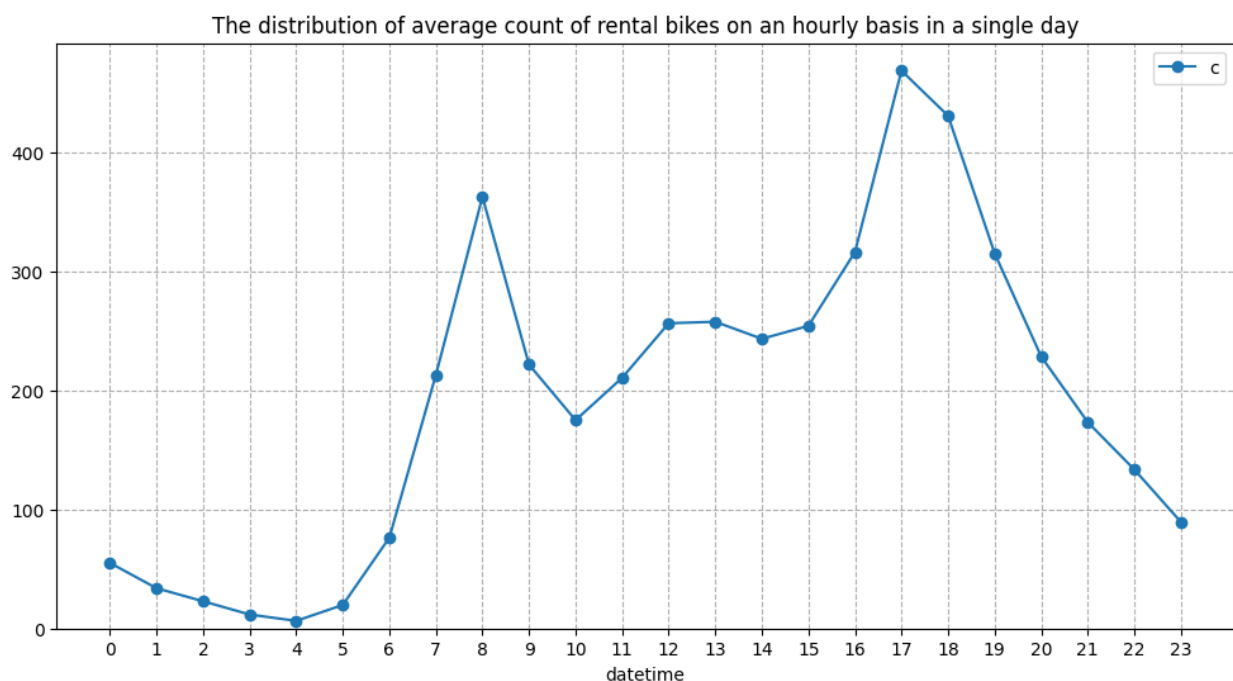

- The average count of rental bikes is the highest at 5 PM followed by 6 PM and 8 AM of the day.
- The average count of rental bikes is the lowest at 4 AM followed by 3 AM and 5 AM of the day.

These patterns indicate that there is a distinct fluctuation in count throughout the day, with low counts during early morning hours, a sudden increase in the morning, a peak count in the afternoon, and a gradual decline in the evening and nighttime.

Basic Information about the Dataset

```
df.info()

<class 'pandas.core.frame.DataFrame'>
RangeIndex: 10886 entries, 0 to 10885
Data columns (total 13 columns):
#   Column          Non-Null Count  Dtype  
---  -
0   datetime         10886 non-null  datetime64[ns]
1   season           10886 non-null  int64   
2   holiday          10886 non-null  int64   
3   workingday       10886 non-null  int64   
4   weather          10886 non-null  int64   
5   temp            10886 non-null  float64  
6   atemp           10886 non-null  float64  
7   humidity         10886 non-null  int64   
8   windspeed        10886 non-null  float64  
9   casual           10886 non-null  int64   
10  registered        10886 non-null  int64   
11  count            10886 non-null  int64   
12  day              10886 non-null  object  
dtypes: datetime64[ns](1), float64(3), int64(8), object(1)
memory usage: 1.1+ MB
```

- The dataframe requires a memory usage of about 1.1+ MB.
- Though the memory usage is small but can we still decrease the memory usage?

```
# 1: spring, 2: summer, 3: fall, 4: winter
def season_category(x):
    if x == 1:
        return 'spring'
    elif x == 2:
        return 'summer'
    elif x == 3:
        return 'fall'
    else:
        return 'winter'
df['season'] = df['season'].apply(season_category)
```

Optimizing Memory Usage of the Dataframe

Updating dtype of season column

```
print('Memory usage of season column : ', df['season'].memory_usage())
# Since the dtype of season column is object, we can convert the dtype
to category to save memory
df['season'] = df['season'].astype('category')
print('Updated Memory usage of season column : ',
df['season'].memory_usage())
```

Memory usage of season column : 87216
Updated Memory usage of season column : 11218

Updating dtype of holiday column

```
print('Max value entry in holiday column : ', df['holiday'].max())
print('Memory usage of holiday column : ',
df['holiday'].memory_usage())
# Since the maximum entry in holiday column is 1 and the dtype is
int64, we can convert the dtype to category to save memory
df['holiday'] = df['holiday'].astype('category')
print('Updated Memory usage of holiday column : ',
df['holiday'].memory_usage())
```

Max value entry in holiday column : 1
Memory usage of holiday column : 87216
Updated Memory usage of holiday column : 11138

Updating dtype of workingday column

```
print('Max value entry in workingday column : ',
df['workingday'].max())
print('Memory usage of workingday column : ',
df['workingday'].memory_usage())
# Since the maximum entry in workingday column is 1 and the dtype is
int64, we can convert the dtype to category to save memory
df['workingday'] = df['workingday'].astype('category')
print('Updated Memory usage of workingday column : ',
df['workingday'].memory_usage())
```

Max value entry in workingday column : 1
Memory usage of workingday column : 87216
Updated Memory usage of workingday column : 11138

Updating dtype of weather column

```
print('Max value entry in weather column : ', df['weather'].max())
print('Memory usage of weather column : ',
df['weather'].memory_usage())
# Since the maximum entry in weather column is 4 and the dtype is
int64, we can convert the dtype to category to save memory
df['weather'] = df['weather'].astype('category')
print('Updated Memory usage of weather column : ',
df['weather'].memory_usage())
```

Max value entry in weather column : 4
Memory usage of weather column : 87216
Updated Memory usage of weather column : 11218

Updating dtype of temp column

```
print('Max value entry in temp column : ', df['temp'].max())
print('Memory usage of temp column : ', df['temp'].memory_usage())
# Since the maximum entry in temp column is 41.0 and the dtype is
float64, we can convert the dtype to float32 to save memory
df['temp'] = df['temp'].astype('float32')
print('Updated Memory usage of temp column : ',
df['temp'].memory_usage())
```

```
Max value entry in temp column : 41.0
Memory usage of temp column : 87216
Updated Memory usage of temp column : 43672
```

Updating dtype of atemp column

```
print('Max value entry in atemp column : ', df['atemp'].max())
print('Memory usage of atemp column : ', df['atemp'].memory_usage())
# Since the maximum entry in atemp column is 45.455 and the dtype is
float64, we can convert the dtype to float32 to save memory
df['atemp'] = df['atemp'].astype('float32')
print('Updated Memory usage of atemp column : ',
df['atemp'].memory_usage())
```

```
Max value entry in atemp column : 45.455
Memory usage of atemp column : 87216
Updated Memory usage of atemp column : 43672
```

Updating dtype of humidity column

```
print('Max value entry in humidity column : ', df['humidity'].max())
print('Memory usage of humidity column : ', df['temp'].memory_usage())
# Since the maximum entry in humidity column is 100 and the dtype is
int64, we can convert the dtype to int8 to save memory
df['humidity'] = df['humidity'].astype('int8')
print('Updated Memory usage of humidity column : ',
df['humidity'].memory_usage())
```

```
Max value entry in humidity column : 100
Memory usage of humidity column : 43672
Updated Memory usage of humidity column : 11014
```

Updating dtype of windspeed column

```
print('Max value entry in windspeed column : ', df['windspeed'].max())
print('Memory usage of windspeed column : ',
df['windspeed'].memory_usage())
# Since the maximum entry in windspeed column is 56.9969 and the dtype
is float64, we can convert the dtype to float32 to save memory
df['windspeed'] = df['windspeed'].astype('float32')
```

```
print('Updated Memory usage of windspeed column : ',  
df['windspeed'].memory_usage())
```

Max value entry in windspeed column : 56.9969
Memory usage of windspeed column : 87216
Updated Memory usage of windspeed column : 43672

Updating dtype of casual column

```
print('Max value entry in casual column : ', df['casual'].max())  
print('Memory usage of casual column : ', df['casual'].memory_usage())  
# Since the maximum entry in casual column is 367 and the dtype is  
int64, we can convert the dtype to int16 to save memory  
df['casual'] = df['casual'].astype('int16')  
print('Updated Memory usage of casual column : ',  
df['casual'].memory_usage())
```

Max value entry in casual column : 367
Memory usage of casual column : 87216
Updated Memory usage of casual column : 21900

Updating dtype of registered column

```
print('Max value entry in registered column : ',  
df['registered'].max())  
print('Memory usage of registered column : ',  
df['registered'].memory_usage())  
# Since the maximum entry in registered column is 886 and the dtype is  
int64, we can convert the dtype to int16 to save memory  
df['registered'] = df['registered'].astype('int16')  
print('Updated Memory usage of registered column : ',  
df['registered'].memory_usage())
```

Max value entry in registered column : 886
Memory usage of registered column : 87216
Updated Memory usage of registered column : 21900

Updating dtype of count column

```
print('Max value entry in count column : ', df['count'].max())  
print('Memory usage of count column : ', df['count'].memory_usage())  
# Since the maximum entry in count column is 977 and the dtype is  
int64, we can convert the dtype to int16 to save memory  
df['count'] = df['count'].astype('int16')  
print('Updated Memory usage of count column : ',  
df['count'].memory_usage())
```

Max value entry in count column : 977
Memory usage of count column : 87216
Updated Memory usage of count column : 21900


```
df.info()

<class 'pandas.core.frame.DataFrame'>
RangeIndex: 10886 entries, 0 to 10885
Data columns (total 13 columns):
#   Column          Non-Null Count  Dtype  
---  -
0   datetime         10886 non-null  datetime64[ns]
1   season           10886 non-null  category
2   holiday          10886 non-null  category
3   workingday       10886 non-null  category
4   weather          10886 non-null  category
5   temp             10886 non-null  float32
6   atemp            10886 non-null  float32
7   humidity         10886 non-null  int8    
8   windspeed        10886 non-null  float32
9   casual           10886 non-null  int16   
10  registered        10886 non-null  int16   
11  count            10886 non-null  int16   
12  day              10886 non-null  object  
dtypes: category(4), datetime64[ns](1), float32(3), int16(3), int8(1), object(1)
memory usage: 415.4+ KB
```

Earlier the dataset was using 1.1+ MB of memory but now it has been reduced to 415.2+ KB. Around 63.17 % reduction in the memory usage.

Basic Description of the dataset

```
df.describe()

{"summary":{"name": "df", "rows": 8, "fields": [{"column": "datetime", "properties": {"dtype": "date", "min": "1970-01-01 00:00:00.000010886", "max": "2012-12-19 23:00:00", "num_unique_values": 7, "samples": ["10886", "2011-12-27 05:56:22.399411968", "2012-07-01 12:45:00"], "semantic_type": "", "description": ""}], {"column": "temp", "properties": {"dtype": "number", "std": 3842.2088125886876, "min": 0.8199999928474426, "max": 10886.0, "num_unique_values": 8, "samples": [20.23086166381836, 26.239999771118164, 10886.0], "semantic_type": "", "description": ""}], {"column": "atemp", "properties": {"dtype": "number", "std": 3841.214608885923, "min": 0.7599999904632568, "max": 10886.0, "num_unique_values": 8, "samples": [23.65508460998535, ]}}]}
```

```

31.059999465942383,\n          10886.0\n          ],\n\n\"semantic_type\": \"\", \n          \"description\": \"\"\n          }\n\n    },\n    {\n        \"column\": \"humidity\", \n        \"properties\": {\n            \"dtype\": \"number\", \n            \"std\": 3830.3684503021896, \n            \"min\": 0.0, \n            \"max\": 10886.0, \n            \"num_unique_values\": 8, \n            \"samples\": [\n261.88645967297446, \n            77.0, \n            10886.0\n            ], \n            \"semantic_type\": \"\", \n            \"description\": \"\"\n            }\n        },\n        {\n            \"column\": \"windspeed\", \n            \"properties\": {\n                \"dtype\": \"number\", \n                \"std\": 3843.014939484328, \n                \"min\": 0.0, \n                \"max\": 10886.0, \n                \"num_unique_values\": 8, \n                \"samples\": [\n212.799395561218262, \n                16.997900009155273, \n                10886.0\n                ], \n                \"semantic_type\": \"\", \n                \"description\": \"\"\n                }\n            },\n            {\n                \"column\": \"casual\", \n                \"properties\": {\n                    \"dtype\": \"number\", \n                    \"std\": 3824.2753676913135, \n                    \"min\": 0.0, \n                    \"max\": 10886.0, \n                    \"num_unique_values\": 8, \n                    \"samples\": [\n36.02195480433584, \n                    49.0, \n                    10886.0\n                    ], \n                    \"semantic_type\": \"\", \n                    \"description\": \"\"\n                    }\n                },\n                {\n                    \"column\": \"registered\", \n                    \"properties\": {\n                        \"dtype\": \"number\", \n                        \"std\": 3779.8696121257044, \n                        \"min\": 0.0, \n                        \"max\": 10886.0, \n                        \"num_unique_values\": 8, \n                        \"samples\": [\n155.5521771082124, \n                        222.0, \n                        10886.0\n                        ], \n                        \"semantic_type\": \"\", \n                        \"description\": \"\"\n                        }\n                    },\n                    {\n                        \"column\": \"count\", \n                        \"properties\": {\n                            \"dtype\": \"number\", \n                            \"std\": 3769.174237043881, \n                            \"min\": 1.0, \n                            \"max\": 10886.0, \n                            \"num_unique_values\": 8, \n                            \"samples\": [\n191.57413191254824, \n                            284.0, \n                            10886.0\n                            ], \n                            \"semantic_type\": \"\", \n                            \"description\": \"\"\n                            }\n                        }\n                    }\n                }\n            }\n        ],\n        \"type\": \"dataframe\"}

```

- These statistics provide insights into the central tendency, spread, and range of the numerical features in the dataset.

```
np.round(df['season'].value_counts(normalize = True) * 100, 2)
```

```

season
winter    25.11
fall      25.11
summer    25.11
spring    24.67
Name: proportion, dtype: float64

```

```
np.round(df['holiday'].value_counts(normalize = True) * 100, 2)
```

```

holiday
0      97.14

```

```

1      2.86
Name: proportion, dtype: float64

np.round(df['workingday'].value_counts(normalize = True) * 100, 2)

workingday
1      68.09
0      31.91
Name: proportion, dtype: float64

np.round(df['weather'].value_counts(normalize = True) * 100, 2)

weather
1      66.07
2      26.03
3       7.89
4       0.01
Name: proportion, dtype: float64

# The below code generates a visually appealing pie chart to showcase
the
    # distribution of seasons in the dataset

plt.figure(figsize = (6, 6))      # setting the figure size to 6*6

# setting the title of the plot
plt.title('Distribution of season', fontdict = {'fontsize' : 18,
                                                'fontweight' : 600,
                                                'fontstyle' :
'oblique',
                                                'fontfamily' :
'serif'})

df_season = np.round(df['season'].value_counts(normalize = True) *
100, 2).to_frame()


# Creating the pie-chart
plt.pie(x = df_season['proportion'],
        explode = [0.025, 0.025, 0.025, 0.025],
        labels = df_season.index,
        autopct = '%.2f%%',
        textprops = {'fontsize' : 14,
                     'fontstyle' : 'oblique',
                     'fontfamily' : 'serif',
                     'fontweight' : 500})

plt.plot()      # displaying the plot

[]

```

Distribution of season

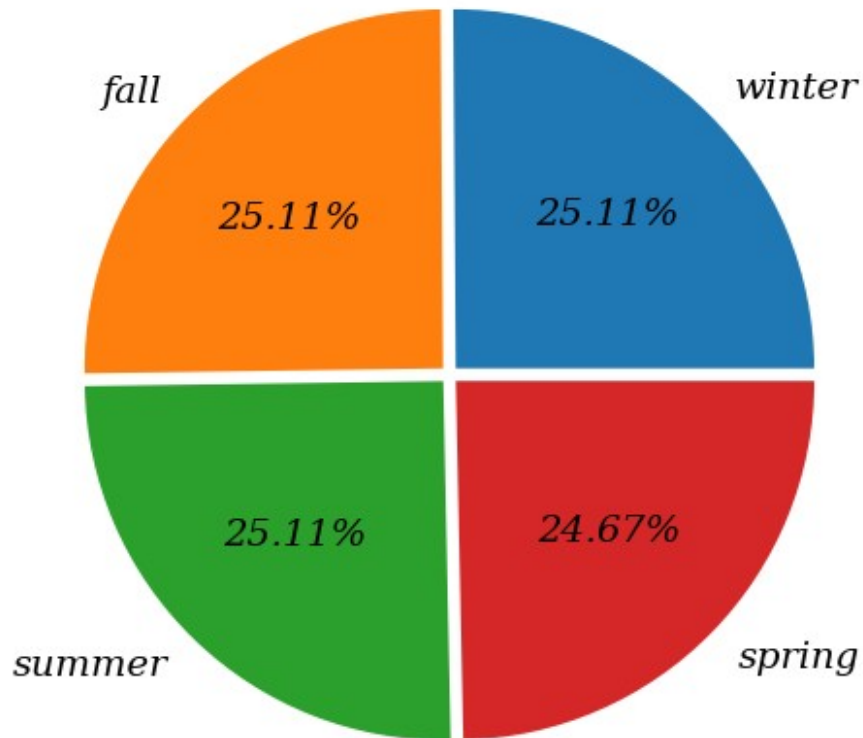

```
# The below code generates a visually appealing pie chart to showcase the
# distribution of holiday in the dataset

plt.figure(figsize = (6, 6))      # setting the figure size to 6*6

# setting the title of the plot
plt.title('Distribution of holiday', fontdict = {'fontsize' : 18,
                                                'fontweight' : 600,
                                                'fontstyle' :
                                                'oblique',
                                                'fontfamily' :
                                                'serif'})


df_holiday = np.round(df['holiday'].value_counts(normalize = True) *
100, 2).to_frame()

# Creating the pie-chart
plt.pie(x = df_holiday['proportion'],
        explode = [0, 0.1],
```

[]

[illegible]

Distribution of workingday

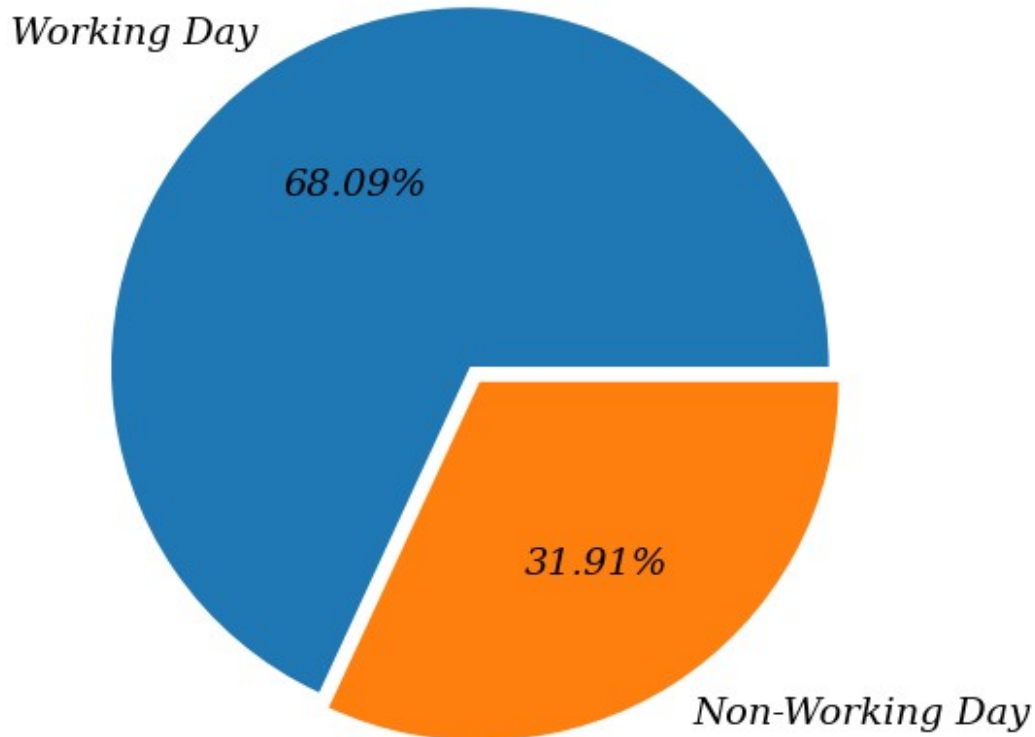

```
# The below code generates a visually appealing pie chart to showcase the
# distribution of weather in the dataset

plt.figure(figsize = (6, 6))      # setting the figure size to 6*6

# setting the title of the plot
plt.title('Distribution of weather', fontdict = {'fontsize' : 18,
                                                'fontweight' : 600,
                                                'fontstyle' :
                                                'oblique',
                                                'fontfamily' :
                                                'serif'})

df_weather = np.round(df['weather'].value_counts(normalize = True) *
100, 2).to_frame()

# Creating the pie-chart
plt.pie(x = df_weather['proportion'],
        explode = [0.025, 0.025, 0.05, 0.05],
```


```

labels = df_weather.index,
autopct = '%.2f%%',
textprops = {'fontsize' : 14,
              'fontstyle' : 'oblique',
              'fontfamily' : 'serif',
              'fontweight' : 500})

plt.plot()          # displaying the plot
[]

```

Distribution of weather

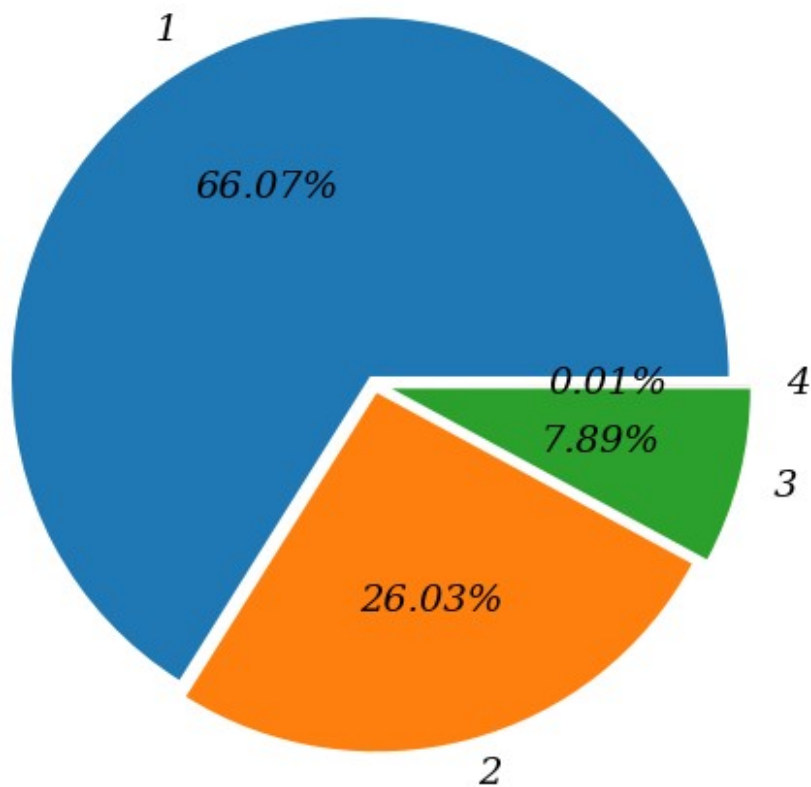


Univariate Analysis


```

# The below code generates a visually appealing count plot to showcase
the
    # distribution of season in the dataset
sns.countplot(data = df, x = 'season')
plt.plot()    # displaying the plot
[]


```

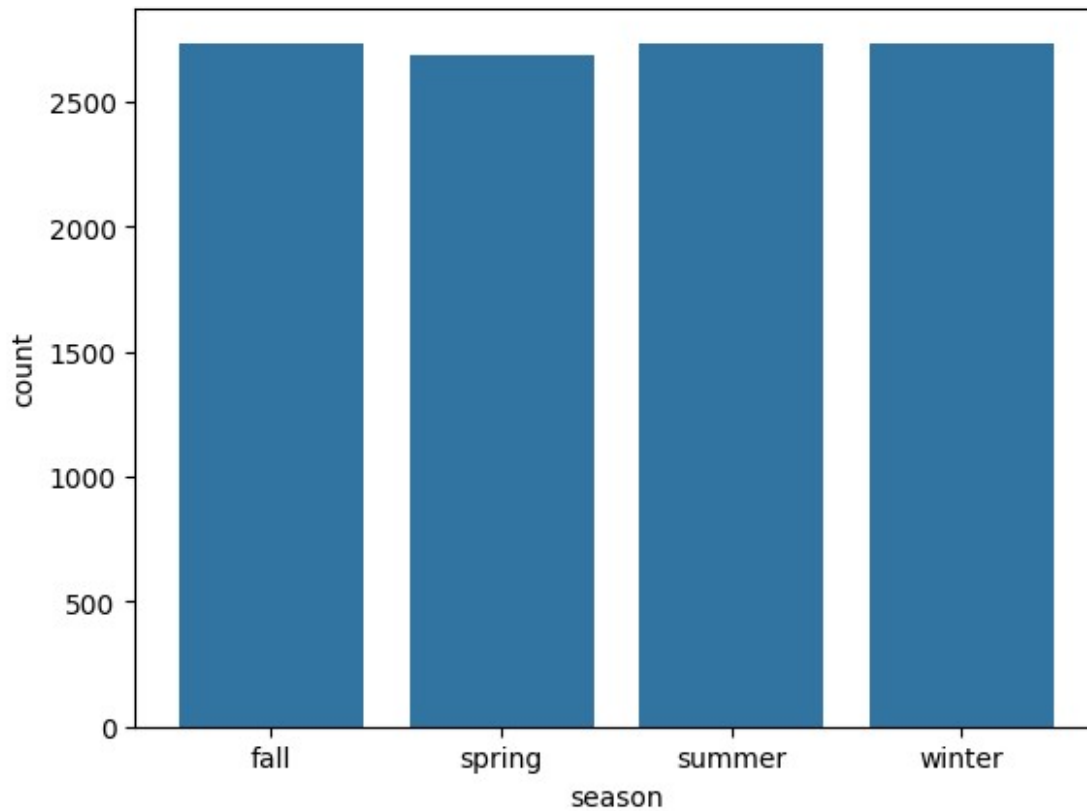
```
# The below code generates a visually appealing count plot to showcase  
the  
    # distribution of holiday in the dataset  
  
sns.countplot(data = df, x = 'holiday')  
plt.plot()    # displaying the chart  
  
[]
```

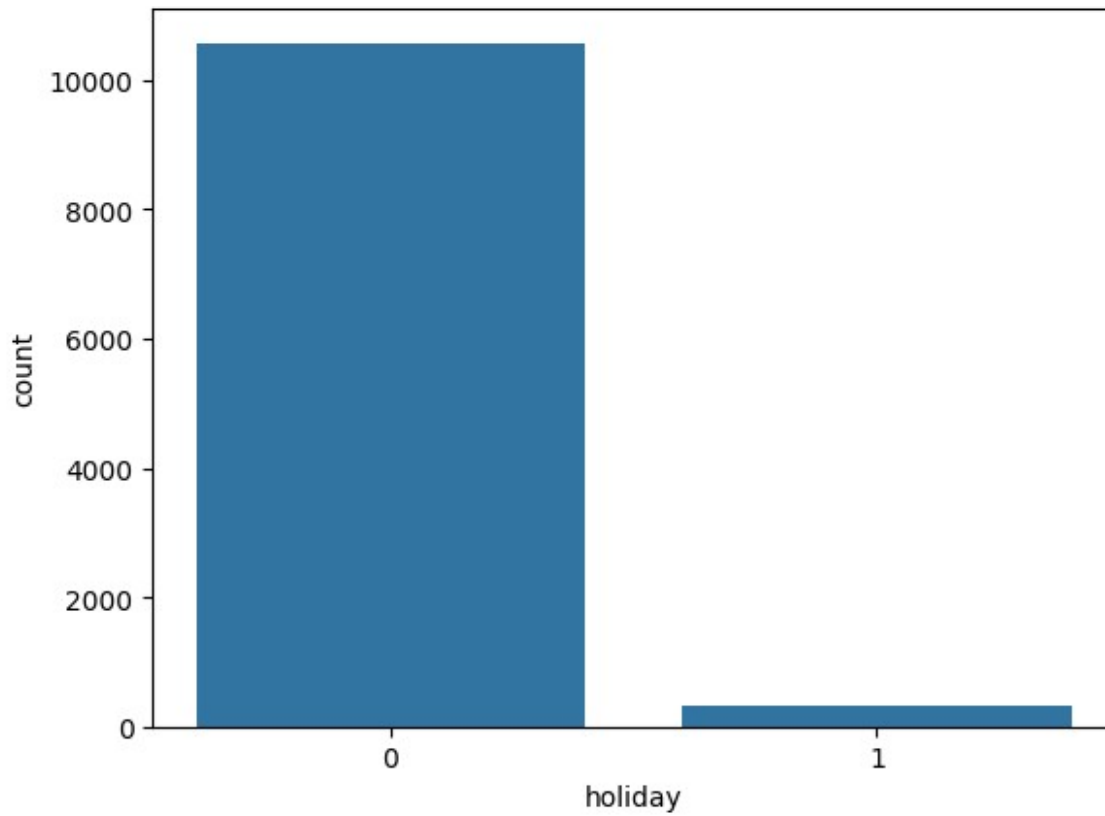

```
# The below code generates a visually appealing count plot to showcase  
the  
    # distribution of workingday in the dataset  
  
sns.countplot(data = df, x = 'workingday')  
plt.plot()    # displaying the chart  
[]
```

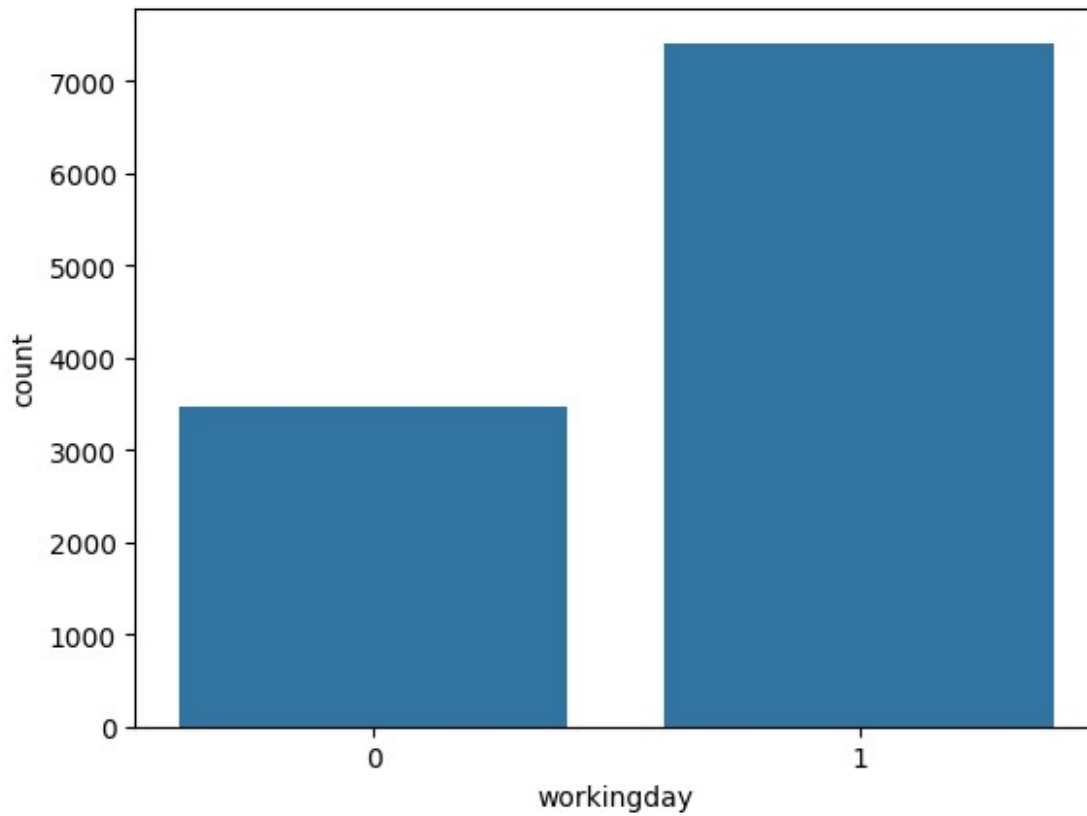


```
# The below code generates a visually appealing count plot to showcase  
the  
    # distribution of weather in the dataset  
  
sns.countplot(data = df, x = 'weather')  
plt.plot()      # displaying the chart  
  
[]
```

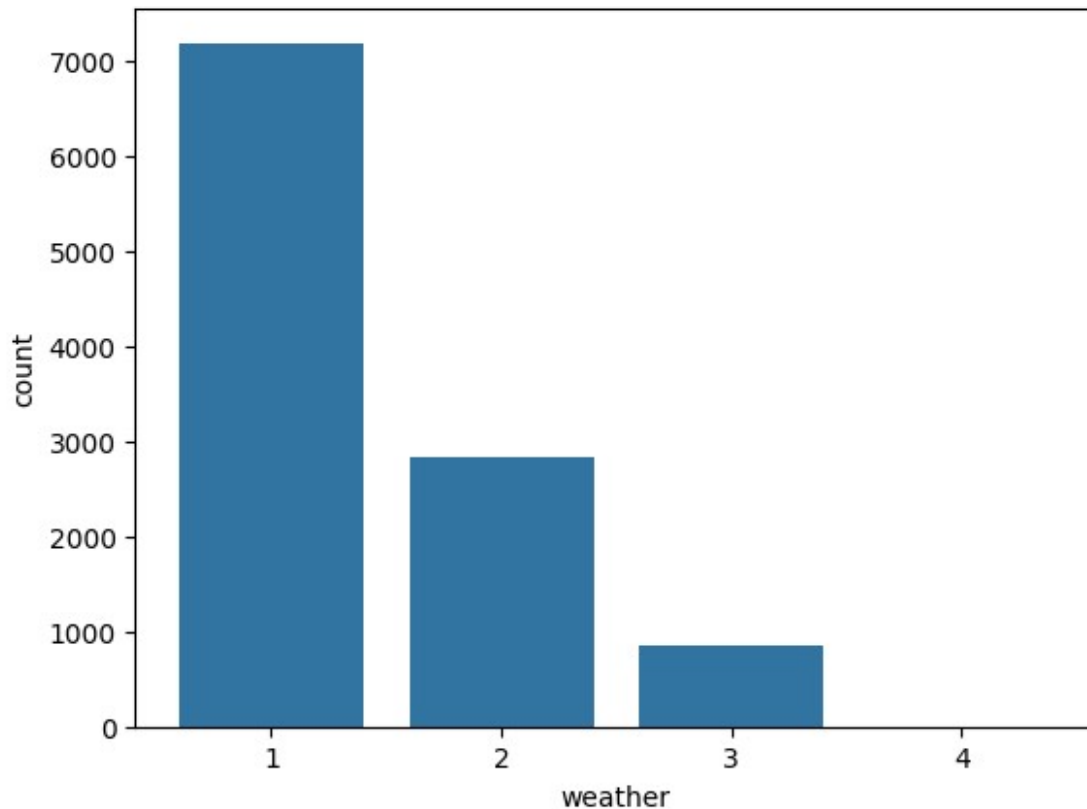

```
# The below code generates a histogram plot for the 'temp' feature,  
# showing the distribution of  
# temperature values in the dataset.  
# The addition of the kernel density estimation plot provides  
# a visual representation of the underlying distribution shape,  
# making it easier to analyze the  
# data distribution.
```

```
sns.histplot(data = df, x = 'temp', kde = True, bins = 40)  
plt.plot()      # displaying the chart
```

```
[]
```

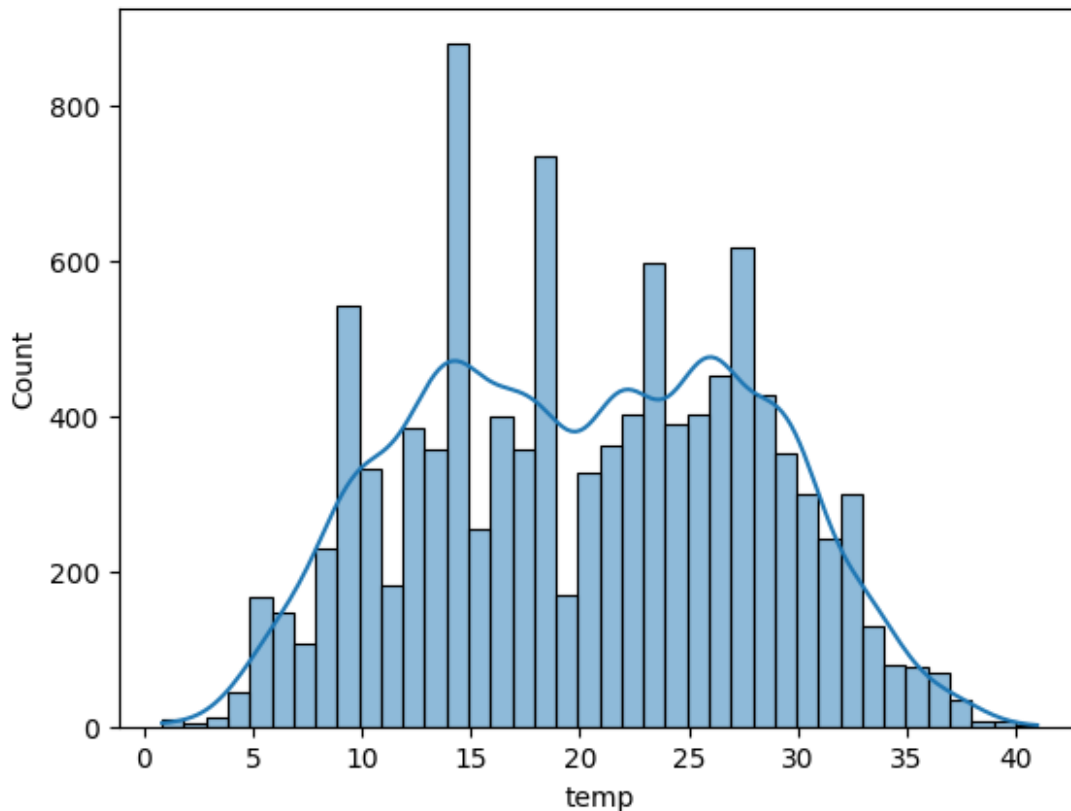

```
temp_mean = np.round(df['temp'].mean(), 2)
temp_std = np.round(df['temp'].std(), 2)
temp_mean, temp_std
```


```
(20.23, 7.79)
```

- The mean and the standard deviation of the temp column is 20.23 and 7.79 degree celcius respectively.

```
# The below code generates a histogram plot for the 'temp' feature,
showing the cumulative
# distribution of temperature values in the dataset.
# The addition of the kernel density estimation plot provides
# a visual representation of the underlying distribution shape,
making it easier to analyze the
# data distribution.
```

```
sns.histplot(data = df, x = 'temp', kde = True, cumulative = True,
stat = 'percent')
plt.grid(axis = 'y', linestyle = '--')
plt.yticks(np.arange(0, 101, 10))
plt.plot() # displaying the chart
```

```
[]
```

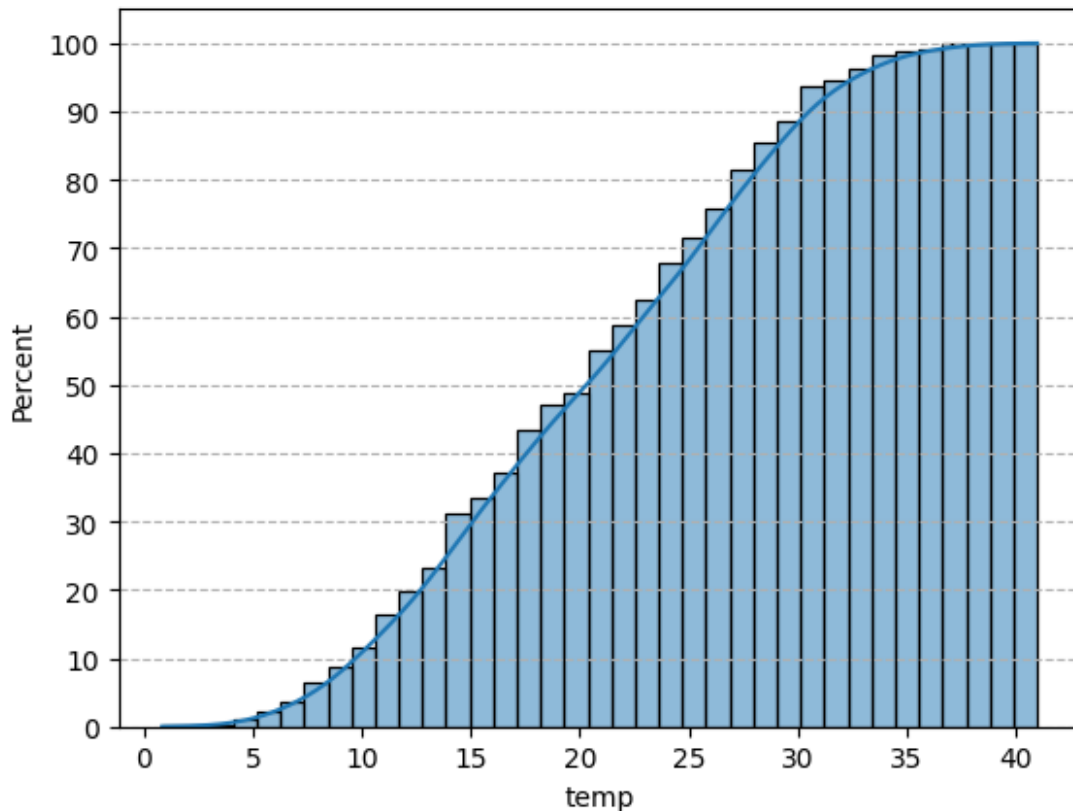


- More than 80 % of the time, the temperature is less than 28 degrees celcius.

```
# The below code generates a histogram plot for the 'atemp' feature,  
# showing the distribution of  
# feeling temperature values in the dataset.  
# The addition of the kernel density estimation plot provides  
# a visual representation of the underlying distribution shape,  
# making it easier to analyze the  
# data distribution.
```

```
sns.histplot(data = df, x = 'atemp', kde = True, bins = 50)  
plt.plot()          # displaying the chart
```

```
[]
```

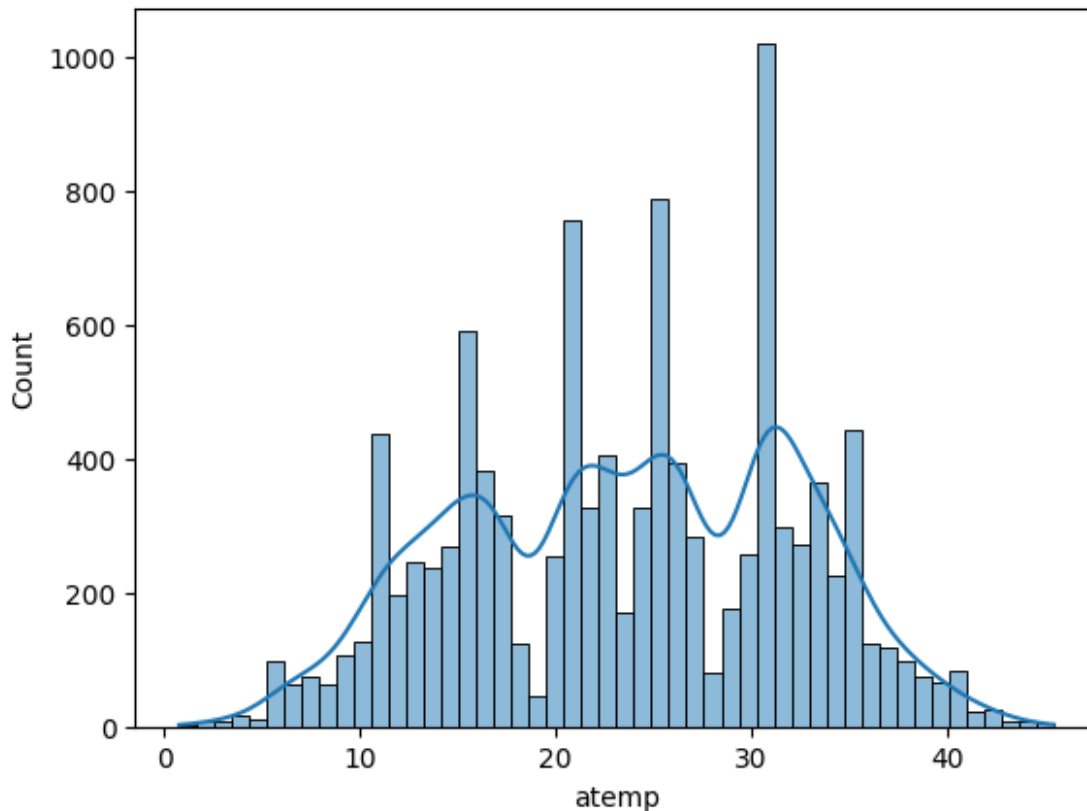

```
temp_mean = np.round(df['atemp'].mean(), 2)
temp_std = np.round(df['atemp'].std(), 2)
temp_mean, temp_std
```


```
(23.66, 8.47)
```

- The mean and the standard deviation of the atemp column is 23.66 and 8.47 degree celcius respectively.

```
# The below code generates a histogram plot for the 'humidity'
feature, showing the distribution of
# humidity values in the dataset.
# The addition of the kernel density estimation plot provides
# a visual representation of the underlying distribution shape,
making it easier to analyze the
# data distribution.
```

```
sns.histplot(data = df, x = 'humidity', kde = True, bins = 50)
plt.plot()      # displaying the chart
```

```
[]
```

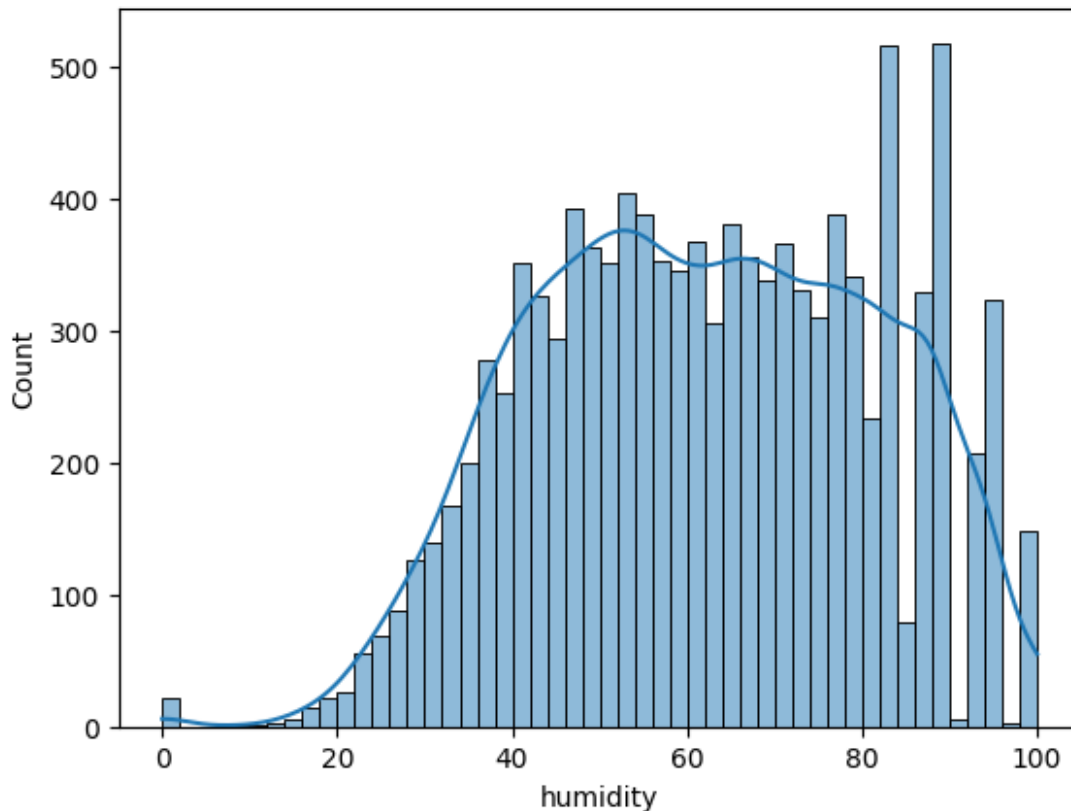

```
humidity_mean = np.round(df['humidity'].mean(), 2)
humidity_std = np.round(df['humidity'].std(), 2)
humidity_mean, humidity_std
```


```
(61.89, 19.25)
```

- The mean and the standard deviation of the humidity column is 61.89 and 19.25 respectively.

```
# The below code generates a histogram plot for the 'humidity'
# feature, showing the cumulative
# distribution of humidity values in the dataset.
# The addition of the kernel density estimation plot provides
# a visual representation of the underlying distribution shape,
# making it easier to analyze the
# data distribution.

sns.histplot(data = df, x = 'humidity', kde = True, cumulative = True,
stat = 'percent')
plt.grid(axis = 'y', linestyle = '--') # setting the gridlines
along y axis
plt.xticks(np.arange(0, 101, 10))
plt.plot() # displaying the chart


[]
```

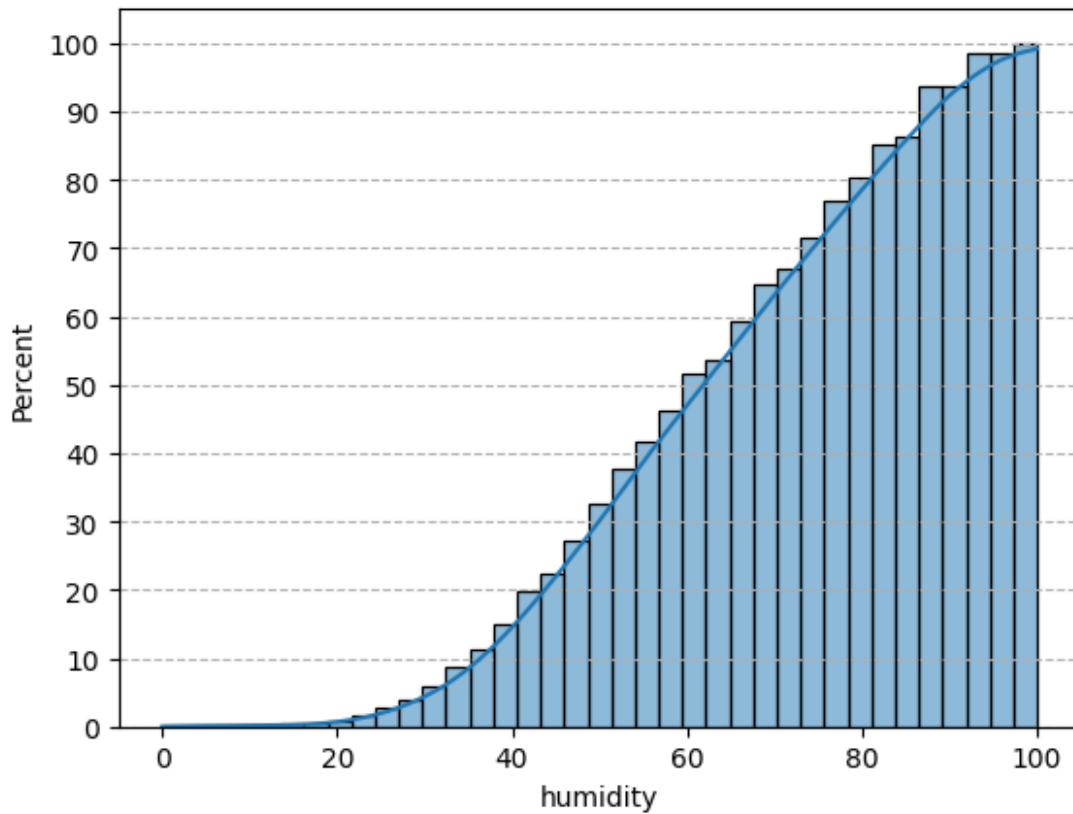- More than 80 % of the time, the humidity value is greater than 40. Thus for most of the time, humidity level varies from optimum to too moist.

```
sns.histplot(data = df, x = 'windspeed', kde = True, cumulative =
True, stat = 'percent')
plt.grid(axis = 'y', linestyle = '--')
plt.yticks(np.arange(0, 101, 10))
plt.plot()      # displaying the chart
```

```
[]
```

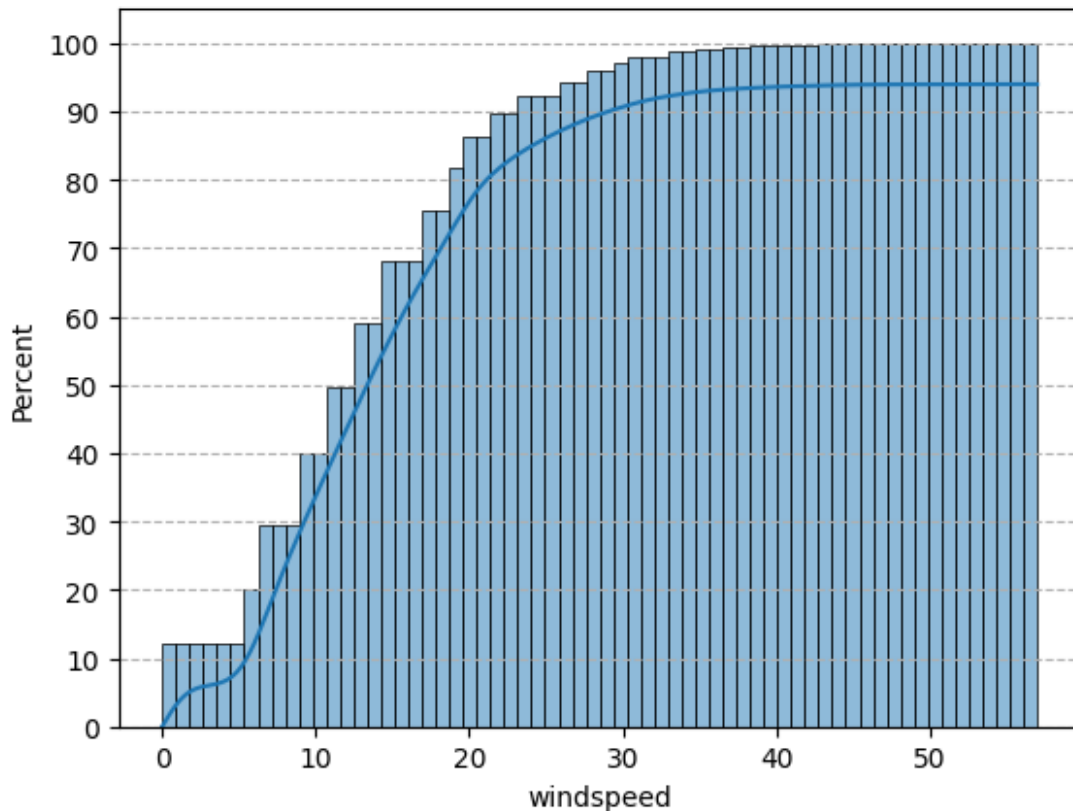

- More than 85 % of the total windspeed data has a value of less than 20.


```
len(df[df['windspeed'] < 20]) / len(df)
```

```
0.8626676465184641
```

```
# The below code generates a histogram plot for the 'casual' feature,  
showing the distribution of  
    # casual users' values in the dataset.  
# The addition of the kernel density estimation plot provides  
    # a visual representation of the underlying distribution shape,  
making it easier to analyze the  
    # data distribution.
```


```
sns.histplot(data = df, x = 'casual', kde = True, bins = 50)  
plt.plot()      # displaying the chart
```

```
[]
```

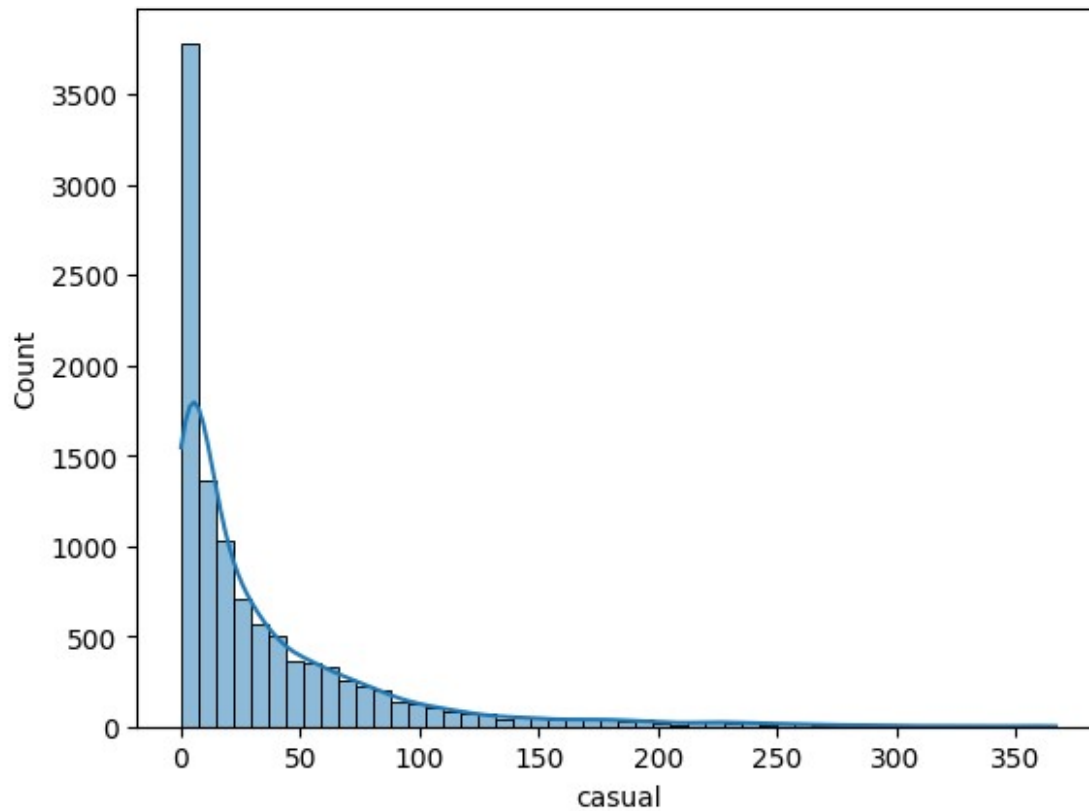

```
sns.histplot(data = df, x = 'casual', kde = True, cumulative = True,
stat = 'percent')
plt.grid(axis = 'y', linestyle = '--')
plt.yticks(np.arange(0, 101, 10))
plt.plot()      # displaying the chart

[]
```

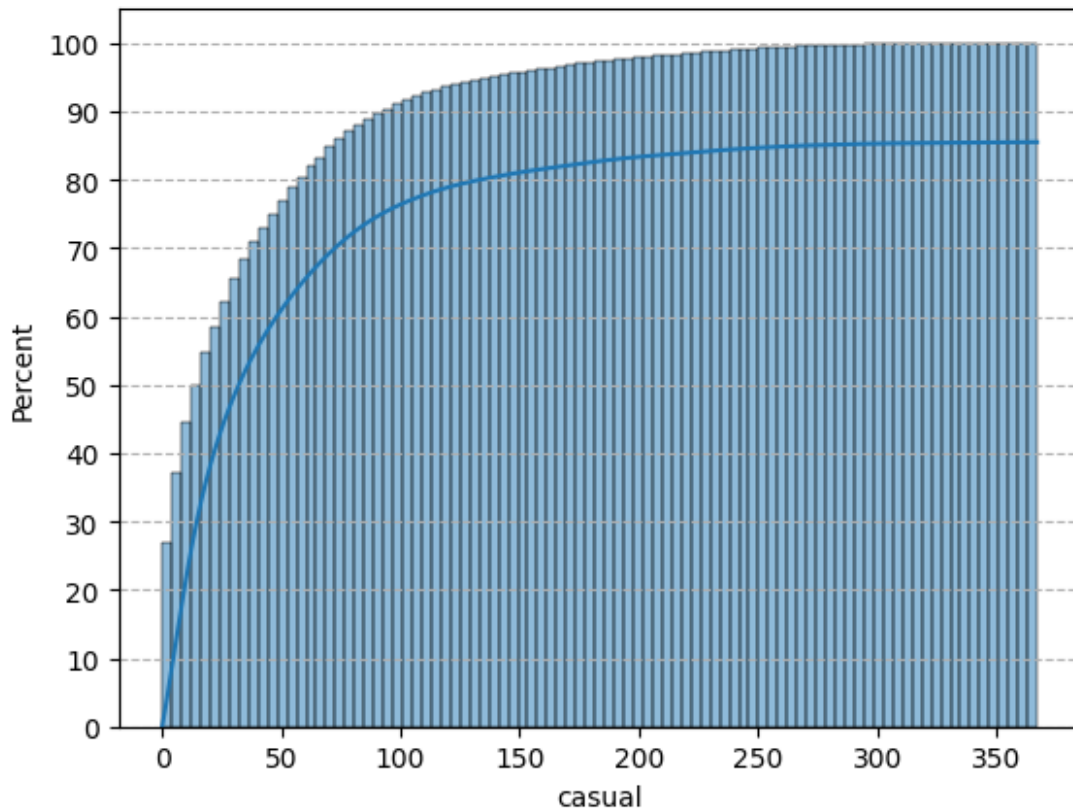


- More than 80 % of the time, the count of casual users is less than 60.


```
# The below code generates a histogram plot for the 'registered'
# feature, showing the distribution of
# registered users' values in the dataset.
# The addition of the kernel density estimation plot provides
# a visual representation of the underlying distribution shape,
# making it easier to analyze the
# data distribution.
```

```
sns.histplot(data = df, x = 'registered', kde = True, bins = 50)
plt.plot()      # displaying the chart
```

```
[]
```

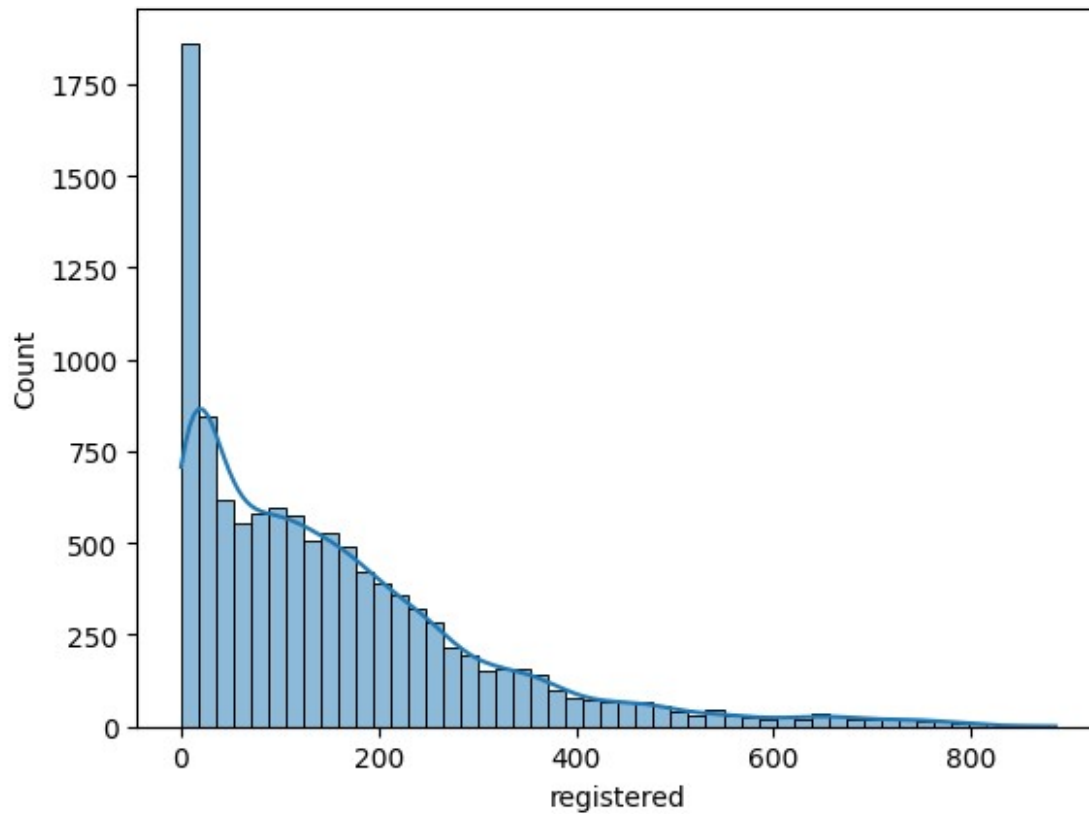







```
sns.histplot(data = df, x = 'registered', kde = True, cumulative =  
True, stat = 'percent')  
plt.grid(axis = 'y', linestyle = '--')  
plt.yticks(np.arange(0, 101, 10))  
plt.plot()           # displaying the chart  
[]
```

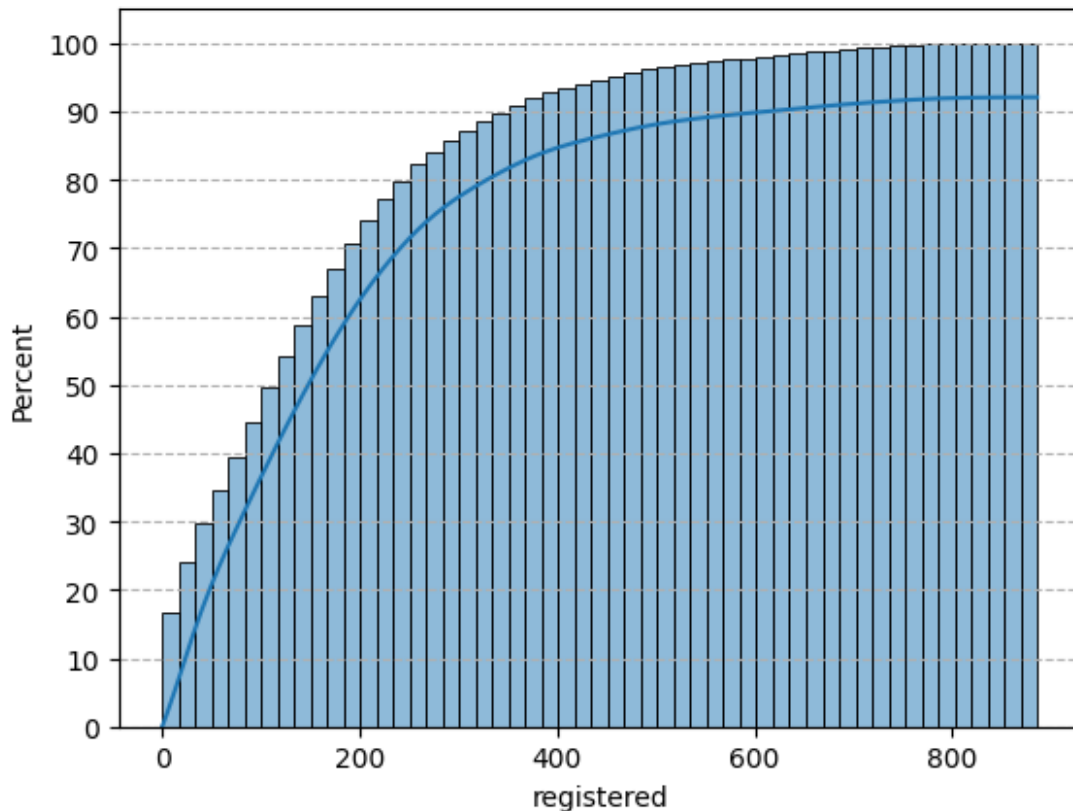

- More than 85 % of the time, the count of registered users is less than 300.

Outliers Detection

```
columns = ['temp', 'humidity', 'windspeed', 'casual', 'registered',
           'count']
colors = np.random.permutation(['red', 'blue', 'green', 'magenta',
                                'cyan', 'gray'])
count = 1
plt.figure(figsize = (15, 16))
for i in columns:
    plt.subplot(3, 2, count)
    plt.title(f"Detecting outliers in '{i}' column")
    sns.boxplot(data = df, x = df[i], color = colors[count - 1],
                showmeans = True, fliersize = 2)
    plt.plot()
    count += 1
```

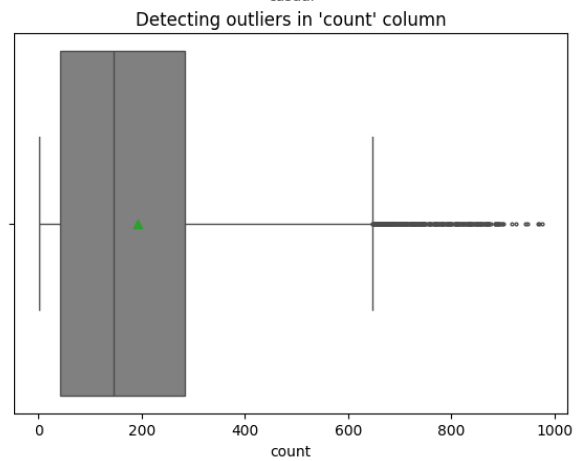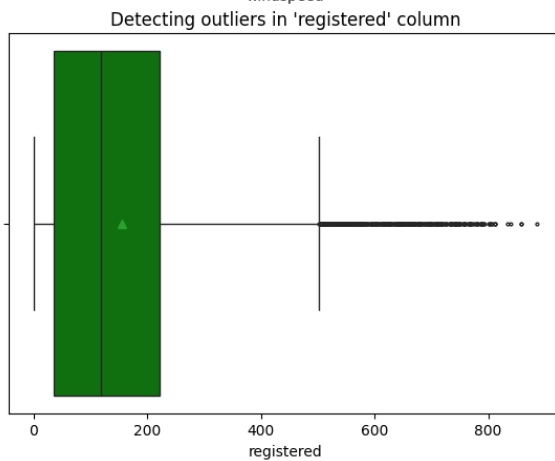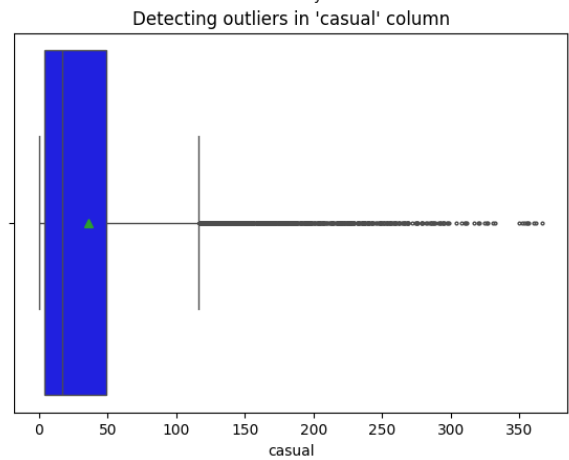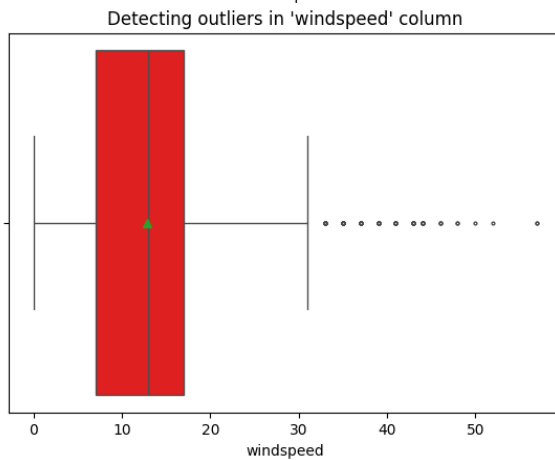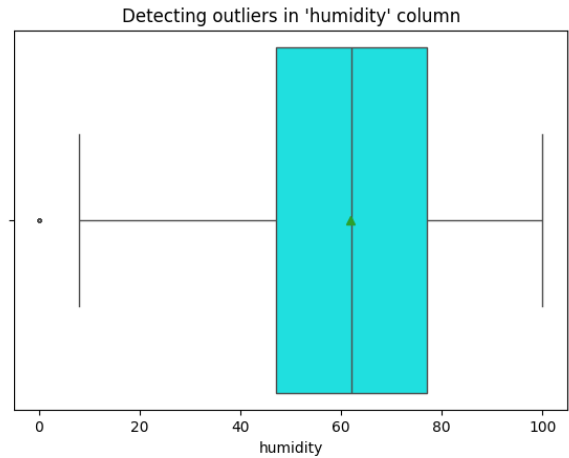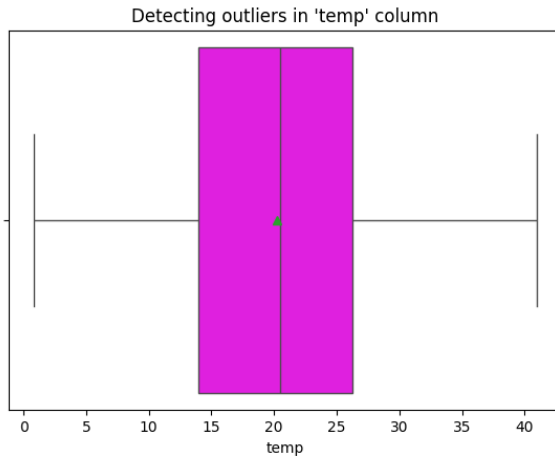

- There is no outlier in the temp column.
- There are few outliers present in humidity column.
- There are many outliers present in each of the columns : windspeed, casual, registered, count.

Bivariate Analysis


```
plt.figure(figsize = (15, 6))
plt.title('Distribution of hourly count of total rental bikes across
```

```

all seasons',
    fontdict = {'size' : 20,
                'style' : 'oblique',
                'family' : 'serif'})
sns.boxplot(data = df, x = 'season', y = 'count', hue = 'workingday',
            showmeans = True)
plt.grid(axis = 'y', linestyle = '--')
plt.plot()

[]

```

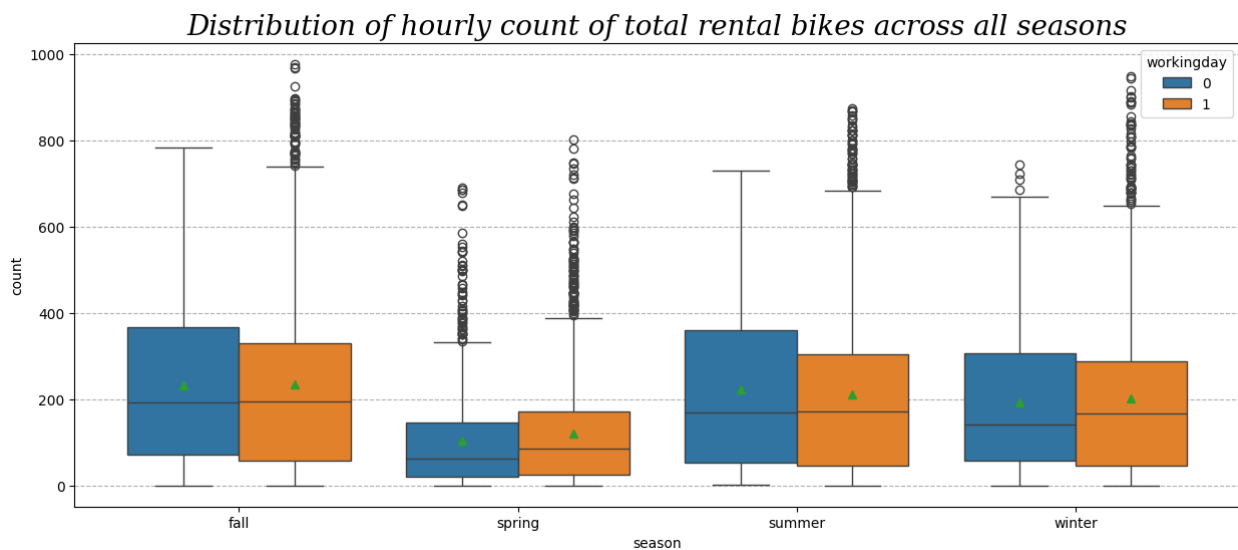


- The hourly count of total rental bikes is higher in the fall season, followed by the summer and winter seasons. It is generally low in the spring season.

```

plt.figure(figsize = (15, 6))
plt.title('Distribution of hourly count of total rental bikes across
all weathers',
    fontdict = {'size' : 20,
                'style' : 'oblique',
                'family' : 'serif'})
sns.boxplot(data = df, x = 'weather', y = 'count', hue = 'workingday',
            showmeans = True)
plt.grid(axis = 'y', linestyle = '--')
plt.plot()

[]

```

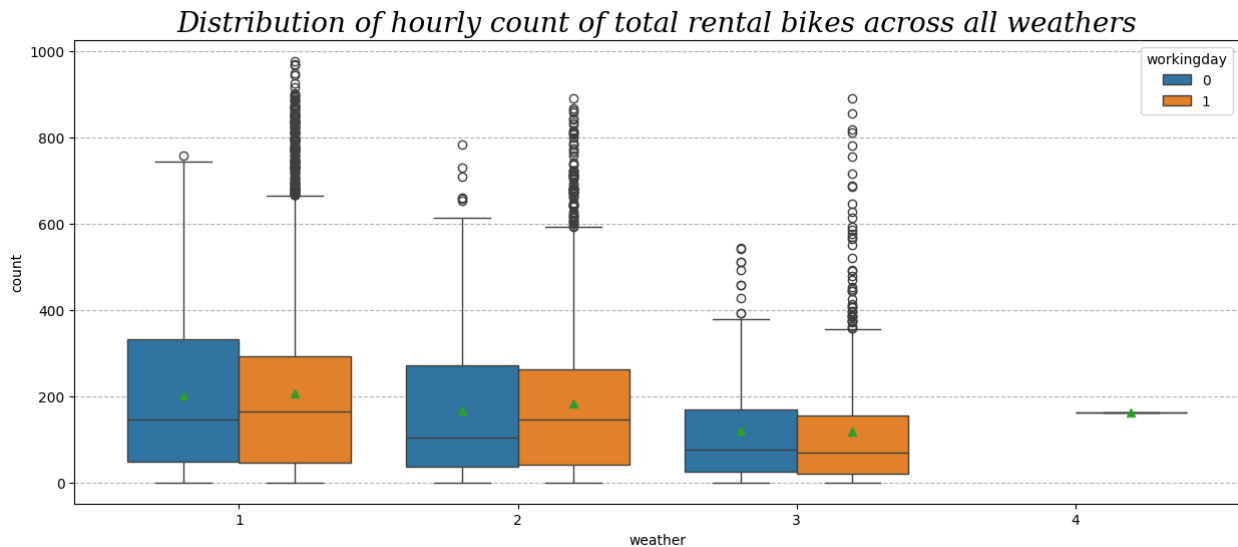- The hourly count of total rental bikes is higher in the clear and cloudy weather, followed by the misty weather and rainy weather. There are very few records for extreme weather conditions.

Is there any effect of Working Day on the number of electric cycles rented ?

```
df.groupby(by = 'workingday')['count'].describe()
```

```
{
  "summary": {
    "name": "df",
    "rows": 2,
    "fields": [
      {
        "column": "workingday",
        "properties": {
          "dtype": "category",
          "num_unique_values": 2,
          "samples": [1, 0]
        },
        "semantic_type": "",
        "description": ""
      },
      {
        "column": "count",
        "properties": {
          "dtype": "number",
          "std": 2784.586504312624,
          "min": 3474.0,
          "max": 7412.0,
          "num_unique_values": 2,
          "samples": [7412.0, 3474.0]
        },
        "semantic_type": "",
        "description": ""
      }
    ]
  },
  "mean": {
    "column": "count",
    "properties": {
      "dtype": "number",
      "std": 3.1856942604597354,
      "min": 188.50662061024755,
      "max": 193.01187263896384,
      "num_unique_values": 2,
      "samples": [193.01187263896384, 188.50662061024755]
    },
    "semantic_type": "",
    "description": ""
  },
  "std": {
    "column": "count",
    "properties": {
      "dtype": "number",
      "std": 7.629430238982044,
      "min": 173.7240153250003,
      "max": 184.5136590421481,
      "num_unique_values": 2,
      "samples": [184.5136590421481, 173.7240153250003]
    },
    "semantic_type": "",
    "description": ""
  },
  "min": {
    "column": "count",
    "properties": {
      "dtype": "number",
      "std": 7.629430238982044,
      "min": 173.7240153250003,
      "max": 184.5136590421481,
      "num_unique_values": 2,
      "samples": [184.5136590421481, 173.7240153250003]
    },
    "semantic_type": "",
    "description": ""
  },
  "max": {
    "column": "count",
    "properties": {
      "dtype": "number",
      "std": 7.629430238982044,
      "min": 173.7240153250003,
      "max": 184.5136590421481,
      "num_unique_values": 2,
      "samples": [184.5136590421481, 173.7240153250003]
    },
    "semantic_type": "",
    "description": ""
  }
}
```

```

{"std": 0.0, "min": 1.0, "max": 1.0, "num_unique_values": 1, "samples": [1.0], "semantic_type": "", "description": ""}, {"column": "25%", "properties": {"dtype": "number", "std": 2.1213203435596424, "min": 41.0, "max": 44.0, "num_unique_values": 2, "samples": [41.0], "semantic_type": "", "description": ""}, {"column": "50%", "properties": {"dtype": "number", "std": 16.263455967290593, "min": 128.0, "max": 151.0, "num_unique_values": 2, "samples": [151.0], "semantic_type": "", "description": ""}, {"column": "75%", "properties": {"dtype": "number", "std": 19.091883092036785, "min": 277.0, "max": 304.0, "num_unique_values": 2, "samples": [277.0], "semantic_type": "", "description": ""}, {"column": "max%", "properties": {"dtype": "number", "std": 137.17871555019022, "min": 783.0, "max": 977.0, "num_unique_values": 2, "samples": [977.0], "semantic_type": "", "description": ""}}], "type": "dataframe"}

```

```


sns.boxplot(data = df, x = 'workingday', y = 'count')
plt.plot()

```

```

[]

```

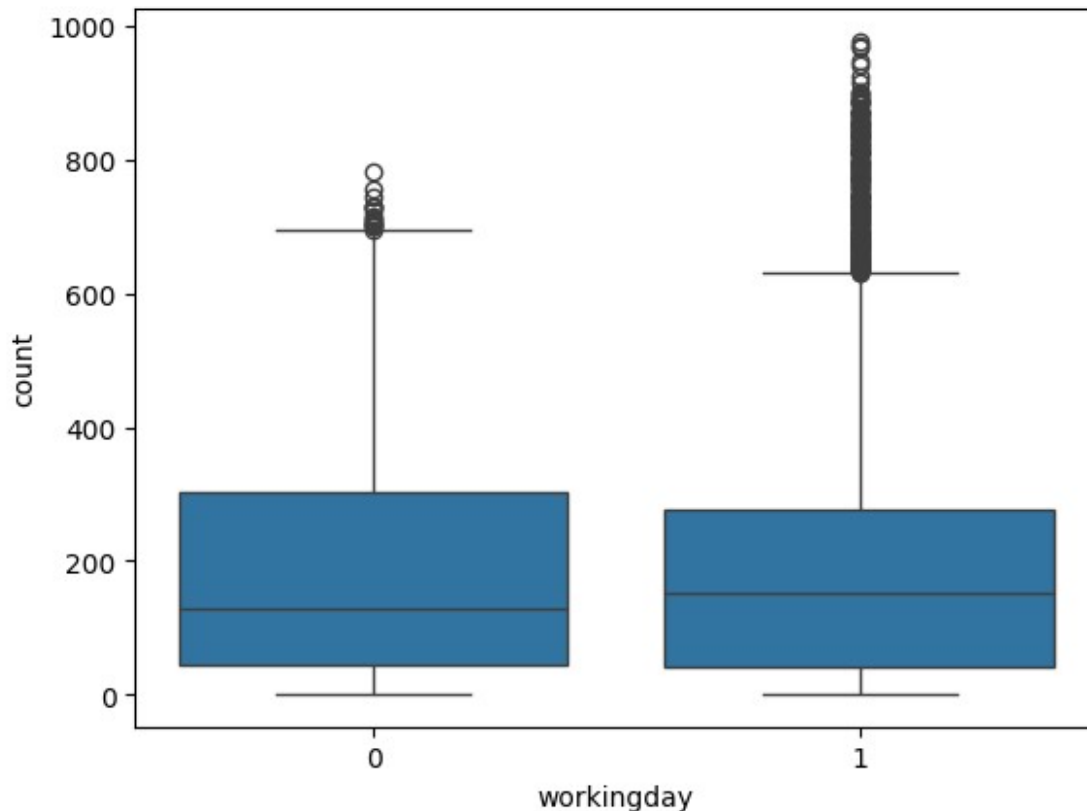

STEP-1: Set up Null Hypothesis

- **Null Hypothesis (H_0)** - Working Day does not have any effect on the number of electric cycles rented.
- **Alternate Hypothesis (H_A)** - Working Day has some effect on the number of electric cycles rented

STEP-2: Checking for basic assumptions for the hypothesis

- Distribution check using **QQ Plot**
- Homogeneity of Variances using **Levene's test**

STEP-3: Define Test statistics; Distribution of T under H_0 .

- If the assumptions of T Test are met then we can proceed performing T Test for independent samples else we will perform the non parametric test equivalent to T Test for independent sample i.e., Mann-Whitney U rank test for two independent samples.

STEP-4: Compute the p-value and fix value of alpha.

-
- We set our ***alpha to be 0.05***


STEP-5: Compare p-value and alpha.

- Based on p-value, we will accept or reject H0.
 - a. **p-val > alpha** : Accept H0
 - b. **p-val < alpha** : Reject H0

Visual Tests to know if the samples follow normal distribution

```
plt.figure(figsize = (15, 5))
plt.subplot(1, 2, 1)
sns.histplot(df.loc[df['workingday'] == 1, 'count'].sample(2000),
             element = 'step', color = 'green', kde = True, label =
'workingday')
plt.legend()
plt.subplot(1, 2, 2)
sns.histplot(df.loc[df['workingday'] == 0, 'count'].sample(2000),
             element = 'step', color = 'blue', kde = True, label =
'non_workingday')
plt.legend()
plt.plot()

[]
```

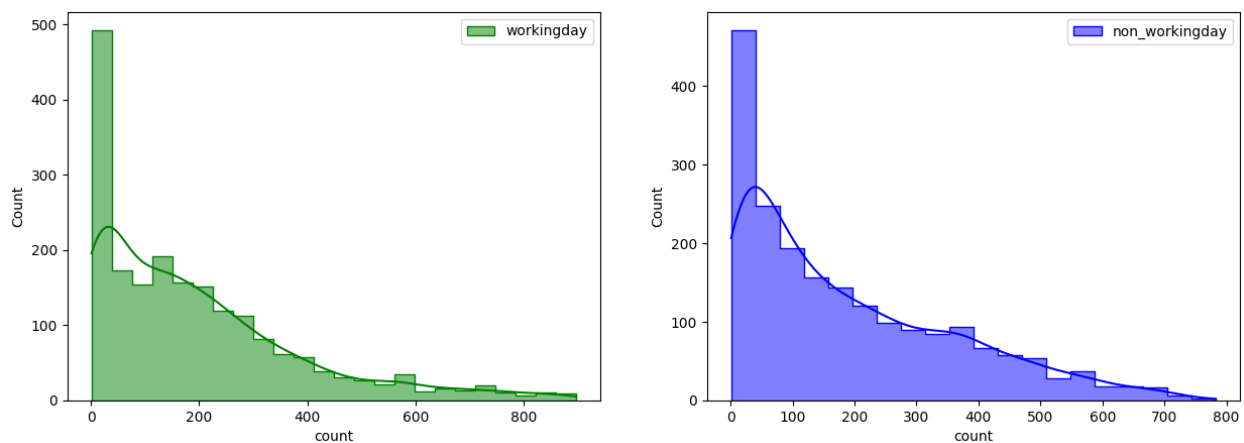


- It can be inferred from the above plot that the distributions do not follow normal distribution.

Distribution check using QQ Plot

```
plt.figure(figsize = (15, 6))
plt.subplot(1, 2, 1)
```

```
plt.suptitle('QQ plots for the count of electric vehicles rented in
workingday and non_workingday')
spy.probplot(df.loc[df['workingday'] == 1, 'count'].sample(2000), plot
= plt, dist = 'norm')
plt.title('QQ plot for workingday')
plt.subplot(1, 2, 2)
spy.probplot(df.loc[df['workingday'] == 0, 'count'].sample(2000), plot
= plt, dist = 'norm')
plt.title('QQ plot for non_workingday')
plt.plot()

[]
```

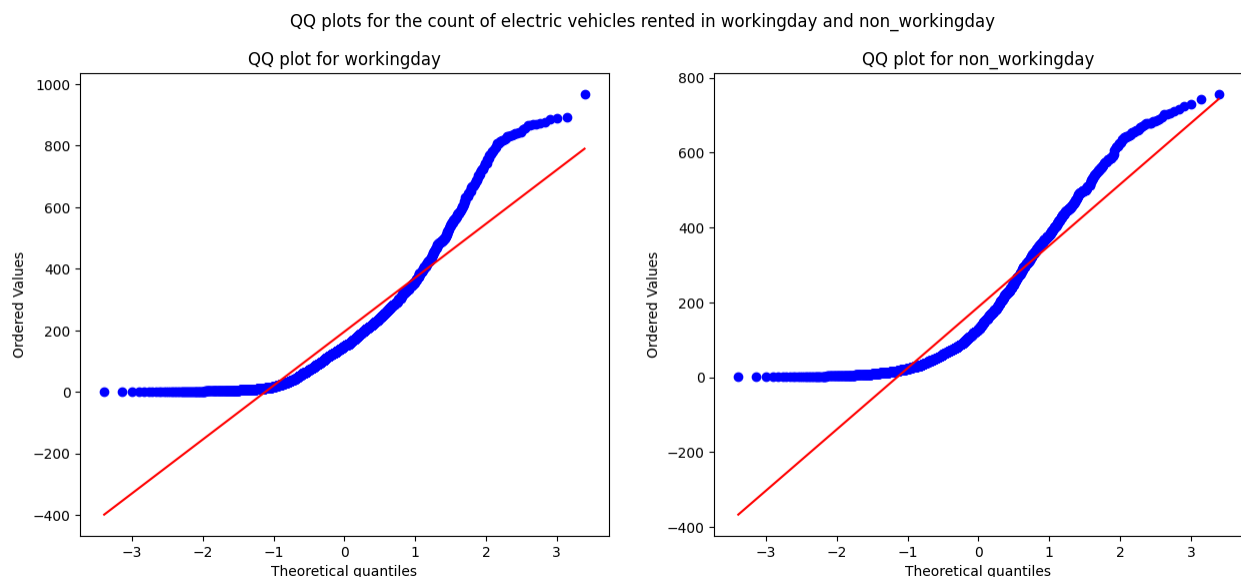

- It can be inferred from the above plot that the distributions do not follow normal distribution.

It can be seen from the above plots that the samples do not come from normal distribution.

- Applying Shapiro-Wilk test for normality

H_0 : The sample **follows normal distribution** H_1 : The sample **does not follow normal distribution**

alpha = 0.05

Test Statistics : **Shapiro-Wilk test for normality**

```
test_stat, p_value = spy.shapiro(df.loc[df['workingday'] == 1,
'count'].sample(2000))
print('p-value', p_value)
if p_value < 0.05:
    print('The sample does not follow normal distribution')
```

```

else:
    print('The sample follows normal distribution')

p-value 7.173867614098434e-39
The sample does not follow normal distribution

test_stat, p_value = spy.shapiro(df.loc[df['workingday'] == 0,
'count'].sample(2000))
print('p-value', p_value)
if p_value < 0.05:
    print('The sample does not follow normal distribution')
else:
    print('The sample follows normal distribution')

p-value 1.0667931223019185e-35
The sample does not follow normal distribution

```

Transforming the data using boxcox transformation and checking if the transformed data follows normal distribution.

```

transformed_workingday = spy.boxcox(df.loc[df['workingday'] == 1,
'count'])[0]
test_stat, p_value = spy.shapiro(transformed_workingday)
print('p-value', p_value)
if p_value < 0.05:
    print('The sample does not follow normal distribution')
else:
    print('The sample follows normal distribution')

p-value 1.6136246052607705e-33
The sample does not follow normal distribution

/usr/local/lib/python3.10/dist-packages/scipy/stats/_morestats.py:1882: UserWarning: p-value may not be accurate for N > 5000.
  warnings.warn("p-value may not be accurate for N > 5000.")

transformed_non_workingday = spy.boxcox(df.loc[df['workingday'] == 1,
'count'])[0]
test_stat, p_value = spy.shapiro(transformed_non_workingday)
print('p-value', p_value)
if p_value < 0.05:
    print('The sample does not follow normal distribution')
else:
    print('The sample follows normal distribution')

p-value 1.6136246052607705e-33
The sample does not follow normal distribution

```

- Even after applying the boxcox transformation on each of the "workingday" and "non_workingday" data, the samples do not follow normal distribution.

- Homogeneity of Variances using **Lavene's test**

```
# Null Hypothesis(H0) - Homogenous Variance
# Alternate Hypothesis(HA) - Non Homogenous Variance

test_stat, p_value = spy.levene(df.loc[df['workingday'] == 1,
'count'].sample(2000),
                                df.loc[df['workingday'] == 0,
'count'].sample(2000))
print('p-value', p_value)
if p_value < 0.05:
    print('The samples do not have Homogenous Variance')
else:
    print('The samples have Homogenous Variance ')

p-value 0.5892582561351879
The samples have Homogenous Variance
```

Since the samples are not normally distributed, T-Test cannot be applied here, we can perform its non parametric equivalent test i.e., Mann-Whitney U rank test for two independent samples.

```
# Ho : Mean no.of electric cycles rented is same for working and non-
working days
# Ha : Mean no.of electric cycles rented is not same for working and
non-working days
# Assuming significance Level to be 0.05
# Test statistics : Mann-Whitney U rank test for two independent
samples

test_stat, p_value = spy.mannwhitneyu(df.loc[df['workingday'] == 1,
'count'],
                                df.loc[df['workingday'] == 0,
'count'])
print('P-value :',p_value)
if p_value < 0.05:
    print('Mean no.of electric cycles rented is not same for working
and non-working days')
else:
    print('Mean no.of electric cycles rented is same for working and
non-working days')

P-value : 0.9679139953914079
Mean no.of electric cycles rented is same for working and non-working
days
```

Therefore, the mean hourly count of the total rental bikes is statistically same for both working and non- working days .

Is there any effect of holidays on the number of electric cycles rented ?

```
df.groupby(by = 'holiday')['count'].describe()
```

```


{"summary":{"\n  \"name\": \"df\",\n  \"rows\": 2,\n  \"fields\": [\n    {\n      \"column\": \"holiday\",\n      \"properties\": {\n        \"dtype\": \"category\",\n        \"num_unique_values\": 2,\n        \"samples\": [\n          1,\n          0\n        ],\n        \"semantic_type\": \"\",\n        \"description\": \"\"\n      }\n    },\n    {\n      \"column\": \"count\",\n      \"properties\": {\n        \"dtype\": \"number\",\n        \"std\": 7257.744002098724,\n        \"min\": 311.0,\n        \"max\": 10575.0,\n        \"num_unique_values\": 2,\n        \"samples\": [\n          311.0,\n          10575.0\n        ],\n        \"semantic_type\": \"\",\n        \"description\": \"\"\n      }\n    },\n    {\n      \"column\": \"mean\",\n      \"properties\": {\n        \"dtype\": \"number\",\n        \"std\": 4.146361976385559,\n        \"min\": 185.87781350482314,\n        \"max\": 191.7416548463357,\n        \"num_unique_values\": 2,\n        \"samples\": [\n          185.87781350482314,\n          191.7416548463357\n        ],\n        \"semantic_type\": \"\",\n        \"description\": \"\"\n      }\n    },\n    {\n      \"column\": \"std\",\n      \"properties\": {\n        \"dtype\": \"number\",\n        \"std\": 9.342718603983695,\n        \"min\": 168.30053147054628,\n        \"max\": 181.51313082973545,\n        \"num_unique_values\": 2,\n        \"samples\": [\n          168.30053147054628,\n          181.51313082973545\n        ],\n        \"semantic_type\": \"\",\n        \"description\": \"\"\n      }\n    },\n    {\n      \"column\": \"min\",\n      \"properties\": {\n        \"dtype\": \"number\",\n        \"std\": 0.0,\n        \"min\": 1.0,\n        \"max\": 1.0,\n        \"num_unique_values\": 1,\n        \"samples\": [\n          1.0\n        ],\n        \"semantic_type\": \"\",\n        \"description\": \"\"\n      }\n    },\n    {\n      \"column\": \"25%\",\n      \"properties\": {\n        \"dtype\": \"number\",\n        \"std\": 3.181980515339464,\n        \"min\": 38.5,\n        \"max\": 43.0,\n        \"num_unique_values\": 2,\n        \"samples\": [\n          38.5\n        ],\n        \"semantic_type\": \"\",\n        \"description\": \"\"\n      }\n    },\n    {\n      \"column\": \"50%\",\n      \"properties\": {\n        \"dtype\": \"number\",\n        \"std\": 8.48528137423857,\n        \"min\": 133.0,\n        \"max\": 145.0,\n        \"num_unique_values\": 2,\n        \"samples\": [\n          133.0\n        ],\n        \"semantic_type\": \"\",\n        \"description\": \"\"\n      }\n    },\n    {\n      \"column\": \"75%\",\n      \"properties\": {\n        \"dtype\": \"number\",\n        \"std\": 17.67766952966369,\n        \"min\": 283.0,\n        \"max\": 308.0,\n        \"num_unique_values\": 2,\n        \"samples\": [\n          308.0\n        ],\n        \"semantic_type\": \"\",\n        \"description\": \"\"\n      }\n    },\n    {\n      \"column\": \"max\",\n      \"properties\": {\n        \"dtype\": \"number\",\n        \"std\": 187.3832970144351,\n        \"min\": 712.0,\n        \"max\": 977.0,\n        \"num_unique_values\": 2,\n        \"samples\": [\n          712.0\n        ],\n        \"semantic_type\": \"\",\n        \"description\": \"\"\n      }\n    }\n  ]\n},\n\"type\":\"dataframe"}

```



```
sns.boxplot(data = df, x = 'holiday', y = 'count')  
plt.plot()
```

```
[]
```

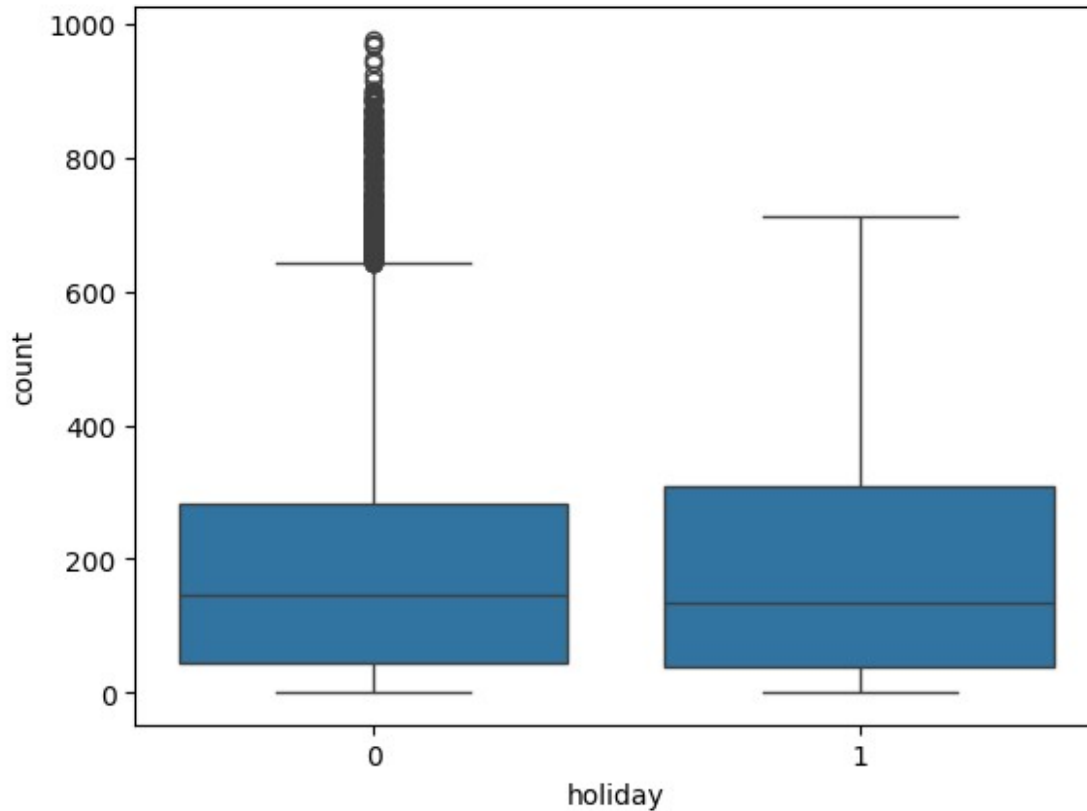

STEP-1: Set up Null Hypothesis

- **Null Hypothesis (H0)** - Holidays have no effect on the number of electric vehicles rented
- **Alternate Hypothesis (HA)** - Holidays has some effect on the number of electric vehicles rented

STEP-2: Checking for basic assumptions for the hypothesis

- Distribution check using **QQ Plot**
- Homogeneity of Variances using **Levene's test**

STEP-3: Define Test statistics; Distribution of T under H0.

- If the assumptions of T Test are met then we can proceed performing T Test for independent samples else we will perform the non parametric test equivalent to T Test for independent sample i.e., Mann-Whitney U rank test for two independent samples.

STEP-4: Compute the p-value and fix value of alpha.



- We set our **alpha to be 0.05**

STEP-5: Compare p-value and alpha.

- Based on p-value, we will accept or reject H0.
 - a. **p-val > alpha** : Accept H0
 - b. **p-val < alpha** : Reject H0

Visual Tests to know if the samples follow normal distribution

```
plt.figure(figsize = (15, 5))
plt.subplot(1, 2, 1)
sns.histplot(df.loc[df['holiday'] == 1, 'count'].sample(200),
              element = 'step', color = 'green', kde = True, label =
'holiday')
plt.legend()
plt.subplot(1, 2, 2)
sns.histplot(df.loc[df['holiday'] == 0, 'count'].sample(200),
              element = 'step', color = 'blue', kde = True, label =
'non_holiday')
plt.legend()
plt.plot()
[]
```

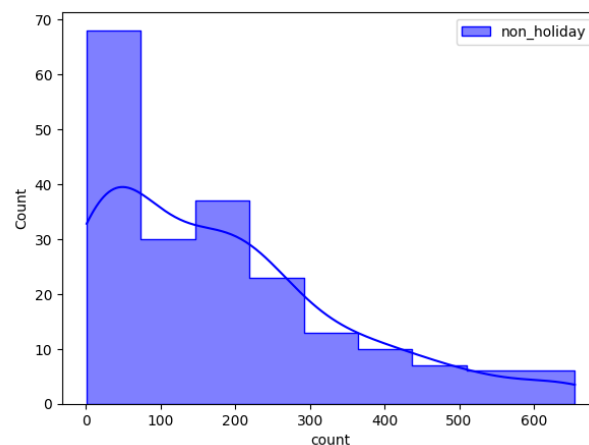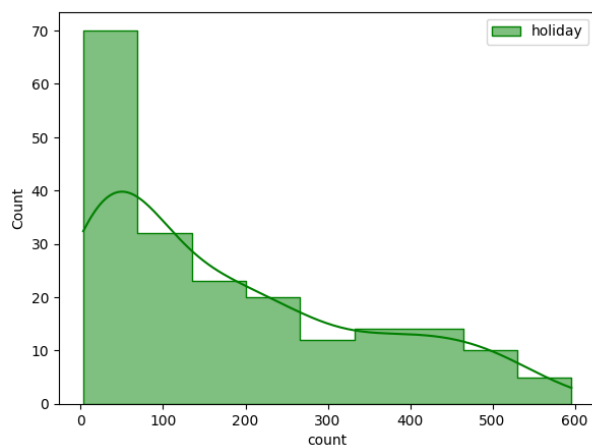


- It can be inferred from the above plot that the distributions do not follow normal distribution.

Distribution check using QQ Plot

```
plt.figure(figsize = (15, 6))
plt.subplot(1, 2, 1)
plt.suptitle('QQ plots for the count of electric vehicles rented in holiday and non_holiday')
spy.probplot(df.loc[df['holiday'] == 1, 'count'].sample(200), plot = plt, dist = 'norm')
plt.title('QQ plot for holiday')
plt.subplot(1, 2, 2)
spy.probplot(df.loc[df['holiday'] == 0, 'count'].sample(200), plot = plt, dist = 'norm')
plt.title('QQ plot for non_holiday')
plt.plot()
```

[]

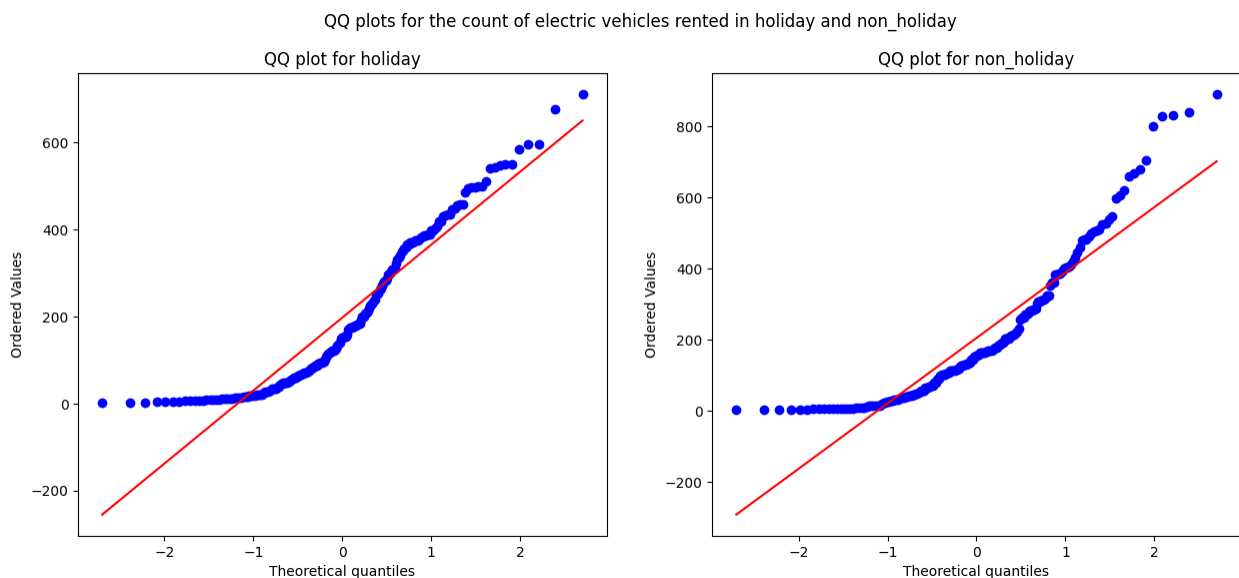

- It can be inferred from the above plot that the distributions do not follow normal distribution.

It can be seen from the above plots that the samples do not come from normal distribution.

- Applying Shapiro-Wilk test for normality

H_0 : The sample **follows normal distribution** H_1 : The sample **does not follow normal distribution**

alpha = 0.05

Test Statistics : **Shapiro-Wilk test for normality**

```

test_stat, p_value = spy.shapiro(df.loc[df['holiday'] == 1,
'count'].sample(200))
print('p-value', p_value)
if p_value < 0.05:
    print('The sample does not follow normal distribution')
else:
    print('The sample follows normal distribution')

p-value 5.4573463803553324e-11
The sample does not follow normal distribution

test_stat, p_value = spy.shapiro(df.loc[df['holiday'] == 0,
'count'].sample(200))
print('p-value', p_value)
if p_value < 0.05:
    print('The sample does not follow normal distribution')
else:
    print('The sample follows normal distribution')

p-value 9.466973732719097e-11
The sample does not follow normal distribution

```

Transforming the data using boxcox transformation and checking if the transformed data follows normal distribution.

```

transformed_holiday = spy.boxcox(df.loc[df['holiday'] == 1, 'count'])
[0]
test_stat, p_value = spy.shapiro(transformed_holiday)
print('p-value', p_value)
if p_value < 0.05:
    print('The sample does not follow normal distribution')
else:
    print('The sample follows normal distribution')

p-value 2.1349180201468698e-07
The sample does not follow normal distribution

transformed_non_holiday = spy.boxcox(df.loc[df['holiday'] == 0,
'count'].sample(5000))[0]
test_stat, p_value = spy.shapiro(transformed_non_holiday)
print('p-value', p_value)
if p_value < 0.05:
    print('The sample does not follow normal distribution')
else:
    print('The sample follows normal distribution')

p-value 3.0484025530979435e-27
The sample does not follow normal distribution

```

- Even after applying the boxcox transformation on each of the "holiday" and "non_holiday" data, the samples do not follow normal distribution.

Homogeneity of Variances using Levene's test

```
# Null Hypothesis(H0) - Homogenous Variance
# Alternate Hypothesis(HA) - Non Homogenous Variance

test_stat, p_value = spy.levene(df.loc[df['holiday'] == 0,
'count'].sample(200),
                                df.loc[df['holiday'] == 1,
'count'].sample(200))
print('p-value', p_value)
if p_value < 0.05:
    print('The samples do not have Homogenous Variance')
else:
    print('The samples have Homogenous Variance ')

p-value 0.3397917567613358
The samples have Homogenous Variance
```

Since the samples are not normally distributed, T-Test cannot be applied here, we can perform its non parametric equivalent test i.e., Mann-Whitney U rank test for two independent samples.

```
# Ho : No.of electric cycles rented is similar for holidays and non-
holidays
# Ha : No.of electric cycles rented is not similar for holidays and
non-holidays days
# Assuming significance Level to be 0.05
# Test statistics : Mann-Whitney U rank test for two independent
samples

test_stat, p_value = spy.mannwhitneyu(df.loc[df['holiday'] == 0,
'count'].sample(200),
                                df.loc[df['holiday'] == 1,
'count'].sample(200))
print('P-value :',p_value)
if p_value < 0.05:
    print('No.of electric cycles rented is not similar for holidays
and non-holidays days')
else:
    print('No.of electric cycles rented is similar for holidays and
non-holidays')

P-value : 0.5184775355493817
No.of electric cycles rented is similar for holidays and non-holidays
```

Therefore, the number of electric cycles rented is statistically similar for both holidays and non - holidays.

Is weather dependent on the season ?

```
df[['weather', 'season']].describe()

{"summary": "{\n  \"name\": \"df[['weather', 'season']]\",\n  \"rows\": 4,\n  \"fields\": [\n    {\n      \"column\": \"weather\",\n      \"properties\": {\n        \"dtype\": \"number\",\n        \"std\": 5430,\n        \"min\": 1,\n        \"max\": 10886,\n        \"num_unique_values\": 4,\n        \"samples\": [\n          4,\n          7192,\n          10886\n        ],\n        \"semantic_type\": \"\",\n        \"description\": \"\"\n      },\n      \"column\": \"season\",\n      \"properties\": {\n        \"dtype\": \"string\",\n        \"num_unique_values\": 4,\n        \"samples\": [\n          4,\n          2734,\n          10886\n        ],\n        \"semantic_type\": \"\",\n        \"description\": \"\"\n      }\n    }\n  ],\n  \"type\": \"dataframe\"}
```

- It is clear from the above statistical description that both 'weather' and 'season' features are categorical in nature.

STEP-1: Set up Null Hypothesis

- Null Hypothesis (H₀)** - weather is independent of season
- Alternate Hypothesis (H_A)** - weather is dependent of seasons.

STEP-2: Define Test statistics

Since we have two categorical features, the Chi- square test is applicable here. Under H₀, the test statistic should follow **Chi-Square Distribution**.

STEP-3: Checking for basic assumptons for the hypothesis (Non-Parametric Test)

- The data in the cells should be **frequencies**, or **counts** of cases.
- The levels (or categories) of the variables are **mutually exclusive**. That is, a particular subject fits into one and only one level of each of the variables.
- There are 2 variables, and both are measured as **categories**.
- The **value of the cell expecteds should be 5 or more** in at least 80% of the cells, and no cell should have an expected of less than one (3).

STEP-4: Compute the p-value and fix value of alpha.

we will be computing the chi square-test p-value using the `chi2_contingency` function using `scipy.stats`. We set our **alpha to be 0.05**

STEP-5: Compare p-value and alpha.

Based on p-value, we will accept or reject H_0 .

1. **p-val > alpha** : Accept H_0
2. **p-val < alpha** : Reject H_0

The **Chi-square statistic is a non-parametric** (distribution free) tool designed to analyze group differences when the dependent variable is measured at a nominal level. Like all non-parametric statistics, the Chi-square is robust with respect to the distribution of the data. Specifically, it does not require equality of variances among the study groups or homoscedasticity in the data.

```
# First, finding the contingency table such that each value is the
# total number of total bikes rented
# for a particular season and weather
cross_table = pd.crosstab(index = df['season'],
                           columns = df['weather'],
                           values = df['count'],
                           aggfunc = np.sum).replace(np.nan, 0)

cross_table

{"summary":{"\n  \"name\": \"cross_table\",\n  \"rows\": 4,\n  \"fields\": [\n    {\n      \"column\": \"season\",\n      \"properties\": {\n        \"dtype\": \"category\",\n        \"num_unique_values\": 4,\n        \"samples\": [\n          \"spring\",\n          \"winter\",\n          \"fall\"\n        ],\n        \"semantic_type\": \"\",\n        \"description\": \"\"\n      },\n      {\n        \"column\": 1,\n        \"properties\": {\n          \"dtype\": \"number\",\n          \"std\": 107982,\n          \"min\": 223009,\n          \"max\": 470116,\n          \"num_unique_values\": 4,\n          \"samples\": [\n            223009,\n            356588,\n            470116\n          ],\n          \"semantic_type\": \"\",\n          \"description\": \"\"\n        },\n        {\n          \"column\": 2,\n          \"properties\": {\n            \"dtype\": \"number\",\n            \"std\": 35004,\n            \"min\": 76406,\n            \"max\": 157191,\n            \"num_unique_values\": 4,\n            \"samples\": [\n              76406,\n              157191,\n              139386\n            ],\n            \"semantic_type\": \"\",\n            \"description\": \"\"\n          },\n          {\n            \"column\": 3,\n            \"properties\": {\n              \"dtype\": \"number\",\n              \"std\": 8524,\n              \"min\": 12919,\n              \"max\": 31160,\n              \"num_unique_values\": 4,\n              \"samples\": [\n                12919,\n                30255,\n                31160\n              ],\n              \"semantic_type\": \"\",\n              \"description\": \"\"\n            },\n            {\n              \"column\": 4,\n              \"properties\": {\n                \"dtype\": \"number\",\n                \"std\": 82,\n                \"min\": 0,\n                \"max\": 164,\n                \"num_unique_values\": 2,\n                \"samples\":
```

```
[\n          164,\n          0\n        ],\n        \"semantic_type\":\n        \"\", \n        \"description\": \"\"\n      }\n    ]\n  }\", \"type\": \"dataframe\", \"variable_name\": \"cross_table\"}
```

Since the above contingency table has one column in which the count of the rented electric vehicle is less than 5 in most of the cells, we can remove the weather 4 and then proceed further.

```
cross_table = pd.crosstab(index = df['season'],
                          columns = df.loc[df['weather'] != 4,
                          'weather'],
                          values = df['count'],
                          aggfunc = np.sum).to_numpy()[ :, :3]

cross_table

array([[470116, 139386, 31160],
       [223009, 76406, 12919],
       [426350, 134177, 27755],
       [356588, 157191, 30255]])

chi_test_stat, p_value, dof, expected = spy.chi2_contingency(observed
= cross_table)
print('Test Statistic =', chi_test_stat)
print('p value =', p_value)
print('-' * 65)
print("Expected : '\n'", expected)

Test Statistic = 10838.372332480214
p value = 0.0
-----
Expected : '
' [[453484.88557396 155812.72247031 31364.39195574]
 [221081.86259035 75961.44434981 15290.69305984]
 [416408.3330293 143073.60199337 28800.06497733]
 [385087.91880639 132312.23118651 26633.8500071 ]]
```

Comparing p value with significance level

```
if p_value.any() < alpha:
    print('Reject Null Hypothesis')
else:
    print('Failed to reject Null Hypothesis')

Failed to reject Null Hypothesis
```


Therefore, there is statistically significant dependency of weather and season based on the number of number of bikes rented.

Is the number of cycles rented is similar or different in different weather ?

```
df.groupby(by = 'weather')['count'].describe()

{"summary": "{\n  \"name\": \"df\",\n  \"rows\": 4,\n  \"fields\": [\n    {\n      \"column\": \"weather\",\n      \"properties\": {\n        \"dtype\": \"category\",\n        \"num_unique_values\": 4,\n        \"samples\": [\n          2,\n          4,\n          1\n        ],\n        \"semantic_type\": \"\",\n        \"description\": \"\"\n      }\n    },\n    {\n      \"column\": \"count\",\n      \"properties\": {\n        \"dtype\": \"number\",\n        \"std\": 3207.7018252948637,\n        \"min\": 1.0,\n        \"max\": 7192.0,\n        \"num_unique_values\": 4,\n        \"samples\": [\n          2834.0,\n          1.0,\n          7192.0\n        ],\n        \"semantic_type\": \"\",\n        \"description\": \"\"\n      }\n    }\n  ],\n  \"column\": \"mean\",\n  \"properties\": {\n    \"dtype\": \"number\",\n    \"std\": 36.20557838834711,\n    \"min\": 118.84633294528521,\n    \"max\": 205.23679087875416,\n    \"num_unique_values\": 4,\n    \"samples\": [\n          178.95553987297106,\n          164.0,\n          205.23679087875416\n        ],\n        \"semantic_type\": \"\",\n        \"description\": \"\"\n      }\n    },\n    {\n      \"column\": \"std\",\n      \"properties\": {\n        \"dtype\": \"number\",\n        \"std\": 24.863823194460068,\n        \"min\": 138.5812970523591,\n        \"max\": 187.9595660313149,\n        \"num_unique_values\": 3,\n        \"samples\": [\n          187.9595660313149,\n          168.36641290145073,\n          138.5812970523591\n        ],\n        \"semantic_type\": \"\",\n        \"description\": \"\"\n      }\n    },\n    {\n      \"column\": \"min\",\n      \"properties\": {\n        \"dtype\": \"number\",\n        \"std\": 81.5,\n        \"min\": 1.0,\n        \"max\": 164.0,\n        \"num_unique_values\": 2,\n        \"samples\": [\n          164.0,\n          1.0\n        ],\n        \"semantic_type\": \"\",\n        \"description\": \"\"\n      }\n    },\n    {\n      \"column\": \"25%\",\n      \"properties\": {\n        \"dtype\": \"number\",\n        \"std\": 64.20280367709809,\n        \"min\": 23.0,\n        \"max\": 164.0,\n        \"num_unique_values\": 4,\n        \"samples\": [\n          41.0,\n          164.0\n        ],\n        \"semantic_type\": \"\",\n        \"description\": \"\"\n      }\n    },\n    {\n      \"column\": \"50%\",\n      \"properties\": {\n        \"dtype\": \"number\",\n        \"std\": 43.162483709814474,\n        \"min\": 71.0,\n        \"max\": 164.0,\n        \"num_unique_values\": 4,\n        \"samples\": [\n          134.0,\n          164.0\n        ],\n        \"semantic_type\": \"\",\n        \"description\": \"\"\n      }\n    },\n    {\n      \"column\": \"75%\",\n      \"properties\": {\n        \"dtype\": \"number\",\n        \"std\": 72.40856302952021,\n        \"min\": 161.0,\n        \"max\": 305.0,\n        \"num_unique_values\": 4,\n        \"samples\": [\n          161.0,\n          305.0,\n          161.0,\n          161.0\n        ],\n        \"semantic_type\": \"\",\n        \"description\": \"\"\n      }\n    }\n  ]\n}
```

```

\"samples\": [\n                264.0,\n                164.0\n            ],\n\"semantic_type\": \"\",\n\"description\": \"\",\n\"column\": \"max\",\n\"properties\": {\n\"dtype\": \"number\",\n\"std\": 379.8618169808595,\n\"min\": 164.0,\n\"max\": 977.0,\n\"num_unique_values\": 4,\n\"samples\": [\n                890.0,\n                164.0\n            ],\n\"semantic_type\": \"\",\n\"description\": \"\"\n}\n}","type":"dataframe"}

```

```


sns.boxplot(data = df, x = 'weather', y = 'count', showmeans = True)
plt.plot()

```

```

[]

```

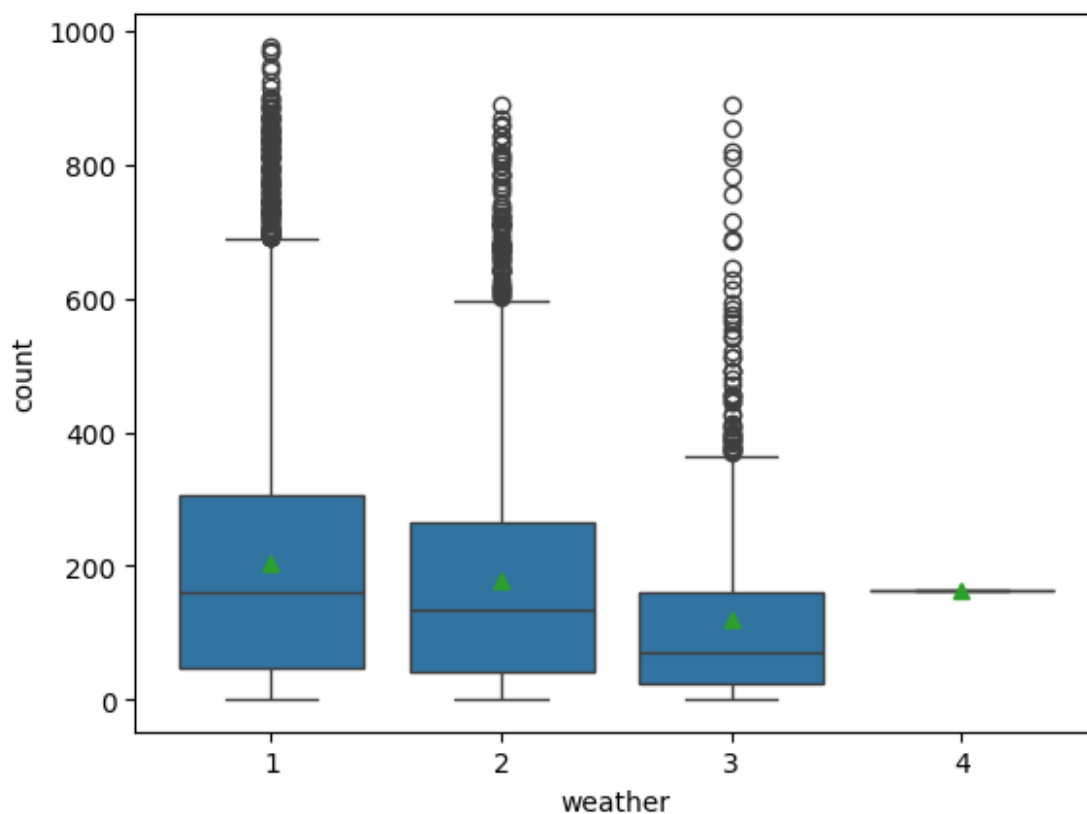

```

df_weather1 = df.loc[df['weather'] == 1]
df_weather2 = df.loc[df['weather'] == 2]
df_weather3 = df.loc[df['weather'] == 3]
df_weather4 = df.loc[df['weather'] == 4]
len(df_weather1), len(df_weather2), len(df_weather3), len(df_weather4)
(7192, 2834, 859, 1)

```

STEP-1: Set up Null Hypothesis

-
- **Null Hypothesis (H0)** - Mean of cycle rented per hour is same for weather 1, 2 and 3. (We wont be considering weather 4 as there in only 1 data point for weather 4 and we cannot perform a ANOVA test with a single data point for a group)
 - **Alternate Hypothesis (HA)** -Mean of cycle rented per hour is not same for season 1,2,3 and 4 are different.

STEP-2: Checking for basic assumptons for the hypothesis

Normality check using **QQ Plot**. If the distribution is not normal, use **BOX-COX transform** to transform it to normal distribution.

Homogeneity of Variances using **Levene's test**

Each observations are **independent**.

STEP-3: Define **Test statistics**

The test statistic for a One-Way ANOVA is denoted as F. For an independent variable with k groups, the F statistic evaluates whether the group means are significantly different.

F=MSB / MSW

Under H0, the test statistic should follow **F-Distribution**.

STEP-4: Decide the kind of test.

We will be performing **right tailed f-test**

STEP-5: Compute the **p-value** and fix value of alpha.

we will be computing the anova-test p-value using the f_oneway function using scipy.stats. We set our **alpha to be 0.05**

STEP-6: Compare p-value and alpha.


Based on p-value, we will accept or reject H0.

- **p-val > alpha** : Accept H0
- **p-val < alpha** : Reject H0

Visual Tests to know if the samples follow normal distribution

```
plt.figure(figsize = (15, 4))
plt.subplot(1, 3, 1)
sns.histplot(df_weather1.loc[:, 'count'].sample(500), bins = 40,
             element = 'step', color = 'green', kde = True, label =
'weather1')
plt.legend()
plt.subplot(1, 3, 2)
sns.histplot(df_weather2.loc[:, 'count'].sample(500), bins = 40,
             element = 'step', color = 'blue', kde = True, label =
'weather2')
plt.legend()
plt.subplot(1, 3, 3)
sns.histplot(df_weather3.loc[:, 'count'].sample(500), bins = 40,
             element = 'step', color = 'red', kde = True, label =
'weather3')
plt.legend()
plt.plot()

[]
```

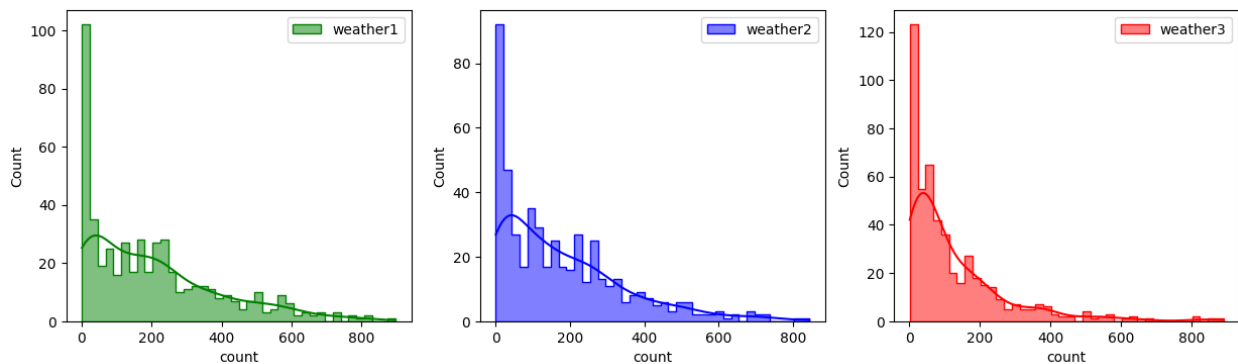


- It can be inferred from the above plot that the distributions do not follow normal distribution.

Distribution check using QQ Plot

```
plt.figure(figsize = (18, 6))
plt.subplot(1, 3, 1)
plt.suptitle('QQ plots for the count of electric vehicles rented in
different weathers')
spy.probplot(df_weather1.loc[:, 'count'].sample(500), plot = plt, dist
= 'norm')
plt.title('QQ plot for weather1')
plt.subplot(1, 3, 2)
spy.probplot(df_weather2.loc[:, 'count'].sample(500), plot = plt, dist
= 'norm')
plt.title('QQ plot for weather2')
plt.subplot(1, 3, 3)
spy.probplot(df_weather3.loc[:, 'count'].sample(500), plot = plt, dist
```

```
= 'norm')
plt.title('QQ plot for weather3')
plt.plot()

[]
```

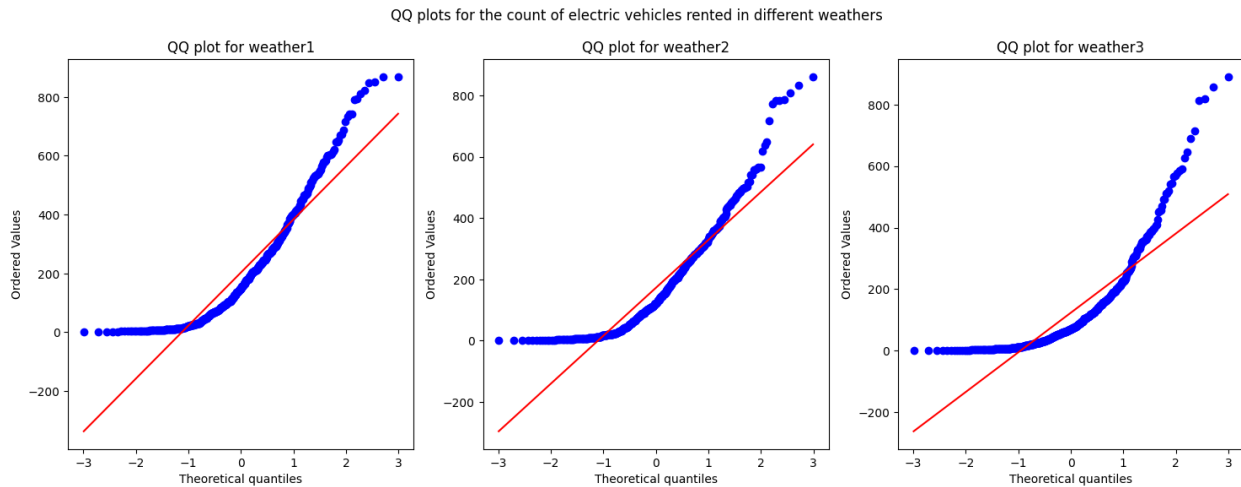

- It can be inferred from the above plot that the distributions do not follow normal distribution.

It can be seen from the above plots that the samples do not come from normal distribution.

- Applying Shapiro-Wilk test for normality

H_0 : The sample **follows normal distribution** H_1 : The sample **does not follow normal distribution**

alpha = 0.05

Test Statistics : **Shapiro-Wilk test for normality**

```
test_stat, p_value = spy.shapiro(df_weather1.loc[:,
'count'].sample(500))
print('p-value', p_value)
if p_value < 0.05:
    print('The sample does not follow normal distribution')
else:
    print('The sample follows normal distribution')
```

p-value 7.988925865673627e-19

The sample does not follow normal distribution

```
test_stat, p_value = spy.shapiro(df_weather2.loc[:,
'count'].sample(500))
print('p-value', p_value)
if p_value < 0.05:
    print('The sample does not follow normal distribution')
```

```

else:
    print('The sample follows normal distribution')

p-value 9.57791397299385e-20
The sample does not follow normal distribution

test_stat, p_value = spy.shapiro(df_weather3.loc[:,
'count'].sample(500))
print('p-value', p_value)
if p_value < 0.05:
    print('The sample does not follow normal distribution')
else:
    print('The sample follows normal distribution')

p-value 7.873844873256446e-27
The sample does not follow normal distribution

```

Transforming the data using boxcox transformation and checking if the transformed data follows normal distribution.

```

transformed_weather1 = spy.boxcox(df_weather1.loc[:,
'count'].sample(5000))[0]
test_stat, p_value = spy.shapiro(transformed_weather1)
print('p-value', p_value)
if p_value < 0.05:
    print('The sample does not follow normal distribution')
else:
    print('The sample follows normal distribution')

p-value 9.093392825256025e-28
The sample does not follow normal distribution

transformed_weather2 = spy.boxcox(df_weather2.loc[:, 'count'])[0]
test_stat, p_value = spy.shapiro(transformed_weather2)
print('p-value', p_value)
if p_value < 0.05:
    print('The sample does not follow normal distribution')
else:
    print('The sample follows normal distribution')

p-value 1.9219748327822736e-19
The sample does not follow normal distribution

transformed_weather3 = spy.boxcox(df_weather3.loc[:, 'count'])[0]
test_stat, p_value = spy.shapiro(transformed_weather3)
print('p-value', p_value)
if p_value < 0.05:
    print('The sample does not follow normal distribution')
else:
    print('The sample follows normal distribution')

```

```
p-value 1.4137293646854232e-06
The sample does not follow normal distribution
```

- Even after applying the boxcox transformation on each of the weather data, the samples do not follow normal distribution.

Homogeneity of Variances using Levene's test

```
# Null Hypothesis(H0) - Homogenous Variance
# Alternate Hypothesis(HA) - Non Homogenous Variance

test_stat, p_value = spy.levene(df_weather1.loc[:,
'count'].sample(500),
                                df_weather2.loc[:,
'count'].sample(500),
                                df_weather3.loc[:,
'count'].sample(500))
print('p-value', p_value)
if p_value < 0.05:
    print('The samples do not have Homogenous Variance')
else:
    print('The samples have Homogenous Variance ')
```

```
p-value 3.279305696872805e-11
The samples do not have Homogenous Variance
```

Since the samples are not normally distributed and do not have the same variance, f_oneway test cannot be performed here, we can perform its non parametric equivalent test i.e., Kruskal-Wallis H-test for independent samples.

```
# Ho : Mean no. of cycles rented is same for different weather
# Ha : Mean no. of cycles rented is different for different weather
# Assuming significance Level to be 0.05
alpha = 0.05
test_stat, p_value = spy.kruskal(df_weather1, df_weather2,
df_weather3)
print('Test Statistic =', test_stat)
print('p value =', p_value)

Test Statistic = [1.36471292e+01 3.87838808e+01 5.37649760e+00
1.56915686e+01
1.08840000e+04 3.70017441e+01 4.14298489e+01 1.83168690e+03
2.80380482e+01 2.84639685e+02 1.73745440e+02 2.04955668e+02
7.08445555e+01]
p value = [1.08783632e-03 3.78605818e-09 6.79999165e-02 3.91398508e-04
0.00000000e+00 9.22939752e-09 1.00837627e-09 0.00000000e+00
8.15859150e-07 1.55338046e-62 1.86920588e-38 3.12206618e-45
4.13333147e-16]
```

Comparing p value with significance level

```
if p_value.any() < 0.05:
    print('Reject Null Hypothesis')
else:
    print('Failed to reject Null Hypothesis')
```

Failed to reject Null Hypothesis

Therefore, the average number of rental bikes is statistically different for different weathers.

Is the number of cycles rented is similar or different in different season ?

```
df.groupby(by = 'season')['count'].describe()
```

```
{
  "summary": {
    "\n  \"name\": \"df\",
    "\n  \"rows\": 4,
    "\n  \"fields\": [
      {
        "\n    \"column\": \"season\",
        "\n    \"properties\": {
          "\n      \"dtype\": \"category\",
          "\n      \"num_unique_values\": 4,
          "\n      \"samples\": [
        "\n          \"spring\",
        "\n          \"winter\",
        "\n          \"fall\"
        "\n        ],
        "\n        \"semantic_type\": \"\",
        "\n        \"description\": \"\"
      }
    },
    {
      "\n      \"column\": \"count\",
      "\n      \"properties\": {
        "\n          \"dtype\": \"number\",
          "\n          \"std\": 23.671361036774655,
          "\n          \"min\": 2686.0,
          "\n          \"max\": 2734.0,
          "\n          \"num_unique_values\": 3,
          "\n          \"samples\": [
        "\n              2733.0,
        "\n              2686.0,
        "\n              2734.0
        "\n            ],
        "\n            \"semantic_type\": \"\",
        "\n            \"description\": \"\"
          }
        },
        {
          "\n          \"column\": \"mean\",
          "\n          \"properties\": {
            "\n              \"dtype\": \"number\",
            "\n              \"std\": 51.994766318826116,
            "\n              \"min\": 116.34326135517499,
            "\n              \"max\": 234.417124039517,
            "\n              \"num_unique_values\": 4,
            "\n              \"samples\": [
        "\n                  116.34326135517499,
        "\n                  198.98829553767374,
        "\n                  234.417124039517
        "\n                ],
        "\n                \"semantic_type\": \"\",
        "\n                \"description\": \"\"
              }
            },
            {
              "\n              \"column\": \"std\",
              "\n              \"properties\": {
                "\n                  \"dtype\": \"number\",
                "\n                  \"std\": 32.88215525208918,
                "\n                  \"min\": 125.27397388810313,
                "\n                  \"max\": 197.15100053680393,
                "\n                  \"num_unique_values\": 4,
                "\n                  \"samples\": [
        "\n                      125.27397388810313,
        "\n                      177.62240938763696,
        "\n                      197.15100053680393
        "\n                    ],
        "\n                    \"semantic_type\": \"\",
        "\n                    \"description\": \"\"
                  }
                },
                {
                  "\n                  \"column\": \"min\",
                  "\n                  \"properties\": {
                    "\n                      \"dtype\": \"number\",
                    "\n                      \"std\": 0.0,
                    "\n                      \"min\": 1.0,
                    "\n                      \"max\": 1.0,
                    "\n                      \"num_unique_values\": 1,
                    "\n                      \"samples\": [
        "\n                          1.0
        "\n                        ],
        "\n                        \"semantic_type\": \"\",
        "\n                        \"description\": \"\"
                      }
                    },
                    {
                      "\n                      \"column\": \"25%\",
                      "\n                      \"properties\": {
                        "\n                          \"dtype\": \"number\",
                        "\n                          \"std\": 18.12916618784953,
                        "\n                          \"min\": 24.0,
                        "\n                          \"max\": 68.0,
                        "\n                          \"num_unique_values\": 4,
                        "\n                          \"samples\": [
        "\n                              24.0
        "\n                            ],
        "\n                            \"semantic_type\": \"\",
        "\n                            \"description\": \"\"
                          }
                        }
                      }
                    }
                  }
                }
              }
            }
          }
        }
      }
    }
  }
}
```



```

n    },\n    {\n        \"column\": \"50%\",\n        \"properties\": {\n            \"dtype\": \"number\",\n            \"std\": 51.00653552895616,\n            \"min\": 78.0,\n            \"max\": 195.0,\n            \"num_unique_values\": 4,\n            \"samples\": [\n                78.0\n            ],\n            \"semantic_type\": \"\",\n            \"description\": \"\"\n        }\n    },\n    {\n        \"column\": \"75%\",\n        \"properties\": {\n            \"dtype\": \"number\",\n            \"std\": 81.26704949321916,\n            \"min\": 164.0,\n            \"max\": 347.0,\n            \"num_unique_values\": 4,\n            \"samples\": [\n                164.0\n            ],\n            \"semantic_type\": \"\",\n            \"description\": \"\"\n        }\n    },\n    {\n        \"column\": \"max\",\n        \"properties\": {\n            \"dtype\": \"number\",\n            \"std\": 79.08381629638266,\n            \"min\": 801.0,\n            \"max\": 977.0,\n            \"num_unique_values\": 4,\n            \"samples\": [\n                801.0\n            ],\n            \"semantic_type\": \"\",\n            \"description\": \"\"\n        }\n    }\n    ],\n    \"type\": \"dataframe\"}

```

```

df_season_spring = df.loc[df['season'] == 'spring', 'count']
df_season_summer = df.loc[df['season'] == 'summer', 'count']
df_season_fall = df.loc[df['season'] == 'fall', 'count']
df_season_winter = df.loc[df['season'] == 'winter', 'count']
len(df_season_spring), len(df_season_summer), len(df_season_fall),
len(df_season_winter)

```

```

(2686, 2733, 2733, 2734)

```

```


sns.boxplot(data = df, x = 'season', y = 'count', showmeans = True)
plt.plot()

```

```

[]

```

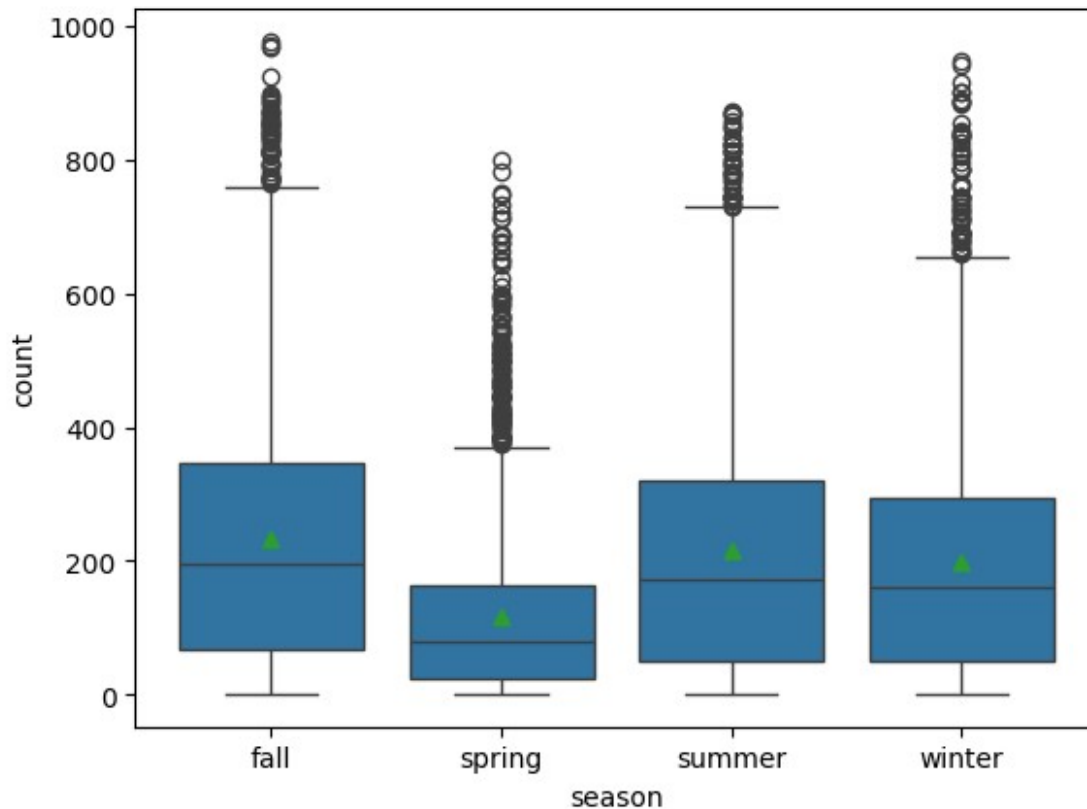

STEP-1: Set up Null Hypothesis

- **Null Hypothesis (H0)** - Mean of cycle rented per hour is same for season 1,2,3 and 4.
- **Alternate Hypothesis (HA)** -Mean of cycle rented per hour is different for season 1,2,3 and 4.

STEP-2: Checking for basic assumptions for the hypothesis

1. **Normality check** using QQ Plot. If the distribution is not normal, use **BOX-COX transform** to transform it to normal distribution.
2. Homogeneity of Variances using **Levene's test**
3. Each observations are **independent**.

STEP-3: Define Test statistics

The test statistic for a One-Way ANOVA is denoted as F. For an independent variable with k groups, the F statistic evaluates whether the group means are significantly different.

F=MSB/MSW

Under H0, the test statistic should follow **F-Distribution**.

STEP-4: Decide the kind of test.

We will be performing **right tailed f-test**

STEP-5: Compute the p-value and fix value of alpha.

we will be computing the anova-test p-value using the **f_oneway** function using scipy.stats. We set our alpha to be **0.05**

STEP-6: Compare p-value and alpha.

Based on p-value, we will accept or reject H0. p-val > alpha : Accept H0 p-val < alpha : Reject H0

The one-way ANOVA compares the means between the groups you are interested in and determines whether any of those means are statistically significantly different from each other.

Specifically, it tests the null hypothesis (H0):

$$\mu_1 = \mu_2 = \mu_3 = \dots = \mu_k$$

where, μ = group mean and k = number of groups.

If, however, the one-way ANOVA returns a statistically significant result, we accept the alternative hypothesis (HA), which is that there are at least two group means that are statistically significantly different from each other.


Visual Tests to know if the samples follow normal distribution

```
plt.figure(figsize = (12, 6))
plt.subplot(2, 2, 1)
sns.histplot(df_season_spring.sample(2500), bins = 50,
             element = 'step', color = 'green', kde = True, label =
             'season_spring')
plt.legend()
plt.subplot(2, 2, 2)
sns.histplot(df_season_summer.sample(2500), bins = 50,
             element = 'step', color = 'blue', kde = True, label =
             'season_summer')
plt.legend()
plt.subplot(2, 2, 3)
```

```

sns.histplot(df_season_fall.sample(2500), bins = 50,
             element = 'step', color = 'red', kde = True, label =
'season_fall')
plt.legend()
plt.subplot(2, 2, 4)
sns.histplot(df_season_winter.sample(2500), bins = 50,
             element = 'step', color = 'yellow', kde = True, label =
'season_winter')
plt.legend()
plt.plot()
[]

```

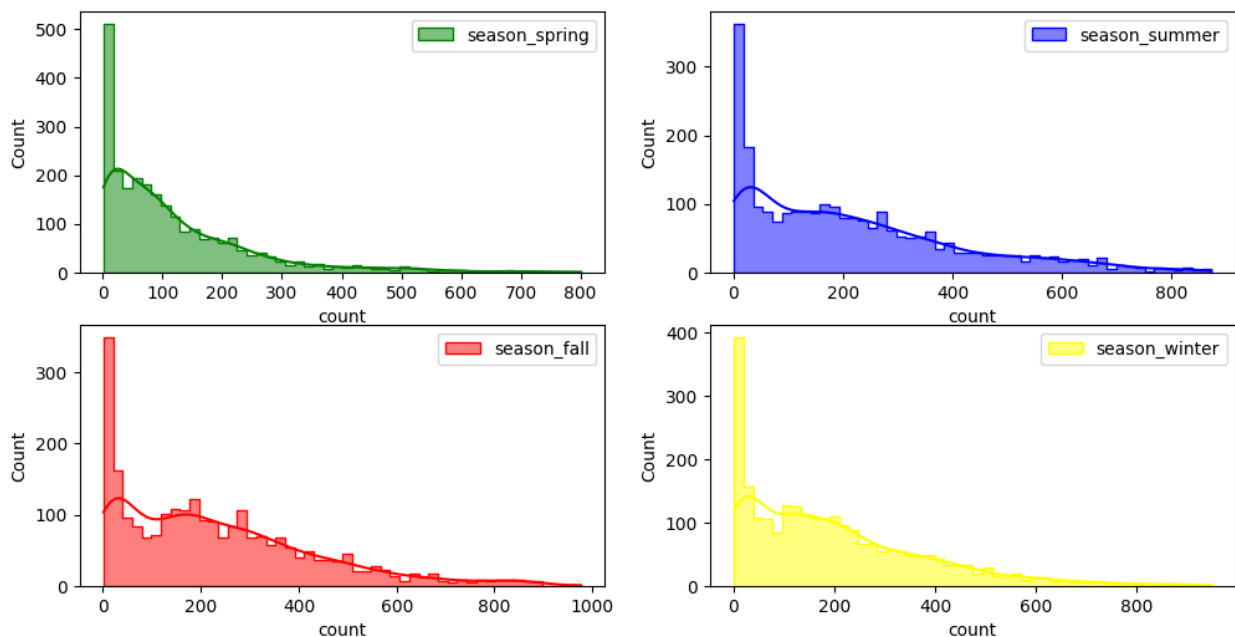

- It can be inferred from the above plot that the distributions do not follow normal distribution.

Distribution check using QQ Plot

```

plt.figure(figsize = (12, 12))
plt.subplot(2, 2, 1)
plt.suptitle('QQ plots for the count of electric vehicles rented in
different seasons')
spy.probplot(df_season_spring.sample(2500), plot = plt, dist = 'norm')
plt.title('QQ plot for spring season')

plt.subplot(2, 2, 2)
spy.probplot(df_season_summer.sample(2500), plot = plt, dist = 'norm')
plt.title('QQ plot for summer season')

plt.subplot(2, 2, 3)

```

```


spy.probplot(df_season_fall.sample(2500), plot = plt, dist = 'norm')
plt.title('QQ plot for fall season')

plt.subplot(2, 2, 4)
spy.probplot(df_season_winter.sample(2500), plot = plt, dist = 'norm')
plt.title('QQ plot for winter season')
plt.plot()

[]

```

QQ plots for the count of electric vehicles rented in different seasons

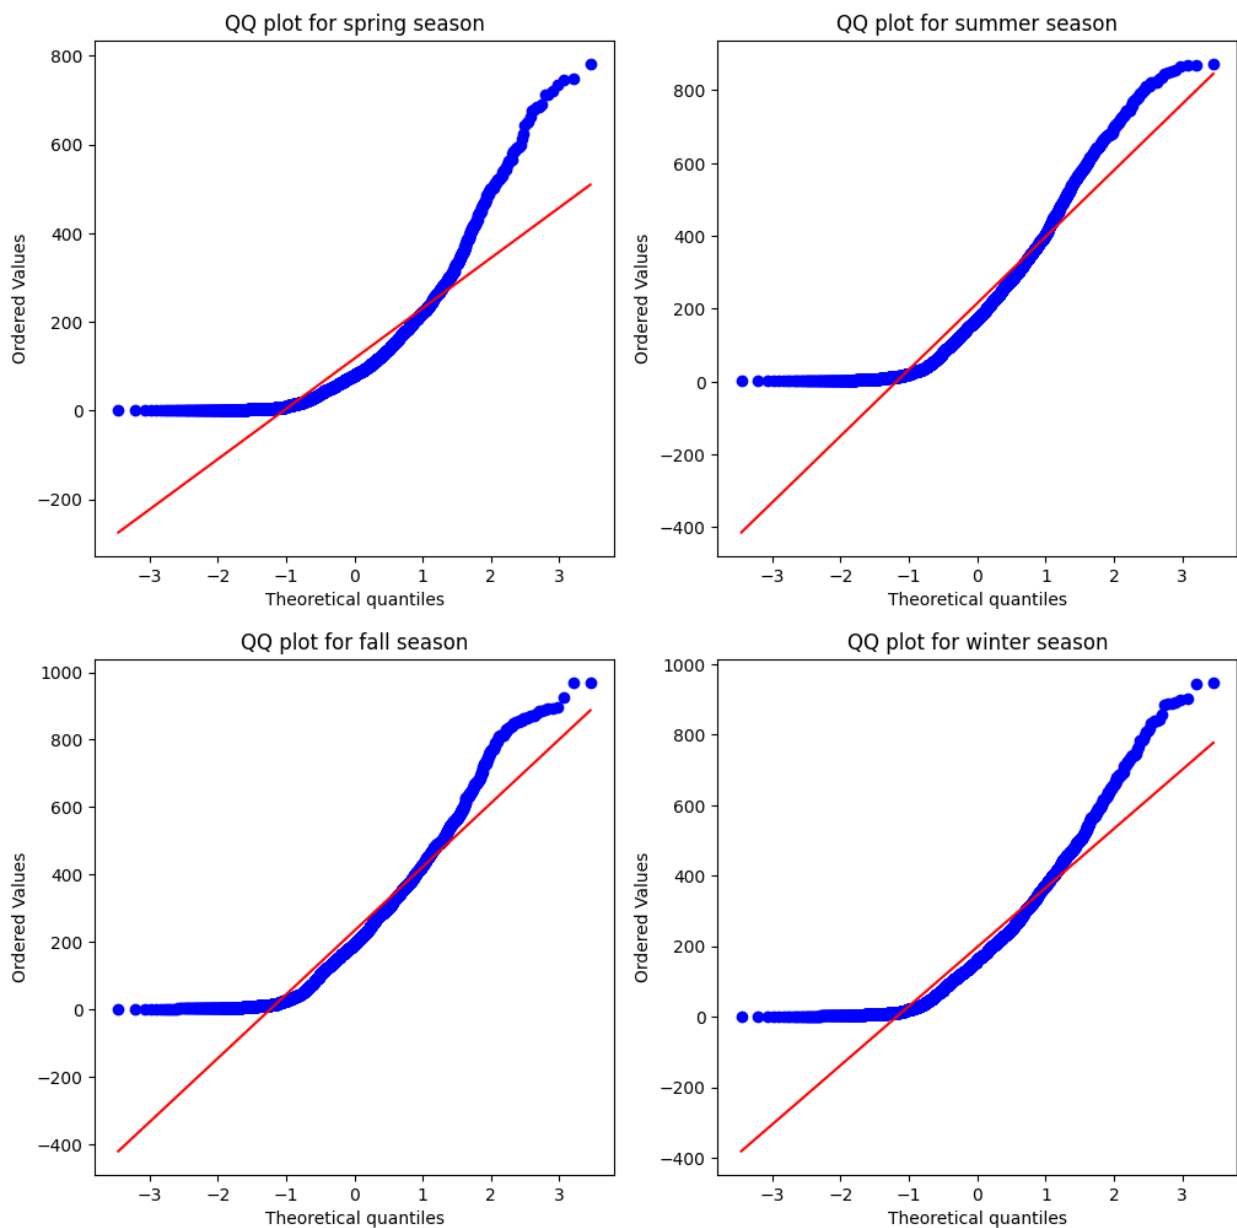

- It can be inferred from the above plots that the distributions do not follow normal distribution.

It can be seen from the above plots that the samples do not come from normal distribution.

- Applying Shapiro-Wilk test for normality

H_0 : The sample **follows normal distribution** H_1 : The sample **does not follow normal distribution**

alpha = 0.05

Test Statistics : **Shapiro-Wilk test for normality**

```
test_stat, p_value = spy.shapiro(df_season_spring.sample(2500))
print('p-value', p_value)
if p_value < 0.05:
    print('The sample does not follow normal distribution')
else:
    print('The sample follows normal distribution')
```

p-value 0.0

The sample does not follow normal distribution

```
test_stat, p_value = spy.shapiro(df_season_summer.sample(2500))
print('p-value', p_value)
if p_value < 0.05:
    print('The sample does not follow normal distribution')
else:
    print('The sample follows normal distribution')
```

p-value 6.608238813907887e-38

The sample does not follow normal distribution

```
test_stat, p_value = spy.shapiro(df_season_fall.sample(2500))
print('p-value', p_value)
if p_value < 0.05:
    print('The sample does not follow normal distribution')
else:
    print('The sample follows normal distribution')
```

p-value 6.738619515275282e-35

The sample does not follow normal distribution

```
test_stat, p_value = spy.shapiro(df_season_winter.sample(2500))
print('p-value', p_value)
if p_value < 0.05:
    print('The sample does not follow normal distribution')
else:
    print('The sample follows normal distribution')
```

p-value 3.5504665559434746e-38

The sample does not follow normal distribution

Transforming the data using boxcox transformation and checking if the transformed data follows normal distribution.

```
transformed_df_season_spring =  
spy.boxcox(df_season_spring.sample(2500))[0]  
test_stat, p_value = spy.shapiro(transformed_df_season_spring)  
print('p-value', p_value)  
if p_value < 0.05:  
    print('The sample does not follow normal distribution')  
else:  
    print('The sample follows normal distribution')  
  
p-value 1.169786778522773e-16  
The sample does not follow normal distribution  
  
transformed_df_season_summer =  
spy.boxcox(df_season_summer.sample(2500))[0]  
test_stat, p_value = spy.shapiro(transformed_df_season_summer)  
print('p-value', p_value)  
if p_value < 0.05:  
    print('The sample does not follow normal distribution')  
else:  
    print('The sample follows normal distribution')  
  
p-value 2.1506607069086355e-21  
The sample does not follow normal distribution  
  
transformed_df_season_fall = spy.boxcox(df_season_fall.sample(2500))  
[0]  
test_stat, p_value = spy.shapiro(transformed_df_season_fall)  
print('p-value', p_value)  
if p_value < 0.05:  
    print('The sample does not follow normal distribution')  
else:  
    print('The sample follows normal distribution')  
  
p-value 2.1714367535537113e-21  
The sample does not follow normal distribution  
  
transformed_df_season_winter =  
spy.boxcox(df_season_winter.sample(2500))[0]  
test_stat, p_value = spy.shapiro(transformed_df_season_winter)  
print('p-value', p_value)  
if p_value < 0.05:  
    print('The sample does not follow normal distribution')  
else:  
    print('The sample follows normal distribution')  
  
p-value 4.701171474637455e-20  
The sample does not follow normal distribution
```

- Even after applying the boxcox transformation on each of the season data, the samples do not follow normal distribution.

Homogeneity of Variances using Levene's test

```
# Null Hypothesis(H0) - Homogenous Variance
# Alternate Hypothesis(HA) - Non Homogenous Variance

test_stat, p_value = spy.levene(df_season_spring.sample(2500),
                                df_season_summer.sample(2500),
                                df_season_fall.sample(2500),
                                df_season_winter.sample(2500))

print('p-value', p_value)
if p_value < 0.05:
    print('The samples do not have Homogenous Variance')
else:
    print('The samples have Homogenous Variance ')

p-value 5.356119878641026e-108
The samples do not have Homogenous Variance
```

Since the samples are not normally distributed and do not have the same variance, f_oneway test cannot be performed here, we can perform its non parametric equivalent test i.e., Kruskal-Wallis H-test for independent samples.

```
# Ho : Mean no. of cycles rented is same for different weather
# Ha : Mean no. of cycles rented is different for different weather
# Assuming significance Level to be 0.05
alpha = 0.05
test_stat, p_value = spy.kruskal(df_season_spring, df_season_summer,
                                df_season_fall, df_season_winter)
print('Test Statistic =', test_stat)
print('p value =', p_value)

Test Statistic = 699.6668548181988
p value = 2.479008372608633e-151
```

Comparing p value with significance level

```
if p_value < alpha:
    print('Reject Null Hypothesis')
else:
    print('Failed to reject Null Hypothesis')

Reject Null Hypothesis
```

Therefore, the average number of rental bikes is statistically different for different seasons.


```
sns.pairplot(data = df,
              kind = 'reg',
```



```

hue = 'workingday',
markers = '.')
plt.plot()
[]

```

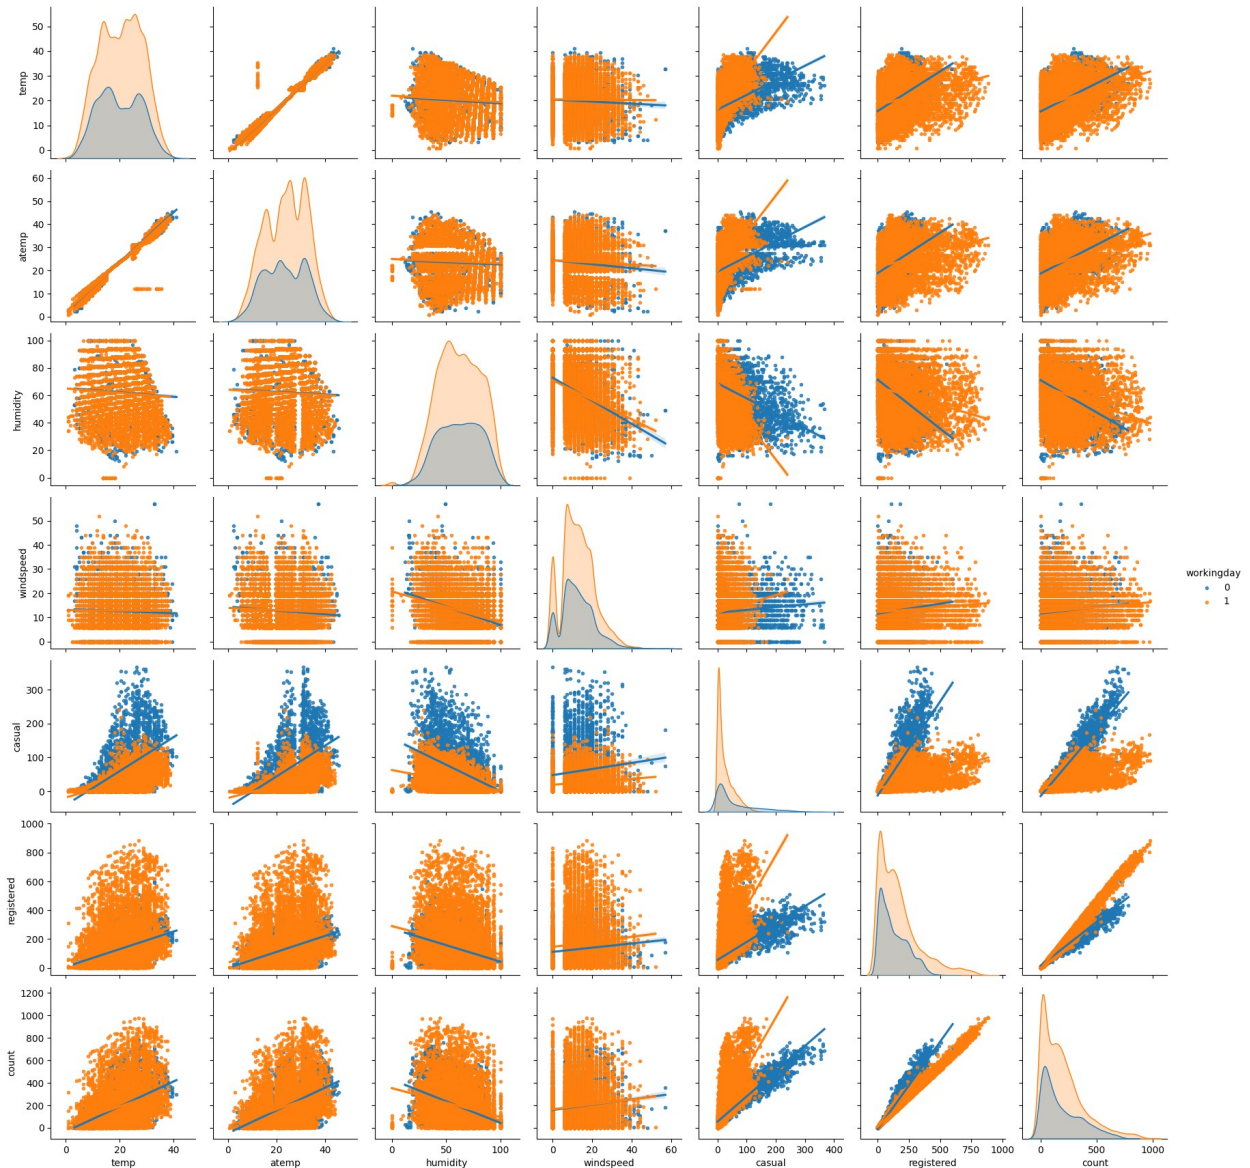

```

corr_data = df.corr()
corr_data

{"summary":{"\n  \"name\": \"corr_data\", \n  \"rows\": 13, \n  \"fields\": [\n    {\n      \"column\": \"datetime\", \n      \"dtype\": \"number\", \n      \"std\": 0.29925031845794475, \n      \"min\": -0.08688817484825098, \n      \"max\": 1.0, \n      \"num_unique_values\": 11, \n

```

```
\n      0.18182275931168923,\n0.3148792718011684\n    ],\n    \"semantic_type\": \"\",\n    \"description\": \"\",\n    \"properties\": {\n      \"dtype\": \"number\",\n      \"std\": null,\n      \"min\": null,\n      \"max\": null,\n      \"num_unique_values\": 0,\n      \"samples\": [],\n      \"semantic_type\": \"\",\n      \"description\": \"\",\n      \"column\": \"holiday\",\n      \"properties\": {\n        \"dtype\": \"number\",\n        \"std\": 0.3179026262283071,\n        \"min\": -0.2504913911873013,\n        \"max\": 1.0,\n        \"num_unique_values\": 11,\n        \"samples\": [],\n        \"semantic_type\": \"\",\n        \"description\": \"\",\n        \"column\": \"workingday\",\n        \"properties\": {\n          \"dtype\": \"number\",\n          \"std\": 0.33818429660594673,\n          \"min\": -0.319110963404297,\n          \"max\": 1.0,\n          \"num_unique_values\": 11,\n          \"samples\": [],\n          \"semantic_type\": \"\",\n          \"description\": \"\",\n          \"column\": \"weather\",\n          \"properties\": {\n            \"dtype\": \"number\",\n            \"std\": 0.33722251202240344,\n            \"min\": -0.13591768027504472,\n            \"max\": 1.0,\n            \"num_unique_values\": 11,\n            \"samples\": [],\n            \"semantic_type\": \"\",\n            \"description\": \"\",\n            \"column\": \"temp\",\n            \"properties\": {\n              \"dtype\": \"number\",\n              \"std\": 0.3915573622726839,\n              \"min\": -0.064948768715229,\n              \"max\": 1.0,\n              \"num_unique_values\": 11,\n              \"samples\": [],\n              \"semantic_type\": \"\",\n              \"description\": \"\",\n              \"column\": \"atemp\",\n              \"properties\": {\n                \"dtype\": \"number\",\n                \"std\": 0.3934141987529899,\n                \"min\": -0.05747300412076462,\n                \"max\": 1.0,\n                \"num_unique_values\": 11,\n                \"samples\": [],\n                \"semantic_type\": \"\",\n                \"description\": \"\",\n                \"column\": \"humidity\",\n                \"properties\": {\n                  \"dtype\": \"number\",\n                  \"std\": 0.395703734590374,\n                  \"min\": -0.34818689928736407,\n                  \"max\": 1.0,\n                  \"num_unique_values\": 11,\n                  \"samples\": [],\n                  \"semantic_type\": \"\",\n                  \"description\": \"\",\n                  \"column\": \"windspeed\",\n                  \"properties\": {\n                    \"dtype\": \"number\",\n                    \"std\": 0.3281762340149438,\n                    \"min\": -0.31860699057692904,\n                    \"max\": 1.0,\n                    \"num_unique_values\": 11,\n                    \"samples\": [],\n                    \"semantic_type\": \"\",\n                    \"description\": \"\",\n                    \"column\": \"casual\",\n                    \"properties\": {\n                      \"dtype\": \"number\",\n                      \"std\": 0.4257034168856442,\n                      \"min\": -0.34818689928736407,\n                      \"max\": 1.0,\n                      \"num_unique_values\": 11,\n                      \"samples\": [],\n                      \"semantic_type\": \"\",
```

```

{"description": "", "column": "registered", "properties": {"dtype": "number", "std": 0.40570874005439966, "min": -0.26545786846975766, "max": 1.0, "num_unique_values": 11, "samples": [], "semantic_type": ""}, {"description": "count", "column": "count", "properties": {"dtype": "number", "std": 0.4346514713114869, "min": -0.31737147887659584, "max": 1.0, "num_unique_values": 11, "samples": [], "semantic_type": ""}, {"description": "day", "column": "day", "properties": {"dtype": "number", "std": null, "min": null, "max": null, "num_unique_values": 0, "samples": [], "semantic_type": ""}}
n}], "type": "dataframe", "variable_name": "corr_data"}

```

```


plt.figure(figsize = (12, 8))
sns.heatmap(data = corr_data, cmap = 'Greens', annot = True, vmin = -1, vmax = 1)
plt.plot()

```

```

[]

```

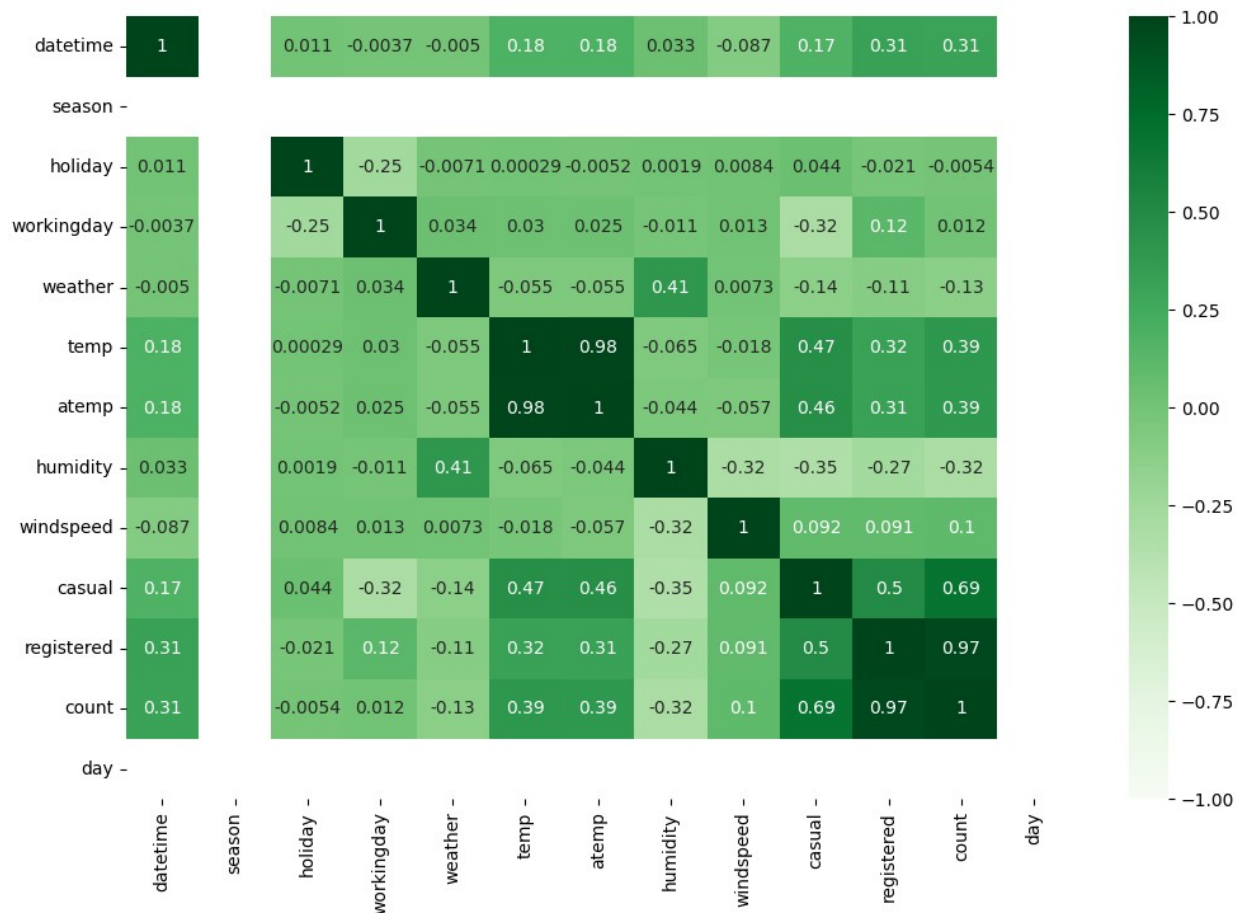

- Very High Correlation (> 0.9) exists between columns [atemp, temp] and [count, registered]
- High positively / negatively correlation ($0.7 - 0.9$) does not exist between any columns.
- Moderate positive correlation ($0.5 - 0.7$) exists between columns [casual, count], [casual, registered].
- Low Positive correlation ($0.3 - 0.5$) exists between columns [count, temp], [count, atemp], [casual, atemp]
- Negligible correlation exists between all other combinations of columns.

Insights

- The data is given from Timestamp('2011-01-01 00:00:00') to Timestamp('2012-12-19 23:00:00'). The total time period for which the data is given is '718 days 23:00:00'.
- Out of every 100 users, around 19 are casual users and 81 are registered users.
- The mean total hourly count of rental bikes is 144 for the year 2011 and 239 for the year 2012. An annual growth rate of 65.41 % can be seen in the demand of electric vehicles on an hourly basis.
- There is a seasonal pattern in the count of rental bikes, with higher demand during the spring and summer months, a slight decline in the fall, and a further decrease in the winter months.

- The average hourly count of rental bikes is the lowest in the month of January followed by February and March.
- There is a distinct fluctuation in count throughout the day, with low counts during early morning hours, a sudden increase in the morning, a peak count in the afternoon, and a gradual decline in the evening and nighttime.
- More than 80 % of the time, the temperature is less than 28 degrees celcius.
- More than 80 % of the time, the humidity value is greater than 40. Thus for most of the time, humidity level varies from optimum to too moist.
- More than 85 % of the total, windspeed data has a value of less than 20.
- The hourly count of total rental bikes is the highest in the clear and cloudy weather, followed by the misty weather and rainy weather. There are very few records for extreme weather conditions.
- The mean hourly count of the total rental bikes is statistically similar for both working and non- working days.
- There is statistically significant dependency of weather and season based on the hourly total number of bikes rented.
- The hourly total number of rental bikes is statistically different for different weathers.
- There is no statistically significant dependency of weather 1, 2, 3 on season based on the average hourly total number of bikes rented.
- The hourly total number of rental bikes is statistically different for different seasons.

Recommendations

- **Seasonal Marketing:** Since there is a clear seasonal pattern in the count of rental bikes, Yulu can adjust its marketing strategies accordingly. Focus on promoting bike rentals during the spring and summer months when there is higher demand. Offer seasonal discounts or special packages to attract more customers during these periods.
- **Time-based Pricing:** Take advantage of the hourly fluctuation in bike rental counts throughout the day. Consider implementing time-based pricing where rental rates are lower during off-peak hours and higher during peak hours. This can encourage customers to rent bikes during less busy times, balancing out the demand and optimizing the resources.
- **Weather-based Promotions:** Recognize the impact of weather on bike rentals. Create weather-based promotions that target customers during clear and cloudy weather, as these conditions show the highest rental counts. Yulu can offer weather-specific discounts to attract more customers during these favorable weather conditions.
- **User Segmentation:** Given that around 81% of users are registered, and the remaining 19% are casual, Yulu can tailor its marketing and communication strategies accordingly. Provide loyalty programs, exclusive offers, or personalized recommendations for registered users to encourage repeat business. For casual users, focus on providing a seamless rental experience and promoting the benefits of bike rentals for occasional use.

- **Optimize Inventory:** Analyze the demand patterns during different months and adjust the inventory accordingly. During months with lower rental counts such as January, February, and March, Yulu can optimize its inventory levels to avoid excess bikes. On the other hand, during peak months, ensure having sufficient bikes available to meet the higher demand.
- **Improve Weather Data Collection:** Given the lack of records for extreme weather conditions, consider improving the data collection process for such scenarios. Having more data on extreme weather conditions can help to understand customer behavior and adjust the operations accordingly, such as offering specialized bike models for different weather conditions or implementing safety measures during extreme weather.
- **Customer Comfort:** Since humidity levels are generally high and temperature is often below 28 degrees Celsius, consider providing amenities like umbrellas, rain jackets, or water bottles to enhance the comfort and convenience of the customers. These small touches can contribute to a positive customer experience and encourage repeat business.
- **Collaborations with Weather Services:** Consider collaborating with weather services to provide real-time weather updates and forecasts to potential customers. Incorporate weather information into your marketing campaigns or rental app to showcase the ideal biking conditions and attract users who prefer certain weather conditions.
- **Seasonal Bike Maintenance:** Allocate resources for seasonal bike maintenance. Before the peak seasons, conduct thorough maintenance checks on the bike fleet to ensure they are in top condition. Regularly inspect and service bikes throughout the year to prevent breakdowns and maximize customer satisfaction.
- **Customer Feedback and Reviews:** Encourage customers to provide feedback and reviews on their biking experience. Collecting feedback can help identify areas for improvement, understand customer preferences, and tailor the services to better meet customer expectations.
- **Social Media Marketing:** Leverage social media platforms to promote the electric bike rental services. Share captivating visuals of biking experiences in different weather conditions, highlight customer testimonials, and engage with potential customers through interactive posts and contests. Utilize targeted advertising campaigns to reach specific customer segments and drive more bookings.
- **Special Occasion Discounts:** Since Yulu focusses on providing a sustainable solution for vehicular pollution, it should give special discounts on the occasions like Zero Emissions Day (21st September), Earth day (22nd April), World Environment Day (5th June) etc in order to attract new users.