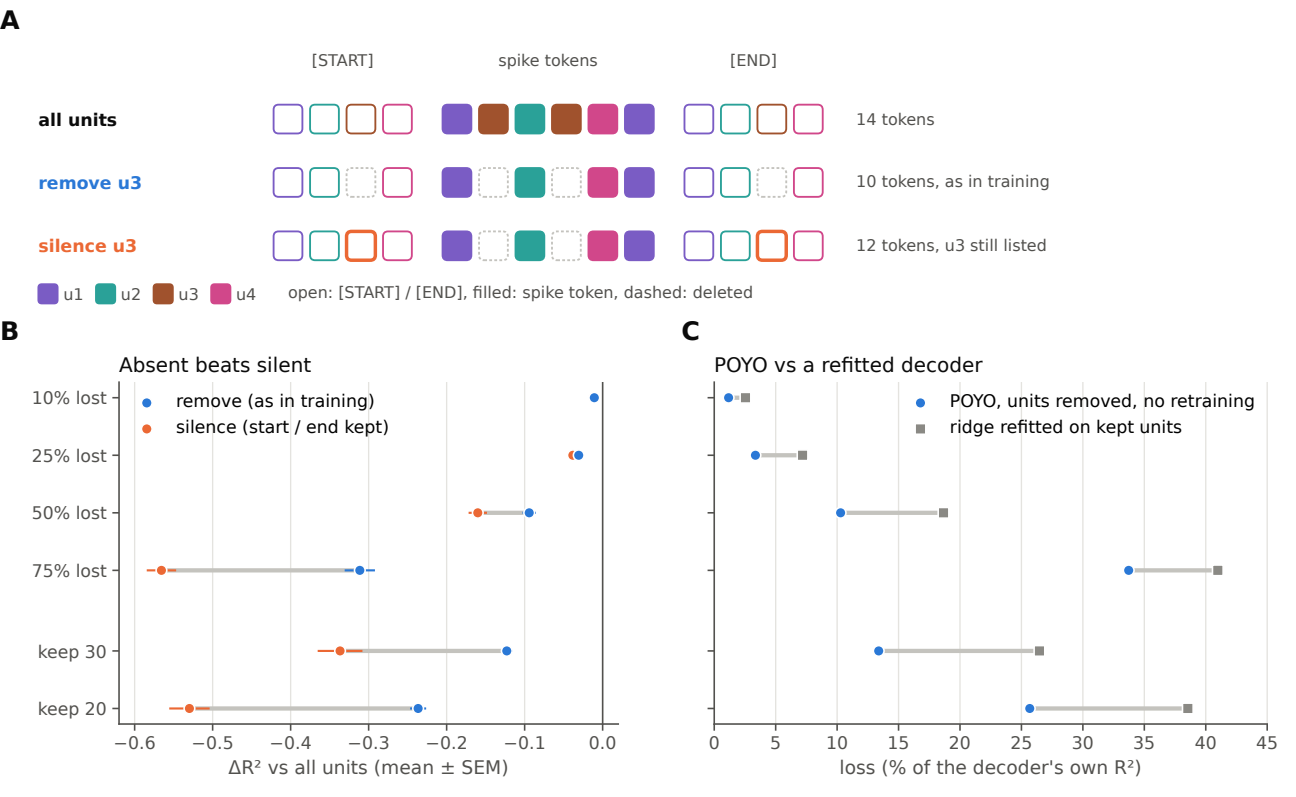
A
[START]
spike tokens
[END]
all units
14 tokens
remove u3
10 tokens, as in training
silence u3
12 tokens, u3 still listed
u1
u2
u3
u4
open: [START] / [END], filled: spike token, dashed: deleted
B
Absent beats silent
remove (as in training)
silence (start / end kept)
10% lost
25% lost
50% lost
75% lost
keep 30
keep 20
−0.6
−0.5
−0.4
−0.3
−0.2
−0.1
0.0
ΔR² vs all units (mean ± SEM)
C
POYO vs a refitted decoder
POYO, units removed, no retraining
ridge refitted on kept units
0
5
10
15
20
25
30
35
40
45
loss (% of the decoder's own R²)