



**Vidyavardhini's College of Engineering and Technology**  
**Department of Artificial Intelligence & Data Science**

---

Experiment No. 7
Implement Booth's algorithm using c-programming
Name: Shruti Gauchandra
Roll Number: 15
Date of Performance:
Date of Submission:



# Vidyavardhini's College of Engineering and Technology

## Department of Artificial Intelligence & Data Science

**Aim:** To implement Booth's algorithm using c-programming.

### Objective -


1. To understand the working of Booths algorithm.
2. To understand how to implement Booth's algorithm using c-programming.

### Theory:

Booth's algorithm is a multiplication algorithm that multiplies two signed binary numbers in 2's complement notation. Booth used desk calculators that were faster at shifting than adding and created the algorithm to increase their speed.

The algorithm works as per the following conditions :

1. If  $Q_n$  and  $Q_{n-1}$  are same i.e. 00 or 11 perform arithmetic shift by 1 bit.
2. If  $Q_n Q_{n-1} = 10$  do  $A = A - B$  and perform arithmetic shift by 1 bit.
3. If  $Q_n Q_{n-1} = 01$  do  $A = A + B$  and perform arithmetic shift by 1 bit.

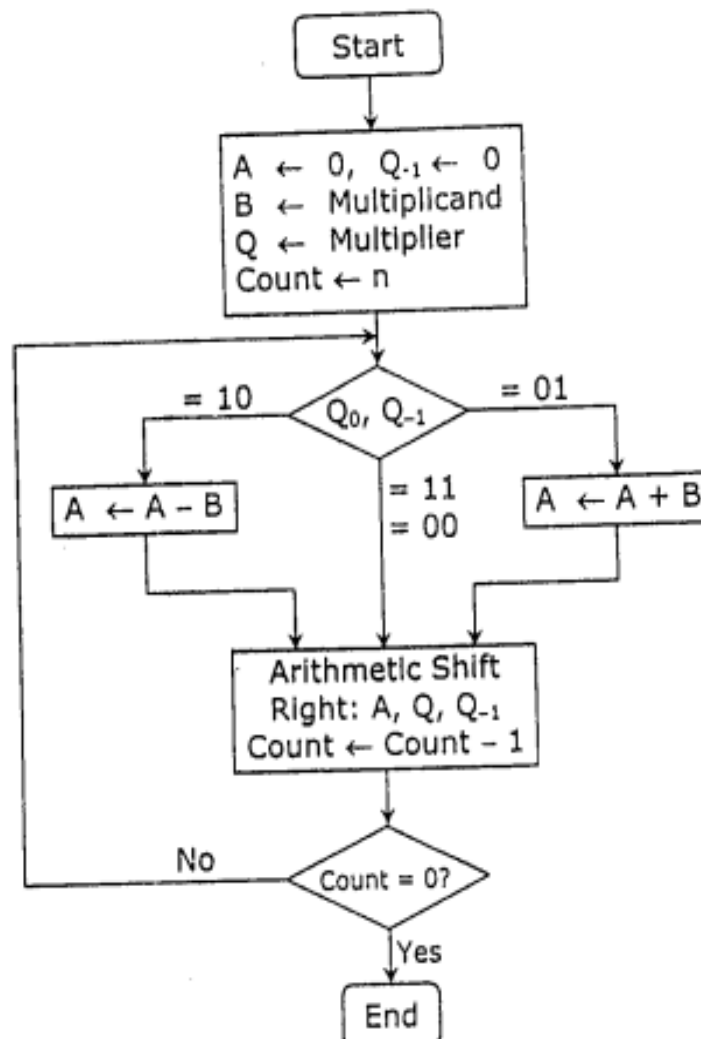



# Vidyavardhini's College of Engineering and Technology

## Department of Artificial Intelligence & Data Science

Multiplicand (B) ← 0 1 0 1 (5), Multiplier (Q) ← 0 1 0 0 (4)				
Steps	A	Q	Q <sub>-1</sub>	Operation
	0 0 0 0	0 1 0 0	0	Initial
Step 1 :	0 0 0 0	0 0 1 0	0	Shift right
Step 2 :	0 0 0 0	0 0 0 1	0	Shift right
Step 3 :	1 0 1 1	0 0 0 1	0	A ← A - B
	1 1 0 1	1 0 0 0	1	Shift right
Step 4 :	0 0 1 0	1 0 0 0	1	A ← A + B
	0 0 0 1	0 1 0 0	0	Shift right
Result	0 0 0 1 0 1 0 0 = +20			

Program:

```
#include<stdio.h>
```

```
#include <math.h>
```

```
int a = 0, b = 0, c = 0, a1 = 0, b1 = 0, com[5] = { 1, 0, 0, 0, 0};
```

```
int anum[5] = {0}, anumcp[5] = {0}, bnum[5] = {0};
```

```
int acomp[5] = {0}, bcomp[5] = {0}, pro[5] = {0}, res[5] = {0};
```

```
void binary()
```

```
{
```

```
    a1 = fabs(a);
```

```
    b1 = fabs(b);
```

```
    int r, r2, i, temp;
```

```
    for (i = 0; i < 5; i++)
```

```
    {
```

```
        r = a1 % 2;
```

```
        a1 = a1 / 2;
```

```
        r2 = b1 % 2;
```



# Vidyavardhini's College of Engineering and Technology

## Department of Artificial Intelligence & Data Science

---

```
b1 = b1 / 2;

anum[i] = r;

anumcp[i] = r;

bnum[i] = r2;

if(r2 == 0)

{

bcomp[i] = 1;

}

if(r == 0)

{

acompi[i]=1;

}

}

c = 0;

for ( i = 0; i < 5; i++)

{

res[i] = com[i]+ bcomp[i] + c;

if(res[i] >= 2)

{

c = 1;

}

else

c = 0;

res[i] = res[i] % 2;
```



# Vidyavardhini's College of Engineering and Technology

## Department of Artificial Intelligence & Data Science

---

```
}  
  
for (i = 4; i >= 0; i--)  
  
{  
  
bcomp[i] = res[i];  
  
}  
  
if (a < 0)  
  
{  
  
c = 0;  
  
for (i = 4; i >= 0; i--)  
  
{  
  
res[i] = 0;  
  
}  
  
for (i = 0; i < 5; i++)  
  
{  
  
res[i] = com[i] + acomp[i] + c;  
  
if (res[i] >= 2){  
  
c = 1;  
  
}  
  
else  
  
c = 0;  
  
res[i] = res[i]%2;  
  
}  
  
for (i = 4; i >= 0; i--)  
  
{
```



# Vidyavardhini's College of Engineering and Technology

## Department of Artificial Intelligence & Data Science

---

```
anum[i] = res[i];  
anumcp[i] = res[i];  
  
}  
  
}  
  
if(b < 0)  
{  
  
for (i = 0; i < 5; i++)  
{  
  
temp = bnum[i];  
bnum[i] = bcomp[i];  
bcomp[i] = temp;  
  
}  
  
}  
  
}  
  
void add(int num[])  
{  
  
int i;  
  
c = 0;  
  
for ( i = 0; i < 5; i++)  
{  
  
res[i] = pro[i] + num[i] + c;  
  
if (res[i] >= 2)  
{  
  
c = 1;
```



# Vidyavardhini's College of Engineering and Technology

## Department of Artificial Intelligence & Data Science

---

```
}  
  
else  
  
{  
  
c = 0;  
  
}  
  
res[i] = res[i]%2;  
  
}  
  
for (i = 4; i >= 0; i--)  
  
{  
  
pro[i] = res[i];  
  
printf("%d",pro[i]);  
  
}  
  
printf(":");  
  
for (i = 4; i >= 0; i--)  
  
{  
  
printf("%d", anumcp[i]);  
  
}  
  
}  
  
void arshift()  
  
{  
  
int temp = pro[4], temp2 = pro[0], i;  
  
for (i = 1; i < 5 ; i++)  
  
{  
  
pro[i-1] = pro[i];
```



# Vidyavardhini's College of Engineering and Technology

## Department of Artificial Intelligence & Data Science

---

```
}  
  
pro[4] = temp;  
  
for (i = 1; i < 5 ; i++)  
{  
    anumcp[i-1] = anumcp[i];  
}  
  
anumcp[4] = temp2;  
  
printf("\nAR-SHIFT: ");  
  
for (i = 4; i >= 0; i--)  
{  
    printf("%d",pro[i]);  
}  
  
printf(":");  
  
for(i = 4; i >= 0; i--)  
{  
    printf("%d", anumcp[i]);  
}  
}  
  
void main()  
{  
  
    int i, q = 0;  
  
    printf("\t\tBOOTH'S MULTIPLICATION ALGORITHM");  
  
    printf("\n\nEnter two numbers to multiply: ");  
  
    printf("\n\nBoth must be less than 16");
```





# Vidyavardhini's College of Engineering and Technology

## Department of Artificial Intelligence & Data Science

---

```
//simulating for two numbers each below 16
```

```
do
```

```
{
```

```
    printf("\nEnter A: ");
```

```
    scanf("%d",&a);
```

```
    printf("Enter B: ");
```

```
    scanf("%d", &b);
```

```
}while(a >=16 || b >=16);
```

```
printf("\nExpected product = %d", a * b);
```

```
binary();
```

```
printf("\n\nBinary Equivalents are: ");
```

```
printf("\nA = ");
```

```
for (i = 4; i >= 0; i--)
```

```
{
```

```
    printf("%d", anum[i]);
```

```
}
```

```
printf("\nB = ");
```

```
for (i = 4; i >= 0; i--)
```

```
{
```

```
    printf("%d", bnum[i]);
```

```
}
```

```
printf("\nB'+ 1 = ");
```

```
for (i = 4; i >= 0; i--)
```

```
{
```



# Vidyavardhini's College of Engineering and Technology

## Department of Artificial Intelligence & Data Science

---

```
printf("%d", bcomp[i]);  
  
}  
  
printf("\n\n");  
  
for (i = 0; i < 5; i++)  
{  
if (anum[i] == q)  
{  
printf("\n-->");  
  
arshift();  
  
q = anum[i];  
}  
  
else if(anum[i] == 1 && q == 0)  
{  
printf("\n-->");  
  
printf("\nSUB B: ");  
  
add(bcomp);  
  
arshift();  
  
q = anum[i];  
}  
  
else  
{  
printf("\n-->");  
  
printf("\nADD B: ");  
  
add(bnum);
```



# Vidyavardhini's College of Engineering and Technology

## Department of Artificial Intelligence & Data Science

---

```
arshift();

q = anum[i];

}

}

printf("\nProduct is = ");

for (i = 4; i >= 0; i--)

{

printf("%d", pro[i]);

}

for (i = 4; i >= 0; i--)

{

printf("%d", anumcp[i]);

}

}
```

### Output:

```
BOOTH'S MULTIPLICATION ALGORITHM
Enter two numbers to multiply:
Both must be less than 16
Enter A: 5
Enter B: 2

Expected product = 10

Binary Equivalents are:
A = 00101
B = 00010
B'+ 1 = 11110

-->
SUB B: 11110:00101
AR-SHIFT: 11111:00010
-->
ADD B: 00001:00010
AR-SHIFT: 00000:10001
-->
SUB B: 11110:10001
AR-SHIFT: 11111:01000
-->
ADD B: 00001:01000
AR-SHIFT: 00000:10100
-->
AR-SHIFT: 00000:01010
Product is = 0000001010

...Program finished with exit code 1
Press ENTER to exit console.
```



### **Conclusion -**

Implementing Booth's algorithm in C provides an efficient method for multiplying binary numbers using signed integers. This algorithm reduces the complexity of multiplication by transforming the problem into a series of shifts and adds, leveraging the properties of binary arithmetic. By coding Booth's algorithm, you can effectively handle signed multiplication operations, which is particularly useful in low-level programming and digital systems design. The algorithm's systematic approach ensures that multiplication operations are performed accurately and efficiently, even when dealing with negative numbers.