



School: ..... Campus: .....

Academic Year: ..... Subject Name: ..... Subject Code: .....

Semester: ..... Program: ..... Branch: ..... Specialization: .....

Date: .....

## Applied and Action Learning

(Learning by Doing and Discovery)

Name of the Experiment : Frontend connect- Web3.js integration

### Objective/Aim:

- To learn how to connect a frontend (HTML/JavaScript) application with the Ethereum blockchain using **Web3.js** and interact with a deployed smart contract through a connected wallet (MetaMask).

### Apparatus/Software Used:

- MetaMask
- Remix IDE
- Vs code


### Procedure:

1. Open Remix IDE and write a simple TodoList.sol smart contract.

```
1 //SPDX-License-Identifier:MIT
2 pragma solidity ^0.8.0;
3
4 contract TodoList {
5     // Define a Task structure with a description and completion status
6     struct Task {
7         string description;
8         bool completed;
9     }
10
11     Task[] public tasks; // dynamic array of Task structs
12
13     // Add a new task to the list (description provided by user)
14     function addTask(string memory _desc) public { infinite gas
15         tasks.push(Task(_desc, false));
16     }
17
18     // Mark a task as completed by index
19     function markCompleted(uint _index) public { 29057 gas
20         require(_index < tasks.length, "Index out of range");
21         tasks[_index].completed = true;
22     }
23
24     // Get a task's details by index (returns tuple: description and completed flag)
25     function getTask(uint _index) public view returns (string memory, bool) { infinite gas
26         require(_index < tasks.length, "Index out of range");
27         Task storage t = tasks[_index];
28         return (t.description, t.completed);
29     }
```

## Procedure:

2. After writing smart contract compile it and copy the abi .
3. Then go to the deploye section and delpoye it and confirm transaction on MetaMask.

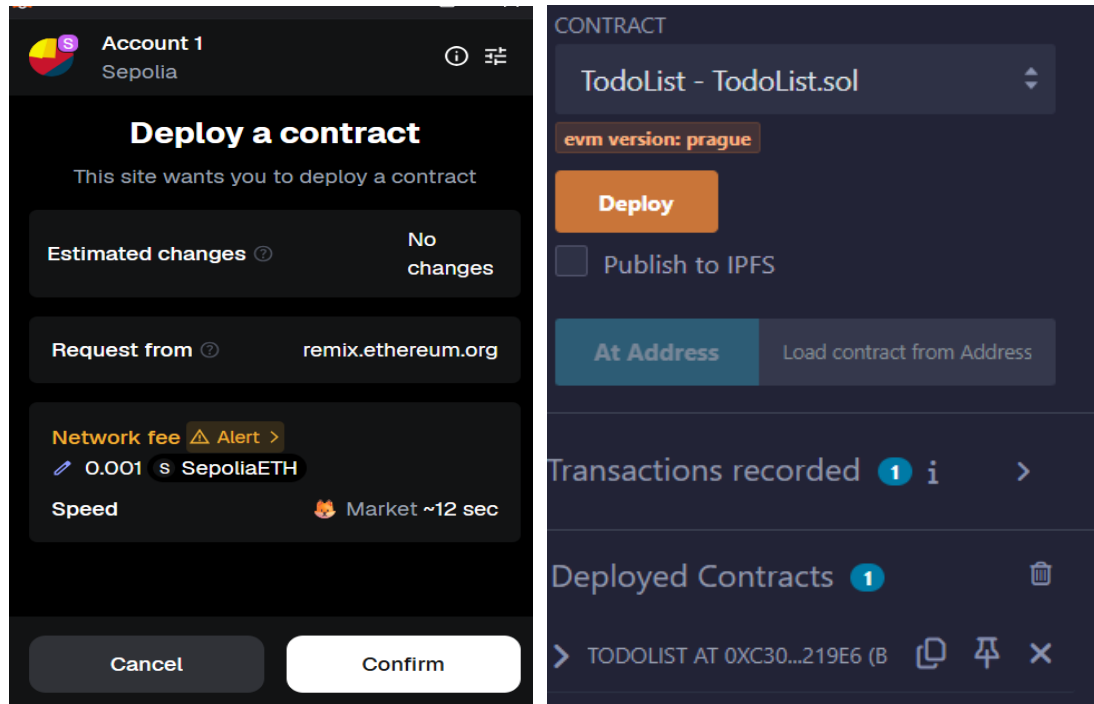

3. Now open Vs code and past the abi and write the frontend in app.js and ether.js after connecting our smart contract with frontend run the the code .

### Todo DApp


Connected Wallet: 0x42ec11bcdf103cccaa71be8e655488d9cc91b8d1

4. Now we test our functions:

- Enter a task and click **Add Task** → MetaMask will pop up for confirmation.

### Todo DApp

Connected Wallet: 0x42ec11bcdf103cccaa71be8e655488d9cc91b8d1

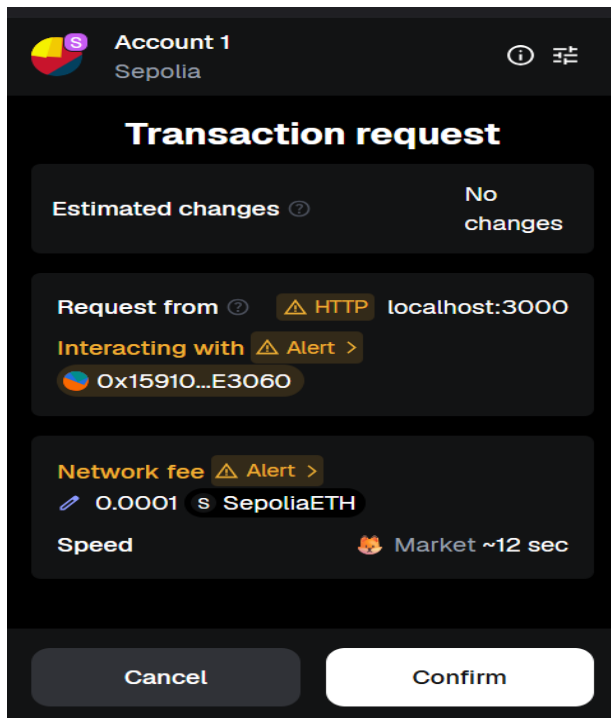

- After confirming, the task appears in the **task list** with (not completed).

## Todo DApp

Connected Wallet: 0x42ec11bcdf103cccaa71be8e655488d9cc91b8d1

Add Task

- sleeping
- eating 

Mark Completed

- Mark the task as completed in Remix or extend frontend with a button → reload page → shows completed.

## Todo DApp

Connected Wallet: 0x42ec11bcdf103cccaa71be8e655488d9cc91b8d1

Add Task

- sleeping
- eating

## Observation:

Applied and Action Learning

- When the DApp loads, tasks stored on the blockchain are displayed.
- Adding a new task triggers a Metamask transaction.
- On confirmation, the task appears in the task list with **Pending/Completed** status.

## ASSESSMENT

Rubrics	Full Mark	Marks Obtained	Remarks
Concept	10		
Planning and Execution/ Practical Simulation/ Programming	10		
Result and Interpretation	10		
Record of Applied and Action Learning	10		
Viva	10		
<b>Total</b>	<b>50</b>		

**Signature of the Student:**

**Name :**

**Regn. No. :**

**Signature of the Faculty:**

Page No. ....

*\*As applicable according to the experiment.  
Two sheets per experiment (10-20) to be used.*