



Online Café & restaurant **management**

Online Café and restaurant management

A PROJECT REPORT

Submitted in partial fulfilment of the

Requirement for the award of Degree of

BACHELOR OF SCIENCE (COMPUTER SCIENCE)

NAME OF THE STUDENT:SHREYA BHATTACHARJEE

SEAT NUMBER:8213

DIVISION:A

UNDER THE ESTEEMED GUIDANCE OF

PROF MR .ABHIJEET SALVI

DEPARTMENT OF COMPUTER SCIENCE

MAHATMA EDUCATION SOCIETY

PILLAI COLLEGE OF ARTS, COMMERCE & SCIENCE (AUTONOMOUS)

(Affiliated to university of Mumbai)

New panvel-410206

Maharashtra

Year 2022-2023

MAHATMA EDUCATION SOCIETY'S
PILLAI COLLEGE OF ARTS, COMMERCE AND SCIENCE
(AUTONOMOUS)
(Affiliated to University of Mumbai)
NEW PANVEL -410206
MAHARASHTRA

DEPARTMENT OF COMPUTER SCIENCE



CERTIFICATE

This is to certify that the project entitled, "ONLINE CAFÉ/RESTAURANT MANAGEMENT SYSTEM", is bonafied work of SHREYA BHATTACHARJEE bearing Seat. No: 8213 submitted in partial fulfilment of the requirements for the award of degree of BACHELOR OF SCIENCE in COMPUTER SCIENCE from University of Mumbai.

Date:

External Examiner

Internal Guide

Coordinate/HOD

College Seal

ACKNOWLEDGEMENT

I Miss Shreya Bhattacharjee Student of Pillai College of Arts, Commerce & Science, New Panvel would like to express my sincere gratitude towards our college's Computer Science Department.

I would like to thank lecturer Prof. Abhijeet Salvi, and for their constant support during the project. Last but not least I thank all my colleagues for being with me throughout the project, which leads to a successful completion of my project.

The project would not have been completed without creativity and energy, which our friends provided

Yours faithfully,

Shreya Bhattacharjee

(Final Year Computer Science)

TABLE OF CONTENTS

SR.NO	CHAPTER NO	PAGE NO.	SIGNATURE
	CHAPTER 1		
1	Introduction		
1.1	Background		
1.2	Objective		
1.3	Purpose		
1.4	Scope		
1.5	Applicability		
	CHAPTER 2		
2	Feasibility Study and Stakeholders		
	CHAPTER 3		
3	Requirement and Analysis		
3.1	Planning and scheduling		
3.2	Software and Hardware Requirement		
3.3	Conceptual Models		
3.3.1	ER Diagram		
3.3.2	Class Diagram		
3.3.3	Use Case Diagram		
3.3.4	Activity Diagram		

3.3.5	Deployment Diagram		
	CHAPTER 4		
4	System Design		
4.1	Data Design		
4.2	Data Integrity and Constraints		
4.3	User Interface and Design		
4.4	Security Issues		
4.5	Test Cases		
	CHAPTER 5		
5	System Coding, Implementation and Testing		
5.1	Code of Project		
5.2	Testing Output		
5.3	Testing Approach		
5.3.1	Unit Testing		
5.3.2	Integrated Testing		
5.4	Modifications and Improvements		
	CHAPTER 6		
6	Conclusion and Future Work		
	Chapter 7		
7	Reference		

CHAPTER 1

1.1 INTRODUCTION

Online café/restaurant management is the process of ordering food, for [delivery](#) or pickup, from a website or other application. The product can be either ready-to-eat food (e.g., direct from a home-kitchen, restaurant, or a [ghost kitchen](#)) or food that has not been specially prepared for direct consumption (e.g., vegetables direct from a farm/garden, fruits, frozen meats. etc).

In restaurant-controlled online food ordering, the restaurants create their own website and app, or choose to hire a delivery vendor. If they choose to create their own website, they make sure to obtain software that manages the orders efficiently, meaning it has the capability to manage different orders at once.

Having an online ordering system can make day-to-day operations more efficient for a restaurant. On the other hand, when a customer places an order online, they take their time to browse the menu and get familiar with add-on deals and offers that your restaurant must be offering.

Advantages of ordering online

- 1. Makes the ordering process easier**
- 2. Efficient customer and order management**
- 3. Monitor your expenses incurred in real-time**
- 4. . Better customers data**

1.2 BACKGROUND

The first online [food order](#) was a pizza from Pizza Hut in 1994.[\[2\]](#)[\[3\]](#)



This is a picture from a 2018 Pizza Hut pizza box, which describes the first online food sale.

The online food ordering market has increased in the U.S with 40 percent of U.S adults having ordered their food online once.[\[4\]](#) The online food ordering market includes foods prepared by restaurants, prepared by independent people, and groceries being ordered online and then picked up or delivered In a 2019 market study of restaurant delivery services, the global market for online-ordered prepared food delivery was estimated at \$94 billion and is estimated to grow at just over 9 percent a year, reaching \$134.5 billion in 2023. Online ordering has started to become the norm, thanks to the convenience, accuracy, and ability to integrate payments. At scale, ubiquitous on-demand and subscription delivery of

prepared food could potentially spell the end of cooking at home.

1.3 OBJECTIVES

- The general objectives of the study is to develop a reliable, convenient and accurate Ordering System.
- The study has the following specific objectives:
- To develop a system that will surely satisfied the customer service.
- To evaluate its performance and acceptability in terms of security, user-friendliness, accuracy and reliability.
- To improve the communication between the client and the server and minimize the time of ordering.
 - To automatically compute the bill.

1.4PURPOSE:

An online ordering and delivery system **provides a complete sales channel for the restaurant**. This means that the restaurant can use it as a tool for generating more profits and organizing the restaurant better. It also allows restaurant owners to save on labor costs and restaurant space needed to serve such customers.

The primary purpose of an online food ordering system **is to allow customers to easily place orders at a restaurant over the internet**.

With Food Aggregators increasing their commission every quarter, it is unsustainable for the restaurant to manage their restaurant while depending on food delivery orders from swiggy and zomato. The online ordering market is expanding and, especially the [online food ordering](#) segment is growing at a very rapid pace. [Food Delivery](#) is the preferred way for customers to enjoy food these days. This change has been roughly owed to the pandemic where customers prefer to [order food online](#) instead of dining out.

1.5 Scope

Food Ordering app can sale Food product, preferred brands, kitchen needs, essential restaurant supplies and more, through this online, one- stop Food store. It provides you with a convenient way to sale from your Food shopping app.

In such a technological era, people find it difficult to visit restaurants. Most often, they are unable to manage time for picking up their order. Therefore, most of them like to use the food delivery app. It provides them with the option to choose the menu as per their choice and place the order instantly with a few clicks.

It seems that with the advent of technologies, people have switched to the utilization of the easy-to-operate mobile app. This is why you find food delivery apps as one of those helping users to get the food at their doorsteps. However, the mobile app developed for food delivery also enables users to book a table, online delivery, and reservations. The availability of the restaurant apps helps restaurants to deliver quick services to their customer

1.6 APPLICABILITY:

This Website is applicable in field of business. It helps people to interact with each other through their business.

CHAPTER 2

.

FEASIBILITY STUDY

An important outcome of preliminary investigation is to determine whether the proposed system is feasible or not. A feasibility study is a test of a system proposal according to its work ability, ability to meet users need an effective use of resources. It is conducted to select the best system that meets the performance standards. It reviews the alternative solution and its objective is not solving the problem. Three key considerations are involved in feasibility analysis.

- Technical feasibility
- Economic feasibility
- Operational feasibility

1. Technical feasibility

In this study, a company's capabilities in terms of technical expertise are the main focus. This evaluation takes the outline of the system or project requirements into consideration.

When the technical feasibility study report is complete, the following factors are vital –

- A business description to evaluate additional factors that affect the study.
- The specific component/ division of the project/ business under assessment.
- The human resources and cost efficiency factors
- The possible or alternative solutions to the problems

In our project we have used HTML ,CSS, JAVASCRIPT for our frontend language combining PHP and My SQL as our two major backend language with PHP performs the function and MYSQL providing the database we require to store the data of website. All this language are easy to used does not required any special training.

2. ECONOMIC FEASIBILITY

The purpose of an economic feasibility study is to demonstrate the net benefit of a proposed project for accepting or disbursing electronic funds/benefits, taking into consideration the benefits and costs to the agency, other state agencies, and the general public as a whole.

This project can help small scale offline shop owners as they can keep their website online 24/7 leading to great profits. This can also help in reduce the machine and manpower utilization which in turn saves time and money.

3.Operational feasibility

Operational feasibility assesses the extent to which the required software performs a series of steps to solve business problems and user requirements.

This feasibility is dependent on human resources (software development team) and involves visualizing whether the software will operate after it is developed and be operative once it is installed.

Operational feasibility also performs the following tasks.

- ✓ Determines whether the problems anticipated in user requirements are of high priority

- ✓ Determines whether the solution suggested by the software development team is acceptable ✓

Analyzes whether users will adapt to a new software

- ✓ Determines whether the organization is satisfied by the alternative solutions proposed by the software development team

STAKEHOLDERS

OWNER

Owner is the one who owns the company. He will always monitor what is happening in the system.

ADMIN

Admin is the one who controls all the data entered by the users in the website forms. Admin filters all the data received and provide genuine information to the customer. Therefore, the Admin has complete control over the website.


DEVELOPERS

Developer's areas stakeholders as they will keep on working on the project for future development. If any issues occur in the system, they will find the problem and try to find a solution for it.

USERS:Users are the ones who really matters in the successful run of the software. They are the ones who decide the future of the website.

CHAPTER 3: REQUIREMENT AND ANALYSIS

3.1 PLANNING AND SCHEDULING

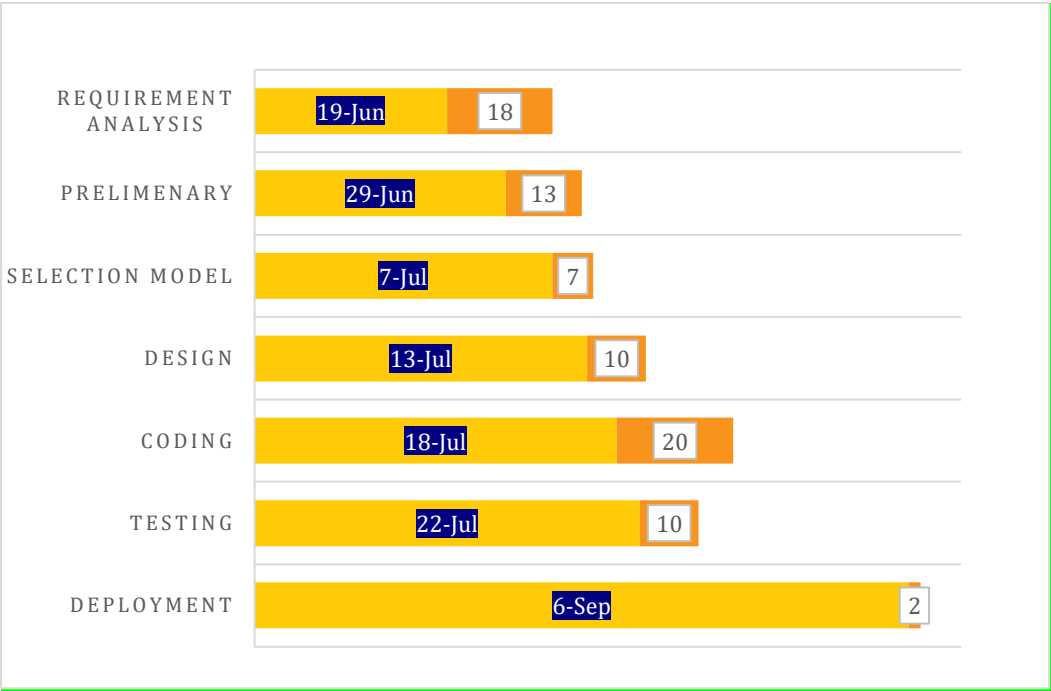

3.2 SOFTWARE AND HARDWARE REQUIREMENTS

HARDWARE REQUIREMENT

DEVELOPER SIDE

	PROCESSOR	RAM	DISK SPACE
CLIENT SIDE	1.6 GHz or Faster processor	1GB RAM	200 GB disk space
Server side	Server environment capable hardware	2GB RAM	As per size of the database

Software Requirement

Front end	Visual studio
Back end	MySQL
Operating system	MACOS,WINDOWS

3.3 CONCEPTUAL MODEL

1.ER DIAGRAM:

What is ER diagram?

ER Diagram stands for Entity Relationship Diagram, also known as ERD is a diagram that displays the relationship of entity sets stored in a database. In other words, ER diagrams help to explain the logical structure of databases. ER diagrams are created based on three basic concepts: entities, attributes and relationships.


ER Diagrams contain different symbols that use rectangles to represent entities, ovals to define attributes and diamond shapes to represent relationships.

At first look, an ER diagram looks very similar to the flowchart. However, ER Diagram includes many specialized symbols, and its meanings make this model unique. The purpose of ER Diagram is to represent the entity framework infrastructure.

The ER Model represents real-world entities and the relationships between them. Creating an ER Model in DBMS is considered as a best practice before implementing your database.

ER Modelling helps you to analyse data requirements systematically to produce a well-designed database. So, it

is considered a best practice to complete ER modelling before implementing your database.

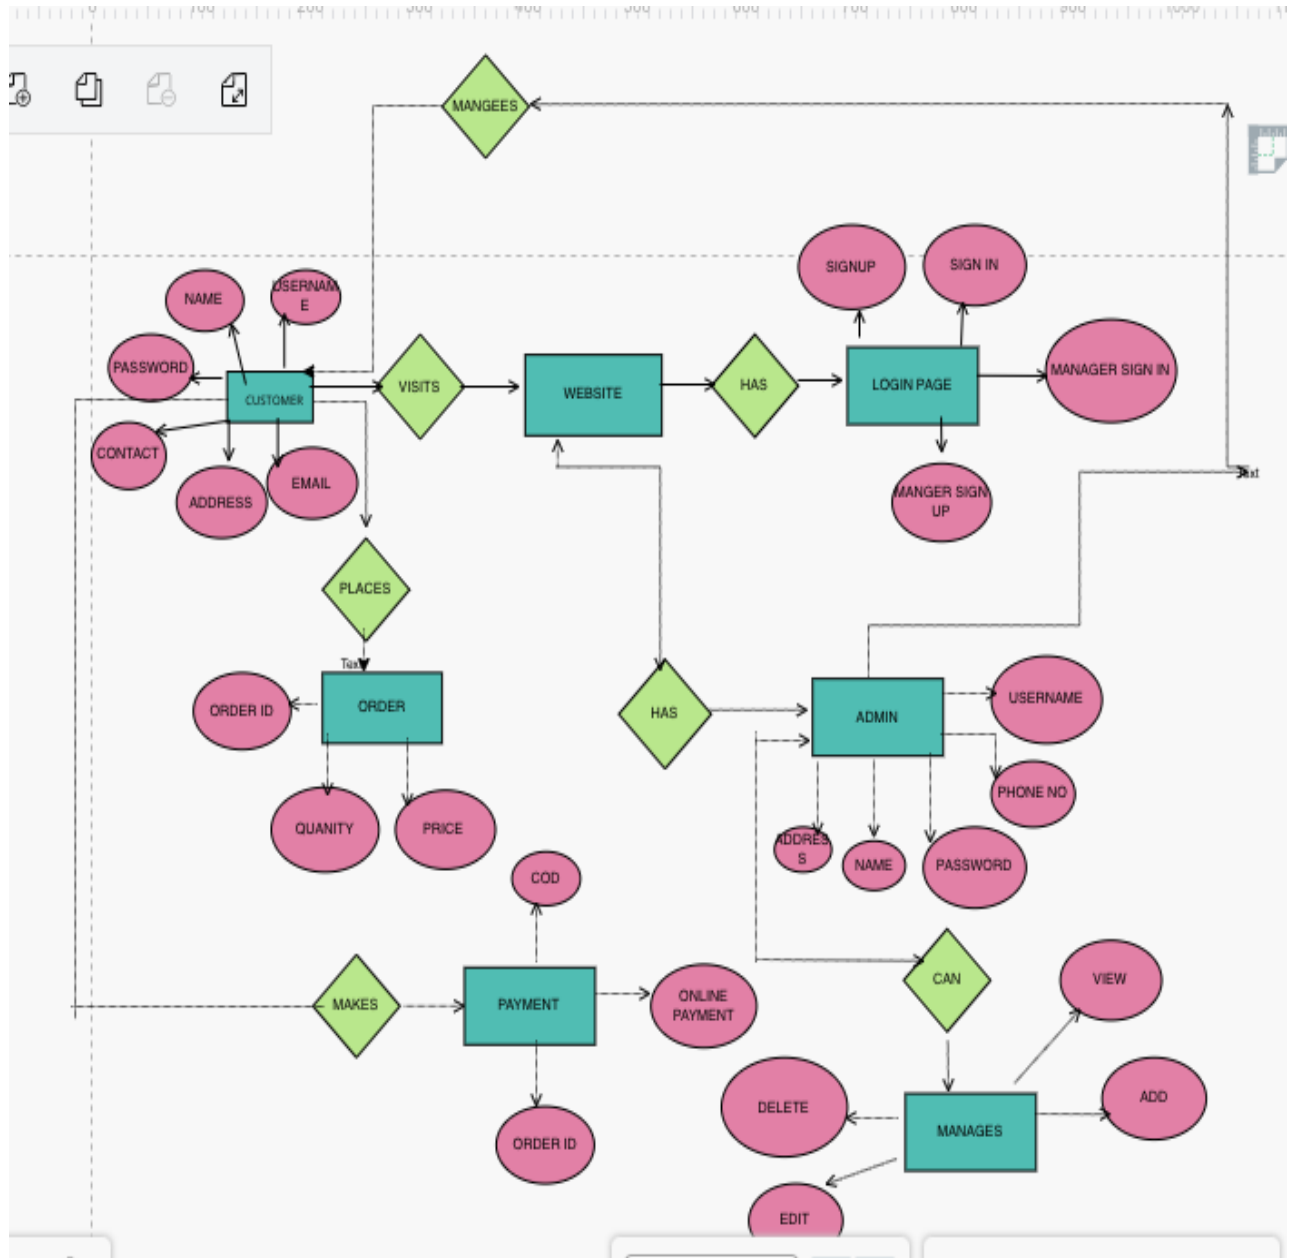

DATABASE DESIGN

The general theme behind a database is to handle information as an integrated whole. A database is a collection of interrelated data stored with minimum redundancy to serve many users quickly and effectively. After designing input and output, the analyst must concentrate on database design or how data should be organized around user requirements. The general objective is to make information access, easy quick, inexpensive and flexible for other users.

During database design the following objectives are concerned

- ✓ Data independence
- ✓ Accurate and integrating
- ✓ More information at low cost
- ✓ Recovery from failure
- ✓ Privacy and security ✓ Performance
- ✓ Ease of learning and use

2 CLASS DIAGRAM:

What is class diagram?

In software engineering, a class diagram in the Unified Modeling Language (UML) is a type of static structure diagram that describes the structure of a system by showing the system's classes, their attributes, operations (or methods), and the relationships among objects.

The class diagram is the main building block of object-oriented modeling. It is used for general conceptual modeling of the structure of the application, and for detailed modeling translating the models into programming code. Class diagrams can also be used for data modeling. The classes in a class diagram represent both the main elements, interactions in the application, and the classes to be programmed.

In the diagram, classes are represented with boxes that contain three compartments:


- The top compartment contains the name of the class. It is printed in bold and centred, and the first letter is capitalized.
- The middle compartment contains the attributes of the class. They are left-aligned and the first letter is lowercase.

- The bottom compartment contains the operations the class can execute. They are also left-aligned and the first letter is lowercase.

In the design of a system, a number of classes are identified and grouped together in a class diagram that helps to determine the static relations between them. With detailed modelling, the classes of the conceptual design are often split into a number of subclasses.

In order to further describe the behaviour of systems, these class diagrams can be complemented by a state diagram or UML state machine.

CLASS DIAGRAM

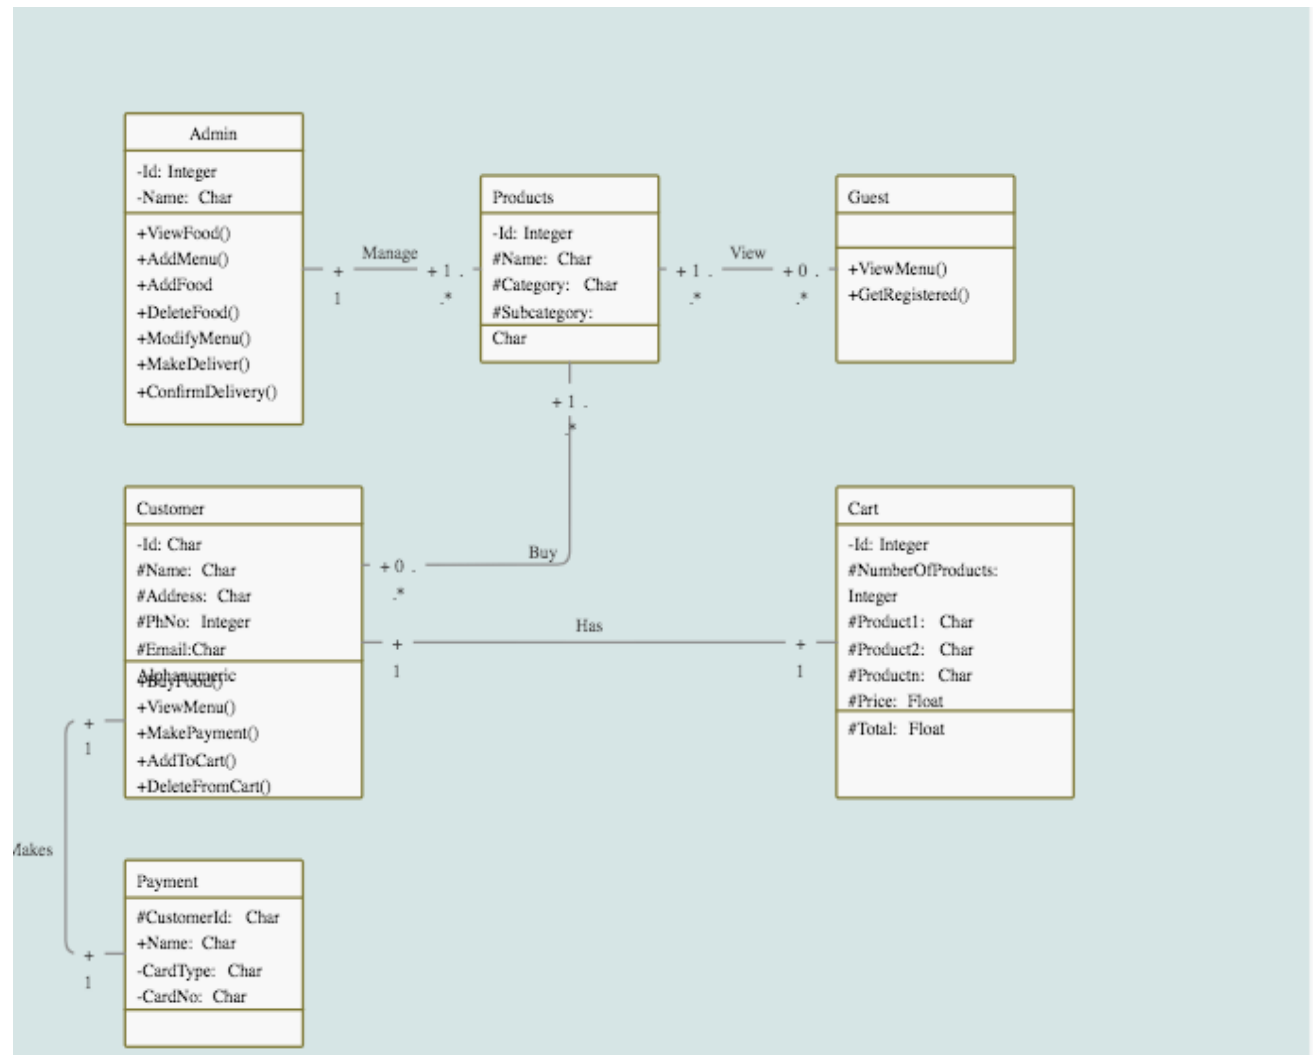

3.USE CASE DIAGRAM:


A use case diagram is a way to summarize details of a system and the users within that system. It is generally shown as a graphic depiction of interactions among different elements in a system. Use case diagrams will specify the events in a system and how those events flow, however, use case diagram does not describe how those events are implemented.

A use case is a methodology used in system analysis to identify, clarify, and organize system requirements. In this context, the term "system" refers to something being developed or operated, such as a mail-order product sales and service Web site. Use case diagrams are employed in UML (Unified Modelling Language), a standard notation for the modelling of real-world objects and systems. There are a number of benefits with having a use case diagram over similar diagrams such as flowcharts.

Use case diagram uses

The reasons why an organization would want to use case diagrams include:

- Represent the goals of systems and users.
- Specify the context a system should be viewed in.
- Specify system requirements.
- Provide a model for the flow of events when it comes to user interactions

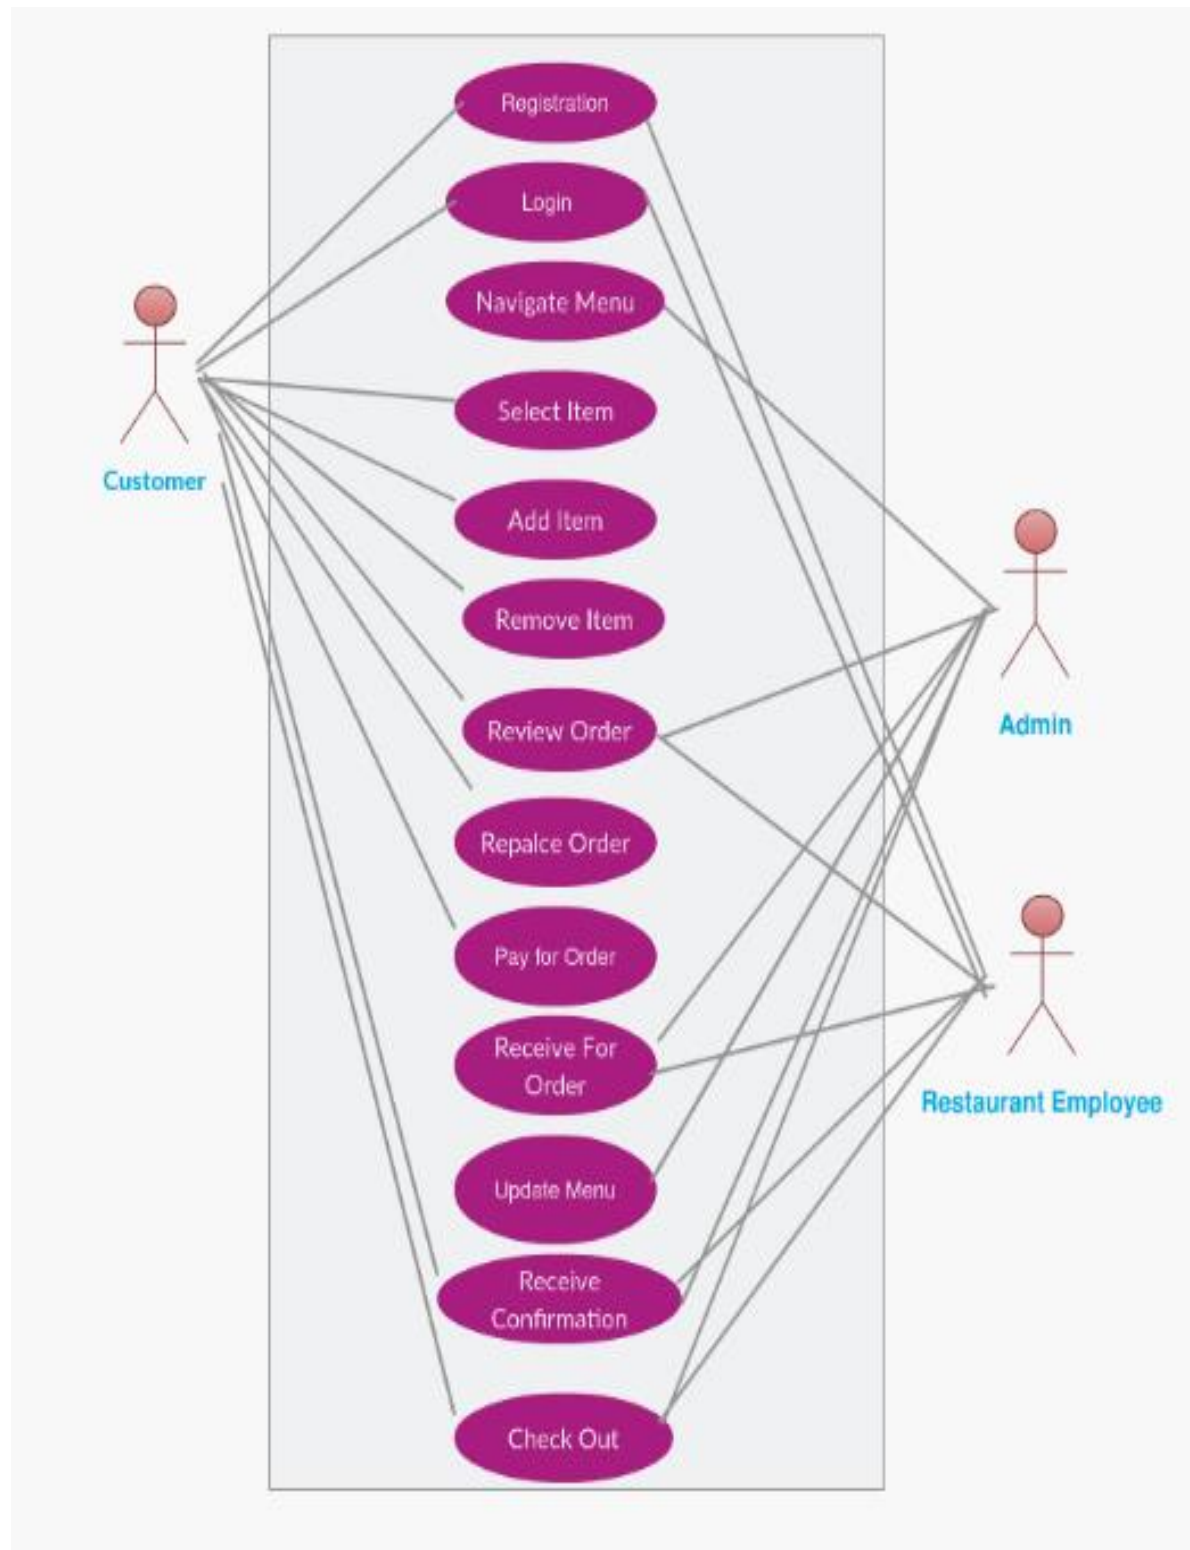


4 ACTIVITY DIAGRAM:

We use Activity Diagrams to illustrate the flow of control in a system and refer to the steps involved in the execution of a use case. We model sequential and concurrent activities using activity diagrams. So, we basically depict workflows visually using an activity diagram. An activity diagram focuses on condition of flow and the sequence in which it happens. We describe or depict what causes a particular event using an activity diagram.

UML models basically three types of diagrams, namely, structure diagrams, interaction diagrams, and behaviour diagrams. An activity diagram is a behavioural diagram i.e., it depicts the behaviour of a system.


An activity diagram portrays the control flow from a start point to a finish point showing the various decision paths that exist while the activity is being executed. We can depict both sequential processing and concurrent processing of activities using an activity diagram. They are used in business and process modelling where their primary use is to depict the dynamic aspects of a system.

User side

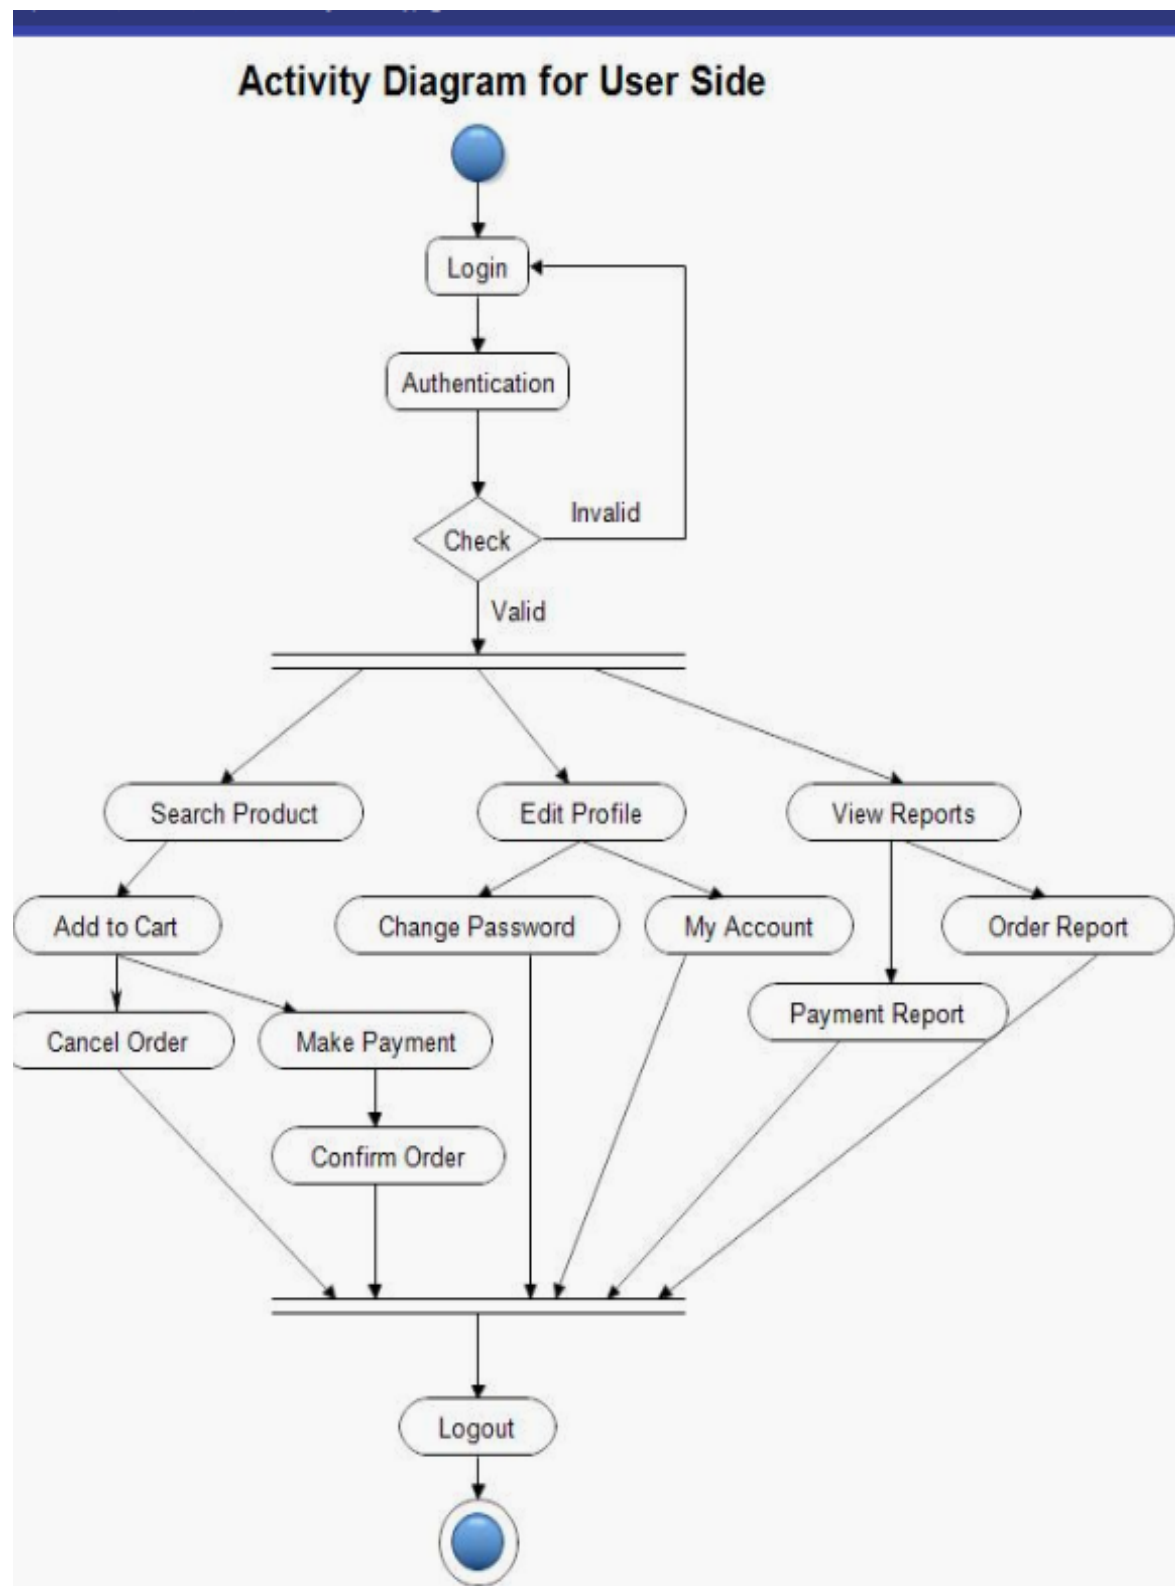

ADMIN SIDE(MANAGER SIDE)

Activity Diagram for Admin Side

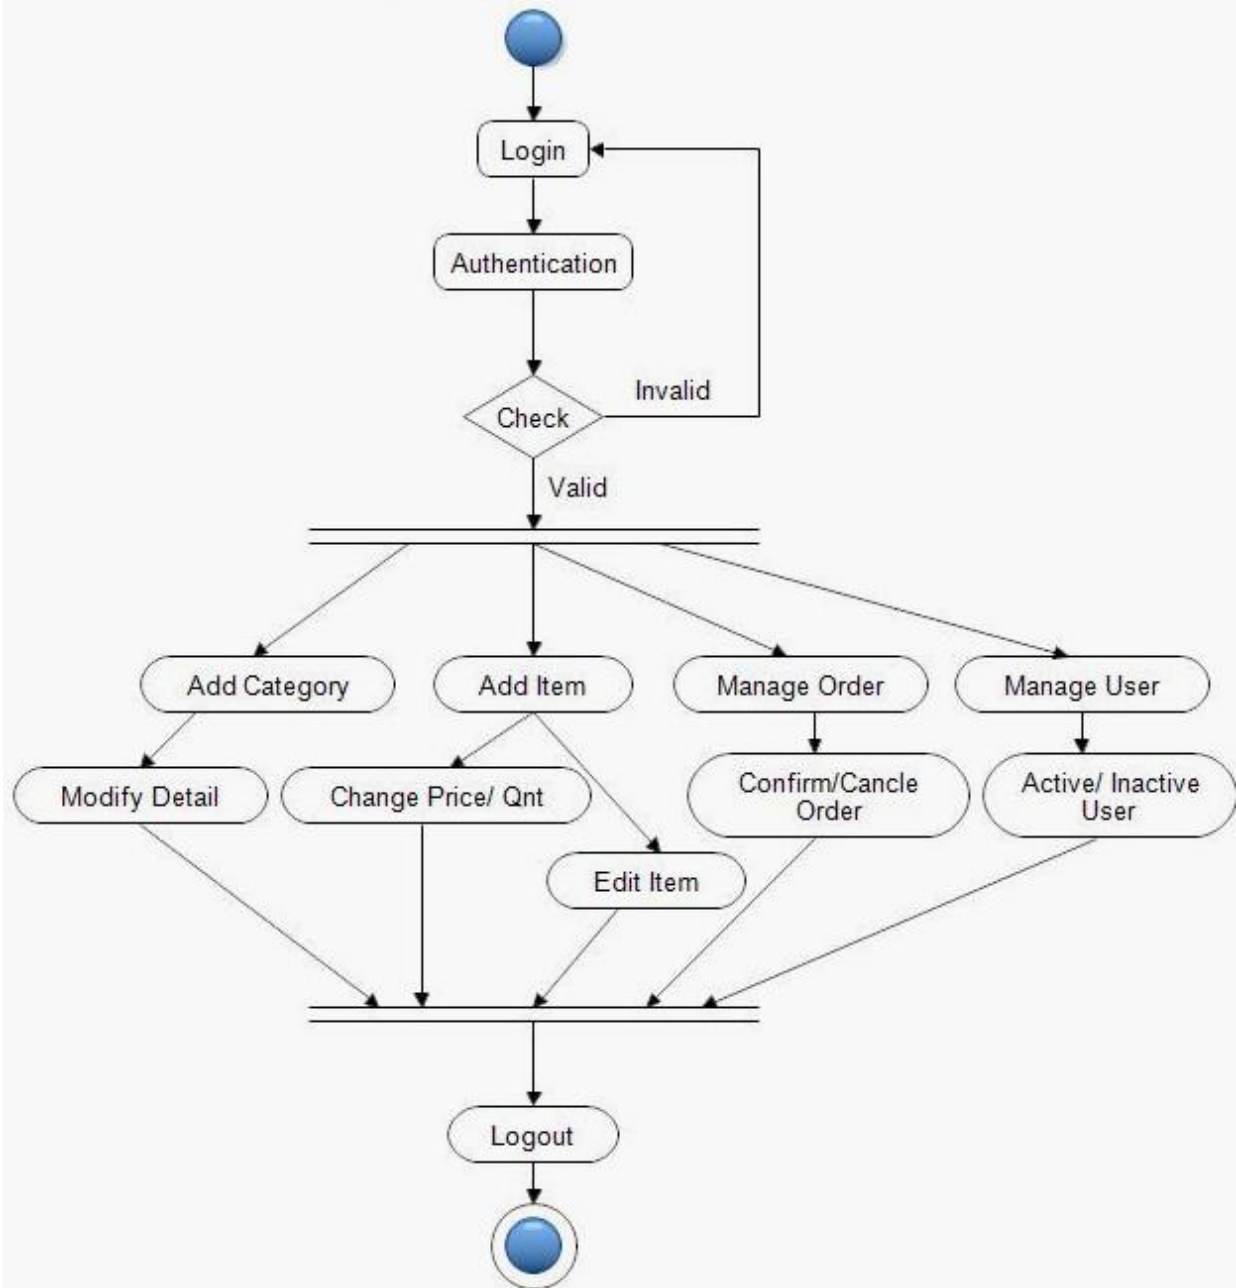

5 DEPLOYMENT DIAGRAM:

A deployment diagram is a UML diagram type that shows the execution architecture of a system, including nodes such as hardware or software execution environments, and the middleware connecting them.

Deployment diagrams are typically used to visualize the physical hardware and software of a system. Using it you can understand how the system will be physically deployed on the hardware.


Deployment diagrams help model the hardware topology of a system compared to other UML diagram types which mostly outline the logical components of a system.

Deployment Diagram Notations:

In order to draw a deployment diagram, you need to first become familiar with the following deployment diagram notations and deployment diagram elements.

Nodes:

A node, represented as a cube, is a physical entity that executes one or more components, subsystems or executables. A node could be a hardware or software element.

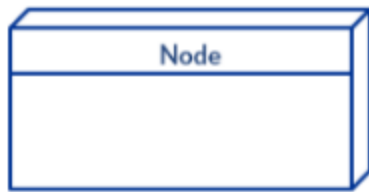


Artifacts:

Artifacts are concrete elements that are caused by a development process. Examples of artifacts are libraries, archives, configuration files, executable files etc.





Communication Associates:

This is represented by a solid line between two nodes. It shows the path of communication between nodes.

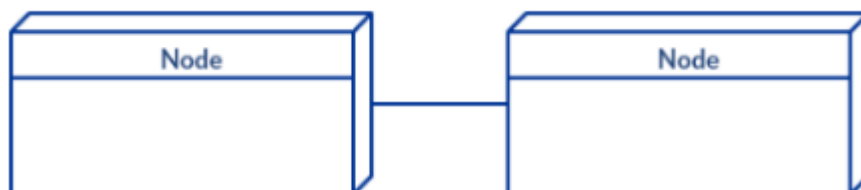

DEPLOYMENT DIAGRAM

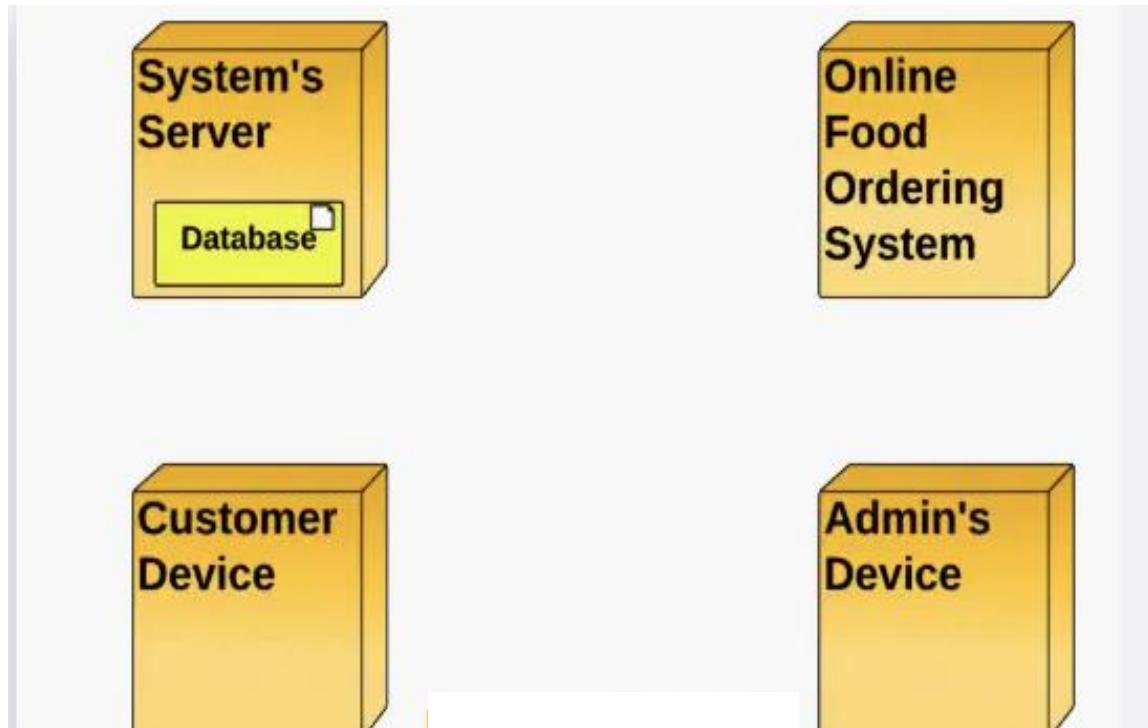

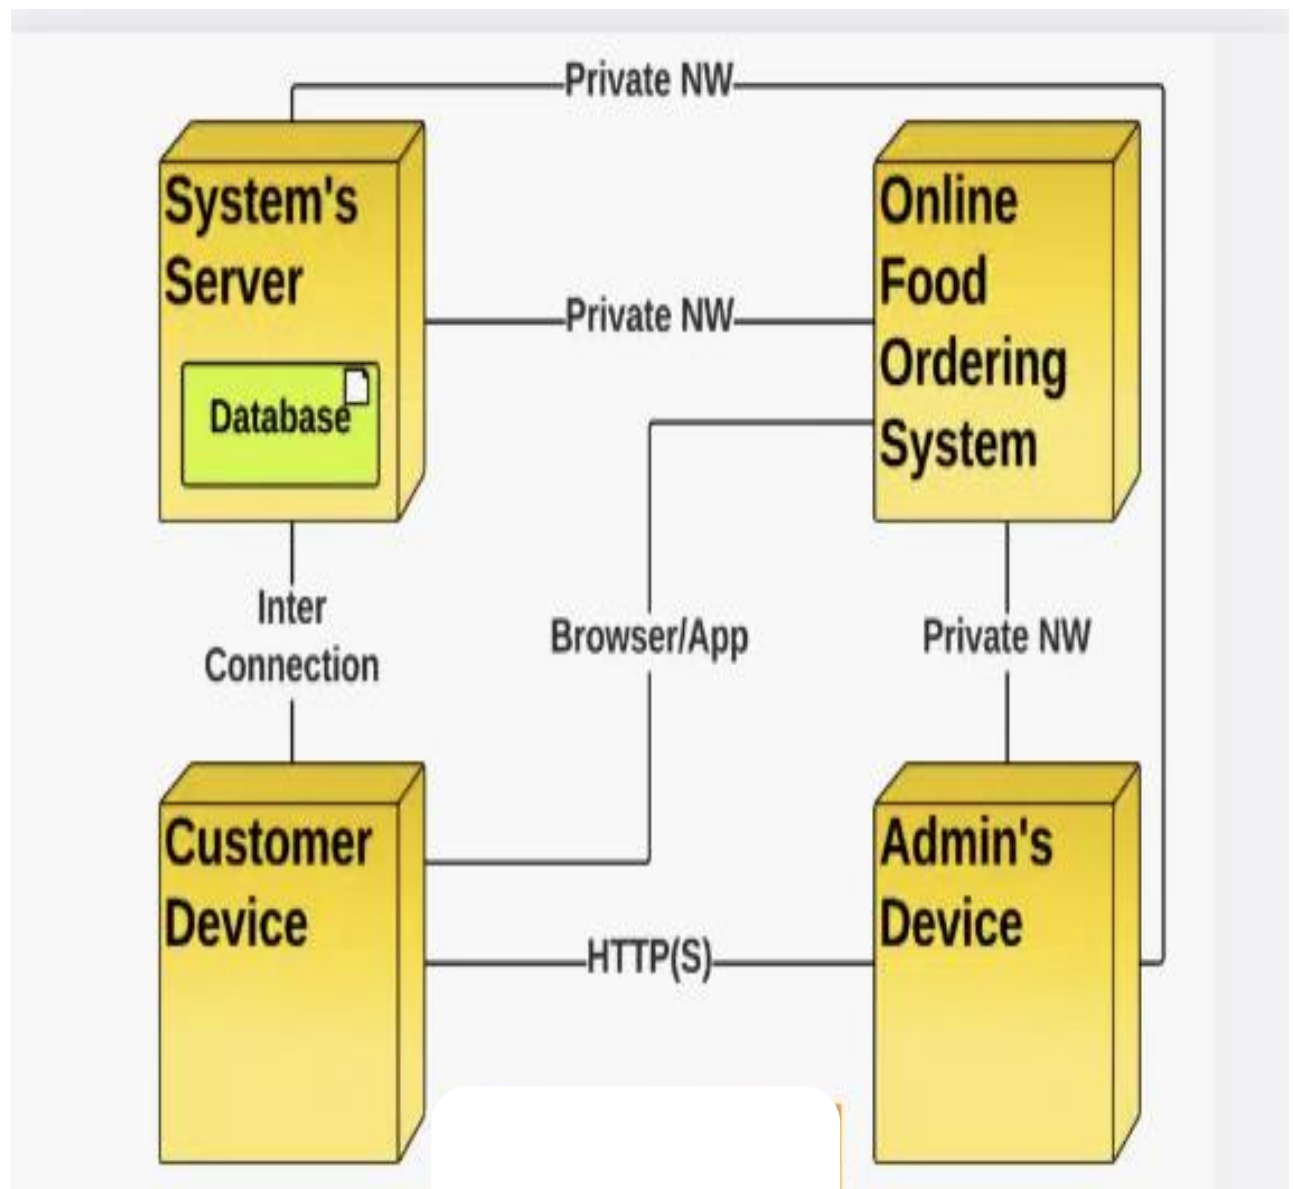

CHAPTER 4

SYSTEM DESIGN

INTRODUCTION TO SYSTEM DESIGN

The design phase is the life cycle phase in which the detailed design of the selected system in the study phase is accomplished. In the design phase, the technical specifications are prepared for the performance of all allocated tasks. It also includes the construction of programs and program testing. In the design phase, the first step is to determine the output is to be produced and in what format. Second, input data and master files have to be designed to meet the requirements of proposed output. The system analyst has to define the methods of capturing and input programs and format of the output and its use by the users.

SYSTEM FLOW CHART

A graphic representation of a system showing the overall flow of control in the processing at the job level; specifies what activities must be done to convert from a physical to logical model is known as a system flowchart. Thus it summarizes what operations are undertaken and where and when they take place. Normally in a system flowchart input from outside are shown to the left and outputs to the right. Symbols representing the operations undertaken

and the documents used are then placed in the appropriate places which gives a general flow of data from top to bottom and left to right. Arrows are used on the connecting lines to indicate the logical flow or sequence where the flow is not in the standard direction. No interaction is implied by crossing lines. Decisions which lead to different actions can also be shown

DATA FLOW DAGRAM

A data flow diagram is graphic representation of a system that shows data flows to, from and within the system, processing functions that change the data in some manner, and the storage of this data. They are networks of related system function that indicated form where information is revived and to where it is sent. An external entity is the originator or receiver of data or information.

DATABASE DESIGN

This activity deals with the design of the physical database. The designer begins to concentrate on file design or how data should be organized around user requirements. How data are organized depends on the data and response requirements that determine hardware configurations. An integrated approach to file design is the database. The general theme is to handle information as an integrated whole, with a minimum of redundancy and improved performance, type and size of data structure used. The objectives of data base are accuracy and integrity, privacy and security of data etc.

CODE DESIGN

Codes can provide brief identification of data items and replace longer descriptions that would be more awkward to store and to manipulate.

INPUT DESIGN

Input design is processing of converting the user oriented description of the inputs of the system. The goal of designing input data to make data entry as easy logical and free from errors as possible. In entering data, operators need to know the following. 1. The allocated space for each field. 2. Field sequence which must match that in the source document. 3. The format in which data fields are entered for example, filling out the data field is required through the edited format mm/dd/yy

When we approach input data design, we design source documents that capture the data and then selected the media use to enter them into the computer. There are different ways in which data can be introduced into the system such as a. The data is converted into a machine sensible form by some realistic source document and types in the relevant items using a keyboard connected to the system. b. The document can be read directly by a machine and this converts information held in the human sensible form into a machine readable form without need for human investigations. c. Data entered into a system through a keyboard. This is done interactively by the person using the system. d. Data is presented in a form suitable to computer as a result of some of the processing. e. The data entry in the system has been designed so as to make to user friendly and also to incorporate certain validation checks. The field name must be documented.

The field name must be known to data entry operator or users so that the data entry will not exceed the allocated space.

OUTPUT DESIGN



The primary consideration in the design of all output is the information requirement and other objective of the users. It is the most important and direct source of information to the user. A major form of output is a hard copy. Print out should be designed around the output requirements of the user. Each output should be given a specific name or title. The output data is displayed on the visual display unit and output can be redirected to printers and or sorted in a file for later use. Here, in this system, program is designed so as to generate a number of relevant outputs displayed in various kinds of user-defined tables in an easily readable and comprehensive manner which can be readily read and understood by the user.

PROCEDURE DESIGN

When program become very long, they are divided into smaller programs or modules. These smaller programs can be written, tested and debugged separately. This technique of programming is known as modular programming. The advantages of modular programming are. 1. It is easy to write, test and debug a module. 2. Generally the modules of common nature are prepared, which can be used at many places. 3. The programmer can use the previously written programs. 4. If a change is to be made, it is made in the particular module; the entire program is not affected.

SOURCE OR SINK

✓ Data cannot move directly from a source to a sink. It must be moved by a process. ✓ A source or sink has a noun phrase label. DATA FLOW ✓ A data flow has only one direction of flow between symbols. It may flow in both directions between a process and a data store to show a read before an update. ✓ A fork in a data flow means that exactly the same data goes from a common location to two or more different processes, data stores, or source/sinks. ✓ A join in a data flow means that exactly the same data come from any of two or more different processes, data stores, or source/sinks to a common location ✓ A data flow cannot go directly back to the same process it leaves. ✓ A data flow to a data store means update. ✓ A data flow from a data store means retrieve or use. ✓ A data flow has a noun phrase label.

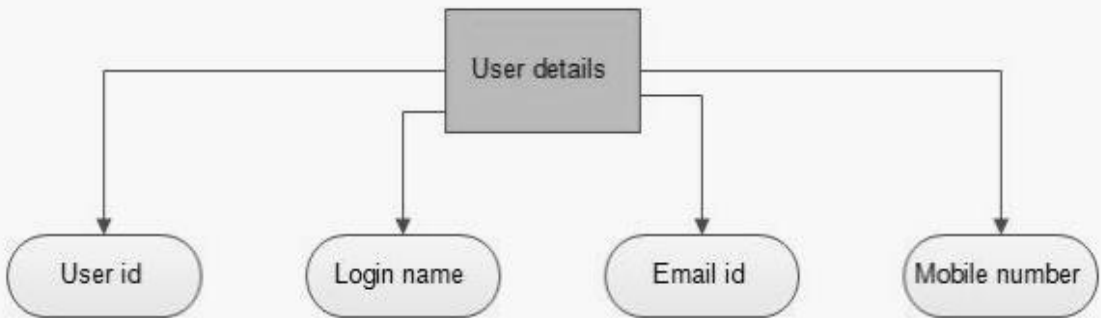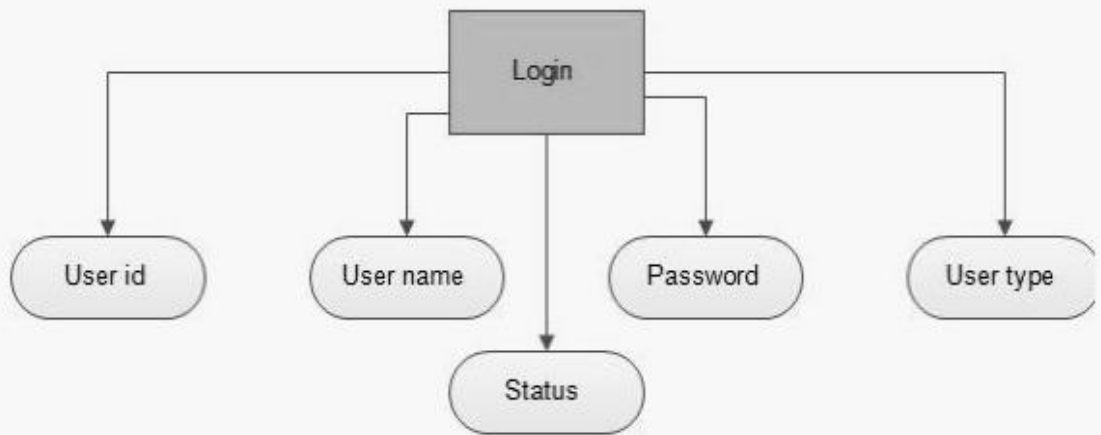

DATA FLOW DIAGRAM

The Data Flow Diagram (DFD) is the graphical representation of the processes and the flow of data among them. A data flow diagram illustrates the processes, data stores, external entities and the connecting data flows in a system. It is a common practice to draw a contextlevel Data Flow Diagram first which shows the interaction between the system and outside entities. A data flow diagram is a graphical tool used to describe and analyze movement of data through a system. They are the central tool and forms the basis from which the other components are developed. The transformation of data from input to output may be described logically and independently of physical components associated with the system. These are known as the logical data flow diagrams

4.1 DATA DESIGN:

Sign up/ login table:-

Attribute Name
Name
Username
Email
Contact
Address
Password

Admin / Managers Table:-

Attribute Name
Name
Username
Email
Contact
Address
Password

Home / Food List Table :-

Attribute Name
Home
About
Contact Us
Sign up
Sign In
Cart
Food zone

4.2 DATA INTEGRITY AND CONSTRAINTS

Login / customer :-

Attribute Name	Data Type	Constraints
Name	Varchar (30)	Primary Key
Username	Varchar (30)	
Email	Varchar (30)	
Contact	Varchar (30)	
Address	Varchar (30)	
Password	Varchar	

Food :-

Attribute Name	Data Type	Constraints
Fid	Int	Primary auto increment
Name	Varchar (30)	

Price	int (30)	
Description	Varchar (30)	
Rid	int(30)	
Imagepath	Varchar (30)	

Admin / Manager :-

Attribute Name	Data Type	Constraints
Name	Varchar (30)	Primary Key
Username	Varchar (30)	
Email	Varchar (30)	
Contact	Varchar (30)	
Address	Varchar (30)	
Password	Varchar	

Order:-

Attribute Name	Data Type	Constraints
Order Id	Int	Primary auto increment
Fid	Int	
Food Name	Varchar (30)	
Price	Int	
Order Date	Date	
Username	Varchar (30)	
Rid	Int	

Restaurants:-

Attribute Name	Data Type	Constraints
Ft id	int	Primary auto increment key
Name	Varchar (30)	
Email	Varchar (30)	

Contact	Varchar (30)	
Address	Varchar (30)	
mid	Int	

DATABASE DESIGN


The general theme behind a database is to handle information as an integrated whole. A database is a collection of interrelated data stored with minimum redundancy to serve many users quickly and effectively. After designing input and output, the analyst must concentrate on database design or how data should be organized around user requirements. The general objective is to make information access, easy quick, inexpensive and flexible for other users.

During database design the following objectives are concerned


- ✓ Controlled Redundancy
- ✓ Data independence
- ✓ Accurate and integrating
- ✓ More information at low cost
- ✓ Recovery from failure

- ✓ Privacy and security
- ✓ Performance
- ✓ Ease of learning and use


Food order

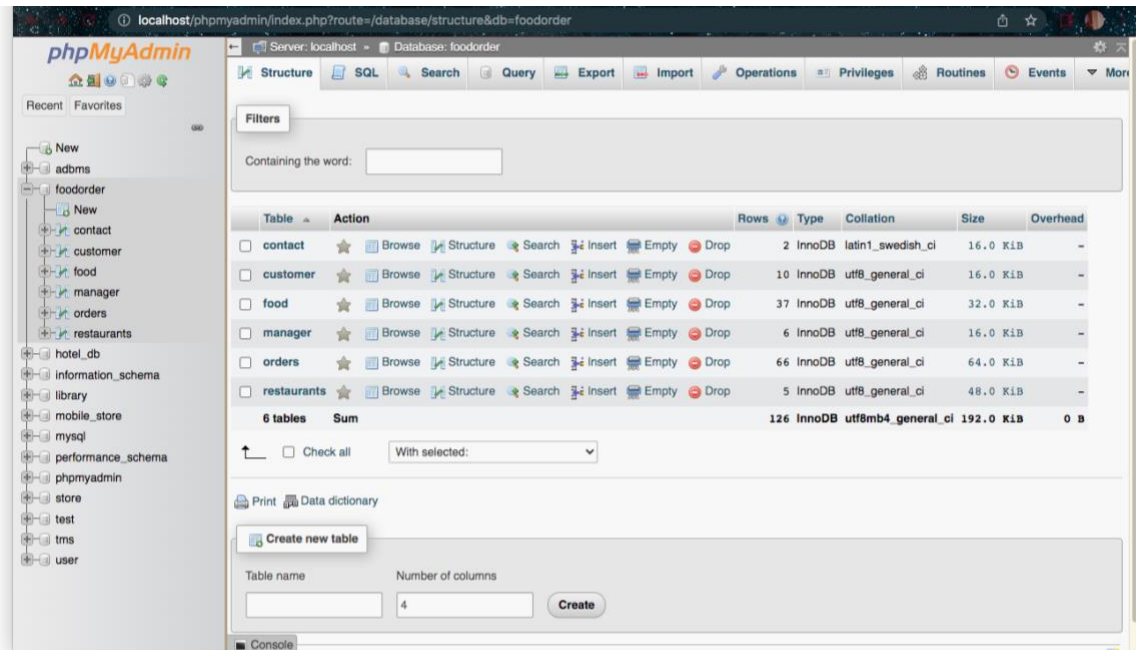


contact

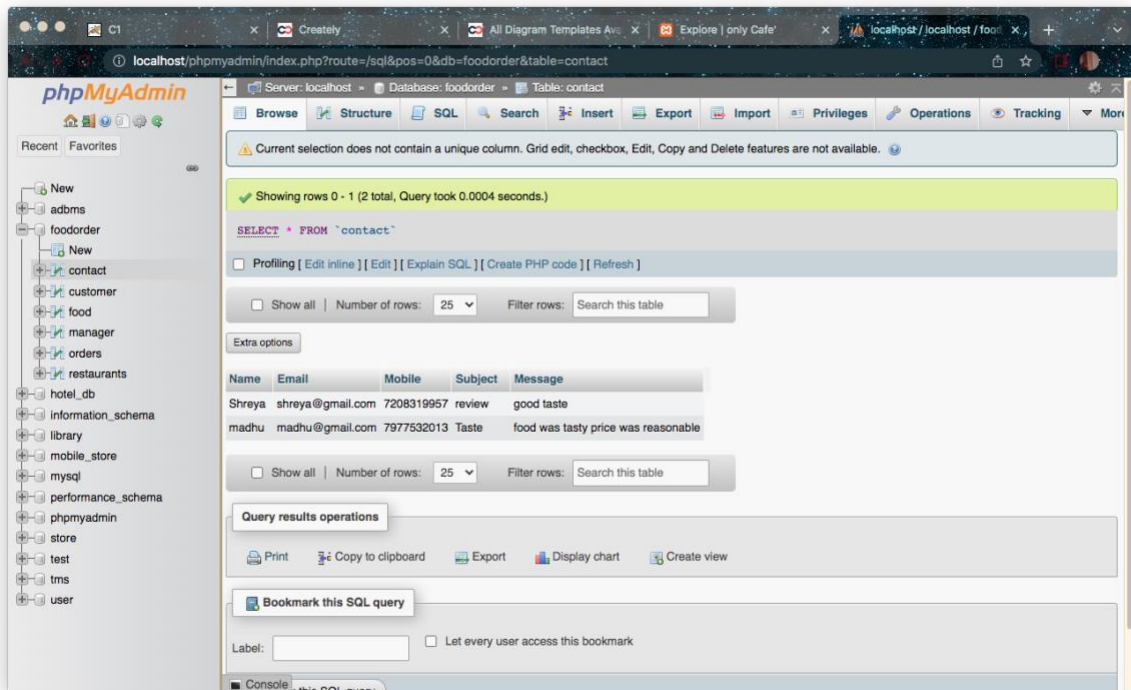

customer

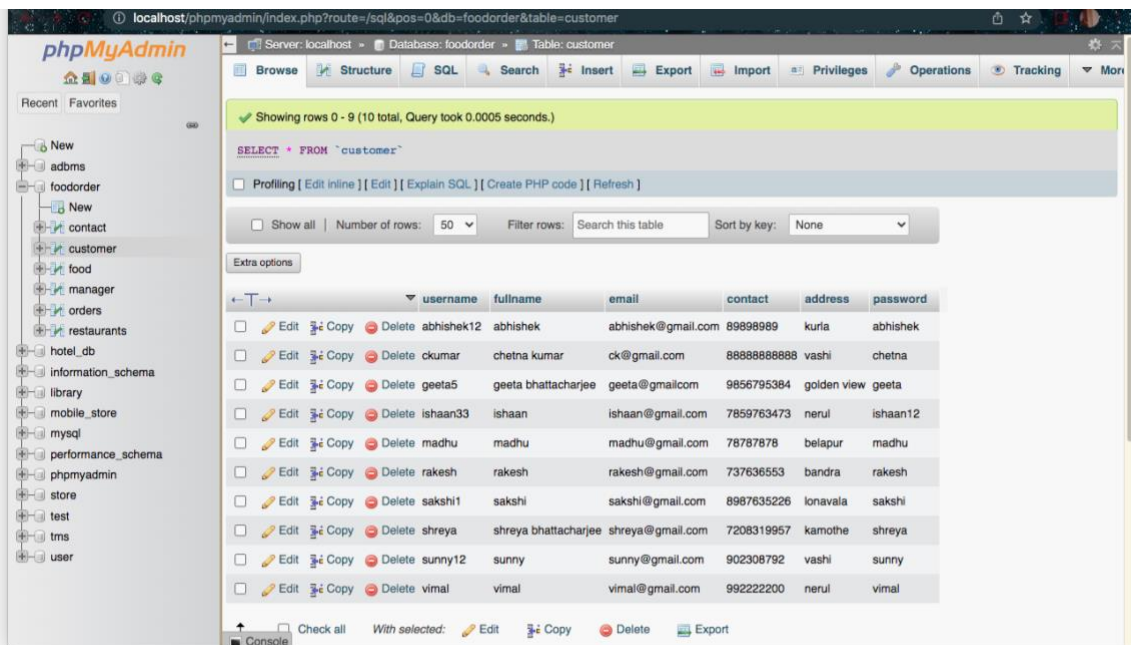


food

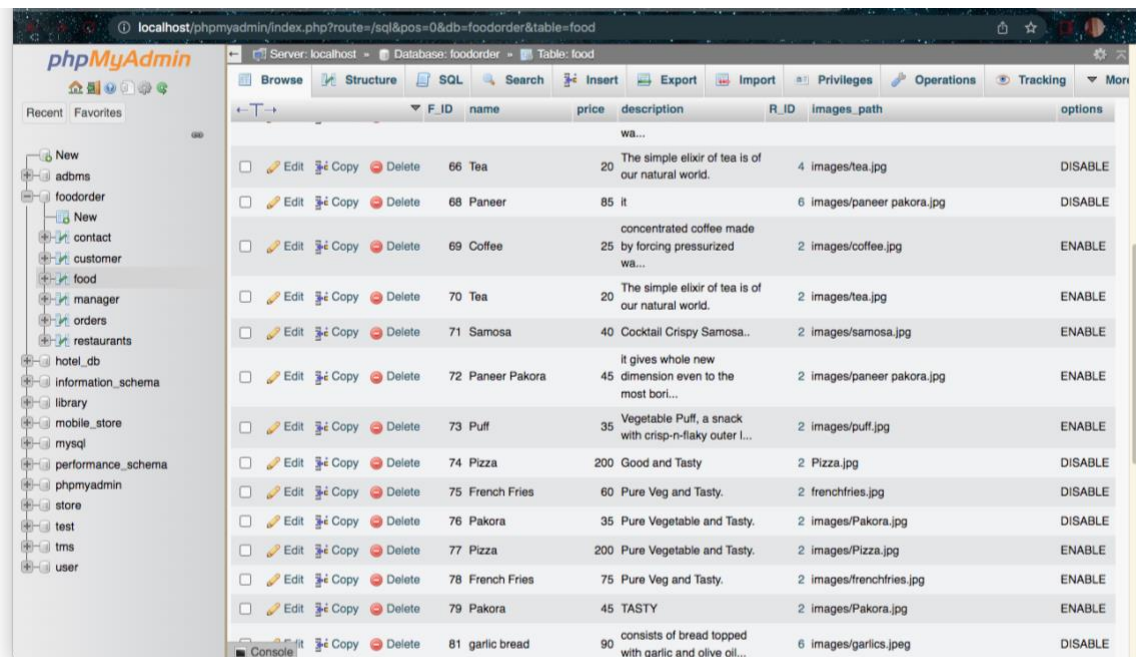

The screenshot shows the phpMyAdmin interface for the 'foodorder' database, specifically the 'food' table. The table has columns: F_ID, name, price, description, R_ID, images_path, and options. The data is as follows:

F_ID	name	price	description	R_ID	images_path	options
66	Tea	20	The simple elixir of tea is of our natural world.	4	images/tea.jpg	DISABLE
68	Paneer	85	it	6	images/paneer pakora.jpg	DISABLE
69	Coffee	25	concentrated coffee made by forcing pressurized wa...	2	images/coffee.jpg	ENABLE
70	Tea	20	The simple elixir of tea is of our natural world.	2	images/tea.jpg	ENABLE
71	Samosa	40	Cocktail Crispy Samosa..	2	images/samosa.jpg	ENABLE
72	Paneer Pakora	45	It gives whole new dimension even to the most bori...	2	images/paneer pakora.jpg	ENABLE
73	Puff	35	Vegetable Puff, a snack with crisp-n-flaky outer l...	2	images/puff.jpg	ENABLE
74	Pizza	200	Good and Tasty	2	Pizza.jpg	DISABLE
75	French Fries	60	Pure Veg and Tasty.	2	frenchfries.jpg	DISABLE
76	Pakora	35	Pure Vegetable and Tasty.	2	images/Pakora.jpg	DISABLE
77	Pizza	200	Pure Vegetable and Tasty.	2	images/Pizza.jpg	ENABLE
78	French Fries	75	Pure Veg and Tasty.	2	images/frenchfries.jpg	ENABLE
79	Pakora	45	TASTY	2	images/Pakora.jpg	ENABLE
81	garlic bread	90	consists of bread topped with garlic and olive oil...	6	images/garlics.jpg	DISABLE

manager

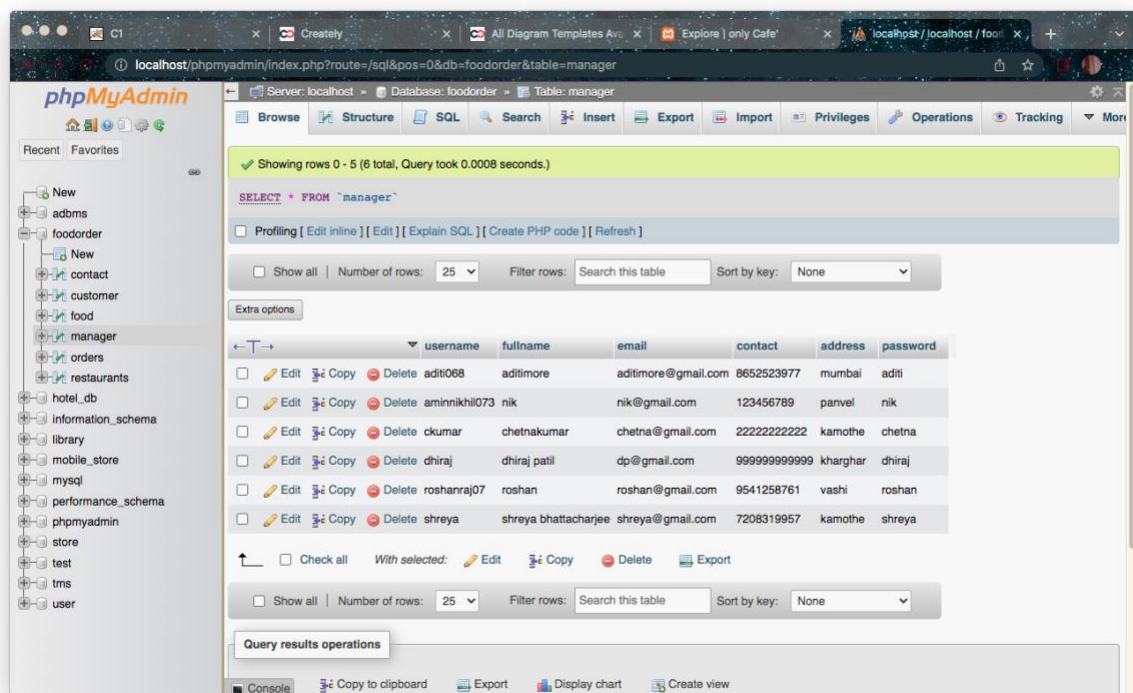

The screenshot shows the phpMyAdmin interface for the 'foodorder' database, specifically the 'manager' table. The table has columns: username, fullname, email, contact, address, and password. The data is as follows:

username	fullname	email	contact	address	password
adit068	aditimore	aditimore@gmail.com	8652523977	mumbai	aditi
aminnikhi073	nik	nik@gmail.com	123456789	panvel	nik
ckumar	chetnakumar	chetna@gmail.com	2222222222	kamothe	chetna
dhiraj	dhiraj patil	dp@gmail.com	9999999999	kharghar	dhiraj
roshanra07	roshan	roshan@gmail.com	9541258761	vashi	roshan
shreya	shreya bhattacharjee	shreya@gmail.com	7208319957	kamothe	shreya

order

localhost/phpmyadmin/index.php?route=sql&pos=0&db=foodorder&table=orders

phpMyAdmin

Recent

Favorites

New

adbmns

foodorder

New

contact

customer

food

manager

orders

restaurants

hotel_db

information_schema

library

mobile_store

mysql

performance_schema

phpmyadmin

store

test

tms

user

Server: localhost Database: foodorder Table: orders

Browse

Structure

SQL

Search

Insert

Export

Import

Privileges

Operations

Tracking

More

Showing rows 0 - 24 (66 total, Query took 0.0005 seconds.)

SELECT * FROM `orders`

Profiling [Edit inline] [Edit] [Explain SQL] [Create PHP code] [Refresh]

1 > >> ☐ Show all | Number of rows: 25 | Filter rows: Search this table | Sort by key: None

Extra options

order_ID

F_ID

foodname

price

quantity

order_date

username

R_ID

☐

Edit

Copy

Delete

69

72

Paneer Pakora

45

3

2022-09-13

shreya

2

☐

Edit

Copy

Delete

70

59

Meurig Fish

60

1

2022-09-13

shreya

2

☐

Edit

Copy

Delete

71

61

Happy Happy Choco Chip Shake

80

1

2022-09-13

shreya

1

☐

Edit

Copy

Delete

72

77

Pizza

200

1

2022-09-13

shreya

2

☐

Edit

Copy

Delete

73

59

Meurig Fish

60

2

2022-09-13

shreya

2

☐

Edit

Copy

Delete

74

61

Happy Happy Choco Chip Shake

80

1

2022-09-13

shreya

1

☐

Edit

Copy

Delete

75

61

Happy Happy Choco Chip Shake

80

1

2022-09-13

shreya

1

☐

Edit

Copy

Delete

76

61

Happy Happy Choco Chip Shake

80

1

2022-09-13

shreya

1

☐

Edit

Copy

Delete

77

63

Baahubali Thali

75

2

2022-09-13

shreya

3

☐

Edit

Copy

Delete

78

58

Juicy Masala Paneer Kathi Roll

40

2

2022-09-13

shreya

1

☐

Edit

Copy

Delete

79

61

Happy Happy Choco Chip Shake

80

1

2022-09-13

vimal

1

☒

Edit

Copy

Delete

80

63

Baahubali Thali

75

1

2022-09-13

vimal

3

restaurant

localhost/phpmyadmin/index.php?route=sql&pos=0&db=foodorder&table=restaurants

phpMyAdmin

Recent Favorites

NewadbmsoverfoodorderNewcontactcustomerfoodmanagerordersrestaurantshotel_dbinformation_schemalibrarymobile_storemysqlperformance_schemaphpmyadminstoretesttmstmsuser

Server: localhost » Database: foodorder » Table: restaurants

Browse

Structure

SQL

Search

Insert

Export

Import

Privileges

Operations

Tracking

More

Showing rows 0 - 4 (5 total, Query took 0.0005 seconds.)

SELECT * FROM `restaurants`

Profiling

Edit inline

Edit

Explain SQL

Create PHP code

Refresh

☐ Show all

Number of rows: 25

Filter rows: Search this table

Sort by key: None

Extra options

←

→

R_ID

name

email

contact

address

M_ID

☐

Edit

Copy

Delete

1

nik

nik@restaurant.com

7998562145

kamothe

aminnikhil073

☐

Edit

Copy

Delete

2

Roshan's Restaurant

roshan@restaurant.com

9887546821

pune

roshanraj07

☐

Edit

Copy

Delete

3

Aditi's Restaurant

aditi@restaurant.com

7778564231

Goa

aditi068

☐

Edit

Copy

Delete

4

Food Exploria

ck@gmail.com

09487810674

kamothe

okumar

☐

Edit

Copy

Delete

6

only

onlycafe@gmail.com

8888888888

belapur

shreya

↶

☐ Check all

With selected:

Edit

Copy

Delete

Export

☐ Show all

Number of rows: 25

Filter rows: Search this table

Sort by key: None

Query results operations

Print

Copy to clipboard

Export

Display chart

Create view

Console

TESTING


What is Software Testing?

Software testing is an activity to check whether the actual results match the expected results and to ensure that the software system is Defect free. It involves execution of a software component or system component to evaluate one or more properties of interest. Software testing also helps to identify errors, gaps or missing requirements in contrary to the actual requirements. It can be either done manually or using automated tools. Some prefer saying Software testing as a white box and Black Box Testing.

What is Software Testing Life Cycle (STLC)?

Software Testing Life Cycle (STLC) is defined as a sequence of activities conducted to perform Software Testing. It consists of series of activities carried out methodologically to help certify your software product.

Diagram - Different stages in Software Test Life Cycle

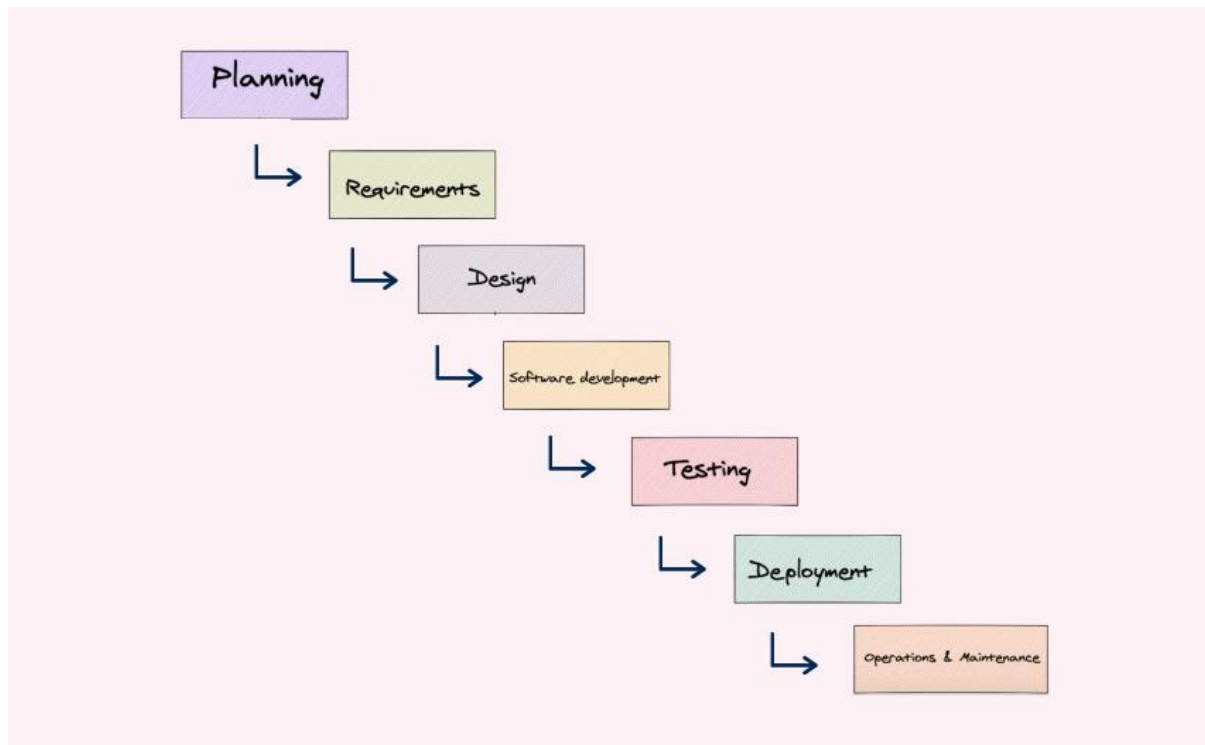

Software testing is the process of executing a program with intension of finding errors in the code. It is a process of evolution of system or its parts by manual or automatic means to verify that it is satisfying specified or requirements or not. Generally, no system is perfect due to communication problems between user and developer, time constraints, or conceptual mistakes by developer. To purpose of system testing is to check and find out these errors or faults as early as possible so losses due to it can be saved.

Testing is the fundamental process of software success. Testing is not a distinct phase in system development life cycle but should be applicable throughout all phases i.e. design development and maintenance phase. Testing is used to show incorrectness and considered to success when an error is detected

OBJECTIVES OF SOFTWARE TESTING

The software testing is usually performed for the following objectives

Software Quality Improvement

The computer and the software are mainly used for complex and critical applications and a bug or fault in software causes severe losses. So a great consideration is required for checking for quality of software.

Verification and Validation

Verification means to test that we are building the product in right way .i.e. are we using the correct procedure for the development of software so that it can meet the user requirements. Validation means to check whether we are building the right product or not.

Software Reliability Estimation

The objective is to discover the residual designing errors before delivery to the customer. The failure data during process are taken down in order to estimate the software reliability.

PRINCIPLES OF SOFTWARE TESTING

Software testing is an extremely creative and challenging task. Some important principles of software testing are as given:-


- ✓ All tests should be traceable to customer requirements.
- ✓ Testing time and resources should be limited i.e. avoid redundant testing.
- ✓ It is impossible to test everything.
- ✓ Use effective resources to test.
- ✓ Test should be planned long before testing begins i.e. after requirement phase

STRATEGY FOR SOFTWARE TESTING

Different levels of testing are used in the test process; each level of testing aims to test different aspects of the system. The First Level is unit testing. In this testing, individual components are tested to ensure that they operate correctly. It focuses on verification efforts. The Second Level is integration testing. It is a systematic technique for constructing the program structure. In this testing, many tested modules are combined into the subsystems which are then tested. The good here is to see if the modules can be integrated properly. The Third Level is integration testing? System testing is actually a series of different tests whose primary purpose is to fully exercise computer based system.

IMPLEMENTATION


A customer's web browser issues an HTTP request from the Contact page. On clicking the button, the content of the fields are posted from the customer's browser as a request to the web server. On receiving the request, the web server retrieves the file, Contacts.asp from its disk or memory and passes it to the php, php.dll, after processing the file php sends the HTML page to the server.

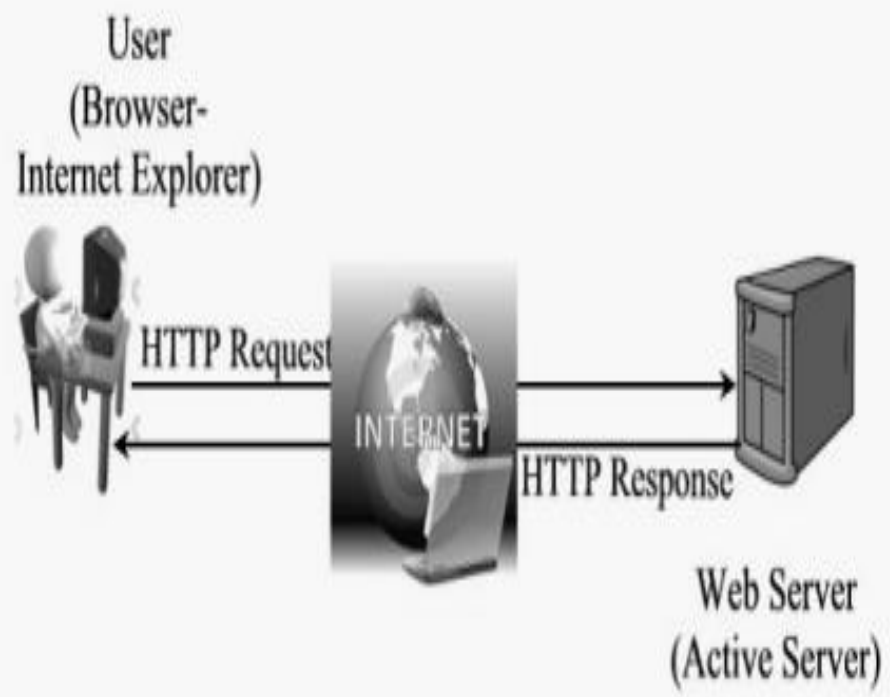


SCREEN SHOTS


CHAPTER-5

Home page

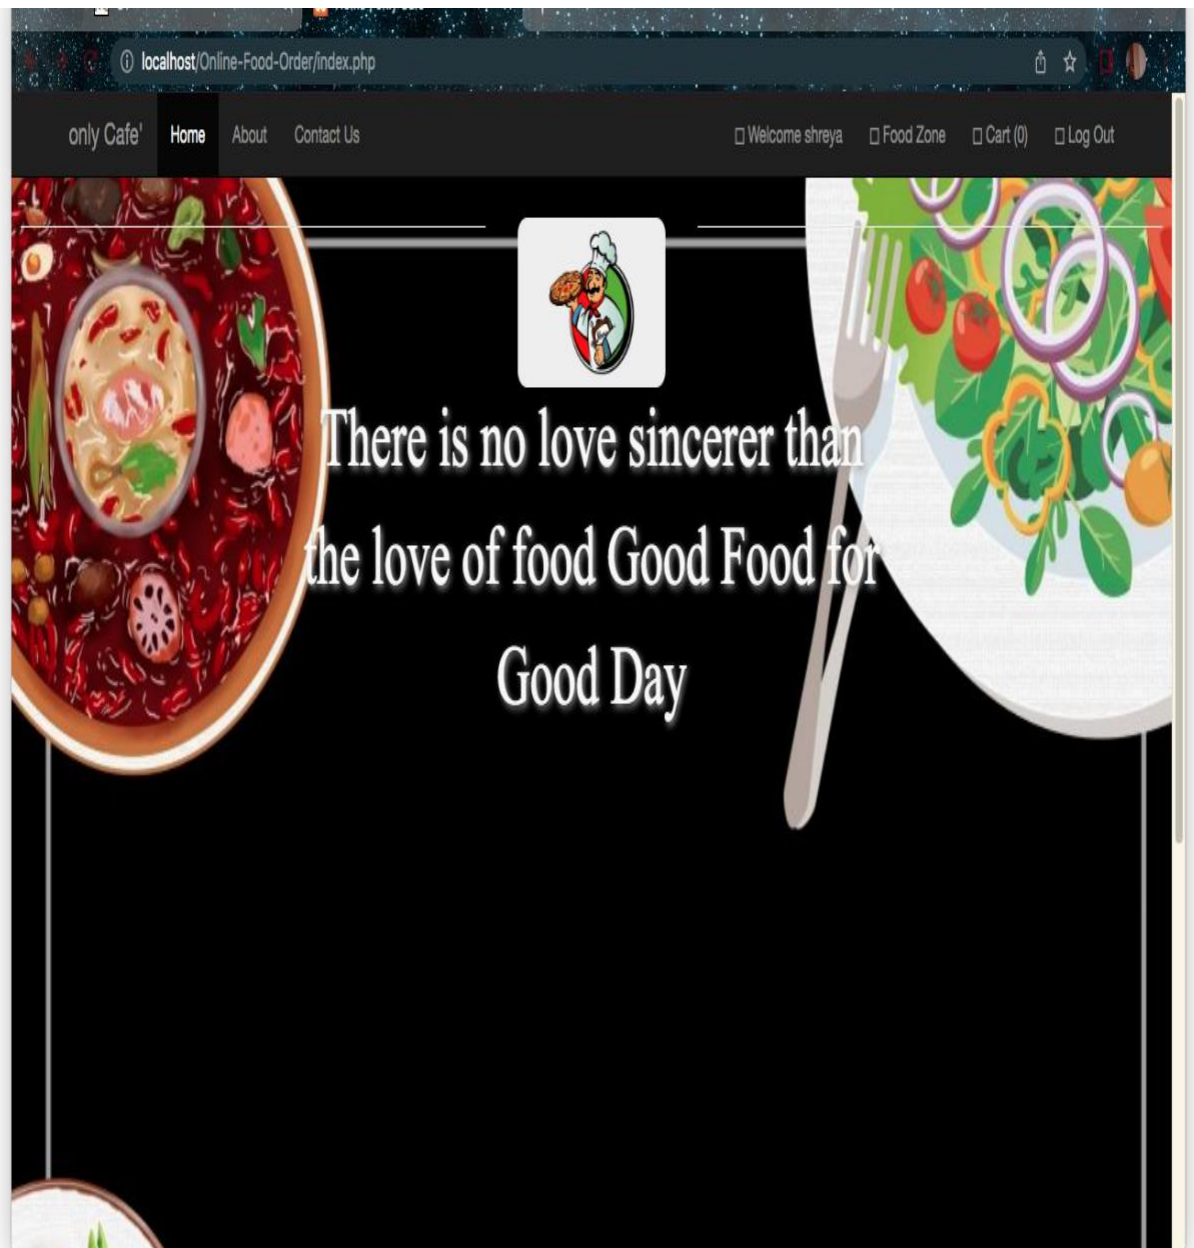


Restaurant List :

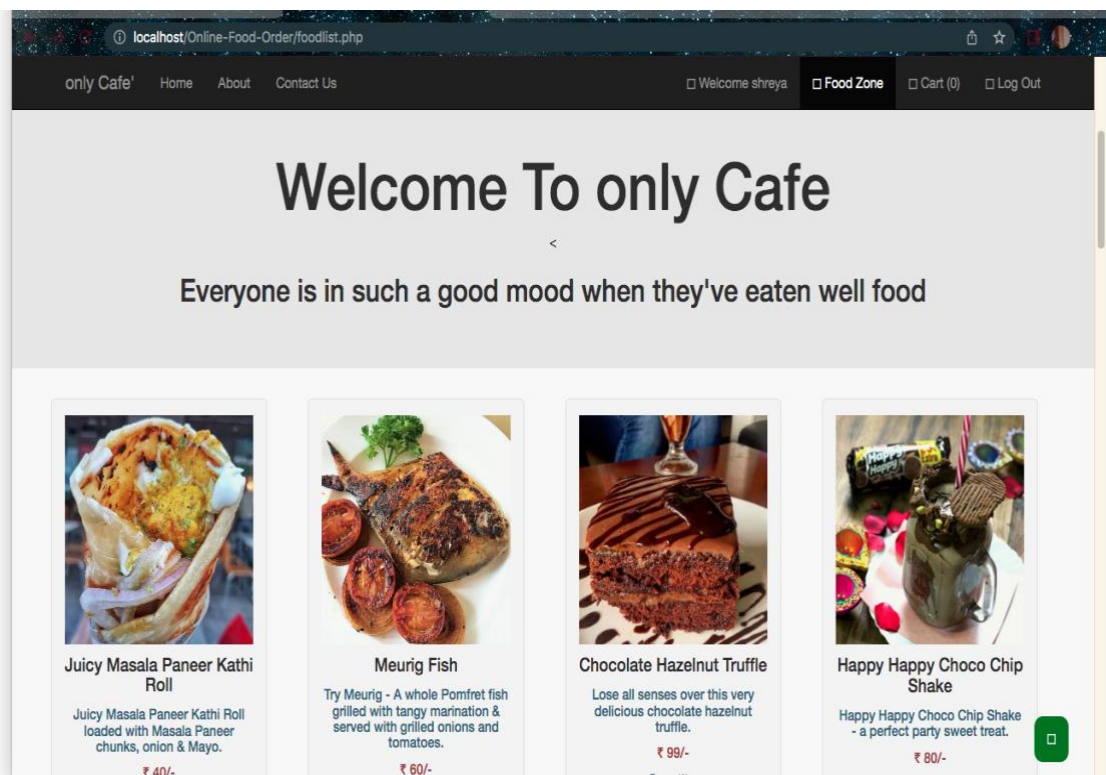


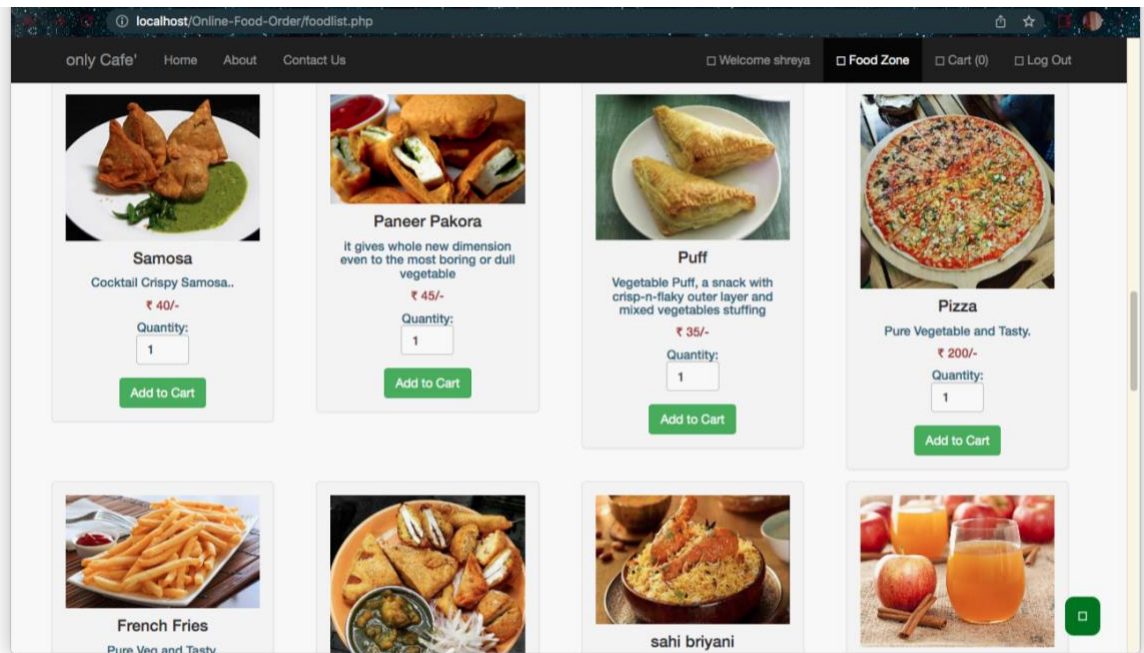

Login page


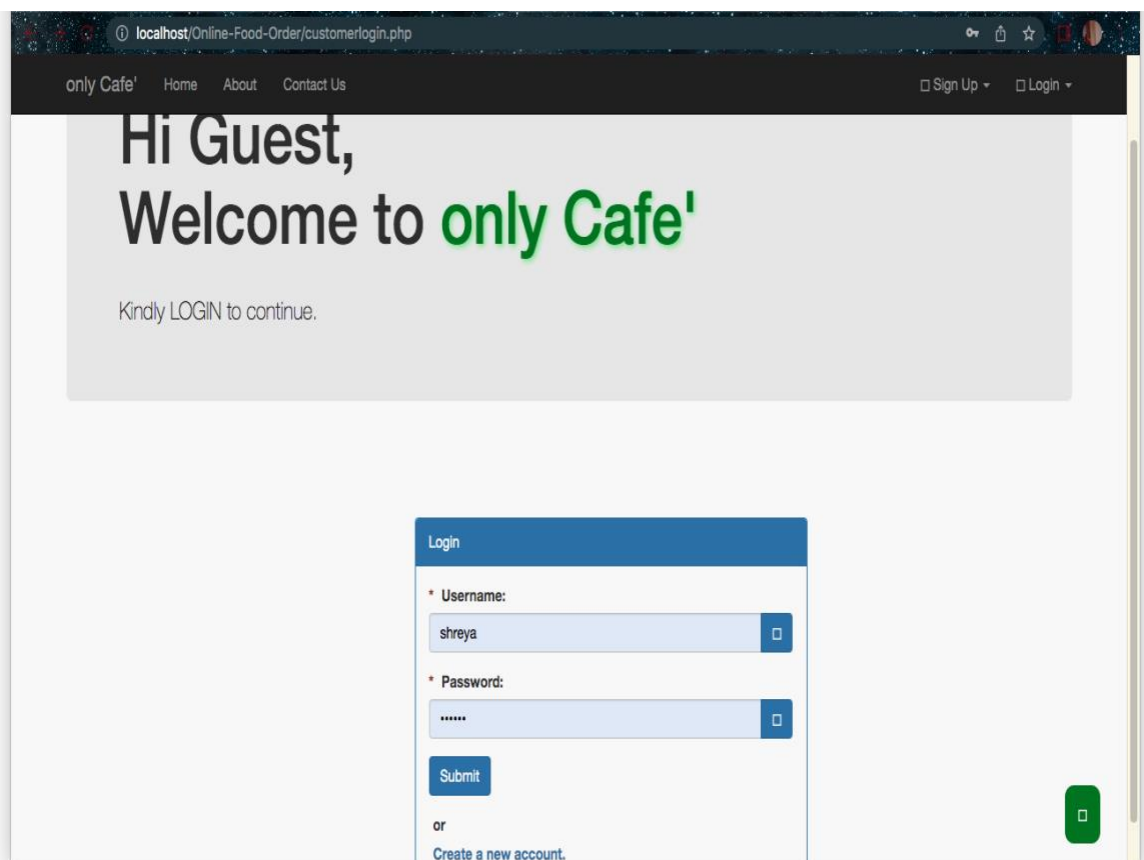


Registration Page :

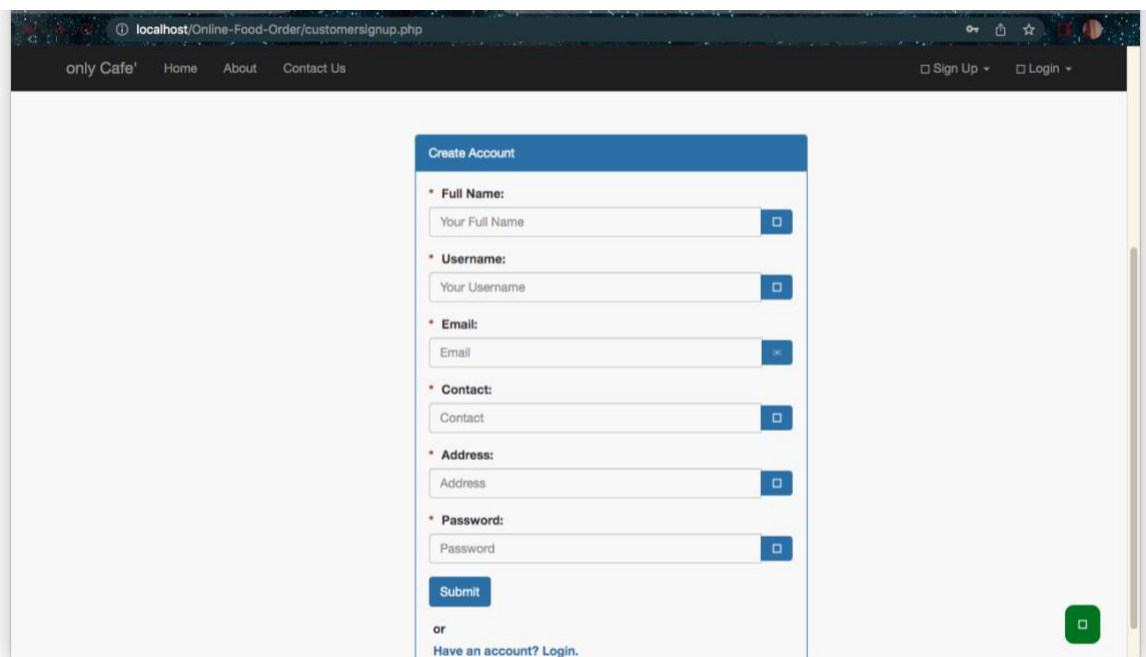

The screenshot displays a web browser window with the address bar showing `localhost/Online-Food-Order/customersignup.php`. The page features a dark navigation bar at the top with the text "only Cafe'" and links for "Home", "About", and "Contact Us". On the right side of the navigation bar, there are links for "Sign Up" and "Login". The main content area is white and contains a "Create Account" form. The form has a blue header with the text "Create Account". It includes six input fields, each with a red asterisk indicating a required field: "Full Name:" (placeholder: "Your Full Name"), "Username:" (placeholder: "Your Username"), "Email:" (placeholder: "Email"), "Contact:" (placeholder: "Contact"), "Address:" (placeholder: "Address"), and "Password:" (placeholder: "Password"). Each input field has a blue square button to its right. Below the input fields is a blue "Submit" button. At the bottom of the form, there is a link that says "or Have an account? Login." and a green square button.

Manager page:

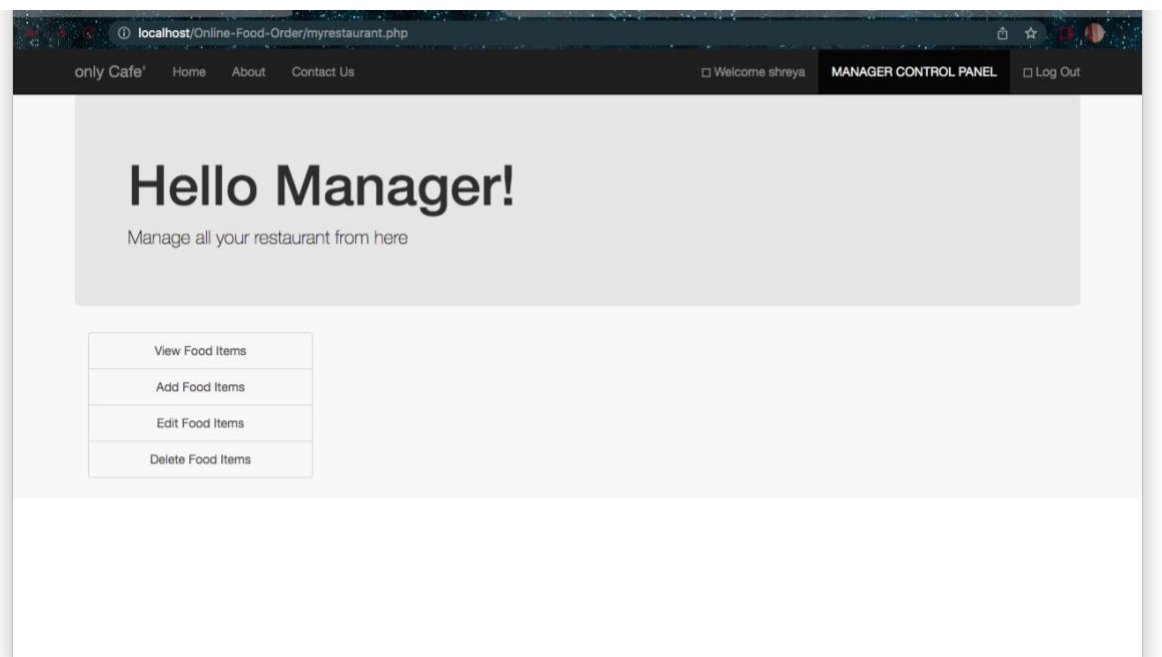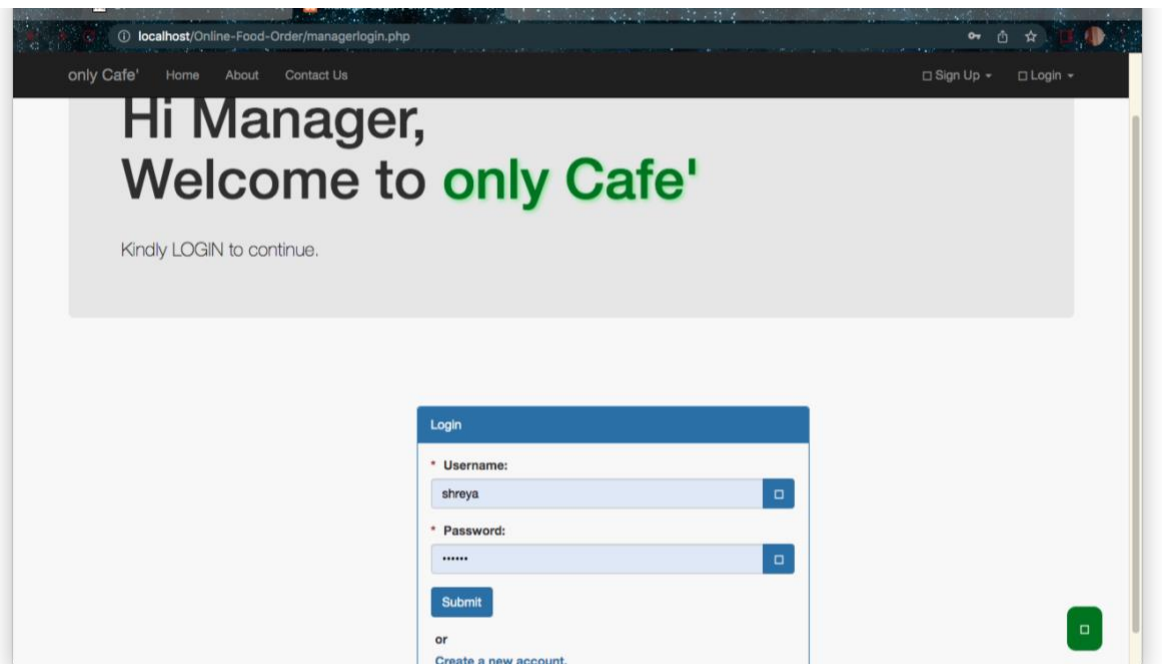

MANAGER SIGN UP PAGE

localhost/Online-Food-Order/managersignup.php

only Cafe' Home About Contact Us Sign Up Login

Create Account

* Full Name:
Your Full Name

* Username:
Your Username

* Email:
Email

* Contact:
Contact

* Address:
Address

* Password:
Password

Submit

CODE

ABOUT US.PHP

```
<?php
session_start();
?>

<html>

<head>
  <title> About | only cafe' </title>

</head>

<link rel="stylesheet" type = "text/css" href ="css/aboutus.css">
<link rel="stylesheet" type = "text/css" href ="css/bootstrap.min.css">
<script type="text/javascript" src="js/jquery.min.js"></script>
<script type="text/javascript" src="js/bootstrap.min.js"></script>

<body>

<button onclick="topFunction()" id="myBtn" title="Go to top">
  <span class="glyphicon glyphicon-chevron-up"></span>
</button>

<script type="text/javascript">
  window.onscroll = function()
  {
    scrollFunction()
  };

  function scrollFunction(){
    if (document.body.scrollTop > 20 || document.documentElement.scrollTop > 20) {
      document.getElementById("myBtn").style.display = "block";
    } else {
```

```

        document.getElementById("myBtn").style.display = "none";
    }
}

```

```

function topFunction() {
    document.body.scrollTop = 0;
    document.documentElement.scrollTop = 0;
}
</script>

```

```

<nav class="navbar navbar-inverse navbar-fixed-top navigation-clean-search" role="navigation">
  <div class="container">
    <div class="navbar-header">
      <button type="button" class="navbar-toggle collapsed" data-toggle="collapse" data-target="#myNavbar">
        <span class="sr-only">Toggle navigation</span>
        <span class="icon-bar"></span>
        <span class="icon-bar"></span>
        <span class="icon-bar"></span>
      </button>
      <a class="navbar-brand" href="index.php">only Cafe</a>
    </div>

```

```

    <div class="collapse navbar-collapse" id="myNavbar">
      <ul class="nav navbar-nav">
        <li><a href="index.php">Home</a></li>
        <li class="active"><a href="aboutus.php">About</a></li>
        <li><a href="contactus.php">Contact Us</a></li>
      </ul>

```

```

<?php
if(isset($_SESSION['login_user1'])){

?>

```

```

      <ul class="nav navbar-nav navbar-right">
        <li><a href="#"><span class="glyphicon glyphicon-user"></span> Welcome <?php echo
$_SESSION['login_user1']; ?> </a></li>
        <li><a href="myrestaurant.php">MANAGER CONTROL PANEL</a></li>
        <li><a href="logout_m.php"><span class="glyphicon glyphicon-log-out"></span> Log Out </a></li>

```



```

        </ul>
<?php
}
else if (isset($_SESSION['login_user2'])) {
    ?>

    <ul class="nav navbar-nav navbar-right">
        <li><a href="#"><span class="glyphicon glyphicon-user"></span> Welcome <?php echo
$_SESSION['login_user2']; ?> </a></li>
        <li><a href="foodlist.php"><span class="glyphicon glyphicon-cutlery"></span> Food Zone </a></li>
        <li><a href="cart.php"><span class="glyphicon glyphicon-shopping-cart"></span> Cart
        (<?php
            if(isset($_SESSION["cart"])){
                $count = count($_SESSION["cart"]);
                echo "$count";
            }
            else
                echo "0";
            ?>)
        </a></li>
        <li><a href="logout_u.php"><span class="glyphicon glyphicon-log-out"></span> Log Out </a></li>
    </ul>

    <?php
}
else {

    ?>

    <ul class="nav navbar-nav navbar-right">
        <li><a href="#" class="dropdown-toggle active" data-toggle="dropdown" role="button" aria-
haspopup="true" aria-expanded="false"><span class="glyphicon glyphicon-user"></span> Sign Up <span
class="caret"></span> </a>
            <ul class="dropdown-menu">
                <li><a href="customersignup.php"> User Sign-up</a></li>
                <li><a href="managersignup.php"> Manager Sign-up</a></li>

            </ul>
        </li>
    </ul>

```

```
<li><a href="#" class="dropdown-toggle active" data-toggle="dropdown" role="button" aria-  
haspopup="true" aria-expanded="false"><span class="glyphicon glyphicon-log-in"></span> Login <span  
class="caret"></span></a>
```

```
<ul class="dropdown-menu">
```

```
<li> <a href="customerlogin.php"> User Login</a></li>
```

```
<li> <a href="managerlogin.php"> Manager Login</a></li>
```

```
</ul>
```

```
</li>
```

```
</ul>
```

```
<?php
```

```
}
```

```
?>
```

```
</div>
```

```
</div>
```

```
</nav>
```

```
<div class="wide" style="background-image: url('images/aee.jpeg');height:800px">
```

```
<div class="tagline">It's not our <font color="orange"><strong>work life</strong></font>, it's our <font  
color="red"><strong><em>life's work</em>.</strong></font></div>
```

```
<h1 style="color: yellow">About the food culture in only cafe'</h1>
```

```
<h5 style="color: white">Offer Outdoor Seating</h5>
```

```
<br>
```

```
<h5 style="color: white">Order food & beverages online from restaurants near & around you. <h5  
style="color: white">We deliver food from your neighborhood local joints, your favorite cafes, luxurious & elite  
restaurants in your area,</h5><h5 style="color :white"> And also from chains like Dominos, KFC, Burger King,  
Pizza Hut, FreshMenu, Mc Donald's, Subway, Faasos, Cafe Coffee Day, Taco Bell, and more. Exciting  
bit?</h5><h5 style="color : white"> We place no minimum order restrictions! Order in as little (or as much) as  
you'd like. We'll Swiggy it to you!!! Only cafe to the youth is a "hangout" spot where they meet people, make  
conversations, and have a whole lot of fun over steaming cups of great coffee.It's been an exciting journey since  
then to becoming the largest organised retail cafe chain in the country Your experience of starting the journey  
and continuing it with excellence over the years will have to be included in the page -The opening and closing  
times of the restaurant must be clearly mentioned in as simple a way as possible so that customers can visit  
accordingly</h5></h5>
```

```
</div>
```

```
        </body>
    </html>
```

ADD FOOD ITEM.PHP

```
<?php
include('session_m.php');

if(!isset($login_session)){
    header('Location: managerlogin.php');
}

?>
<!DOCTYPE html>
<html>

    <head>
        <title> Manager Login | Only Cafe' </title>
    </head>

    <link rel="stylesheet" type = "text/css" href ="css/add_food_items.css">
    <link rel="stylesheet" type = "text/css" href ="css/bootstrap.min.css">
    <script type="text/javascript" src="js/jquery.min.js"></script>
    <script type="text/javascript" src="js/bootstrap.min.js"></script>

    <body>

        <button onclick="topFunction()" id="myBtn" title="Go to top">
            <span class="glyphicon glyphicon-chevron-up"></span>
        </button>

        <script type="text/javascript">
            window.onload = function()
            {
                scrollFunction()
            };
        </script>
```

```

function scrollFunction(){
    if (document.body.scrollTop > 20 || document.documentElement.scrollTop > 20) {
        document.getElementById("myBtn").style.display = "block";
    } else {
        document.getElementById("myBtn").style.display = "none";
    }
}

```

```

function topFunction() {
    document.body.scrollTop = 0;
    document.documentElement.scrollTop = 0;
}
</script>

```

```

<nav class="navbar navbar-inverse navbar-fixed-top navigation-clean-search" role="navigation">
    <div class="container">
        <div class="navbar-header">
            <button type="button" class="navbar-toggle collapsed" data-toggle="collapse" data-target="#myNavbar">
                <span class="sr-only">Toggle navigation</span>
                <span class="icon-bar"></span>
                <span class="icon-bar"></span>
                <span class="icon-bar"></span>
            </button>
            <a class="navbar-brand" href="index.php">Le Cafe</a>
        </div>

```

```

        <div class="collapse navbar-collapse " id="myNavbar">
            <ul class="nav navbar-nav">
                <li><a href="index.php">Home</a></li>
                <li><a href="aboutus.php">About</a></li>
                <li><a href="contactus.php">Contact Us</a></li>
            </ul>

```

```

            <ul class="nav navbar-nav navbar-right">
                <li><a href="#"><span class="glyphicon glyphicon-user"></span> Welcome <?php echo $login_session;
?> </a></li>
                <li class="active"> <a href="managerlogin.php">MANAGER CONTROL PANEL</a></li>
                <li><a href="logout_m.php"><span class="glyphicon glyphicon-log-out"></span> Log Out </a></li>
            </ul>

```

```
</div>
```

```
</div>
```

```
</nav>
```

```
<div class="container">
```

```
<div class="jumbotron">
```

```
<h1>Hello Manager! </h1>
```

```
<p>Manage all your restaurant from here</p>
```

```
</div>
```

```
</div>
```

```
<div class="container">
```

```
<div class="container">
```

```
<div class="col">
```

```
</div>
```

```
</div>
```

```
<div class="col-xs-3" style="text-align: center;">
```

```
<div class="list-group">
```

```
<a href="myrestaurant.php" class="list-group-item ">My Restaurant</a>
```

```
<a href="add_food_items.php" class="list-group-item active">Add Food Items</a>
```

```
<a href="edit_food_items.php" class="list-group-item ">Edit Food Items</a>
```

```
<a href="delete_food_items.php" class="list-group-item ">Delete Food Items</a>
```

```
</div>
```

```
</div>
```

```
<div class="col-xs-9">
```

```
<div class="form-area" style="padding: 0px 100px 100px 100px;">
```

```
<form action="add_food_items1.php" method="POST">
```

```
<br style="clear: both">
```

```

<h3 style="margin-bottom: 25px; text-align: center; font-size: 30px;"> ADD NEW FOOD ITEM HERE </h3>

<div class="form-group">
  <input type="text" class="form-control" id="name" name="name" placeholder="Your Food name"
required="">
</div>

<div class="form-group">
  <input type="text" class="form-control" id="price" name="price" placeholder="Your Food Price (INR)"
required="">
</div>

<div class="form-group">
  <input type="text" class="form-control" id="description" name="description" placeholder="Your Food
Description" required="">
</div>

<div class="form-group">
  <input type="text" class="form-control" id="images_path" name="images_path" placeholder="Your Food
Image Path [images/<filename>.<extention>]" required="">
</div>

<div class="form-group">
  <button type="submit" id="submit" name="submit" class="btn btn-primary pull-right"> ADD FOOD
</button>
</div>
</form>

</div>

</div>

</body>
</html>

```

ADD FOOD ITEMS1.PHP

```

<?php

include('session_m.php');

if(!isset($login_session)){
header('Location: managerlogin.php');
}

$name = $conn->real_escape_string($_POST['name']);
$price = $conn->real_escape_string($_POST['price']);
$description = $conn->real_escape_string($_POST['description']);

// Storing Session
$user_check=$_SESSION['login_user1'];
$R_IDsql = "SELECT RESTAURANTS.R_ID FROM RESTAURANTS, MANAGER WHERE
RESTAURANTS.M_ID='$user_check'";
$R_IDresult = mysqli_query($conn,$R_IDsql);
$R_IDrs = mysqli_fetch_array($R_IDresult, MYSQLI_BOTH);
$R_ID = $R_IDrs['R_ID'];

$images_path = $conn->real_escape_string($_POST['images_path']);

$query = "INSERT INTO FOOD(name,price,description,R_ID,images_path) VALUES('" . $name . "','" . $price .
"', '" . $description . "','" . $R_ID . "','" . $images_path . "')";
$success = $conn->query($query);

if (!$success){

?>

<!DOCTYPE html>
<html>
<head>
    <title></title>
    <link rel="stylesheet" type="text/css" href="css/add_food_items.css">
    <link rel="stylesheet" type="text/css" href="css/bootstrap.min.css">
    <script type="text/javascript" src="js/jquery.min.js"></script>

```

```
<script type="text/javascript" src="js/bootstrap.min.js"></script>
</head>
<body>

<button onclick="topFunction()" id="myBtn" title="Go to top">
  <span class="glyphicon glyphicon-chevron-up"></span>
</button>

<script type="text/javascript">
  window.onscroll = function()
  {
    scrollFunction()
  };

  function scrollFunction(){
    if (document.body.scrollTop > 20 || document.documentElement.scrollTop > 20) {
      document.getElementById("myBtn").style.display = "block";
    } else {
      document.getElementById("myBtn").style.display = "none";
    }
  }

  function topFunction() {
    document.body.scrollTop = 0;
    document.documentElement.scrollTop = 0;
  }
</script>

<nav class="navbar navbar-inverse navbar-fixed-top navigation-clean-search" role="navigation">
  <div class="container">
    <div class="navbar-header">
      <button type="button" class="navbar-toggle collapsed" data-toggle="collapse" data-target="#myNavbar">
        <span class="sr-only">Toggle navigation</span>
        <span class="icon-bar"></span>
        <span class="icon-bar"></span>
        <span class="icon-bar"></span>
      </button>
      <a class="navbar-brand" href="index.php">Le Cafe'</a>
    </div>
```



```

<div class="collapse navbar-collapse " id="myNavbar">
  <ul class="nav navbar-nav">
    <li><a href="index.php">Home</a></li>
    <li><a href="aboutus.php">About</a></li>
    <li><a href="contactus.php">Contact Us</a></li>
  </ul>

  <ul class="nav navbar-nav navbar-right">
    <li><a href="#"><span class="glyphicon glyphicon-user"></span> Welcome <?php echo $login_session;
?> </a></li>
    <li class="active"> <a href="managerlogin.php">MANAGER CONTROL PANEL</a></li>
    <li><a href="logout_m.php"><span class="glyphicon glyphicon-log-out"></span> Log Out </a></li>
  </ul>
</div>

</div>
</nav>

<div class="container">
  <div class="jumbotron">
    <h1>Oops...!!! </h1>
    <p>Kindly enter your Restaurant details before adding food items.</p>
    <p><a href="myrestaurant.php"> Click Me </a></p>

  </div>
</div>

<br><br><br><br><br><br><br><br><br><br>
</body>

</html>

<?php
}
else {
  echo "SUCCESS";
  header('Location: add_food_items.php');
}

```

```
$conn->close();
```

```
?>
```

CART.PHP

```
<?php
```

```
session_start();
```

```
require 'connection.php';
```

```
$conn = Connect();
```

```
if(!isset($_SESSION['login_user2'])){
```

```
header("location: customerlogin.php");
```

```
}
```

```
?>
```

```
<html>
```

```
<head>
```

```
<title> Cart | only Cafe' </title>
```

```
</head>
```

```
<link rel="stylesheet" type = "text/css" href ="css/cart.css">
```

```
<link rel="stylesheet" type = "text/css" href ="css/bootstrap.min.css">
```

```
<script type="text/javascript" src="js/jquery.min.js"></script>
```

```
<script type="text/javascript" src="js/bootstrap.min.js"></script>
```

```
<body>
```

```
<button onclick="topFunction()" id="myBtn" title="Go to top">
```

```
<span class="glyphicon glyphicon-chevron-up"></span>
```

```
</button>
```

```
<script type="text/javascript">
```

```
window.onscroll = function()
```

```
{
```

```
scrollFunction()
```

```
};
```

```
function scrollFunction(){  
    if (document.body.scrollTop > 20 || document.documentElement.scrollTop > 20) {  
        document.getElementById("myBtn").style.display = "block";  
    } else {  
        document.getElementById("myBtn").style.display = "none";  
    }  
}
```

```
function topFunction() {  
    document.body.scrollTop = 0;  
    document.documentElement.scrollTop = 0;  
}
```

```
</script>
```

```
<nav class="navbar navbar-inverse navbar-fixed-top navigation-clean-search" role="navigation">  
    <div class="container">  
        <div class="navbar-header">  
            <button type="button" class="navbar-toggle collapsed" data-toggle="collapse" data-target="#myNavbar">  
                <span class="sr-only">Toggle navigation</span>  
                <span class="icon-bar"></span>  
                <span class="icon-bar"></span>  
                <span class="icon-bar"></span>  
            </button>  
            <a class="navbar-brand" href="index.php">onlyCafe</a>  
        </div>
```

```
        <div class="collapse navbar-collapse " id="myNavbar">  
            <ul class="nav navbar-nav">  
                <li><a href="index.php">Home</a></li>  
                <li><a href="aboutus.php">About</a></li>  
                <li><a href="contactus.php">Contact Us</a></li>  
            </ul>
```

```
<?php
```

```
if(isset($_SESSION['login_user1'])){
```

```
?>
```

```

<ul class="nav navbar-nav navbar-right">
    <li><a href="#"><span class="glyphicon glyphicon-user"></span> Welcome <?php echo
$_SESSION['login_user1']; ?> </a></li>
    <li><a href="myrestaurant.php">MANAGER CONTROL PANEL</a></li>
    <li><a href="logout_m.php"><span class="glyphicon glyphicon-log-out"></span> Log Out </a></li>
</ul>
<?php
}
else if (isset($_SESSION['login_user2'])) {
    ?>
    <ul class="nav navbar-nav navbar-right">
        <li><a href="#"><span class="glyphicon glyphicon-user"></span> Welcome <?php echo
$_SESSION['login_user2']; ?> </a></li>
        <li><a href="foodlist.php"><span class="glyphicon glyphicon-cutlery"></span> Food Zone </a></li>
        <li class="active" ><a href="foodlist.php"><span class="glyphicon glyphicon-shopping-cart"></span> Cart
        (<?php
            if(isset($_SESSION["cart"])){
                $count = count($_SESSION["cart"]);
                echo "$count";
            }
            else
                echo "0";
            ?>)
        </a></li>
        <li><a href="logout_u.php"><span class="glyphicon glyphicon-log-out"></span> Log Out </a></li>
    </ul>
    <?php
}
else {
    ?>

    <ul class="nav navbar-nav navbar-right">
        <li><a href="#" class="dropdown-toggle active" data-toggle="dropdown" role="button" aria-
haspopup="true" aria-expanded="false"><span class="glyphicon glyphicon-user"></span> Sign Up <span
class="caret"></span> </a>
            <ul class="dropdown-menu">
                <li> <a href="customersignup.php"> User Sign-up</a></li>

```

```

        <li> <a href="managersignup.php"> Manager Sign-up</a></li>
        <li> <a href="#"> Admin Sign-up</a></li>
    </ul>
</li>

<li><a href="#" class="dropdown-toggle active" data-toggle="dropdown" role="button" aria-
haspopup="true" aria-expanded="false"><span class="glyphicon glyphicon-log-in"></span> Login <span
class="caret"></span></a>
    <ul class="dropdown-menu">
        <li> <a href="customerlogin.php"> User Login</a></li>
        <li> <a href="managerlogin.php"> Manager Login</a></li>
        <li> <a href="#"> Admin Login</a></li>
    </ul>
</li>
</ul>

<?php
}
?>

</div>

</div>
</nav>

<?php
if(!empty($_SESSION["cart"]))
{
    ?>
    <div class="container">
        <div class="jumbotron">
            <h1>Your Shopping Cart</h1>
            <p>Looks tasty...!!!</p>

        </div>

    </div>

</div>
<div class="table-responsive" style="padding-left: 100px; padding-right: 100px;" >

```

```

<table class="table table-striped">
  <thead class="thead-dark">
    <tr>
      <th width="40%">Food Name</th>
      <th width="10%">Quantity</th>
      <th width="20%">Price Details</th>
      <th width="15%">Order Total</th>
      <th width="5%">Action</th>
    </tr>
  </thead>

  <?php

$total = 0;
foreach($_SESSION["cart"] as $keys => $values)
{
  ?>
  <tr>
    <td><?php echo $values["food_name"]; ?></td>
    <td><?php echo $values["food_quantity"] ?></td>
    <td>&#8377; <?php echo $values["food_price"]; ?></td>
    <td>&#8377; <?php echo number_format($values["food_quantity"] * $values["food_price"], 2); ?></td>
    <td><a href="cart.php?action=delete&id=<?php echo $values["food_id"]; ?>"><span class="text-
danger">Remove</span></a></td>
  </tr>
  <?php
$total = $total + ($values["food_quantity"] * $values["food_price"]);
}
?>
  <tr>
    <td colspan="3" align="right">Total</td>
    <td align="right">&#8377; <?php echo number_format($total, 2); ?></td>
    <td></td>
  </tr>
</table>
<?php
  echo '<a href="cart.php?action=empty"><button class="btn btn-danger"><span class="glyphicon glyphicon-
trash"></span> Empty Cart</button></a>&nbsp;<a href="foodlist.php"><button class="btn btn-

```

```
warning">Continue Shopping</button></a>&nbsp;<a href="payment.php"><button class="btn btn-success pull-right"><span class="glyphicon glyphicon-share-alt"></span> Check Out</button></a>';
```

```
?>
```

```
</div>
```

```
<br><br><br><br><br><br><br>
```

```
<?php
```

```
}
```

```
if(empty($_SESSION["cart"]))
```

```
{
```

```
?>
```

```
<div class="container">
```

```
<div class="jumbotron">
```

```
<h1>Your Shopping Cart</h1>
```

```
<p>Oops! We can't smell any food here. Go back and <a href="foodlist.php">order now.</a></p>
```

```
</div>
```

```
</div>
```

```
<br><br><br><br><br><br><br><br><br><br><br><br><br>
```

```
<?php
```

```
}
```

```
?>
```

```
<?php
```

```
if(isset($_POST["add"]))
```

```
{
```

```
if(isset($_SESSION["cart"]))
```

```
{
```

```
$item_array_id = array_column($_SESSION["cart"], "food_id");
```

```
if(!in_array($_GET["id"], $item_array_id))
```

```
{
```

```
$count = count($_SESSION["cart"]);
```

```
$item_array = array(
```

```
'food_id' => $_GET["id"],
```

```
'food_name' => $_POST["hidden_name"],
```

```
'food_price' => $_POST["hidden_price"],
```

```
'R_ID' => $_POST["hidden_RID"],
'food_quantity' => $_POST["quantity"]
);
$_SESSION["cart"][$count] = $item_array;
echo '<script>window.location="cart.php"</script>';
}
else
{
echo '<script>alert("Products already added to cart")</script>';
echo '<script>window.location="cart.php"</script>';
}
}
else
{
$item_array = array(
'food_id' => $_GET["id"],
'food_name' => $_POST["hidden_name"],
'food_price' => $_POST["hidden_price"],
'R_ID' => $_POST["hidden_RID"],
'food_quantity' => $_POST["quantity"]
);
$_SESSION["cart"][0] = $item_array;
}
}
if(isset($_GET["action"]))
{
if($_GET["action"] == "delete")
{
foreach($_SESSION["cart"] as $keys => $values)
{
if($values["food_id"] == $_GET["id"])
{
unset($_SESSION["cart"][$keys]);
echo '<script>alert("Food has been removed")</script>';
echo '<script>window.location="cart.php"</script>';
}
}
}
}
```



```

if(isset($_GET["action"]))
{
if($_GET["action"] == "empty")
{
foreach($_SESSION["cart"] as $keys => $values)
{

unset($_SESSION["cart"]);
echo '<script>alert("Cart is made empty!")</script>';
echo '<script>window.location="cart.php"</script>';

}
}
}

?>
<?php

?>

</body>
</html>

```

COD.PHP

```

<?php
session_start();
require 'connection.php';
$conn = Connect();
if(!isset($_SESSION['login_user2'])){
header("location: customerlogin.php");
}

unset($_SESSION["cart"]);
?>

<html>

```

```
<head>
  <title> Cart | Only cafe' </title>
</head>

<link rel="stylesheet" type = "text/css" href ="css/COD.css">
<link rel="stylesheet" type = "text/css" href ="css/bootstrap.min.css">
<script type="text/javascript" src="js/jquery.min.js"></script>
<script type="text/javascript" src="js/bootstrap.min.js"></script>

<body>

  <button onclick="topFunction()" id="myBtn" title="Go to top">
    <span class="glyphicon glyphicon-chevron-up"></span>
  </button>

  <script type="text/javascript">
    window.onscroll = function()
    {
      scrollFunction()
    };

    function scrollFunction(){
      if (document.body.scrollTop > 20 || document.documentElement.scrollTop > 20) {
        document.getElementById("myBtn").style.display = "block";
      } else {
        document.getElementById("myBtn").style.display = "none";
      }
    }

    function topFunction() {
      document.body.scrollTop = 0;
      document.documentElement.scrollTop = 0;
    }
  </script>

  <nav class="navbar navbar-inverse navbar-fixed-top navigation-clean-search" role="navigation">
    <div class="container">
      <div class="navbar-header">
        <button type="button" class="navbar-toggle collapsed" data-toggle="collapse" data-target="#myNavbar">
```

```

        <span class="sr-only">Toggle navigation</span>
        <span class="icon-bar"></span>
        <span class="icon-bar"></span>
        <span class="icon-bar"></span>
    </button>
    <a class="navbar-brand" href="index.php">only Cafe'</a>
</div>

<div class="collapse navbar-collapse " id="myNavbar">
    <ul class="nav navbar-nav">
        <li><a href="index.php">Home</a></li>
        <li><a href="aboutus.php">About</a></li>
        <li><a href="contactus.php">Contact Us</a></li>

    </ul>

<?php
if(isset($_SESSION['login_user1'])){

?>

    <ul class="nav navbar-nav navbar-right">
        <li><a href="#"><span class="glyphicon glyphicon-user"></span> Welcome <?php echo
$_SESSION['login_user1']; ?> </a></li>
        <li><a href="myrestaurant.php">MANAGER CONTROL PANEL</a></li>
        <li><a href="logout_m.php"><span class="glyphicon glyphicon-log-out"></span> Log Out </a></li>
    </ul>

<?php
}
else if (isset($_SESSION['login_user2'])) {
    ?>

    <ul class="nav navbar-nav navbar-right">
        <li><a href="#"><span class="glyphicon glyphicon-user"></span> Welcome <?php echo
$_SESSION['login_user2']; ?> </a></li>
        <li><a href="foodlist.php"><span class="glyphicon glyphicon-cutlery"></span> Food Zone </a></li>
        <li><a href="cart.php"><span class="glyphicon glyphicon-shopping-cart"></span> Cart
        (<?php
            if(isset($_SESSION["cart"])){
                $count = count($_SESSION["cart"]);

```

```

        echo "$count";
    }
    else
        echo "0";
    ?>)
</a></li>
<li><a href="logout_u.php"><span class="glyphicon glyphicon-log-out"></span> Log Out </a></li>
</ul>
<?php
}
else {

?>

<ul class="nav navbar-nav navbar-right">
    <li><a href="#" class="dropdown-toggle active" data-toggle="dropdown" role="button" aria-
haspopup="true" aria-expanded="false"><span class="glyphicon glyphicon-user"></span> Sign Up <span
class="caret"></span> </a>
        <ul class="dropdown-menu">
            <li> <a href="customersignup.php"> User Sign-up</a></li>
            <li> <a href="managersignup.php"> Manager Sign-up</a></li>
            <li> <a href="#"> Admin Sign-up</a></li>
        </ul>
    </li>

    <li><a href="#" class="dropdown-toggle active" data-toggle="dropdown" role="button" aria-
haspopup="true" aria-expanded="false"><span class="glyphicon glyphicon-log-in"></span> Login <span
class="caret"></span></a>
        <ul class="dropdown-menu">
            <li> <a href="customerlogin.php"> User Login</a></li>
            <li> <a href="managerlogin.php"> Manager Login</a></li>
            <li> <a href="#"> Admin Login</a></li>
        </ul>
    </li>
</ul>

<?php
}
?>

```

```
</div>

</div>
</nav>


<div class="container">
  <div class="jumbotron">
    <h1 class="text-center" style="color: green;"><span class="glyphicon glyphicon-ok-circle"></span> Order
Placed Successfully.</h1>
  </div>
</div>
<br>

<h2 class="text-center"> Thank you for Ordering at only cafe!! The ordering process is now complete.</h2>

<?php
$num1 = rand(100000,999999);
$num2 = rand(100000,999999);
$num3 = rand(100000,999999);
$number = $num1.$num2.$num3;
?>

<h3 class="text-center"> <strong>Your Order Number:</strong> <span style="color: blue;"><?php echo
"$number"; ?></span> </h3>

</body>

</html>
```

CONNECTION.PHP

```
<?php

function Connect()
```

```
{
    $dbhost = "localhost";
    $dbuser = "root";
    $dbpass = "";
    $dbname = "foodorder";

    //Create Connection
    $conn = new mysqli($dbhost, $dbuser, $dbpass, $dbname) or die($conn->connect_error);

    return $conn;
}
?>
```

CONTACT US.PHP

```
<?php
session_start();
?>

<html>

<head>
    <title> Contact | only Cafe' </title>
</head>

<link rel="stylesheet" type = "text/css" href ="css/contactus.css">
<link rel="stylesheet" type = "text/css" href ="css/bootstrap.min.css">
<script type="text/javascript" src="js/jquery.min.js"></script>
<script type="text/javascript" src="js/bootstrap.min.js"></script>

<body>

<button onclick="topFunction()" id="myBtn" title="Go to top">
    <span class="glyphicon glyphicon-chevron-up"></span>
```

```
</button>
```

```
<script type="text/javascript">
```

```
    window.onscroll = function()
```

```
    {
```

```
        scrollFunction()
```

```
    };
```

```
function scrollFunction(){
```

```
    if (document.body.scrollTop > 20 || document.documentElement.scrollTop > 20) {
```

```
        document.getElementById("myBtn").style.display = "block";
```

```
    } else {
```

```
        document.getElementById("myBtn").style.display = "none";
```

```
    }
```

```
}
```

```
function topFunction() {
```

```
    document.body.scrollTop = 0;
```

```
    document.documentElement.scrollTop = 0;
```

```
}
```

```
</script>
```

```
<nav class="navbar navbar-inverse navbar-fixed-top navigation-clean-search" role="navigation">
```

```
    <div class="container">
```

```
        <div class="navbar-header">
```

```
            <button type="button" class="navbar-toggle collapsed" data-toggle="collapse" data-target="#myNavbar">
```

```
                <span class="sr-only">Toggle navigation</span>
```

```
                <span class="icon-bar"></span>
```

```
                <span class="icon-bar"></span>
```

```
                <span class="icon-bar"></span>
```

```
            </button>
```

```
            <a class="navbar-brand" href="index.php">only Cafe'</a>
```

```
        </div>
```

```
    <div class="collapse navbar-collapse" id="myNavbar">
```

```
        <ul class="nav navbar-nav">
```

```
            <li><a href="index.php">Home</a></li>
```

```
            <li><a href="aboutus.php">About</a></li>
```

```
            <li class="active"><a href="contactus.php">Contact Us</a></li>
```

```
        </ul>
```

```

<?php

if(isset($_SESSION['login_user1'])){

?>

<ul class="nav navbar-nav navbar-right">
    <li><a href="#"><span class="glyphicon glyphicon-user"></span> Welcome <?php echo
$_SESSION['login_user1']; ?> </a></li>
    <li><a href="myrestaurant.php">MANAGER CONTROL PANEL</a></li>
    <li><a href="logout_m.php"><span class="glyphicon glyphicon-log-out"></span> Log Out </a></li>
</ul>
<?php
}
else if (isset($_SESSION['login_user2'])) {
?>

<ul class="nav navbar-nav navbar-right">
    <li><a href="#"><span class="glyphicon glyphicon-user"></span> Welcome <?php echo
$_SESSION['login_user2']; ?> </a></li>
    <li><a href="foodlist.php"><span class="glyphicon glyphicon-cutlery"></span> Food Zone </a></li>
    <li><a href="cart.php"><span class="glyphicon glyphicon-shopping-cart"></span> Cart
    (<?php
        if(isset($_SESSION["cart"])){
            $count = count($_SESSION["cart"]);
            echo "$count";
        }
        else
            echo "0";
        ?>)
    </a></li>
    <li><a href="logout_u.php"><span class="glyphicon glyphicon-log-out"></span> Log Out </a></li>
</ul>
<?php
}
else {

?>

```



```

<ul class="nav navbar-nav navbar-right">
    <li><a href="#" class="dropdown-toggle active" data-toggle="dropdown" role="button" aria-
haspopup="true" aria-expanded="false"><span class="glyphicon glyphicon-user"></span> Sign Up <span
class="caret"></span> </a>
        <ul class="dropdown-menu">
            <li> <a href="customersignup.php"> User Sign-up</a></li>
            <li> <a href="managersignup.php"> Manager Sign-up</a></li>

        </ul>
    </li>

    <li><a href="#" class="dropdown-toggle active" data-toggle="dropdown" role="button" aria-
haspopup="true" aria-expanded="false"><span class="glyphicon glyphicon-log-in"></span> Login <span
class="caret"></span></a>
        <ul class="dropdown-menu">
            <li> <a href="customerlogin.php"> User Login</a></li>
            <li> <a href="managerlogin.php"> Manager Login</a></li>

        </ul>
    </li>
</ul>

<?php
}
?>
</div>

</div>
</nav>
<br>

<div class="heading">
    <strong>Want to contact <span class="edit"> only Cafe' </span>?</strong>
    <br>
    Here are a few ways to get in touch with us.
</div>

<div class="col-xs-12 line"><hr></div>

```

```

<div class="container" >
<div class="col-md-5" style="float: none; margin: 0 auto;">
  <div class="form-area">
    <form method="post" action="">
      <br style="clear: both">
      <h3 style="margin-bottom: 25px; text-align: center; font-size: 30px;"> Contact Form</h3>

      <div class="form-group">
        <input type="text" class="form-control" id="name" name="name" placeholder="Name" required
autofocus="">
      </div>

      <div class="form-group">
        <input type="email" class="form-control" id="email" name="email" placeholder="Email" required>
      </div>

      <div class="form-group">
        <input type="Number" class="form-control" id="mobile" name="mobile" placeholder="Mobile Number"
required>
      </div>

      <div class="form-group">
        <input type="text" class="form-control" id="subject" name="subject" placeholder="Subject" required>
      </div>

      <div class="form-group">
        <textarea class="form-control" type="textarea" id="message" name="message" placeholder="Message"
maxlength="140" rows="7"></textarea>
        <span class="help-block"><p id="characterLeft" class="help-block">Max Character length : 140
</p></span>
      </div>
      <input type="submit" name="submit" type="button" id="submit" name="submit" class="btn btn-primary pull-
right"/>
    </form>

  </div>
</div>

</div>

```

```
<?php
if (isset($_POST['submit'])){
require 'connection.php';
$conn = Connect();

$Name = $conn->real_escape_string($_POST['name']);
>Email_Id = $conn->real_escape_string($_POST['email']);
$Mobile_No = $conn->real_escape_string($_POST['mobile']);
$Subject = $conn->real_escape_string($_POST['subject']);
$Message = $conn->real_escape_string($_POST['message']);

$query = "INSERT into contact(Name,Email,Mobile,Subject,Message)
VALUES('$Name','$Email_Id','$Mobile_No','$Subject','$Message')";
$success = $conn->query($query);

if (!$success){
    die("Couldnt enter data: ".$conn->error);
}

$conn->close();
}
?>

</body>

</html>
```

CUSTOMER REGISTER SUCESSFULLY.PHP

```
<html>

<head>
    <title> Manager Login | only Cafe' </title>
</head>
```

```
<link rel="stylesheet" type = "text/css" href = "css/manager_registered_success.css">
<link rel="stylesheet" type = "text/css" href = "css/bootstrap.min.css">
<script type="text/javascript" src="js/jquery.min.js"></script>
<script type="text/javascript" src="js/bootstrap.min.js"></script>

<body>

<button onclick="topFunction()" id="myBtn" title="Go to top">
  <span class="glyphicon glyphicon-chevron-up"></span>
</button>

<script type="text/javascript">
  window.onscroll = function()
  {
    scrollFunction()
  };

  function scrollFunction(){
    if (document.body.scrollTop > 20 || document.documentElement.scrollTop > 20) {
      document.getElementById("myBtn").style.display = "block";
    } else {
      document.getElementById("myBtn").style.display = "none";
    }
  }

  function topFunction() {
    document.body.scrollTop = 0;
    document.documentElement.scrollTop = 0;
  }
</script>

<nav class="navbar navbar-inverse navbar-fixed-top navigation-clean-search" role="navigation">
  <div class="container">
    <div class="navbar-header">
      <button type="button" class="navbar-toggle collapsed" data-toggle="collapse" data-target="#myNavbar">
        <span class="sr-only">Toggle navigation</span>
        <span class="icon-bar"></span>
        <span class="icon-bar"></span>
        <span class="icon-bar"></span>
      </button>
    </div>
  </div>
</nav>
```

```

        </button>

        <a class="navbar-brand" href="index.php">only Cafe'</a>
    </div>

    <div class="collapse navbar-collapse" id="myNavbar">
        <ul class="nav navbar-nav">
            <li class="active" ><a href="index.php">Home</a></li>
            <li><a href="aboutus.php">About</a></li>
            <li><a href="contactus.php">Contact Us</a></li>
        </ul>

        <ul class="nav navbar-nav navbar-right">
            <li><a href="#"><span class="glyphicon glyphicon-user"></span> Sign Up </a></li>
            <li><a href="#"><span class="glyphicon glyphicon-log-in"></span> Login </a></li>
        </ul>
    </div>

</div>
</nav>

<?php

require 'connection.php';
$conn = Connect();

$fullname = $conn->real_escape_string($_POST['fullname']);
$username = $conn->real_escape_string($_POST['username']);
$email = $conn->real_escape_string($_POST['email']);
$contact = $conn->real_escape_string($_POST['contact']);
$address = $conn->real_escape_string($_POST['address']);
$password = $conn->real_escape_string($_POST['password']);

$query = "INSERT into CUSTOMER(fullname,username,email,contact,address,password) VALUES('" .
$fullname . "','" . $username . "','" . $email . "','" . $contact . "','" . $address . "','" . $password . "')";
$success = $conn->query($query);

if (!$success){
    die("Couldnt enter data: ".$conn->error);
}

```

```
$conn->close();
```

```
?>
```

```
<div class="container">
  <div class="jumbotron" style="text-align: center;">
    <h2> <?php echo "Welcome $fullname!" ?> </h2>
    <h1>Your account has been created.</h1>
    <p>Login Now from <a href="customerlogin.php">HERE</a></p>
  </div>
</div>

</body>
</html>
```

CUSTOMER LOGIN.PHP

```
<?php
include('login_u.php');

if(isset($_SESSION['login_user2'])){
  header("location: foodlist.php");
}
?>
```

```
<!DOCTYPE html>
<html>
```

```
<head>
  <title> Guest Login | only Cafe' </title>
</head>
```

```
<link rel="stylesheet" type = "text/css" href ="css/managerlogin.css">
<link rel="stylesheet" type = "text/css" href ="css/bootstrap.min.css">
<script type="text/javascript" src="js/jquery.min.js"></script>
<script type="text/javascript" src="js/bootstrap.min.js"></script>
```

```
<body>
```

```
<button onclick="topFunction()" id="myBtn" title="Go to top">
  <span class="glyphicon glyphicon-chevron-up"></span>
</button>
```

```
<script type="text/javascript">
```

```
  window.onscroll = function()
```

```
  {
```

```
    scrollFunction()
```

```
  };
```

```
function scrollFunction(){
```

```
  if (document.body.scrollTop > 20 || document.documentElement.scrollTop > 20) {
```

```
    document.getElementById("myBtn").style.display = "block";
```

```
  } else {
```

```
    document.getElementById("myBtn").style.display = "none";
```

```
  }
```

```
}
```

```
function topFunction() {
```

```
  document.body.scrollTop = 0;
```

```
  document.documentElement.scrollTop = 0;
```

```
}
```

```
</script>
```

```
<nav class="navbar navbar-inverse navbar-fixed-top navigation-clean-search" role="navigation">
```

```
<div class="container">
```

```
<div class="navbar-header">
```

```
<button type="button" class="navbar-toggle collapsed" data-toggle="collapse" data-target="#myNavbar">
```

```
<span class="sr-only">Toggle navigation</span>
```

```
<span class="icon-bar"></span>
```

```
<span class="icon-bar"></span>
```

```
<span class="icon-bar"></span>
```

```
</button>
```

```
<a class="navbar-brand" href="index.php">only Cafe</a>
```

```
</div>
```

```
<div class="collapse navbar-collapse" id="myNavbar">
```

```
<ul class="nav navbar-nav">
```

```
<li><a href="index.php">Home</a></li>
<li><a href="aboutus.php">About</a></li>
<li><a href="contactus.php">Contact Us</a></li>
</ul>
```

```
<ul class="nav navbar-nav navbar-right">
  <li><a href="#" class="dropdown-toggle active" data-toggle="dropdown" role="button" aria-
haspopup="true" aria-expanded="false"><span class="glyphicon glyphicon-user"></span> Sign Up <span
class="caret"></span> </a>
    <ul class="dropdown-menu">
      <li> <a href="customersignup.php"> User Sign-up</a></li>
      <li> <a href="managersignup.php"> Manager Sign-up</a></li>

    </ul>
  </li>
```

```
    <li><a href="#" class="dropdown-toggle active" data-toggle="dropdown" role="button" aria-
haspopup="true" aria-expanded="false"><span class="glyphicon glyphicon-log-in"></span> Login <span
class="caret"></span></a>
      <ul class="dropdown-menu">
        <li> <a href="customerlogin.php"> User Login</a></li>
        <li> <a href="managerlogin.php"> Manager Login</a></li>

      </ul>
    </li>
  </ul>
</div>
```

```
</div>
</nav>
```

```
<div class="container">
  <div class="jumbotron">
    <h1>Hi Guest,<br> Welcome to <span class="edit"> only Cafe' </span></h1>
    <br>
    <p>Kindly LOGIN to continue.</p>
  </div>
</div>
```

```
<div class="container" style="margin-top: 4%; margin-bottom: 2%;">
```



```

<div class="col-md-5 col-md-offset-4">
  <label style="margin-left: 5px;color: red;"><span> <?php echo $error; ?> </span></label>
<div class="panel panel-primary">
  <div class="panel-heading"> Login </div>
  <div class="panel-body">

  <form action="" method="POST">

  <div class="row">
    <div class="form-group col-xs-12">
      <label for="username"><span class="text-danger" style="margin-right: 5px;">*</span> Username:
    </label>
    <div class="input-group">
      <input class="form-control" id="username" type="text" name="username" placeholder="Username"
required="" autofocus="">
      <span class="input-group-btn">
        <label class="btn btn-primary"><span class="glyphicon glyphicon-user" aria-hidden="true"></span></label>
      </span>
    </div>
  </div>
</div>

  <div class="row">
    <div class="form-group col-xs-12">
      <label for="password"><span class="text-danger" style="margin-right: 5px;">*</span> Password: </label>
      <div class="input-group">
        <input class="form-control" id="password" type="password" name="password" placeholder="Password"
required="">
        <span class="input-group-btn">
          <label class="btn btn-primary"><span class="glyphicon glyphicon-lock" aria-
hidden="true"></span></label>
        </span>
      </div>
    </div>
  </div>
</div>

  <div class="row">
    <div class="form-group col-xs-4">

```

```

        <button class="btn btn-primary" name="submit" type="submit" value=" Login ">Submit</button>
    </div>

</div>
<label style="margin-left: 5px;">or</label> <br>
<label style="margin-left: 5px;"><a href="customersignup.php">Create a new account.</a></label>

</form>
</div>
</div>
</div>
</div>

</body>
</html>

```

CUSTOMER SIGNUP.PHP

```

<html>
<head>
    <title> Guest Signup | only Cafe' </title>
</head>

<link rel="stylesheet" type = "text/css" href ="css/managersignup.css">
<link rel="stylesheet" type = "text/css" href ="css/bootstrap.min.css">
<script type="text/javascript" src="js/jquery.min.js"></script>
<script type="text/javascript" src="js/bootstrap.min.js"></script>

<body>

    <button onclick="topFunction()" id="myBtn" title="Go to top">
        <span class="glyphicon glyphicon-chevron-up"></span>
    </button>

    <script type="text/javascript">

```

```

window.onscroll = function()
{
    scrollFunction()
};

function scrollFunction(){
    if (document.body.scrollTop > 20 || document.documentElement.scrollTop > 20) {
        document.getElementById("myBtn").style.display = "block";
    } else {
        document.getElementById("myBtn").style.display = "none";
    }
}

function topFunction() {
    document.body.scrollTop = 0;
    document.documentElement.scrollTop = 0;
}
</script>

```

```

<nav class="navbar navbar-inverse navbar-fixed-top navigation-clean-search" role="navigation">
  <div class="container">
    <div class="navbar-header">
      <button type="button" class="navbar-toggle collapsed" data-toggle="collapse" data-target="#myNavbar">
        <span class="sr-only">Toggle navigation</span>
        <span class="icon-bar"></span>
        <span class="icon-bar"></span>
        <span class="icon-bar"></span>
      </button>
      <a class="navbar-brand" href="index.php">only Cafe'</a>
    </div>

    <div class="collapse navbar-collapse " id="myNavbar">
      <ul class="nav navbar-nav">
        <li ><a href="index.php">Home</a></li>
        <li><a href="aboutus.php">About</a></li>
        <li><a href="contactus.php">Contact Us</a></li>
      </ul>

      <ul class="nav navbar-nav navbar-right">

```

```
    <li><a href="#" class="dropdown-toggle active" data-toggle="dropdown" role="button" aria-
haspopup="true" aria-expanded="false"><span class="glyphicon glyphicon-user"></span> Sign Up <span
class="caret"></span> </a>
```

```
    <ul class="dropdown-menu">
```

```
    <li> <a href="customersignup.php"> User Sign-up</a></li>
```

```
    <li> <a href="managersignup.php"> Manager Sign-up</a></li>
```

```
</ul>
```

```
</li>
```

```
    <li><a href="#" class="dropdown-toggle active" data-toggle="dropdown" role="button" aria-
haspopup="true" aria-expanded="false"><span class="glyphicon glyphicon-log-in"></span> Login <span
class="caret"></span></a>
```

```
    <ul class="dropdown-menu">
```

```
    <li> <a href="customerlogin.php"> User Login</a></li>
```

```
    <li> <a href="managerlogin.php"> Manager Login</a></li>
```

```
</ul>
```

```
</li>
```

```
</ul>
```

```
</div>
```

```
</div>
```

```
</nav>
```

```
<div class="container">
```

```
<div class="jumbotron">
```

```
<h1>Hi peeps, <br> Welcome to <span class="edit"> only Cafe' </span></h1>
```

```
<br>
```

```
<p>Get started by creating your account</p>
```

```
</div>
```

```
</div>
```

```
<div class="container" style="margin-top: 4%; margin-bottom: 2%;">
```

```
<div class="col-md-5 col-md-offset-4">
```

```
<div class="panel panel-primary">
```

```
<div class="panel-heading"> Create Account </div>
```

```
<div class="panel-body">
```

```

<form role="form" action="customer_registered_success.php" method="POST">

<div class="row">
<div class="form-group col-xs-12">
<label for="fullname"><span class="text-danger" style="margin-right: 5px;”*</span> Full Name: </label>
<div class="input-group">
<input class="form-control" id="fullname" type="text" name="fullname" placeholder="Your Full Name"
required="" autofocus="">
<span class="input-group-btn">
<label class="btn btn-primary"><span class="glyphicon glyphicon-user" aria-hidden="true"></span></label>
</span>
</span>
</div>
</div>
</div>

<div class="row">
<div class="form-group col-xs-12">
<label for="username"><span class="text-danger" style="margin-right: 5px;”*</span> Username:
</label>
<div class="input-group">
<input class="form-control" id="username" type="text" name="username" placeholder="Your Username"
required="">
<span class="input-group-btn">
<label class="btn btn-primary"><span class="glyphicon glyphicon-user" aria-hidden="true"></span></label>
</span>
</span>
</div>
</div>
</div>

<div class="row">
<div class="form-group col-xs-12">
<label for="email"><span class="text-danger" style="margin-right: 5px;”*</span> Email: </label>
<div class="input-group">
<input class="form-control" id="email" type="email" name="email" placeholder="Email" required="">
<span class="input-group-btn">
<label class="btn btn-primary"><span class="glyphicon glyphicon-envelope" aria-
hidden="true"></span></label>

```

```

    </span>
    </span>
  </div>
</div>
</div>

<div class="row">
  <div class="form-group col-xs-12">
    <label for="contact"><span class="text-danger" style="margin-right: 5px;">*</span> Contact: </label>
    <div class="input-group">
      <input class="form-control" id="contact" type="text" name="contact" placeholder="Contact" required="">
      <span class="input-group-btn">
        <label class="btn btn-primary"><span class="glyphicon glyphicon-phone" aria-
hidden="true"></span></label>
      </span>

    </div>
  </div>
</div>

<div class="row">
  <div class="form-group col-xs-12">
    <label for="address"><span class="text-danger" style="margin-right: 5px;">*</span> Address: </label>
    <div class="input-group">
      <input class="form-control" id="address" type="text" name="address" placeholder="Address"
required="">
      <span class="input-group-btn">
        <label class="btn btn-primary"><span class="glyphicon glyphicon-home" aria-hidden="true"></span></label>
      </span>
    </div>
  </div>
</div>

<div class="row">
  <div class="form-group col-xs-12">
    <label for="password"><span class="text-danger" style="margin-right: 5px;">*</span> Password: </label>
    <div class="input-group">
      <input class="form-control" id="password" type="password" name="password" placeholder="Password"
required="">

```

```

        <span class="input-group-btn">
            <label class="btn btn-primary"><span class="glyphicon glyphicon-lock" aria-
hidden="true"></span></label>
        </span>

    </div>
</div>
</div>

<div class="row">
    <div class="form-group col-xs-4">
        <button class="btn btn-primary" type="submit">Submit</button>
    </div>

</div>
<label style="margin-left: 5px;">or</label> <br>
<label style="margin-left: 5px;"><a href="customerlogin.php">Have an account? Login.</a></label>

</form>

</div>

</div>

</div>
</div>
</body>
</html>

```

DELETE FOOD ITEM.PHP

```

<?php
include('session_m.php');

```

```
if(!isset($login_session)){
header('Location: managerlogin.php');
}

?>
<!DOCTYPE html>
<html>

<head>
<title> Manager Login | only Cafe' </title>
</head>

<link rel="stylesheet" type = "text/css" href ="css/delete_food_items.css">
<link rel="stylesheet" type = "text/css" href ="css/bootstrap.min.css">
<script type="text/javascript" src="js/jquery.min.js"></script>
<script type="text/javascript" src="js/bootstrap.min.js"></script>

<body>

<button onclick="topFunction()" id="myBtn" title="Go to top">
<span class="glyphicon glyphicon-chevron-up"></span>
</button>

<script type="text/javascript">
window.onload = function()
{
scrollFunction()
};

function scrollFunction(){
if (document.body.scrollTop > 20 || document.documentElement.scrollTop > 20) {
document.getElementById("myBtn").style.display = "block";
} else {
document.getElementById("myBtn").style.display = "none";
}
}

function topFunction() {
```



```
document.body.scrollTop = 0;
document.documentElement.scrollTop = 0;
}
</script>
```

```
<nav class="navbar navbar-inverse navbar-fixed-top navigation-clean-search" role="navigation">
  <div class="container">
    <div class="navbar-header">
      <button type="button" class="navbar-toggle collapsed" data-toggle="collapse" data-target="#myNavbar">
        <span class="sr-only">Toggle navigation</span>
        <span class="icon-bar"></span>
        <span class="icon-bar"></span>
        <span class="icon-bar"></span>
      </button>
      <a class="navbar-brand" href="index.php">only Cafe'</a>
    </div>
```

```
    <div class="collapse navbar-collapse " id="myNavbar">
      <ul class="nav navbar-nav">
        <li><a href="index.php">Home</a></li>
        <li><a href="aboutus.php">About</a></li>
        <li><a href="contactus.php">Contact Us</a></li>
      </ul>
```

```
      <ul class="nav navbar-nav navbar-right">
        <li><a href="#"><span class="glyphicon glyphicon-user"></span> Welcome <?php echo $login_session;
?> </a></li>
        <li class="active"> <a href="managerlogin.php">MANAGER CONTROL PANEL</a></li>
        <li><a href="logout_m.php"><span class="glyphicon glyphicon-log-out"></span> Log Out </a></li>
      </ul>
    </div>
```

```
  </div>
</nav>
```

```
<div class="container">
  <div class="jumbotron">
```

```
<h1>Hello Manager! </h1>
<p>Manage all your restaurant from here</p>
```

```
</div>
```

```
</div>
```

```
<div class="container">
  <div class="container">
    <div class="col">
```

```

    </div>
```

```
  </div>
</div>
```

```

    <div class="col-xs-3" style="text-align: center;">
```

```

      <div class="list-group">
```

```
        <a href="myrestaurant.php" class="list-group-item ">My Restaurant</a>
```

```
        <a href="view_food_items.php" class="list-group-item ">View Food Items</a>
```

```
        <a href="add_food_items.php" class="list-group-item ">Add Food Items</a>
```

```
        <a href="edit_food_items.php" class="list-group-item ">Edit Food Items</a>
```

```
        <a href="delete_food_items.php" class="list-group-item active">Delete Food Items</a>
```

```
        <a href="view_order_details.php" class="list-group-item ">View Order Details</a>
```

```
      </div>
```

```
    </div>
```

```

  <div class="col-xs-9">
```

```
    <div class="form-area" style="padding: 0px 100px 100px 100px;">
```

```
      <form action="delete_food_items1.php" method="POST">
```

```
        <br style="clear: both">
```

```
        <h3 style="margin-bottom: 25px; text-align: center; font-size: 30px;"> DELETE YOUR FOOD ITEMS
FROM HERE </h3>
```

```
<?php
```

```
// Storing Session
```

```
$user_check=$_SESSION['login_user1'];
```

```
$sql = "SELECT * FROM food f WHERE f.options = 'ENABLE' AND f.R_ID IN (SELECT r.R_ID FROM  
RESTAURANTS r WHERE r.M_ID='$user_check') ORDER BY F_ID";
```

```
$result = mysqli_query($conn, $sql);
```

```
if (mysqli_num_rows($result) > 0)
```

```
{
```

```
?>
```

```
<table class="table table-striped">
```

```
<thead class="thead-dark">
```

```
<tr>
```

```
<th> # </th>
```

```
<th> Food ID </th>
```

```
<th> Food Name </th>
```

```
<th> Price </th>
```

```
<th> Description </th>
```

```
<th> Restaurant ID </th>
```

```
</tr>
```

```
</thead>
```

```
<?PHP
```

```
//OUTPUT DATA OF EACH ROW
```

```
while($row = mysqli_fetch_assoc($result)){
```

```
?>
```

```
<tbody>
```

```
<tr>
```

```
<td> <input name="checkbox[]" type="checkbox" value="<?php echo $row['F_ID']; ?>" /> </td>
```

```
<td><?php echo $row["F_ID"]; ?></td>
```

```
<td><?php echo $row["name"]; ?></td>
```

```
<td><?php echo $row["price"]; ?></td>
```

```
<td><?php echo $row["description"]; ?></td>
```

```
<td><?php echo $row["R_ID"]; ?></td>
```

```
</tr>
```

```
</tbody>
```

```

<?php } ?>
</table>

<br>

    <div class="form-group">
        <button type="submit" id="submit" name="delete" value="Delete" class="btn btn-danger pull-right">
DELETE</button>
    </div>

<?php } else { ?>

<h4><center>0 RESULTS</center> </h4>

<?php } ?>

</form>

</div>

</div>
</div>

</body>
</html>

```

DELETE FOOD ITEM1.PHP

```

<?php

include('session_m.php');

if(!isset($login_session)){
header('Location: managerlogin.php');
}

```

```
$cheks = implode("", $_POST['checkbox']);  
$sql = "UPDATE FOOD SET `options` = 'DISABLE' WHERE F_ID in ('$cheks')";  
$result = mysqli_query($conn,$sql) or die(mysqli_error($conn));  
  
header('Location: delete_food_items.php');  
$conn->close();  
  
?>
```

EDIT FOOD ITEM.PHP

```
<?php  
include('session_m.php');  
  
if(!isset($login_session)){  
header('Location: managerlogin.php');  
}  
  
?>  
  
<!DOCTYPE html>  
<html>  
  
    <head>  
        <title> Manager Login | only Cafe' </title>  
    </head>  
  
    <link rel="stylesheet" type = "text/css" href = "css/edit_food_items.css">  
    <link rel="stylesheet" type = "text/css" href = "css/bootstrap.min.css">  
    <script type="text/javascript" src="js/jquery.min.js"></script>  
    <script type="text/javascript" src="js/bootstrap.min.js"></script>  
    <script type="text/javascript">  
        function display_alert()  
        {
```

```
    alert("Data Updated Successfully...!!!");
}
</script>
```

```
<body>
```

```
<button onclick="topFunction()" id="myBtn" title="Go to top">
  <span class="glyphicon glyphicon-chevron-up"></span>
</button>
```

```
<script type="text/javascript">
```

```
  window.onscroll = function()
  {
    scrollFunction()
  };

```

```
function scrollFunction(){
  if (document.body.scrollTop > 20 || document.documentElement.scrollTop > 20) {
    document.getElementById("myBtn").style.display = "block";
  } else {
    document.getElementById("myBtn").style.display = "none";
  }
}

```

```
function topFunction() {
  document.body.scrollTop = 0;
  document.documentElement.scrollTop = 0;
}

```

```
</script>
```

```
<nav class="navbar navbar-inverse navbar-fixed-top navigation-clean-search" role="navigation">
  <div class="container">
    <div class="navbar-header">
      <button type="button" class="navbar-toggle collapsed" data-toggle="collapse" data-target="#myNavbar">
        <span class="sr-only">Toggle navigation</span>
        <span class="icon-bar"></span>
        <span class="icon-bar"></span>
        <span class="icon-bar"></span>
      </button>

```

```
<a class="navbar-brand" href="index.php">only Cafe'</a>
</div>

<div class="collapse navbar-collapse " id="myNavbar">
  <ul class="nav navbar-nav">
    <li><a href="index.php">Home</a></li>
    <li><a href="aboutus.php">About</a></li>
    <li><a href="contactus.php">Contact Us</a></li>
  </ul>

  <ul class="nav navbar-nav navbar-right">
    <li><a href="#"><span class="glyphicon glyphicon-user"></span> Welcome <?php echo $login_session;
?> </a></li>
    <li class="active"> <a href="managerlogin.php">MANAGER CONTROL PANEL</a></li>
    <li><a href="logout_m.php"><span class="glyphicon glyphicon-log-out"></span> Log Out </a></li>
  </ul>
</div>

</div>
</nav>
```

```
<div class="container">
  <div class="jumbotron">
    <h1>Hello Manager! </h1>
    <p>Manage all your restaurant from here</p>

  </div>
</div>
```

```
<div class="container">
  <div class="container">
    <div class="col">

  </div>
</div>
```

```
<div class="col-xs-3" style="text-align: center;">

<div class="list-group">
  <a href="myrestaurant.php" class="list-group-item ">My Restaurant</a>
  <a href="view_food_items.php" class="list-group-item ">View Food Items</a>
  <a href="add_food_items.php" class="list-group-item ">Add Food Items</a>
  <a href="edit_food_items.php" class="list-group-item active">Edit Food Items</a>
  <a href="delete_food_items.php" class="list-group-item ">Delete Food Items</a>
  <a href="view_order_details.php" class="list-group-item ">View Order Details</a>
</div>
</div>
```

```
<div class="col-xs-3">

<div class="form-area" style="padding: 10px 10px 110px 10px; ">

<div style="text-align: center;">
  <h3>Click On Menu <br><br></h3>
</div>
<?php
```

```
if (isset($_GET['submit'])) {
  $F_ID = $_GET['dfid'];
  $name = $_GET['dname'];
  $price = $_GET['dprice'];
  $description = $_GET['ddescription'];

  $query = mysqli_query($conn, "UPDATE food set
  name='$name', price='$price',
  description='$description' where F_ID='$F_ID'");
}
```



```

$query = mysqli_query($conn, "SELECT * FROM food f WHERE f.R_ID IN (SELECT r.R_ID FROM
RESTAURANTS r WHERE r.M_ID='$user_check') ORDER BY F_ID");

while ($row = mysqli_fetch_array($query)) {

    ?>

    <div class="list-group" style="text-align: center;">
        <?php
        echo "<b><a href='edit_food_items.php?update= {$row['F_ID']}'>{$row['name']}</a></b>";
        ?>
    </div>

    <?php
    }
    ?>

    <?php
    if (isset($_GET['update'])) {
        $update = $_GET['update'];
        $query1 = mysqli_query($conn, "SELECT * FROM food WHERE F_ID=$update");
        while ($row1 = mysqli_fetch_array($query1)) {

            ?>
        }
    }
    </div>
    </div>

    <div class="container">
    <div class="col-md-6">
    <div class="form-area" style="padding: 0px 100px 100px 100px;">
        <form action="edit_food_items.php" method="GET">
        <br style="clear: both">
        <h3 style="margin-bottom: 25px; text-align: center; font-size: 30px;"> EDIT YOUR FOOD ITEMS HERE
    </h3>

    <div class="form-group">
        <input class="input" type="hidden" name="dfid" value=<?php echo $row1['F_ID']; ?> />

```

```
</div>
```

```
<div class="form-group">
```

```
    <label for="username"><span class="text-danger" style="margin-right: 5px;">*</span> Food Name:
</label>
```

```
    <input type="text" class="form-control" id="dname" name="dname" value=<?php echo $row1['name']; ?>
placeholder="Your Food name" required="">
```

```
</div>
```

```
<div class="form-group">
```

```
    <label for="username"><span class="text-danger" style="margin-right: 5px;">*</span> Food Price:
</label>
```

```
    <input type="text" class="form-control" id="dprice" name="dprice" value=<?php echo $row1['price']; ?>
placeholder="Your Food Price (INR)" required="">
```

```
</div>
```

```
<div class="form-group">
```

```
    <label for="username"><span class="text-danger" style="margin-right: 5px;">*</span> Food Description:
</label>
```

```
    <input type="text" class="form-control" id="ddescription" name="ddescription" value=<?php echo
$row1['description']; ?> placeholder="Your Food Description" required="">
```

```
</div>
```

```
<div class="form-group">
```

```
    <button type="submit" id="submit" name="submit" class="btn btn-primary pull-right"
onclick="display_alert()" value="Display alert box" > Update </button>
```

```
</div>
```

```
</form>
```

```
<?php
}
}
```

```
?>
```

```
</div>
```

```
</div>
```

```
<?php
```

```
mysqli_close($conn);
```

```
?>
```

```
</div>
```

```
</div>
```

```
</body>
```

```
<br>
```

```
</html>
```

FOODLIST.PHP

```
<?php
```

```
session_start();
```

```
if(!isset($_SESSION['login_user2'])){
```

```
header("location: customerlogin.php");
```

```
}
```

```
?>
```

```
<html>
```

```
<head>
```

```
<title> Explore | only Cafe' </title>
```

```
</head>
```

```
<link rel="stylesheet" type = "text/css" href = "css/foodlist.css">
```

```
<link rel="stylesheet" type = "text/css" href = "css/bootstrap.min.css">
```

```
<script type="text/javascript" src="js/jquery.min.js"></script>
```

```
<script type="text/javascript" src="js/bootstrap.min.js"></script>
```

```
<body>
```

```
<button onclick="topFunction()" id="myBtn" title="Go to top">
  <span class="glyphicon glyphicon-chevron-up"></span>
</button>
```

```
<script type="text/javascript">
```

```
  window.onscroll = function()
  {
    scrollFunction()
  };
```

```
function scrollFunction(){
  if (document.body.scrollTop > 20 || document.documentElement.scrollTop > 20) {
    document.getElementById("myBtn").style.display = "block";
  } else {
    document.getElementById("myBtn").style.display = "none";
  }
}
```

```
function topFunction() {
  document.body.scrollTop = 0;
  document.documentElement.scrollTop = 0;
}
```

```
</script>
```

```
<nav class="navbar navbar-inverse navbar-fixed-top navigation-clean-search" role="navigation">
```

```
<div class="container">
```

```
<div class="navbar-header">
```

```
<button type="button" class="navbar-toggle collapsed" data-toggle="collapse" data-target="#myNavbar">
```

```
<span class="sr-only">Toggle navigation</span>
```

```
<span class="icon-bar"></span>
```

```
<span class="icon-bar"></span>
```

```
<span class="icon-bar"></span>
```

```
</button>
```

```
<a class="navbar-brand" href="index.php">only Cafe'</a>
```

```
</div>
```

```

<div class="collapse navbar-collapse " id="myNavbar">
    <ul class="nav navbar-nav">
        <li><a href="index.php">Home</a></li>
        <li><a href="aboutus.php">About</a></li>
        <li><a href="contactus.php">Contact Us</a></li>

    </ul>

<?php
if(isset($_SESSION['login_user1'])){

?>

    <ul class="nav navbar-nav navbar-right">
        <li><a href="#"><span class="glyphicon glyphicon-user"></span> Welcome <?php echo
$_SESSION['login_user1']; ?> </a></li>
        <li><a href="myrestaurant.php">MANAGER CONTROL PANEL</a></li>
        <li><a href="logout_m.php"><span class="glyphicon glyphicon-log-out"></span> Log Out </a></li>
    </ul>
<?php
}
else if (isset($_SESSION['login_user2'])) {
    ?>

    <ul class="nav navbar-nav navbar-right">
        <li><a href="#"><span class="glyphicon glyphicon-user"></span> Welcome <?php echo
$_SESSION['login_user2']; ?> </a></li>
        <li class="active" ><a href="foodlist.php"><span class="glyphicon glyphicon-cutlery"></span> Food Zone
</a></li>
        <li><a href="cart.php"><span class="glyphicon glyphicon-shopping-cart"></span> Cart (<?php
if(isset($_SESSION["cart"])){
    $count = count($_SESSION["cart"]);
    echo "$count";
}
else
    echo "0";
?>) </a></li>
        <li><a href="logout_u.php"><span class="glyphicon glyphicon-log-out"></span> Log Out </a></li>
    </ul>
<?php

```

```

}
else {

?>

<ul class="nav navbar-nav navbar-right">
    <li><a href="#" class="dropdown-toggle active" data-toggle="dropdown" role="button" aria-
haspopup="true" aria-expanded="false"><span class="glyphicon glyphicon-user"></span> Sign Up <span
class="caret"></span> </a>
        <ul class="dropdown-menu">
            <li> <a href="customersignup.php"> User Sign-up</a></li>
            <li> <a href="managersignup.php"> Manager Sign-up</a></li>
            <li> <a href="#"> Admin Sign-up</a></li>
        </ul>
    </li>

    <li><a href="#" class="dropdown-toggle active" data-toggle="dropdown" role="button" aria-
haspopup="true" aria-expanded="false"><span class="glyphicon glyphicon-log-in"></span> Login <span
class="caret"></span></a>
        <ul class="dropdown-menu">
            <li> <a href="customerlogin.php"> User Login</a></li>
            <li> <a href="managerlogin.php"> Manager Login</a></li>
            <li> <a href="#"> Admin Login</a></li>
        </ul>
    </li>
</ul>

<?php
}
?>

</div>

</div>
</nav>

<div id="myCarousel" class="carousel slide" data-ride="carousel">
<ol class="carousel-indicators">
    <li data-target="#myCarousel" data-slide-to="0" class="active"></li>

```

```
<li data-target="#myCarousel" data-slide-to="1"></li>
<li data-target="#myCarousel" data-slide-to="2"></li>
</ol>
```

```
<div class="carousel-inner">
```

```
<div class="item active">

<div class="carousel-caption">
</div>
</div>
```

```
<div class="item">

<div class="carousel-caption">
```

```
</div>
```

```
</div>
```

```
<div class="item">

<div class="carousel-caption">
</div>
</div>
```

```
</div>
```

```
<a class="left carousel-control" href="#myCarousel" data-slide="prev">
  <span class="glyphicon glyphicon-chevron-left"></span>
  <span class="sr-only">Previous</span>
</a>
```

```
<a class="right carousel-control" href="#myCarousel" data-slide="next">
  <span class="glyphicon glyphicon-chevron-right"></span>
  <span class="sr-only">Next</span>
</a>
</div>
```

```
<div class="jumbotron">
```

```
<div class="container text-center">
```

```
<h1>Welcome To only Cafe</h1>
```

```
<<h2>Everyone is in such a good mood when they've eaten well food</h2>
```

```
</div>
</div>
```

```
<div class="container" style="width:95%;">
```

```
<!-- Display all Food from food table -->
```

```
<?php
```

```
require 'connection.php';
```

```
$conn = Connect();
```

```
$sql = "SELECT * FROM FOOD WHERE options = 'ENABLE' ORDER BY F_ID";
```

```
$result = mysqli_query($conn, $sql);
```

```
if (mysqli_num_rows($result) > 0)
```

```
{
```

```
    $count=0;
```

```
    while($row = mysqli_fetch_assoc($result)){
```

```
        if ($count == 0)
```

```
            echo "<div class='row'>";
```

```
    ?>
```

```
<div class="col-md-3">
```

```
<form method="post" action="cart.php?action=add&id=<?php echo $row["F_ID"]; ?>">
```

```
<div class="mypanel" align="center";>
```

```
" class="img-responsive">
```

```
<h4 class="text-dark"><?php echo $row["name"]; ?></h4>
```

```
<h5 class="text-info"><?php echo $row["description"]; ?></h5>
```

```
<h5 class="text-danger">&#8377; <?php echo $row["price"]; ?></h5>
```

```
<h5 class="text-info">Quantity: <input type="number" min="1" max="25" name="quantity" class="form-control"
value="1" style="width: 60px;"> </h5>
```

```
<input type="hidden" name="hidden_name" value="<?php echo $row["name"]; ?>">
```

```
<input type="hidden" name="hidden_price" value="<?php echo $row["price"]; ?>">
```

```
<input type="hidden" name="hidden_RID" value="<?php echo $row["R_ID"]; ?>">
```

```
<input type="submit" name="add" style="margin-top:5px;" class="btn btn-success" value="Add to Cart">
```



```
</div>
</form>
```

```
</div>
```

```
<?php
$count++;
if($count==4)
{
    echo "</div>";
    $count=0;
}
}
?>
```

```
</div>
```

```
</div>
```

```
<?php
}
else
{
    ?>
```

```
<div class="container">
    <div class="jumbotron">
        <center>
            <label style="margin-left: 5px;color: red;"> <h1>Oops! No food is available.</h1> </label>
            <p>Stay Hungry...! :P</p>
        </center>
```

```
</div>
```

```
</div>
```

```
<?php
```

```
}
```

```
?>
```

</body>

</html>

FOOD ORDER.SQL

-- phpMyAdmin SQL Dump

-- version 4.7.9

-- https://www.phpmyadmin.net/

--

-- Host: 127.0.0.1

-- Generation Time: Apr 22, 2019 at 02:53 PM

-- Server version: 10.1.31-MariaDB

-- PHP Version: 7.2.3

SET SQL_MODE = "NO_AUTO_VALUE_ON_ZERO";

SET AUTOCOMMIT = 0;

START TRANSACTION;

SET time_zone = "+00:00";

/*!40101 SET @OLD_CHARACTER_SET_CLIENT=@@CHARACTER_SET_CLIENT */;

/*!40101 SET @OLD_CHARACTER_SET_RESULTS=@@CHARACTER_SET_RESULTS */;

/*!40101 SET @OLD_COLLATION_CONNECTION=@@COLLATION_CONNECTION */;

/*!40101 SET NAMES utf8mb4 */;

--

-- Database: `foodorder`

--

--

-- Table structure for table `contact`

--

CREATE TABLE `contact` (

```
`Name` varchar(250) NOT NULL,  
`Email` varchar(250) NOT NULL,  
`Mobile` varchar(250) NOT NULL,  
`Subject` varchar(250) NOT NULL,  
`Message` varchar(250) NOT NULL  
) ENGINE=InnoDB DEFAULT CHARSET=latin1;
```

```
--  
-- Dumping data for table `contact`  
--
```

```
INSERT INTO `contact` (`Name`, `Email`, `Mobile`, `Subject`, `Message`) VALUES  
(`CHANDAN KUMAR`, `ckj40856@gmail.com`, `9487810674`, `sa`, ``),  
(`CHANDAN KUMAR`, `ckj40856@gmail.com`, `9487810674`, `sa`, ``),  
(`BIRJU KUMAR`, `ckj40856@gmail.com`, `8903079750`, `asd`, `asdasdasd`),  
(`CHANDAN KUMAR`, `ckj40856@gmail.com`, `9487810674`, `asd`, `hfgdsfsx`);
```

```
-- -----  
--  
-- Table structure for table `customer`  
--
```

```
CREATE TABLE `customer` (  
  `username` varchar(30) NOT NULL,  
  `fullname` varchar(30) NOT NULL,  
  `email` varchar(30) NOT NULL,  
  `contact` varchar(30) NOT NULL,  
  `address` varchar(50) NOT NULL,  
  `password` varchar(30) NOT NULL  
) ENGINE=InnoDB DEFAULT CHARSET=utf8;
```

```
--  
-- Dumping data for table `customer`  
--
```

```
INSERT INTO `customer` (`username`, `fullname`, `email`, `contact`, `address`, `password`) VALUES  
(`birju`, `BIRJU KUMAR`, `bkm123r@gmail.com`, `8903079750`, `Pondicherry University, SRK HOSTEL ROOM  
NUMBER-59`, `Birju123@`),
```

```
('ckumar', 'CHANDAN KUMAR', 'ckj40856@gmail.com', '9487810674', 'Pondicherry University, SRK HOSTEL ROOM NUMBER-59,', 'Ckumar123@'),
('nidha', 'nidha', 'nidha@gmail.com', '998696572', 'Maharashtra', 'suhail'),
('pratheek083', 'Pratheek Shiri', 'pratheek@gmail.com', '8779546521', 'Hyderabad', 'pratheek'),
('rakshithk00', 'Rakshith Kotian', 'rakshith@gmail.com', '9547123658', 'Gujarath', 'rakshith');
```

```
-- -----
```

```
--
```

```
-- Table structure for table `food`
```

```
--
```

```
CREATE TABLE `food` (
  `F_ID` int(30) NOT NULL,
  `name` varchar(30) NOT NULL,
  `price` int(30) NOT NULL,
  `description` varchar(200) NOT NULL,
  `R_ID` int(30) NOT NULL,
  `images_path` varchar(200) NOT NULL,
  `options` varchar(10) NOT NULL DEFAULT 'ENABLE'
) ENGINE=InnoDB DEFAULT CHARSET=utf8;
```

```
--
```

```
-- Dumping data for table `food`
```

```
--
```

```
INSERT INTO `food` (`F_ID`, `name`, `price`, `description`, `R_ID`, `images_path`, `options`) VALUES
(58, 'Juicy Masala Paneer Kathi Roll', 40, 'Juicy Masala Paneer Kathi Roll loaded with Masala Paneer chunks, onion & Mayo.', 1, 'images/Masala_Paneer_Kathi_Roll.jpg', 'ENABLE'),
(59, 'Meurig Fish', 60, 'Try Meurig - A whole Pomfret fish grilled with tangy marination & served with grilled onions and tomatoes.', 2, 'images/Meurig.jpg', 'ENABLE'),
(60, 'Chocolate Hazelnut Truffle', 99, 'Lose all senses over this very delicious chocolate hazelnut truffle.', 3, 'images/Chocolate_Hazelnut_Truffle.jpg', 'ENABLE'),
(61, 'Happy Happy Choco Chip Shake', 80, 'Happy Happy Choco Chip Shake - a perfect party sweet treat.', 1, 'images/Happy_Happy_Choco_Chip_Shake.jpg', 'ENABLE'),
(62, 'Spring Rolls', 65, 'Delicious Spring Rolls by Dragon Hut, Delhi. Order now!!!', 2, 'images/Spring_Rolls.jpg', 'ENABLE'),
(63, 'Baahubali Thali', 75, 'Baahubali Thali is accompanied by Kattapa Biriyani, Devasena Paratha, Bhalladeva Patiala Lassi', 3, 'images/Baahubali_Thali.jpg', 'ENABLE');
```

(65, 'Coffee', 25, 'concentrated coffee made by forcing pressurized water through finely ground coffee beans.', 4, 'images/coffee.jpg', 'DISABLE'),

(66, 'Tea', 20, 'The simple elixir of tea is of our natural world.', 4, 'images/tea.jpg', 'DISABLE'),

(68, 'Paneer', 85, 'it', 6, 'images/paneer pakora.jpg', 'DISABLE'),

(69, 'Coffee', 25, 'concentrated coffee made by forcing pressurized water through finely ground coffee beans.', 2, 'images/coffee.jpg', 'ENABLE'),

(70, 'Tea', 20, 'The simple elixir of tea is of our natural world.', 2, 'images/tea.jpg', 'ENABLE'),

(71, 'Samosa', 40, 'Cocktail Crispy Samosa.', 2, 'images/samosa.jpg', 'ENABLE'),

(72, 'Paneer Pakora', 45, 'it gives whole new dimension even to the most boring or dull vegetable', 2, 'images/paneer pakora.jpg', 'ENABLE'),

(73, 'Puff', 35, 'Vegetable Puff, a snack with crisp-n-flaky outer layer and mixed vegetables stuffing', 2, 'images/puff.jpg', 'ENABLE'),

(74, 'Pizza', 200, 'Good and Tasty ', 2, 'Pizza.jpg', 'DISABLE'),

(75, 'French Fries', 60, 'Pure Veg and Tasty.', 2, 'frenchfries.jpg', 'DISABLE'),

(76, 'Pakora', 35, 'Pure Vegetable and Tasty.', 2, 'images/Pakora.jpg', 'DISABLE'),

(77, 'Pizza', 200, 'Pure Vegetable and Tasty.', 2, 'images/Pizza.jpg', 'ENABLE'),

(78, 'French Fries', 75, 'Pure Veg and Tasty.', 2, 'images/frenchfries.jpg', 'ENABLE'),

(79, 'Pakora', 45, 'TASTY', 2, 'images/Pakora.jpg', 'ENABLE');

--

-- Table structure for table `manager`

--

```
CREATE TABLE `manager` (
  `username` varchar(30) NOT NULL,
  `fullname` varchar(30) NOT NULL,
  `email` varchar(30) NOT NULL,
  `contact` varchar(30) NOT NULL,
  `address` varchar(50) NOT NULL,
  `password` varchar(30) NOT NULL
) ENGINE=InnoDB DEFAULT CHARSET=utf8;
```

--

-- Dumping data for table `manager`

--

```
INSERT INTO `manager` (`username`, `fullname`, `email`, `contact`, `address`, `password`) VALUES
('aditi068', 'Aditi Naik', 'aditi@gmail.com', '8654751259', 'Goa', 'aditi'),
```

```
('aminnikhil073', 'Nikhil Amin', 'aminnikhil073@gmail.com', '9632587412', 'Karnataka', 'nikhil'),
('ckumar', 'Chandan Kumar', 'ckj40856@gmail.com', '9487810674', 'Pondicherry University, SRK HOSTEL
ROOM NUMBER-59,', 'Ckumar123'),
('dhiraj', 'DHIRAJ KUMAR', 'dk123@gmail.com', '8903079750', 'Pondicherry. Le cafe', 'Dhiraj'),
('roshanraj07', 'Roshan Raj', 'roshan@gmail.com', '9541258761', 'Bihar', 'roshan');
```

```
-- -----
```

```
--
```

```
-- Table structure for table `orders`
```

```
--
```

```
CREATE TABLE `orders` (
  `order_ID` int(30) NOT NULL,
  `F_ID` int(30) NOT NULL,
  `foodname` varchar(30) NOT NULL,
  `price` int(30) NOT NULL,
  `quantity` int(30) NOT NULL,
  `order_date` date NOT NULL,
  `username` varchar(30) NOT NULL,
  `R_ID` int(30) NOT NULL
) ENGINE=InnoDB DEFAULT CHARSET=utf8;
```

```
--
```

```
-- Dumping data for table `orders`
```

```
--
```

```
INSERT INTO `orders` (`order_ID`, `F_ID`, `foodname`, `price`, `quantity`, `order_date`, `username`, `R_ID`)
VALUES
```

```
(1, 58, 'Juicy Masala Paneer Kathi Roll', 40, 1, '2019-03-03', 'ckumar', 1),
(2, 61, 'Happy Happy Choco Chip Shake', 80, 2, '2019-03-03', 'ckumar', 1),
(3, 61, 'Happy Happy Choco Chip Shake', 80, 2, '2019-03-03', 'ckumar', 1),
(4, 65, 'Coffee', 25, 4, '2019-03-03', 'ckumar', 4),
(5, 58, 'Juicy Masala Paneer Kathi Roll', 40, 7, '2019-03-03', 'ckumar', 1),
(6, 65, 'Coffee', 25, 2, '2019-03-03', 'ckumar', 4),
(7, 58, 'Juicy Masala Paneer Kathi Roll', 40, 7, '2019-03-03', 'ckumar', 1),
(8, 65, 'Coffee', 25, 2, '2019-03-03', 'ckumar', 4),
(9, 60, 'Chocolate Hazelnut Truffle', 99, 1, '2019-03-03', 'ckumar', 3),
(10, 59, 'Meurig Fish', 60, 1, '2019-03-05', 'ckumar', 2),
(11, 60, 'Chocolate Hazelnut Truffle', 99, 1, '2019-03-05', 'ckumar', 3),
```

(12, 65, 'Coffee', 25, 1, '2019-03-05', 'ckumar', 4),
(13, 59, 'Meurig Fish', 60, 4, '2019-03-05', 'ckumar', 2),
(14, 58, 'Juicy Masala Paneer Kathi Roll', 40, 1, '2019-03-05', 'ckumar', 1),
(15, 60, 'Chocolate Hazelnut Truffle', 99, 4, '2019-03-05', 'ckumar', 3),
(16, 65, 'Coffee', 25, 1, '2019-03-05', 'ckumar', 4),
(17, 66, 'Tea', 20, 7, '2019-03-05', 'ckumar', 4),
(18, 59, 'Meurig Fish', 60, 5, '2019-03-05', 'birju', 2),
(19, 63, 'Baahubali Thali', 75, 1, '2019-03-05', 'birju', 3),
(20, 68, 'Paneer Pakora', 75, 1, '2019-03-05', 'birju', 6),
(21, 62, 'Spring Rolls', 65, 1, '2019-03-05', 'birju', 2),
(22, 68, 'Paneer Pakora', 75, 1, '2019-03-05', 'birju', 6),
(23, 62, 'Spring Rolls', 65, 1, '2019-03-05', 'birju', 2),
(24, 65, 'Coffee', 25, 1, '2019-03-05', 'birju', 4),
(25, 68, 'Paneer Pakora', 75, 1, '2019-03-05', 'birju', 6),
(26, 59, 'Meurig Fish', 60, 6, '2019-03-05', 'birju', 2),
(27, 58, 'Juicy Masala Paneer Kathi Roll', 40, 1, '2019-03-05', 'birju', 1),
(28, 59, 'Meurig Fish', 60, 1, '2019-03-05', 'birju', 2),
(29, 58, 'Juicy Masala Paneer Kathi Roll', 40, 1, '2019-03-05', 'birju', 1),
(30, 60, 'Chocolate Hazelnut Truffle', 99, 1, '2019-03-15', 'ckumar', 3),
(31, 59, 'Meurig Fish', 60, 1, '2019-03-15', 'ckumar', 2),
(32, 61, 'Happy Happy Choco Chip Shake', 80, 1, '2019-03-15', 'ckumar', 1),
(33, 60, 'Chocolate Hazelnut Truffle', 99, 1, '2019-03-15', 'ckumar', 3),
(34, 59, 'Meurig Fish', 60, 1, '2019-03-15', 'ckumar', 2),
(35, 61, 'Happy Happy Choco Chip Shake', 80, 1, '2019-03-15', 'ckumar', 1),
(36, 62, 'Spring Rolls', 65, 1, '2019-03-15', 'ckumar', 2),
(37, 72, 'Paneer Pakora', 45, 6, '2019-03-15', 'ckumar', 2),
(38, 78, 'French Fries', 75, 7, '2019-03-15', 'ckumar', 2),
(39, 78, 'French Fries', 75, 1, '2019-03-15', 'ckumar', 2),
(40, 73, 'Puff', 35, 1, '2019-03-15', 'ckumar', 2),
(41, 77, 'Pizza', 200, 2, '2019-03-16', 'ckumar', 2),
(42, 70, 'Tea', 20, 1, '2019-03-16', 'ckumar', 2),
(43, 60, 'Chocolate Hazelnut Truffle', 99, 2, '2019-03-16', 'ckumar', 3),
(44, 70, 'Tea', 20, 1, '2019-03-16', 'ckumar', 2),
(45, 60, 'Chocolate Hazelnut Truffle', 99, 2, '2019-03-16', 'ckumar', 3),
(46, 70, 'Tea', 20, 1, '2019-03-16', 'ckumar', 2),
(47, 60, 'Chocolate Hazelnut Truffle', 99, 2, '2019-03-16', 'ckumar', 3),
(48, 60, 'Chocolate Hazelnut Truffle', 99, 4, '2019-03-25', 'ckumar', 3),
(49, 62, 'Spring Rolls', 65, 6, '2019-03-25', 'ckumar', 2),
(50, 70, 'Tea', 20, 5, '2019-03-25', 'ckumar', 2),
(51, 73, 'Puff', 35, 3, '2019-03-25', 'ckumar', 2),

```

(52, 70, 'Tea', 20, 1, '2019-03-30', 'ckumar', 2),
(53, 60, 'Chocolate Hazelnut Truffle', 99, 5, '2019-03-30', 'ckumar', 3),
(54, 69, 'Coffee', 25, 7, '2019-03-30', 'ckumar', 2),
(55, 62, 'Spring Rolls', 65, 1, '2019-04-01', 'ckumar', 2),
(56, 70, 'Tea', 20, 4, '2019-04-01', 'ckumar', 2),
(57, 70, 'Tea', 20, 1, '2019-04-01', 'ckumar', 2),
(58, 60, 'Chocolate Hazelnut Truffle', 99, 1, '2019-04-01', 'ckumar', 3),
(59, 59, 'Meurig Fish', 60, 6, '2019-04-02', 'ckumar', 2),
(60, 61, 'Happy Happy Choco Chip Shake', 80, 1, '2019-04-02', 'ckumar', 1),
(61, 71, 'Samosa', 40, 3, '2019-04-17', 'ckumar', 2),
(62, 70, 'Tea', 20, 4, '2019-04-17', 'ckumar', 2),
(63, 72, 'Paneer Pakora', 45, 2, '2019-04-17', 'ckumar', 2),
(64, 71, 'Samosa', 40, 3, '2019-04-17', 'ckumar', 2),
(65, 70, 'Tea', 20, 4, '2019-04-17', 'ckumar', 2),
(66, 72, 'Paneer Pakora', 45, 2, '2019-04-17', 'ckumar', 2),
(67, 60, 'Chocolate Hazelnut Truffle', 99, 1, '2019-04-18', 'ckumar', 3),
(68, 71, 'Samosa', 40, 1, '2019-04-18', 'ckumar', 2);

```

```

-----

```

```

--

```

```

-- Table structure for table `restaurants`

```

```

--

```

```

CREATE TABLE `restaurants` (
  `R_ID` int(30) NOT NULL,
  `name` varchar(30) NOT NULL,
  `email` varchar(30) NOT NULL,
  `contact` varchar(30) NOT NULL,
  `address` varchar(50) NOT NULL,
  `M_ID` varchar(30) NOT NULL
) ENGINE=InnoDB DEFAULT CHARSET=utf8;

```

```

--

```

```

-- Dumping data for table `restaurants`

```

```

--

```

```

INSERT INTO `restaurants` (`R_ID`, `name`, `email`, `contact`, `address`, `M_ID`) VALUES
(1, 'Nikhil's Restaurant', 'nikhil@restaurant.com', '7998562145', 'Karnataka', 'aminnikhil073'),
(2, 'Roshan's Restaurant', 'roshan@restaurant.com', '9887546821', 'Bihar', 'roshanraj07'),

```



```
(3, 'Aditi's Restaurant', 'aditi@restaurant.com', '7778564231', 'Goa', 'aditi068'),  
(4, 'Food Exploria', 'ckj40856@gmail.com', '09487810674', 'C:\\xampp\\htdocs\\FoodExploria-  
master\\images/coffee.', 'ckumar'),  
(6, 'Le Cafe', 'lecafepondi234@gmail.com', '9443369040', 'Pondicherry,rock beach Near,Le cafe', 'dhiraj');
```

```
--
```

```
-- Indexes for dumped tables
```

```
--
```

```
--
```

```
-- Indexes for table `customer`
```

```
--
```

```
ALTER TABLE `customer`  
  ADD PRIMARY KEY (`username`);
```

```
--
```

```
-- Indexes for table `food`
```

```
--
```

```
ALTER TABLE `food`  
  ADD PRIMARY KEY (`F_ID`,`R_ID`),  
  ADD KEY `R_ID` (`R_ID`);
```

```
--
```

```
-- Indexes for table `manager`
```

```
--
```

```
ALTER TABLE `manager`  
  ADD PRIMARY KEY (`username`);
```

```
--
```

```
-- Indexes for table `orders`
```

```
--
```

```
ALTER TABLE `orders`  
  ADD PRIMARY KEY (`order_ID`),  
  ADD KEY `F_ID` (`F_ID`),  
  ADD KEY `username` (`username`),  
  ADD KEY `R_ID` (`R_ID`);
```

```
--
```

```
-- Indexes for table `restaurants`
```

```
--
```

```
ALTER TABLE `restaurants`
  ADD PRIMARY KEY (`R_ID`),
  ADD UNIQUE KEY `M_ID_2` (`M_ID`),
  ADD KEY `M_ID` (`M_ID`);

--

-- AUTO_INCREMENT for dumped tables
--

--

-- AUTO_INCREMENT for table `food`
--

ALTER TABLE `food`
  MODIFY `F_ID` int(30) NOT NULL AUTO_INCREMENT, AUTO_INCREMENT=80;

--

-- AUTO_INCREMENT for table `orders`
--

ALTER TABLE `orders`
  MODIFY `order_ID` int(30) NOT NULL AUTO_INCREMENT, AUTO_INCREMENT=69;

--

-- AUTO_INCREMENT for table `restaurants`
--

ALTER TABLE `restaurants`
  MODIFY `R_ID` int(30) NOT NULL AUTO_INCREMENT, AUTO_INCREMENT=7;

--

-- Constraints for dumped tables
--

--

-- Constraints for table `food`
--

ALTER TABLE `food`
  ADD CONSTRAINT `food_ibfk_1` FOREIGN KEY (`R_ID`) REFERENCES `restaurants` (`R_ID`);

--

-- Constraints for table `orders`
--
```

```
ALTER TABLE `orders`  
  ADD CONSTRAINT `orders_ibfk_1` FOREIGN KEY (`F_ID`) REFERENCES `food` (`F_ID`),  
  ADD CONSTRAINT `orders_ibfk_2` FOREIGN KEY (`username`) REFERENCES `customer` (`username`),  
  ADD CONSTRAINT `orders_ibfk_3` FOREIGN KEY (`R_ID`) REFERENCES `restaurants` (`R_ID`);  
  
--  
-- Constraints for table `restaurants`  
--  
ALTER TABLE `restaurants`  
  ADD CONSTRAINT `restaurants_ibfk_1` FOREIGN KEY (`M_ID`) REFERENCES `manager` (`username`);  
COMMIT;  
  
/*!40101 SET CHARACTER_SET_CLIENT=@OLD_CHARACTER_SET_CLIENT */;  
/*!40101 SET CHARACTER_SET_RESULTS=@OLD_CHARACTER_SET_RESULTS */;  
/*!40101 SET COLLATION_CONNECTION=@OLD_COLLATION_CONNECTION */;
```

INDEX.PHP

```
<?php  
session_start();  
?>  
  
<html>  
  
  <head>  
    <title> Home | only Cafe' </title>  
  </head>  
  
  <link rel="stylesheet" type = "text/css" href ="css/bootstrap.min.css">  
  
  <link rel="stylesheet" type = "text/css" href ="css/index.css">  
  
  <body>  
  
    <button onclick="topFunction()" id="myBtn" title="Go to top">  
      <span class="glyphicon glyphicon-chevron-up"></span>
```

```

</button>

<script type="text/javascript">
    window.onscroll = function()
    {
        scrollFunction()
    };

    function scrollFunction(){
        if (document.body.scrollTop > 20 || document.documentElement.scrollTop > 20) {
            document.getElementById("myBtn").style.display = "block";
        } else {
            document.getElementById("myBtn").style.display = "none";
        }
    }

    function topFunction() {
        document.body.scrollTop = 0;
        document.documentElement.scrollTop = 0;
    }
</script>

<nav class="navbar navbar-inverse navbar-fixed-top navigation-clean-search" role="navigation">
    <div class="container">
        <div class="navbar-header">
            <button type="button" class="navbar-toggle collapsed" data-toggle="collapse" data-target="#myNavbar">
                <span class="sr-only">Toggle navigation</span>
                <span class="icon-bar"></span>
                <span class="icon-bar"></span>
                <span class="icon-bar"></span>
            </button>
            <a class="navbar-brand" href="index.php">only Cafe'</a>
        </div>

        <div class="collapse navbar-collapse " id="myNavbar">
            <ul class="nav navbar-nav">
                <li class="active" ><a href="index.php">Home</a></li>
                <li><a href="aboutus.php">About</a></li>
                <li><a href="contactus.php">Contact Us</a></li>

            </ul>

```

```

<?php
if(isset($_SESSION['login_user1'])){

?>

        <ul class="nav navbar-nav navbar-right">
            <li><a href="#"><span class="glyphicon glyphicon-user"></span> Welcome <?php echo
$_SESSION['login_user1']; ?> </a></li>
            <li><a href="myrestaurant.php">MANAGER CONTROL PANEL</a></li>
            <li><a href="logout_m.php"><span class="glyphicon glyphicon-log-out"></span> Log Out </a></li>
        </ul>
<?php
}
else if (isset($_SESSION['login_user2'])) {
    ?>

        <ul class="nav navbar-nav navbar-right">
            <li><a href="#"><span class="glyphicon glyphicon-user"></span> Welcome <?php echo
$_SESSION['login_user2']; ?> </a></li>
            <li><a href="foodlist.php"><span class="glyphicon glyphicon-cutlery"></span> Food Zone </a></li>
            <li><a href="cart.php"><span class="glyphicon glyphicon-shopping-cart"></span> Cart
                (<?php
                    if(isset($_SESSION["cart"])){
                        $count = count($_SESSION["cart"]);
                        echo "$count";
                    }
                    else
                        echo "0";
                    ?>)
                </a></li>
            <li><a href="logout_u.php"><span class="glyphicon glyphicon-log-out"></span> Log Out </a></li>
        </ul>
<?php
}
else {

    ?>

        <ul class="nav navbar-nav navbar-right">

```

```
<li><a href="#" class="dropdown-toggle active" data-toggle="dropdown" role="button" aria-haspopup="true" aria-expanded="false"><span class="glyphicon glyphicon-user"></span> Sign Up <span class="caret"></span> </a>
```

```
    <ul class="dropdown-menu">
```

```
    <li> <a href="customersignup.php"> User Sign-up</a></li>
```

```
    <li> <a href="managersignup.php"> Manager Sign-up</a></li>
```

```
</ul>
```

```
</li>
```

```
    <li><a href="#" class="dropdown-toggle active" data-toggle="dropdown" role="button" aria-haspopup="true" aria-expanded="false"><span class="glyphicon glyphicon-log-in"></span> Login <span class="caret"></span></a>
```

```
    <ul class="dropdown-menu">
```

```
    <li> <a href="customerlogin.php"> User Login</a></li>
```

```
    <li> <a href="managerlogin.php"> Manager Login</a></li>
```

```
</ul>
```

```
</li>
```

```
</ul>
```

```
<?php
```

```
}
```

```
?>
```

```
</div>
```

```
</div>
```

```
</nav>
```

```
<div class="wide">
```

```
    <div class="col-xs-5 line"><hr></div>
```

```
    <div class="col-xs-2 logo"></div>
```

```
    <div class="col-xs-5 line"><hr></div>
```

```
    <div class="tagline">There is no love sincerer than the love of food Good Food for Good Day</div>
```

```
<div class="wide" style="background-image: url('images/aee.jpeg');height:800px">
```

```
</div>
```

```
<br>
```

```
<div class="orderblock">
```

```
<h2>Feeling Hungry?</h2>

<center><a class="btn btn-success btn-lg" href="customerlogin.php" role="button" > Order Now </a></center>

</div>
```

```
</body>
</html>
```

LOGIN_M.PHP

```
<?php
session_start();
$error="";

if (isset($_POST['submit'])) {
if (empty($_POST['username']) || empty($_POST['password'])) {
$error = "Username or Password is invalid";
}
else
{
// Define $username and $password
$username=$_POST['username'];
$password=$_POST['password'];
require 'connection.php';
$conn = Connect();

// SQL query to fetch information of registered users and finds user match.
$query = "SELECT username, password FROM MANAGER WHERE username=? AND password=? LIMIT 1";

$stmt = $conn->prepare($query);
$stmt -> bind_param("ss", $username, $password);
$stmt -> execute();
$stmt -> bind_result($username, $password);
$stmt -> store_result();

if ($stmt->fetch())
{
```

```

        $_SESSION['login_user1']=$username; // Initializing Session
        header("location: myrestaurant.php"); // Redirecting To Other Page
    } else {
        $error = "Username or Password is invalid";
    }
    mysqli_close($conn); // Closing Connection
}
}
?>

```

LOGIN_U.PHP

```

<?php
session_start();

$error="";

if (isset($_POST['submit'])) {
    if (empty($_POST['username']) || empty($_POST['password'])) {
        $error = "Username or Password is invalid";
    }
    else
    {
        // Define $username and $password
        $username=$_POST['username'];
        $password=$_POST['password'];
        // Establishing Connection with Server by passing server_name, user_id and password as a parameter
        require 'connection.php';
        $conn = Connect();

        // SQL query to fetch information of registered users and finds user match.
        $query = "SELECT username, password FROM CUSTOMER WHERE username=? AND password=? LIMIT 1";

        // To protect MySQL injection for Security purpose
        $stmt = $conn->prepare($query);
        $stmt -> bind_param("ss", $username, $password);
        $stmt -> execute();
        $stmt -> bind_result($username, $password);
        $stmt -> store_result();
    }
}

```



```
if ($stmt->fetch())
{
    $_SESSION['login_user2']=$username; // Initializing Session
    header("location: foodlist.php"); // Redirecting To Other Page
} else {
$error = "Username or Password is invalid";
}
mysqli_close($conn); // Closing Connection
}
}
?>
```

LOGOUT_M.PHP

```
<?php
session_start();
if(session_destroy()) // Destroying All Sessions
{
    header("Location: managerlogin.php"); // Redirecting To Home Page
}
?>
```

LOGOUT_U.PHP

```
<?php
session_start();
if(session_destroy()) // Destroying All Sessions
{
    header("Location: customerlogin.php"); // Redirecting To Home Page
}
?>
```

MANAGER_REGISTER_SUCESSFULLY.PHP

```
<html>

<head>
```

```
<title> Manager Login | only Cafe' </title>
</head>

<link rel="stylesheet" type = "text/css" href ="css/manager_registered_success.css">
<link rel="stylesheet" type = "text/css" href ="css/bootstrap.min.css">
<script type="text/javascript" src="js/jquery.min.js"></script>
<script type="text/javascript" src="js/bootstrap.min.js"></script>

<body>

<button onclick="topFunction()" id="myBtn" title="Go to top">
  <span class="glyphicon glyphicon-chevron-up"></span>
</button>

<script type="text/javascript">
  window.onscroll = function()
  {
    scrollFunction()
  };

  function scrollFunction(){
    if (document.body.scrollTop > 20 || document.documentElement.scrollTop > 20) {
      document.getElementById("myBtn").style.display = "block";
    } else {
      document.getElementById("myBtn").style.display = "none";
    }
  }

  function topFunction() {
    document.body.scrollTop = 0;
    document.documentElement.scrollTop = 0;
  }
</script>

<nav class="navbar navbar-inverse navbar-fixed-top navigation-clean-search" role="navigation">
  <div class="container">
    <div class="navbar-header">
      <button type="button" class="navbar-toggle collapsed" data-toggle="collapse" data-target="#myNavbar">
        <span class="sr-only">Toggle navigation</span>
      </button>
    </div>
  </div>
</nav>
```

```

        <span class="icon-bar"></span>
        <span class="icon-bar"></span>
        <span class="icon-bar"></span>
    </button>
    <a class="navbar-brand" href="index.php">only Cafe'</a>
</div>

```

```

<div class="collapse navbar-collapse " id="myNavbar">
    <ul class="nav navbar-nav">
        <li class="active" ><a href="index.php">Home</a></li>
        <li><a href="aboutus.php">About</a></li>
        <li><a href="contactus.php">Contact Us</a></li>
    </ul>

```

```

    <ul class="nav navbar-nav navbar-right">
        <li><a href="#"><span class="glyphicon glyphicon-user"></span> Sign Up </a></li>
        <li><a href="#"><span class="glyphicon glyphicon-log-in"></span> Login </a></li>
    </ul>
</div>

```

```

</div>
</nav>

```

```

<?php

```

```

require 'connection.php';
$conn = Connect();

```

```

$fullname = $conn->real_escape_string($_POST['fullname']);
$username = $conn->real_escape_string($_POST['username']);
$email = $conn->real_escape_string($_POST['email']);
$contact = $conn->real_escape_string($_POST['contact']);
$address = $conn->real_escape_string($_POST['address']);
$password = $conn->real_escape_string($_POST['password']);

```

```

$query = "INSERT into MANAGER(fullname,username,email,contact,address,password) VALUES('" . $fullname .
        "','" . $username . "','" . $email . "','" . $contact . "','" . $address . "','" . $password . "')";
$success = $conn->query($query);

```

```

if (!$success){

```

```
die("Couldnt enter data: ".$conn->error);
}

$conn->close();

?>

<div class="container">
  <div class="jumbotron" style="text-align: center;">
    <h2> <?php echo "Welcome $fullname!" ?> </h2>
    <h1>Your account has been created.</h1>
    <p>Login Now from <a href="managerlogin.php">HERE</a></p>
  </div>
</div>

</body>
</html>
```

MANAGER LOGIN.PHP

```
<?php
include('login_m.php'); // Includes Login Script

if(isset($_SESSION['login_user1'])){
header("location: myrestaurant.php"); //Redirecting to myrestaurant Page
}
?>

<!DOCTYPE html>
<html>

<head>
  <title> Manager Login | only Cafe' </title>
</head>

<link rel="stylesheet" type = "text/css" href ="css/managerlogin.css">
```

```
<link rel="stylesheet" type = "text/css" href = "css/bootstrap.min.css">
```

```
<script type="text/javascript" src="js/jquery.min.js"></script>
```

```
<script type="text/javascript" src="js/bootstrap.min.js"></script>
```

```
<body>
```

```
<button onclick="topFunction()" id="myBtn" title="Go to top">
```

```
<span class="glyphicon glyphicon-chevron-up"></span>
```

```
</button>
```

```
<script type="text/javascript">
```

```
window.onscroll = function()
```

```
{
```

```
    scrollFunction()
```

```
};
```

```
function scrollFunction(){
```

```
    if (document.body.scrollTop > 20 || document.documentElement.scrollTop > 20) {
```

```
        document.getElementById("myBtn").style.display = "block";
```

```
    } else {
```

```
        document.getElementById("myBtn").style.display = "none";
```

```
    }
```

```
}
```

```
function topFunction() {
```

```
    document.body.scrollTop = 0;
```

```
    document.documentElement.scrollTop = 0;
```

```
}
```

```
</script>
```

```
<nav class="navbar navbar-inverse navbar-fixed-top navigation-clean-search" role="navigation">
```

```
<div class="container">
```

```
<div class="navbar-header">
```

```
<button type="button" class="navbar-toggle collapsed" data-toggle="collapse" data-target="#myNavbar">
```

```
<span class="sr-only">Toggle navigation</span>
```

```
<span class="icon-bar"></span>
```

```
<span class="icon-bar"></span>
```

```
<span class="icon-bar"></span>
```

```
</button>
```

```
<a class="navbar-brand" href="index.php">only Cafe'</a>
</div>
```

```
<div class="collapse navbar-collapse " id="myNavbar">
  <ul class="nav navbar-nav">
    <li ><a href="index.php">Home</a></li>
    <li><a href="aboutus.php">About</a></li>
    <li><a href="contactus.php">Contact Us</a></li>
  </ul>
```

```
  <ul class="nav navbar-nav navbar-right">
    <li><a href="#" class="dropdown-toggle active" data-toggle="dropdown" role="button" aria-
haspopup="true" aria-expanded="false"><span class="glyphicon glyphicon-user"></span> Sign Up <span
class="caret"></span> </a>
      <ul class="dropdown-menu">
        <li> <a href="customersignup.php"> User Sign-up</a></li>
        <li> <a href="managersignup.php"> Manager Sign-up</a></li>
      </ul>
    </li>
```

```
    <li><a href="#" class="dropdown-toggle active" data-toggle="dropdown" role="button" aria-
haspopup="true" aria-expanded="false"><span class="glyphicon glyphicon-log-in"></span> Login <span
class="caret"></span></a>
      <ul class="dropdown-menu">
        <li> <a href="customerlogin.php"> User Login</a></li>
        <li> <a href="managerlogin.php"> Manager Login</a></li>
      </ul>
    </li>
  </ul>
</div>
```

```
</div>
</nav>
```

```
<div class="container">
  <div class="jumbotron">
    <h1>Hi Manager,<br> Welcome to <span class="edit"> only Cafe' </span></h1>
    <br>
```

```
<p>Kindly LOGIN to continue.</p>
```

```
</div>
```

```
</div>
```

```
<div class="container" style="margin-top: 4%; margin-bottom: 2%;">
```

```
<div class="col-md-5 col-md-offset-4">
```

```
<label style="margin-left: 5px;color: red;"><span> <?php echo $error; ?> </span></label>
```

```
<div class="panel panel-primary">
```

```
<div class="panel-heading"> Login </div>
```

```
<div class="panel-body">
```

```
<form action="" method="POST">
```

```
<div class="row">
```

```
<div class="form-group col-xs-12">
```

```
<label for="username"><span class="text-danger" style="margin-right: 5px;">*</span> Username:
</label>
```

```
<div class="input-group">
```

```
<input class="form-control" id="username" type="text" name="username" placeholder="Username"
required="" autofocus="">
```

```
<span class="input-group-btn">
```

```
<label class="btn btn-primary"><span class="glyphicon glyphicon-user" aria-hidden="true"></label>
```

```
</span>
```

```
</span>
```

```
</div>
```

```
</div>
```

```
</div>
```

```
<div class="row">
```

```
<div class="form-group col-xs-12">
```

```
<label for="password"><span class="text-danger" style="margin-right: 5px;">*</span> Password: </label>
```

```
<div class="input-group">
```

```
<input class="form-control" id="password" type="password" name="password" placeholder="Password"
required="">
```

```
<span class="input-group-btn">
```

```
<label class="btn btn-primary"><span class="glyphicon glyphicon-lock" aria-
hidden="true"></span></label>
```

```
</span>
```

```
</div>
```

```
        </div>
    </div>

    <div class="row">
        <div class="form-group col-xs-4">
            <button class="btn btn-primary" name="submit" type="submit" value=" Login ">Submit</button>

        </div>

    </div>

    <label style="margin-left: 5px;">or</label> <br>
    <label style="margin-left: 5px;"><a href="managersignup.php">Create a new account.</a></label>

</form>

</div>

</div>

</div>
</div>
</body>
</html>
```

MANGER_SIGN UP.PHP

```
<html>

<head>
    <title> Manager Signup | only Cafe' </title>
</head>

<link rel="stylesheet" type = "text/css" href ="css/managersignup.css">
<link rel="stylesheet" type = "text/css" href ="css/bootstrap.min.css">
<script type="text/javascript" src="js/jquery.min.js"></script>
<script type="text/javascript" src="js/bootstrap.min.js"></script>
```



```
<body>
```

```
<button onclick="topFunction()" id="myBtn" title="Go to top">
```

```
<span class="glyphicon glyphicon-chevron-up"></span>
```

```
</button>
```

```
<script type="text/javascript">
```

```
window.onscroll = function()
```

```
{
```

```
    scrollFunction()
```

```
};
```

```
function scrollFunction(){
```

```
    if (document.body.scrollTop > 20 || document.documentElement.scrollTop > 20) {
```

```
        document.getElementById("myBtn").style.display = "block";
```

```
    } else {
```

```
        document.getElementById("myBtn").style.display = "none";
```

```
    }
```

```
}
```

```
function topFunction() {
```

```
    document.body.scrollTop = 0;
```

```
    document.documentElement.scrollTop = 0;
```

```
}
```

```
</script>
```

```
<nav class="navbar navbar-inverse navbar-fixed-top navigation-clean-search" role="navigation">
```

```
<div class="container">
```

```
<div class="navbar-header">
```

```
<button type="button" class="navbar-toggle collapsed" data-toggle="collapse" data-target="#myNavbar">
```

```
<span class="sr-only">Toggle navigation</span>
```

```
<span class="icon-bar"></span>
```

```
<span class="icon-bar"></span>
```

```
<span class="icon-bar"></span>
```

```
</button>
```

```
<a class="navbar-brand" href="index.php">only Cafe'</a>
```

```
</div>
```

```
<div class="collapse navbar-collapse " id="myNavbar">
```

```
<ul class="nav navbar-nav">
  <li><a href="index.php">Home</a></li>
  <li><a href="aboutus.php">About</a></li>
  <li><a href="contactus.php">Contact Us</a></li>
</ul>

<ul class="nav navbar-nav navbar-right">
  <li><a href="#" class="dropdown-toggle active" data-toggle="dropdown" role="button" aria-
haspopup="true" aria-expanded="false"><span class="glyphicon glyphicon-user"></span> Sign Up <span
class="caret"></span> </a>
    <ul class="dropdown-menu">
      <li><a href="customersignup.php"> User Sign-up</a></li>
      <li><a href="managersignup.php"> Manager Sign-up</a></li>
    </ul>
  </li>

  <li><a href="#" class="dropdown-toggle active" data-toggle="dropdown" role="button" aria-
haspopup="true" aria-expanded="false"><span class="glyphicon glyphicon-log-in"></span> Login <span
class="caret"></span></a>
    <ul class="dropdown-menu">
      <li><a href="customerlogin.php"> User Login</a></li>
      <li><a href="managerlogin.php"> Manager Login</a></li>
    </ul>
  </li>
</ul>
</div>

</div>
</nav>

<div class="container">
<div class="jumbotron">
  <h1>Hi Shreya, <br> Welcome to <span class="edit"> only Cafe' </span></h1>
  <br>
<p>Get started by creating your account</p>
</div>
</div>
```

```
<div class="container" style="margin-top: 4%; margin-bottom: 2%;">
  <div class="col-md-5 col-md-offset-4">
    <div class="panel panel-primary">
      <div class="panel-heading"> Create Account </div>
      <div class="panel-body">

        <form role="form" action="manager_registered_success.php" method="POST">

          <div class="row">
            <div class="form-group col-xs-12">
              <label for="fullname"><span class="text-danger" style="margin-right: 5px;”*</span> Full Name: </label>
              <div class="input-group">
                <input class="form-control" id="fullname" type="text" name="fullname" placeholder="Your Full Name"
required="" autofocus="">
                <span class="input-group-btn">
                  <label class="btn btn-primary"><span class="glyphicon glyphicon-user" aria-hidden="true"></label>
                </span>
              </div>
            </div>
          </div>

          <div class="row">
            <div class="form-group col-xs-12">
              <label for="username"><span class="text-danger" style="margin-right: 5px;”*</span> Username:
</label>
              <div class="input-group">
                <input class="form-control" id="username" type="text" name="username" placeholder="Your Username"
required="">
                <span class="input-group-btn">
                  <label class="btn btn-primary"><span class="glyphicon glyphicon-user" aria-hidden="true"></label>
                </span>
              </div>
            </div>
          </div>
        </form>
      </div>
    </div>
  </div>
</div>
```

```

<div class="row">
  <div class="form-group col-xs-12">
    <label for="email"><span class="text-danger" style="margin-right: 5px;">*</span> Email: </label>
    <div class="input-group">
      <input class="form-control" id="email" type="email" name="email" placeholder="Email" required="">
      <span class="input-group-btn">
        <label class="btn btn-primary"><span class="glyphicon glyphicon-envelope" aria-
hidden="true"></span></label>
      </span>
    </div>
  </div>
</div>

<div class="row">
  <div class="form-group col-xs-12">
    <label for="contact"><span class="text-danger" style="margin-right: 5px;">*</span> Contact: </label>
    <div class="input-group">
      <input class="form-control" id="contact" type="text" name="contact" placeholder="Contact" required="">
      <span class="input-group-btn">
        <label class="btn btn-primary"><span class="glyphicon glyphicon-phone" aria-
hidden="true"></span></label>
      </span>
    </div>
  </div>
</div>

<div class="row">
  <div class="form-group col-xs-12">
    <label for="address"><span class="text-danger" style="margin-right: 5px;">*</span> Address: </label>
    <div class="input-group">
      <input class="form-control" id="address" type="text" name="address" placeholder="Address"
required="">
      <span class="input-group-btn">
        <label class="btn btn-primary"><span class="glyphicon glyphicon-home" aria-hidden="true"></span></label>
      </span>
    </div>
  </div>
</div>

```

```
</div>
```

```
<div class="row">
```

```
<div class="form-group col-xs-12">
```

```
<label for="password"><span class="text-danger" style="margin-right: 5px;">*</span> Password: </label>
```

```
<div class="input-group">
```

```
<input class="form-control" id="password" type="password" name="password" placeholder="Password"
required="">
```

```
<span class="input-group-btn">
```

```
<label class="btn btn-primary"><span class="glyphicon glyphicon-lock" aria-
hidden="true"></span></label>
```

```
</span>
```

```
</div>
```

```
</div>
```

```
</div>
```

```
<div class="row">
```

```
<div class="form-group col-xs-4">
```

```
<button class="btn btn-primary" type="submit">Submit</button>
```

```
</div>
```

```
</div>
```

```
<label style="margin-left: 5px;">or</label> <br>
```

```
<label style="margin-left: 5px;"><a href="managerlogin.php">Have an account? Login.</a></label>
```

```
</form>
```

```
</div>
```

```
</div>
```

```
</div>
```

```
</div>
```

```
</body>

<footer class="container-fluid bg-4 text-center">
<br>
<p> shreya Exploria 2022| &copy All Rights Reserved </p>
<br>
</footer>
</html>
```

MY RESTURANT .PHP

```
<?php
include('session_m.php');

if(!isset($login_session)){
header('Location: managerlogin.php'); // Redirecting To Home Page
}

?>
<!DOCTYPE html>
<html>

<head>
<title> Manager Login | only Cafe' </title>
</head>
```

```
<link rel="stylesheet" type = "text/css" href ="css/myrestaurant.css">
<link rel="stylesheet" type = "text/css" href ="css/bootstrap.min.css">
<script type="text/javascript" src="js/jquery.min.js"></script>
<script type="text/javascript" src="js/bootstrap.min.js"></script>

<body>

<button onclick="topFunction()" id="myBtn" title="Go to top">
  <span class="glyphicon glyphicon-chevron-up"></span>
</button>

<script type="text/javascript">
  window.onscroll = function()
  {
    scrollFunction()
  };

  function scrollFunction(){
    if (document.body.scrollTop > 20 || document.documentElement.scrollTop > 20) {
      document.getElementById("myBtn").style.display = "block";
    } else {
      document.getElementById("myBtn").style.display = "none";
    }
  }

  function topFunction() {
    document.body.scrollTop = 0;
    document.documentElement.scrollTop = 0;
  }
</script>

<nav class="navbar navbar-inverse navbar-fixed-top navigation-clean-search" role="navigation">
  <div class="container">
    <div class="navbar-header">
      <button type="button" class="navbar-toggle collapsed" data-toggle="collapse" data-target="#myNavbar">
        <span class="sr-only">Toggle navigation</span>
        <span class="icon-bar"></span>
        <span class="icon-bar"></span>
        <span class="icon-bar"></span>
      </button>
    </div>
  </div>
</nav>
```

```
</button>

<a class="navbar-brand" href="index.php">only Cafe'</a>

</div>
```

```
<div class="collapse navbar-collapse " id="myNavbar">
  <ul class="nav navbar-nav">
    <li><a href="index.php">Home</a></li>
    <li><a href="aboutus.php">About</a></li>
    <li><a href="contactus.php">Contact Us</a></li>
  </ul>

  <ul class="nav navbar-nav navbar-right">
    <li><a href="#"><span class="glyphicon glyphicon-user"></span> Welcome <?php echo $login_session;
?> </a></li>
    <li class="active"> <a href="managerlogin.php">MANAGER CONTROL PANEL</a></li>
    <li><a href="logout_m.php"><span class="glyphicon glyphicon-log-out"></span> Log Out </a></li>
  </ul>
</div>

</div>
</nav>
```

```
<div class="container">
  <div class="jumbotron">
    <h1>Hello Manager! </h1>
    <p>Manage all your restaurant from here</p>

  </div>
</div>

<div class="container">
  <div class="container">
    <div class="col">

    </div>
  </div>
</div>
```



```
<div class="col-xs-3" style="text-align: center;">

<div class="list-group">
  <a href="view_food_items.php" class="list-group-item ">View Food Items</a>
  <a href="add_food_items.php" class="list-group-item ">Add Food Items</a>
  <a href="edit_food_items.php" class="list-group-item ">Edit Food Items</a>
  <a href="delete_food_items.php" class="list-group-item ">Delete Food Items</a>
</div>
</div>

</body>
</html>
```

MY RESTAURANT1.PHP

```
<?php

include('session_m.php');

if(!isset($login_session)){
header('Location: managerlogin.php');
}

$name = $conn->real_escape_string($_POST['name']);
$email = $conn->real_escape_string($_POST['email']);
$contact = $conn->real_escape_string($_POST['contact']);
$address = $conn->real_escape_string($_POST['address']);
```

```
$query = "INSERT INTO RESTAURANTS(name,email,contact,address,M_ID) VALUES('" . $name . "','" . $email .
 "','" . $contact . "','" . $address . "','" . $_SESSION['login_user1'] . "')";
$success = $conn->query($query);
```

```
if (!$success){
```

```
    ?>
```

```
    <!DOCTYPE html>
```

```
    <html>
```

```
    <head>
```

```
        <title>change</title>
```

```
    <link rel="stylesheet" type="text/css" href="css/add_food_items.css">
```

```
    <link rel="stylesheet" type="text/css" href="css/bootstrap.min.css">
```

```
    <script type="text/javascript" src="js/jquery.min.js"></script>
```

```
    <script type="text/javascript" src="js/bootstrap.min.js"></script>
```

```
    </head>
```

```
    <body>
```

```
        <button onclick="topFunction()" id="myBtn" title="Go to top">
```

```
            <span class="glyphicon glyphicon-chevron-up"></span>
```

```
        </button>
```

```
    <script type="text/javascript">
```

```
        window.onscroll = function()
```

```
        {
```

```
            scrollFunction()
```

```
        };
```

```
    function scrollFunction(){
```

```
        if (document.body.scrollTop > 20 || document.documentElement.scrollTop > 20) {
```

```
            document.getElementById("myBtn").style.display = "block";
```

```
        } else {
```

```
            document.getElementById("myBtn").style.display = "none";
```

```
        }
```

```
    }
```

```
    function topFunction() {
```

```
        document.body.scrollTop = 0;
```

```
        document.documentElement.scrollTop = 0;
```

```
    }
```

```
</script>
```

```

<nav class="navbar navbar-inverse navbar-fixed-top navigation-clean-search" role="navigation">
  <div class="container">
    <div class="navbar-header">
      <button type="button" class="navbar-toggle collapsed" data-toggle="collapse" data-target="#myNavbar">
        <span class="sr-only">Toggle navigation</span>
        <span class="icon-bar"></span>
        <span class="icon-bar"></span>
        <span class="icon-bar"></span>
      </button>
      <a class="navbar-brand" href="index.php">only Cafe'</a>
    </div>

    <div class="collapse navbar-collapse " id="myNavbar">
      <ul class="nav navbar-nav">
        <li class="active" ><a href="index.php">Home</a></li>
        <li><a href="aboutus.php">About</a></li>
        <li><a href="contactus.php">Contact Us</a></li>
      </ul>

      <ul class="nav navbar-nav navbar-right">
        <li><a href="#"><span class="glyphicon glyphicon-user"></span> Sign Up </a></li>
        <li><a href="#"><span class="glyphicon glyphicon-log-in"></span> Login </a></li>
      </ul>
    </div>

  </div>
</nav>

<div class="container">
  <div class="jumbotron" style="text-align: center;">
    <h1>Your already have one restaurant.</h1>
    <p>Go back to your <a href="view_food_items.php">Restaurant</a></p>
  </div>
</div>

</body>
</html>

<?php
}

```

```
else {  
    header('Location: myrestaurant.php');  
}
```

```
$conn->close();
```

```
?>
```

ONLINEPAY.PHP

```
<?php  
session_start();  
require 'connection.php';  
$conn = Connect();  
if(!isset($_SESSION['login_user2']) || !isset($_SESSION['cart'])){  
    header("location: customerlogin.php");  
}
```

```
?>
```

```
<html>
```

```
<head>
```

```
<title> Online Payment | only Cafe' </title>
```

```
</head>
```

```
<link rel="stylesheet" type = "text/css" href ="css/COD.css">
```

```
<link rel="stylesheet" type = "text/css" href ="css/bootstrap.min.css">
```

```
<script type="text/javascript" src="js/jquery.min.js"></script>
```

```
<script type="text/javascript" src="js/bootstrap.min.js"></script>
```

```
<body>
```

```
<button onclick="topFunction()" id="myBtn" title="Go to top">
```

```
<span class="glyphicon glyphicon-chevron-up"></span>
```

```
</button>
```

```
<script type="text/javascript">
```

```
    window.onscroll = function()
```

```
    {
```

```
        scrollFunction()
```

```
    };
```

```
function scrollFunction(){
```

```
    if (document.body.scrollTop > 20 || document.documentElement.scrollTop > 20) {
```

```
        document.getElementById("myBtn").style.display = "block";
```

```
    } else {
```

```
        document.getElementById("myBtn").style.display = "none";
```

```
    }
```

```
}
```

```
function topFunction() {
```

```
    document.body.scrollTop = 0;
```

```
    document.documentElement.scrollTop = 0;
```

```
}
```

```
</script>
```

```
<nav class="navbar navbar-inverse navbar-fixed-top navigation-clean-search" role="navigation">
```

```
    <div class="container">
```

```
        <div class="navbar-header">
```

```
            <button type="button" class="navbar-toggle collapsed" data-toggle="collapse" data-target="#myNavbar">
```

```
                <span class="sr-only">Toggle navigation</span>
```

```
                <span class="icon-bar"></span>
```

```
                <span class="icon-bar"></span>
```

```
                <span class="icon-bar"></span>
```

```
            </button>
```

```
            <a class="navbar-brand" href="index.php">only Cafe'</a>
```

```
        </div>
```

```
    <div class="collapse navbar-collapse" id="myNavbar">
```

```
        <ul class="nav navbar-nav">
```

```
            <li><a href="index.php">Home</a></li>
```

```
            <li><a href="aboutus.php">About</a></li>
```

```
            <li><a href="contactus.php">Contact Us</a></li>
```

```
</ul>
```

```
<?php
```

```
if(isset($_SESSION['login_user1'])){
```

```
?>
```

```
<ul class="nav navbar-nav navbar-right">
```

```
<li><a href="#"><span class="glyphicon glyphicon-user"></span> Welcome <?php echo
```

```
$_SESSION['login_user1']; ?> </a></li>
```

```
<li><a href="myrestaurant.php">MANAGER CONTROL PANEL</a></li>
```

```
<li><a href="logout_m.php"><span class="glyphicon glyphicon-log-out"></span> Log Out </a></li>
```

```
</ul>
```

```
<?php
```

```
}
```

```
else if (isset($_SESSION['login_user2'])) {
```

```
?>
```

```
<ul class="nav navbar-nav navbar-right">
```

```
<li><a href="#"><span class="glyphicon glyphicon-user"></span> Welcome <?php echo
```

```
$_SESSION['login_user2']; ?> </a></li>
```

```
<li><a href="foodlist.php"><span class="glyphicon glyphicon-cutlery"></span> Food Zone </a></li>
```

```
<li><a href="cart.php"><span class="glyphicon glyphicon-shopping-cart"></span> Cart
```

```
(<?php
```

```
if(isset($_SESSION["cart"])){
```

```
$count = count($_SESSION["cart"]);
```

```
echo "$count";
```

```
}
```

```
else
```

```
echo "0";
```

```
?>)
```

```
</a></li>
```

```
<li><a href="logout_u.php"><span class="glyphicon glyphicon-log-out"></span> Log Out </a></li>
```

```
</ul>
```

```
<?php
```

```
}
```

```
else {
```

```
?>
```

```

<ul class="nav navbar-nav navbar-right">
    <li><a href="#" class="dropdown-toggle active" data-toggle="dropdown" role="button" aria-
haspopup="true" aria-expanded="false"><span class="glyphicon glyphicon-user"></span> Sign Up <span
class="caret"></span> </a>
        <ul class="dropdown-menu">
            <li> <a href="customersignup.php"> User Sign-up</a></li>
            <li> <a href="managersignup.php"> Manager Sign-up</a></li>
            <li> <a href="#"> Admin Sign-up</a></li>
        </ul>
    </li>

    <li><a href="#" class="dropdown-toggle active" data-toggle="dropdown" role="button" aria-
haspopup="true" aria-expanded="false"><span class="glyphicon glyphicon-log-in"></span> Login <span
class="caret"></span></a>
        <ul class="dropdown-menu">
            <li> <a href="customerlogin.php"> User Login</a></li>
            <li> <a href="managerlogin.php"> Manager Login</a></li>
            <li> <a href="#"> Admin Login</a></li>
        </ul>
    </li>
</ul>

<?php
}
?>

</div>

</div>

</nav>

```

```

<div class="container">
    <div class="row">
        <div class="jumbotron">
            <h1 class="text-center">Online Payment</h1>
            <p class="text-center">Enter your payment details below.</p>
        </div>
    </div>
</div>

```

```

</div>
<div class="row">
  <div class="col-md-6 col-md-offset-3">
    <div class="credit-card-div">
      <div class="panel panel-default">
        <div class="panel-heading">

          <div class="row">
            <div class="col-md-12 col-sm-12 col-xs-12">
              <h5 class="text-muted"> Credit Card Number</h5>
            </div>
            <div class="col-md-3 col-sm-3 col-xs-3">
              <input type="text" class="form-control" placeholder="0000" required="" />
            </div>
            <div class="col-md-3 col-sm-3 col-xs-3">
              <input type="text" class="form-control" placeholder="0000" required="" />
            </div>
            <div class="col-md-3 col-sm-3 col-xs-3">
              <input type="text" class="form-control" placeholder="0000" required="" />
            </div>
            <div class="col-md-3 col-sm-3 col-xs-3">
              <input type="text" class="form-control" placeholder="0000" required="" />
            </div>
          </div>
        <br>
        <div class="row ">
          <div class="col-md-3 col-sm-3 col-xs-3">
            <span class="help-block text-muted small-font"> Expiry Month</span>
            <input type="text" class="form-control" placeholder="MM" required="" />
          </div>
          <div class="col-md-3 col-sm-3 col-xs-3">
            <span class="help-block text-muted small-font"> Expiry Year</span>
            <input type="text" class="form-control" placeholder="YY" required="" />
          </div>
          <div class="col-md-3 col-sm-3 col-xs-3">
            <span class="help-block text-muted small-font"> CCV</span>
            <input type="text" class="form-control" placeholder="CCV" required="" />
          </div>
          <div class="col-md-3 col-sm-3 col-xs-3"><br>
            
          </div>
        </div>
      </div>
    </div>
  </div>
</div>

```



```
        </div>
    </div>
    <br>
    <div class="row ">
        <div class="col-md-12 pad-adjust">

            <input type="text" class="form-control" placeholder="Name On The Card" required="" />

        </div>
    </div>
    <br>
    <div class="row">
        <div class="col-md-12 pad-adjust">
            <div class="checkbox">
                <label>
                    <input type="checkbox" checked class="text-muted" required=""> Save details for fast
payments. <a href="#">Learn More</a>
                </label>
            </div>
        </div>
    </div>
    <div class="row ">
        <div class="col-md-6 col-sm-6 col-xs-6 pad-adjust">
            <a href="payment.php"><input type="submit" class="btn btn-danger btn-block"
value="CANCEL" required="" /></a>
        </div>
        <div class="col-md-6 col-sm-6 col-xs-6 pad-adjust">
            <a href="COD.php"><input type="submit" class="btn btn-success btn-block" value="PAY
NOW" required="" /></a>
        </div>
    </div>

</div>
</div>
</div>
</div>
```

```
</body>
</html>
```

ONLINE-UPDATE.PHP

```
<?php
if(session_id() == "" || !isset($_SESSION)){session_start();}

include 'config.php';

if(isset($_SESSION['cart'])) {

    $total = 0;

    foreach($_SESSION['cart'] as $F_ID => $quantity) {

        $result = $mysqli->query("SELECT * FROM FOOD WHERE id = ".$F_ID);

        if($result){

            if($obj = $result->fetch_object()) {

                $cost = $obj->price * $quantity;

                $user = $_SESSION["username"];

                $query = $mysqli->query("INSERT INTO orders (product_code, product_name, product_desc, price, units,
total, email) VALUES('$obj->product_code', '$obj->product_name', '$obj->product_desc', $obj->price, $quantity,
$cost, '$user')");

                if($query){
                    $newqty = $obj->qty - $quantity;
                    if($mysqli->query("UPDATE products SET qty = ".$newqty." WHERE id = ".$F_ID)){

                        }

                    }
                }
            }
        }
    }
}
```

```
}
```

```
}  
}  
}
```

```
header("location:bill.php");
```

```
?>
```

PAYMENT.PHP

```
<?php  
session_start();  
require 'connection.php';  
$conn = Connect();  
if(!isset($_SESSION['login_user2'])){  
header("location: customerlogin.php");  
}  
?>
```

```
<html>
```

```
<head>
```

```
<title> Cart | only Cafe' </title>
```

```
</head>
```

```
<link rel="stylesheet" type = "text/css" href ="css/payment.css">
```

```
<link rel="stylesheet" type = "text/css" href ="css/bootstrap.min.css">
```

```
<script type="text/javascript" src="js/jquery.min.js"></script>
```

```
<script type="text/javascript" src="js/bootstrap.min.js"></script>
```

```
<body>
```

```
<button onclick="topFunction()" id="myBtn" title="Go to top">
```

```
<span class="glyphicon glyphicon-chevron-up"></span>
```

```
</button>
```

```
<script type="text/javascript">
```

```
    window.onscroll = function()
```

```
    {
```

```
        scrollFunction()
```

```
    };
```

```
function scrollFunction(){
```

```
    if (document.body.scrollTop > 20 || document.documentElement.scrollTop > 20) {
```

```
        document.getElementById("myBtn").style.display = "block";
```

```
    } else {
```

```
        document.getElementById("myBtn").style.display = "none";
```

```
    }
```

```
}
```

```
function topFunction() {
```

```
    document.body.scrollTop = 0;
```

```
    document.documentElement.scrollTop = 0;
```

```
}
```

```
</script>
```

```
<nav class="navbar navbar-inverse navbar-fixed-top navigation-clean-search" role="navigation">
```

```
    <div class="container">
```

```
        <div class="navbar-header">
```

```
            <button type="button" class="navbar-toggle collapsed" data-toggle="collapse" data-target="#myNavbar">
```

```
                <span class="sr-only">Toggle navigation</span>
```

```
                <span class="icon-bar"></span>
```

```
                <span class="icon-bar"></span>
```

```
                <span class="icon-bar"></span>
```

```
            </button>
```

```
            <a class="navbar-brand" href="index.php">only Cafe'</a>
```

```
        </div>
```

```
    <div class="collapse navbar-collapse" id="myNavbar">
```

```
        <ul class="nav navbar-nav">
```

```
            <li><a href="index.php">Home</a></li>
```

```
            <li><a href="aboutus.php">About</a></li>
```

```
            <li><a href="contactus.php">Contact Us</a></li>
```

```

        </ul>

<?php
if(isset($_SESSION['login_user1'])){

?>

        <ul class="nav navbar-nav navbar-right">
            <li><a href="#"><span class="glyphicon glyphicon-user"></span> Welcome <?php echo
$_SESSION['login_user1']; ?> </a></li>
            <li><a href="myrestaurant.php">MANAGER CONTROL PANEL</a></li>
            <li><a href="logout_m.php"><span class="glyphicon glyphicon-log-out"></span> Log Out </a></li>
        </ul>

<?php
}
else if (isset($_SESSION['login_user2'])) {
    ?>

        <ul class="nav navbar-nav navbar-right">
            <li><a href="#"><span class="glyphicon glyphicon-user"></span> Welcome <?php echo
$_SESSION['login_user2']; ?> </a></li>
            <li><a href="foodlist.php"><span class="glyphicon glyphicon-cutlery"></span> Food Zone </a></li>
            <li><a href="cart.php"><span class="glyphicon glyphicon-shopping-cart"></span> Cart
            (<?php
                if(isset($_SESSION["cart"])){
                    $count = count($_SESSION["cart"]);
                    echo "$count";
                }
                else
                    echo "0";
            ?>)
            </a></li>
            <li><a href="logout_u.php"><span class="glyphicon glyphicon-log-out"></span> Log Out </a></li>
        </ul>

<?php
}
else {

    ?>

    <ul class="nav navbar-nav navbar-right">

```

```
<li><a href="#" class="dropdown-toggle active" data-toggle="dropdown" role="button" aria-  
haspopup="true" aria-expanded="false"><span class="glyphicon glyphicon-user"></span> Sign Up <span  
class="caret"></span> </a>
```

```
<ul class="dropdown-menu">  
<li> <a href="customersignup.php"> User Sign-up</a></li>  
<li> <a href="managersignup.php"> Manager Sign-up</a></li>  
<li> <a href="#"> Admin Sign-up</a></li>  
</ul>  
</li>
```

```
<li><a href="#" class="dropdown-toggle active" data-toggle="dropdown" role="button" aria-  
haspopup="true" aria-expanded="false"><span class="glyphicon glyphicon-log-in"></span> Login <span  
class="caret"></span></a>
```

```
<ul class="dropdown-menu">  
<li> <a href="customerlogin.php"> User Login</a></li>  
<li> <a href="managerlogin.php"> Manager Login</a></li>  
<li> <a href="#"> Admin Login</a></li>  
</ul>  
</li>  
</ul>
```

```
<?php
```

```
}
```

```
?>
```

```
</div>
```

```
</div>
```

```
</nav>
```

```
<?php
```

```
$gtotal = 0;
```

```
foreach($_SESSION["cart"] as $keys => $values)
```

```
{
```

```
    $F_ID = $values["food_id"];
```

```
    $foodname = $values["food_name"];
```

```
    $quantity = $values["food_quantity"];
```

```
    $price = $values["food_price"];
```

```
    $total = ($values["food_quantity"] * $values["food_price"]);
```

```
    $R_ID = $values["R_ID"];
```

```
$username = $_SESSION["login_user2"];
```

```
$order_date = date("Y-m-d");
```

```
$gtotal = $gtotal + $total;
```

```
$query = "INSERT INTO ORDERS (F_ID, foodname, price, quantity, order_date, username, R_ID)
```

```
VALUES ('" . $F_ID . "', '" . $foodname . "', '" . $price . "', '" . $quantity . "', '" . $order_date . "', '" . $username . "', '" . $R_ID . "')";
```

```
$success = $conn->query($query);
```

```
if(!$success)
```

```
{
```

```
?>
```

```
<div class="container">
```

```
<div class="jumbotron">
```

```
<h1>Something went wrong!</h1>
```

```
<p>Try again later.</p>
```

```
</div>
```

```
</div>
```

```
<?php
```

```
}
```

```
}
```

```
?>
```

```
<div class="container">
```

```
<div class="jumbotron">
```

```
<h1>Choose your payment option</h1>
```

```
</div>
```

```
</div>
```

```
<br>
```

```
<h1 class="text-center">Grand Total: &#8377;<?php echo "$gtotal"; ?>/-</h1>
```

```
<h5 class="text-center">including all service charges. (no delivery charges applied)</h5>
```

```
<br>
```

```
<h1 class="text-center">
```

```
<a href="cart.php"><button class="btn btn-warning"><span class="glyphicon glyphicon-circle-arrow-  
left"></span> Go back to cart</button></a>  
  
<a href="onlinepay.php"><button class="btn btn-success"><span class="glyphicon glyphicon-credit-  
card"></span> Pay Online</button></a>  
  
<a href="COD.php"><button class="btn btn-success"><span class="glyphicon glyphicon-"></span> Cash On  
Delivery</button></a>  
</h1>
```

```
<br><br><br><br><br>  
    </body>  
</html>
```

SESSION_M.PHP

```
<?php  
require 'connection.php';  
$conn = Connect();  
  
session_start();  
  
$user_check=$_SESSION['login_user1'];  
  
// SQL Query To Fetch Complete Information Of User  
$query = "SELECT username FROM MANAGER WHERE username = '$user_check'";  
$ses_sql = mysqli_query($conn, $query);  
$row = mysqli_fetch_assoc($ses_sql);  
$login_session =$row['username'];  
  
?>
```

SESSION_U.PHP

```
<?php  
require 'connection.php';  
$conn = Connect();
```



```
session_start();

$user_check=$_SESSION['login_user2'];

// SQL Query To Fetch Complete Information Of User
$query = "SELECT username FROM CUSTOMER WHERE username = '$user_check'";
$ses_sql = mysqli_query($conn, $query);
$row = mysqli_fetch_assoc($ses_sql);
$login_session =$row['username'];

?>
```

UPDATE-CART.PHP

```
<?php
```

```
if(!isset($_SESSION))
{
    session_start();
}

include 'connection.php';
$conn = Connect();

$F_ID = $_GET['id'];
$action = $_GET['action'];

$sql = "SELECT quantity FROM food WHERE F_id = ".$F_ID;

$result = mysqli_query($conn, $sql);

if($result){

    if($obj = mysqli_fetch_assoc($result)) {
```

```

switch($action) {

    case "add":
        if($_SESSION['cart'][$F_ID]+1 <= $row["quantity"])
            $_SESSION['cart'][$F_ID]++;
        break;

    case "remove":
        $_SESSION['cart'][$F_ID]--;
        if($_SESSION['cart'][$F_ID] == 0)
            unset($_SESSION['cart'][$F_ID]);
        break;

    }
}

header("location:cart.php");

?>

```

VIEW_FOOD_ITEM.PHP

```

<?php
include('session_m.php');

if(!isset($login_session)){
    header('Location: managerlogin.php'); // Redirecting To Home Page
}

?>

<!DOCTYPE html>

<html>

```

```
<head>
  <title> Manager Login | only Cafe' </title>
</head>

<link rel="stylesheet" type = "text/css" href ="css/view_food_items.css">
<link rel="stylesheet" type = "text/css" href ="css/bootstrap.min.css">
<script type="text/javascript" src="js/jquery.min.js"></script>
<script type="text/javascript" src="js/bootstrap.min.js"></script>

<body>

  <button onclick="topFunction()" id="myBtn" title="Go to top">
    <span class="glyphicon glyphicon-chevron-up"></span>
  </button>

  <script type="text/javascript">
    window.onscroll = function()
    {
      scrollFunction()
    };

    function scrollFunction(){
      if (document.body.scrollTop > 20 || document.documentElement.scrollTop > 20) {
        document.getElementById("myBtn").style.display = "block";
      } else {
        document.getElementById("myBtn").style.display = "none";
      }
    }

    function topFunction() {
      document.body.scrollTop = 0;
      document.documentElement.scrollTop = 0;
    }
  </script>

  <nav class="navbar navbar-inverse navbar-fixed-top navigation-clean-search" role="navigation">
    <div class="container">
      <div class="navbar-header">
        <button type="button" class="navbar-toggle collapsed" data-toggle="collapse" data-target="#myNavbar">
```

```

        <span class="sr-only">Toggle navigation</span>
        <span class="icon-bar"></span>
        <span class="icon-bar"></span>
        <span class="icon-bar"></span>
    </button>
    <a class="navbar-brand" href="index.php">only Caffee'</a>
</div>

<div class="collapse navbar-collapse " id="myNavbar">
    <ul class="nav navbar-nav">
        <li><a href="index.php">Home</a></li>
        <li><a href="aboutus.php">About</a></li>
        <li><a href="contactus.php">Contact Us</a></li>
    </ul>

    <ul class="nav navbar-nav navbar-right">
        <li><a href="#"><span class="glyphicon glyphicon-user"></span> Welcome <?php echo $login_session;
?> </a></li>
        <li class="active"> <a href="managerlogin.php">MANAGER CONTROL PANEL</a></li>
        <li><a href="logout_m.php"><span class="glyphicon glyphicon-log-out"></span> Log Out </a></li>
    </ul>
</div>

</div>
</nav>

<div class="container">
    <div class="jumbotron">
        <h1>Hello Manager! </h1>
        <p>Manage all your restaurant from here</p>

    </div>
</div>

<div class="container">
    <div class="container">
        <div class="col">

```

```
</div>
</div>
```

```
<div class="col-xs-3" style="text-align: center;">

<div class="list-group">
  <a href="myrestaurant.php" class="list-group-item ">My Restaurant</a>
  <a href="view_food_items.php" class="list-group-item active">View Food Items</a>
  <a href="add_food_items.php" class="list-group-item ">Add Food Items</a>
  <a href="edit_food_items.php" class="list-group-item ">Edit Food Items</a>
  <a href="delete_food_items.php" class="list-group-item ">Delete Food Items</a>
  <a href="view_order_details.php" class="list-group-item ">View Order Details</a>
</div>
</div>
```

```
<div class="col-xs-9">
  <div class="form-area" style="padding: 0px 100px 100px 100px;">
    <form action="" method="POST">
    <br style="clear: both">
    <h3 style="margin-bottom: 25px; text-align: center; font-size: 30px;"> YOUR FOOD ITEMS LIST </h3>
```

```
<?php
```

```
// Storing Session
$user_check=$_SESSION['login_user1'];
$sql = "SELECT * FROM food f WHERE f.R_ID IN (SELECT r.R_ID FROM RESTAURANTS r WHERE
r.M_ID='$user_check') ORDER BY F_ID";
$result = mysqli_query($conn, $sql);

if (mysqli_num_rows($result) > 0)
{
```

?>

```
<table class="table table-striped">
```

```
  <thead class="thead-dark">
```

```
    <tr>
```

```
      <th> </th>
```

```
      <th> Food ID </th>
```

```
      <th> Food Name </th>
```

```
      <th> Price </th>
```

```
      <th> Description </th>
```

```
      <th> Restaurant ID </th>
```

```
    </tr>
```

```
  </thead>
```

```
<?PHP
```

```
  //OUTPUT DATA OF EACH ROW
```

```
  while($row = mysqli_fetch_assoc($result)){
```

```
?>
```

```
<tbody>
```

```
  <tr>
```

```
    <td> <span class="glyphicon glyphicon-menu-right"></span> </td>
```

```
    <td><?php echo $row["F_ID"]; ?></td>
```

```
    <td><?php echo $row["name"]; ?></td>
```

```
    <td><?php echo $row["price"]; ?></td>
```

```
    <td><?php echo $row["description"]; ?></td>
```

```
    <td><?php echo $row["R_ID"]; ?></td>
```

```
  </tr>
```

```
</tbody>
```

```
<?php } ?>
```

```
</table>
```

```
<br>
```

```
<?php } else { ?>
```

```
<h4><center>0 RESULTS</center> </h4>
```

```
<?php } ?>

</form>

</div>

</div>
</div>
<br>
<br>
<br>
<br>

</body>
</html>
```

VIEW ORDER DETAILS.PHP

```
<?php
include('session_m.php');

if(!isset($login_session)){
header('Location: managerlogin.php');
}

?>
<!DOCTYPE html>
<html>

<head>
<title> Manager Login | only Cafe' </title>
</head>

<link rel="stylesheet" type = "text/css" href ="css/view_order_details.css">
<link rel="stylesheet" type = "text/css" href ="css/bootstrap.min.css">
<script type="text/javascript" src="js/jquery.min.js"></script>
<script type="text/javascript" src="js/bootstrap.min.js"></script>
```

```
<body>
```

```
<button onclick="topFunction()" id="myBtn" title="Go to top">
  <span class="glyphicon glyphicon-chevron-up"></span>
</button>
```

```
<script type="text/javascript">
```

```
  window.onscroll = function()
  {
    scrollFunction()
  };
```

```
function scrollFunction(){
  if (document.body.scrollTop > 20 || document.documentElement.scrollTop > 20) {
    document.getElementById("myBtn").style.display = "block";
  } else {
    document.getElementById("myBtn").style.display = "none";
  }
}
```

```
function topFunction() {
  document.body.scrollTop = 0;
  document.documentElement.scrollTop = 0;
}
```

```
</script>
```

```
<nav class="navbar navbar-inverse navbar-fixed-top navigation-clean-search" role="navigation">
```

```
<div class="container">
```

```
<div class="navbar-header">
```

```
<button type="button" class="navbar-toggle collapsed" data-toggle="collapse" data-target="#myNavbar">
```

```
<span class="sr-only">Toggle navigation</span>
```

```
<span class="icon-bar"></span>
```

```
<span class="icon-bar"></span>
```

```
<span class="icon-bar"></span>
```

```
</button>
```

```
<a class="navbar-brand" href="index.php">only Cafe'</a>
```

```
</div>
```



```
<div class="collapse navbar-collapse" id="myNavbar">
  <ul class="nav navbar-nav">
    <li><a href="index.php">Home</a></li>
    <li><a href="aboutus.php">About</a></li>
    <li><a href="contactus.php">Contact Us</a></li>
  </ul>

  <ul class="nav navbar-nav navbar-right">
    <li><a href="#"><span class="glyphicon glyphicon-user"></span> Welcome <?php echo $login_session;
?> </a></li>
    <li class="active"> <a href="managerlogin.php">MANAGER CONTROL PANEL</a></li>
    <li><a href="logout_m.php"><span class="glyphicon glyphicon-log-out"></span> Log Out </a></li>
  </ul>
</div>

</div>
</nav>
```

```
<div class="container">
  <div class="jumbotron">
    <h1>Hello Manager! </h1>
    <p>Manage all your restaurant from here</p>

  </div>
</div>
```

```
<div class="container">
  <div class="container">
    <div class="col">

  </div>
</div>
```

```
<div class="col-xs-3" style="text-align: center;">
```

```
<div class="list-group">
```

```

<a href="myrestaurant.php" class="list-group-item ">My Restaurant</a>
<a href="view_food_items.php" class="list-group-item">View Food Items</a>
<a href="add_food_items.php" class="list-group-item ">Add Food Items</a>
<a href="edit_food_items.php" class="list-group-item ">Edit Food Items</a>
<a href="delete_food_items.php" class="list-group-item ">Delete Food Items</a>
<a href="view_order_details.php" class="list-group-item active">View Order Details</a>
</div>
</div>

```

```

<div class="col-xs-9">
  <div class="form-area" style="padding: 0px 100px 100px 100px;">
    <form action="" method="POST">
      <br style="clear: both">
      <h3 style="margin-bottom: 25px; text-align: center; font-size: 30px;"> YOUR FOOD ORDER LIST </h3>

```

```
<?php
```

```
// Storing Session
```

```

$user_check=$_SESSION['login_user1'];
$sql = "SELECT * FROM orders o WHERE o.R_ID IN (SELECT r.R_ID FROM RESTAURANTS r WHERE
r.M_ID='$user_check') ORDER BY order_date";
$result = mysqli_query($conn, $sql);

```

```

if (mysqli_num_rows($result) > 0)
{

?>

```

```

<table class="table table-striped">
  <thead class="thead-dark">
    <tr>
      <th> </th>
      <th> Order ID </th>

```

```

        <th> Food ID </th>
        <th> Order Date </th>
        <th> Food Name </th>
        <th> Price </th>
        <th> Quantity </th>
        <th> Customer </th>
    </tr>
</thead>

<?PHP
    //OUTPUT DATA OF EACH ROW
    while($row = mysqli_fetch_assoc($result)){
        ?>

<tbody>
    <tr>
        <td> <span class="glyphicon glyphicon-menu-right"></span> </td>
        <td><?php echo $row["order_ID"]; ?></td>
        <td><?php echo $row["F_ID"]; ?></td>
        <td><?php echo $row["order_date"]; ?></td>
        <td><?php echo $row["foodname"]; ?></td>
        <td><?php echo $row["price"]; ?></td>
        <td><?php echo $row["quantity"]; ?></td>
        <td><?php echo $row["username"]; ?></td>
    </tr>
</tbody>

<?php } ?>
</table>
<br>

<?php } else { ?>

<h4><center>0 RESULTS</center> </h4>

<?php } ?>

</form>

```

</div>

</div>

</div>

</body>

</html>

CHAPTER-6

FUTURE ENHANCEMENT

We think that not a single project is ever considered as complete forever. Because our mind is always thinking something new and our necessities also are growing day by day. We always want something more than what we have.

This project can be easily implemented under various situations. We can add new features as and when we require. Reusability is possible as and when require in this project. There is flexibility in all the modules. We can also include online payment services to this project using PayPal. This will help customers to pay online for their purchases using Credit/Debit card. There are many features which could be added to this project for making this project more productive.

FUTURE WORK

✓ **Customize orders: Allow customers to customize food orders**

Enhance User Interface by adding more user interactive features.

Provide Deals and promotional

✓ Offer details to home page. Provide Recipes of the Week/Day to Home Page

✓ Payment Options: Add different payment options such as PayPal, Cash, Gift Cards etc. Allow to save payment details for future use.

✓ Allow to process an order as a Guest

✓ Delivery Options: Add delivery option

CONCLUSION

The software development is never completed. There is always a need for modification. There could have been other approaches to implement the system. I have tried to my level best to make the

system an interactive as possible. The system has been developed with much care and free of errors and at the same time it is efficient and less time consuming. The purpose of this project was to develop a web application for purchasing items from a shop

CHAPTER-7

REFRENCES

BIBLIOGRAPHY

During the development of our system, we have taken the reference from Books and journals, which we would like to mention in this section.

These books acted as our tutors during the system development..

System Analysis And Design - Kenneth E. Kendall, Julie E. Kendall

An Analysis and Design of Information Systems –
Grayce M. Booth

Software Engineering - Roger S. Pressman Database Management System - James A. Larson
PHP: A Beginner's Guide - RiwantoMegosinarso

✓ www.google.com

✓ www.mysql.com

✓ <http://en.wikipedia.org/wiki/Recruitment>

✓ www.w3schools.com

✓ www.google.co.in

✓ <http://www.recruitmentsystems.com/>