


```
id: INTEGER [PK]

user_id: INTEGER [FK]
username: VARCHAR(250)
bio: LONGVARCHAR
uid: BIGINT
access_token: VARCHAR(250)
access_token_secret: VARCHAR(250)
avatar: VARCHAR(250)
avatar: Status: BIT
created_at: TIMESTAMP
updated_at: TIMESTAMP
```

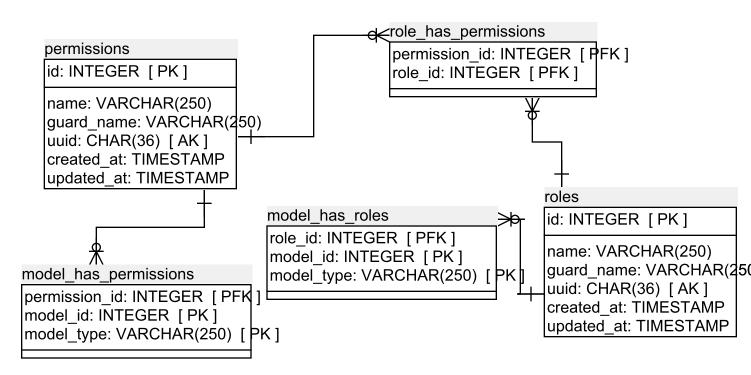

oauth_access_tokens

id: VARCHAR(100) [PK]

user_id: INTEGER client_id: INTEGER name: VARCHAR(250) scopes: LONGVARCHAR revoked: BIT

created_at: TIMESTAMP updated_at: TIMESTAMP expires_at: TIMESTAMP

oauth_clients

id: INTEGER [PK]

user_id: INTEGER
name: VARCHAR(250)
secret: VARCHAR(100)
redirect: LONGVARCHAR
personal_access_client: BIT
password_client: BIT
revoked: BIT
created at: TIMESTAMP

updated at: TIMESTAMP

revoked: BIT expires_at: TIMESTAMP

oauth auth codes

user id: INTEGER

client id: INTEGER

lid: VARCHAR(100) [PK]

scopes: LONGVARCHAR

oauth_refresh_tokens

id: VARCHAR(100) [PK]

access_token_id: VARCHAR(100)

revoked: BIT

expires_at: TIMESTAMP