

# **Api Documentation**

Api Documentation

Apache 2.0

crud-controller: CRUD Controller

search-controller: Search Controller

[ BASE URL: / , API VERSION: 1.0 ]

Show/Hide | List Operations | Expand Operations

Show/Hide List Operations Expand Operations

# **Api Documentation**

Api Documentation

Apache 2.0

crud-controller : CRUD Controller	Show/Hide List Operations Expand Operations
/admin/purchaseReport	createPurchaseReport
РUТ /admin/purchaseReport	updatePurchaseReport
GET /admin/purchaseReport/id/{id}	getPurchaseReportById
/admin/purchaseReport/{id}	deletePurchaseReportByld
POST /admin/shoe	createShoe
РUТ /admin/shoe	updateShoe
DELETE /admin/shoe/{id}	deleteShoeByld
GET /admin/shoe/{id}	getShoeByld
search-controller : Search Controller	Show/Hide List Operations Expand Operations
GET /admin/purchaseReport/all	getAllPurchaseReport
/admin/purchaseReport/category/{category}	getAllPurchaseReportsByCategory
/admin/purchaseReport/date/{dateInMs}	getAllPurchaseReportsByDop
GET /admin/shoe/all	getAllShoes

#### Request URL

http://localhost:4000/admin/purchaseReport/all

#### Request Headers

```
{
    "Accept": "*/*"
}
```

#### Response Body

```
"id": 5,
  "purchasedBy": "user_1",
  "category": "Running",
  "dop": "1970-01-01",
  "orderList": "adidas_runner:5,nike_airmax:10"
},
  "id": 6,
  "purchasedBy": "user_2",
  "category": "Cricket",
  "dop": "1970-01-01",
  "orderList": "adidas_cricket:5,nike_cricket:10"
},
  "id": 7,
  "purchasedBy": "user_3",
  "category": "Basketball",
  "dop": "1970-01-01",
  "orderList": "adidas_basketball:5,nike_basketball:10"
},
```

## Response Class (Status 200)

OK

Model Example Value

```
{
  "category": "string",
  "dop": "2020-10-05T10:21:18.475Z",
  "id": 0,
  "orderList": "string",
  "purchasedBy": "string"
}
```

# Response Content Type ▼/\* ➤

#### **Parameters**

Parameter	Value	Description	Parameter Type	Data Type
pr	<pre>{     "category": "Running",     "dop": "2020-10-05T10:21:18.475Z",     "id": 10,     "orderList": "adidas_runners:24",     "purchasedBy": "user_7" }  Parameter content type: application/json &gt;</pre>	pr	body	<pre>Model Example Value  {     "category": "string",     "dop": "2020-10-05T10:21:18.500Z",     "id": 0,     "orderList": "string",     "purchasedBy": "string" }</pre>

```
Curl
```

```
curl -X POST --header 'Content-Type: application/json' --header 'Accept: application/json' -d '{ \
 "category": "Running", \
"dop": "2020-10-05T10:21:18.475Z", \
"id": 10, \
"orderList": "adidas_runners:24", \
"purchasedBy": "user_7" \
}' 'http://localhost:4000/admin/purchaseReport'
```

## Request URL

```
http://localhost:4000/admin/purchaseReport
```

## Request Headers

```
"Accept": "*/*"
```

# Response Body

```
"id": 9,
  "purchasedBy": "user_7",
 "category": "Running",
  "dop": "2020-10-05T10:21:18.475+0000",
  "orderList": "adidas_runners:24"
}
```

# Response Code

200

category

Response Model

Parameter	Value	Description	Param

meter Type Data Type path

string

Headers

Response Messages

HTTP Status Code

category

404

Try it out!

401 Unauthorized 403

Hide Response

Running

Forbidden

Not Found

Reason

#### Curl

```
curl -X GET --header 'Accept: application/json' 'http://localhost:4000/admin/purchaseReport/category/Running'
```

#### Request URL

```
http://localhost:4000/admin/purchaseReport/category/Running
```

#### Request Headers

```
{
    "Accept": "*/*"
}
```

#### Response Body

```
[
    "id": 5,
    "purchasedBy": "user_1",
    "category": "Running",
    "dop": "1970-01-01",
    "orderList": "adidas_runner:5,nike_airmax:10"
},
{
    "id": 9,
    "purchasedBy": "user_7",
    "category": "Running",
    "dop": "2020-10-05",
    "orderList": "adidas_runners:24"
}
```

#### Response Code

# Response Class (Status 200)

OK

GET

Model Example Value

```
"category": "string",
"id": 0,
"name": "string",
"price": 0
```


# Response Content Type \*/\* >

## **Parameters**

Parameter	Value	Description	Parameter Type	Data Type
id	3	id	path	integer

Response Messages				
HTTP Status Code	Reason	Response Model	Headers	
401	Unauthorized			
403	Forbidden			
404	Not Found			
Try it out!				

```
Curl
 curl -X GET --header 'Accept: application/json' 'http://localhost:4000/admin/shoe/3'
Request URL
 http://localhost:4000/admin/shoe/3
Request Headers
"Accept": "*/*"
Response Body
    "id": 3,
    "name": "Shoe Name 3",
    "category": "Running",
    "price": 900.24
Response Code
 200
```

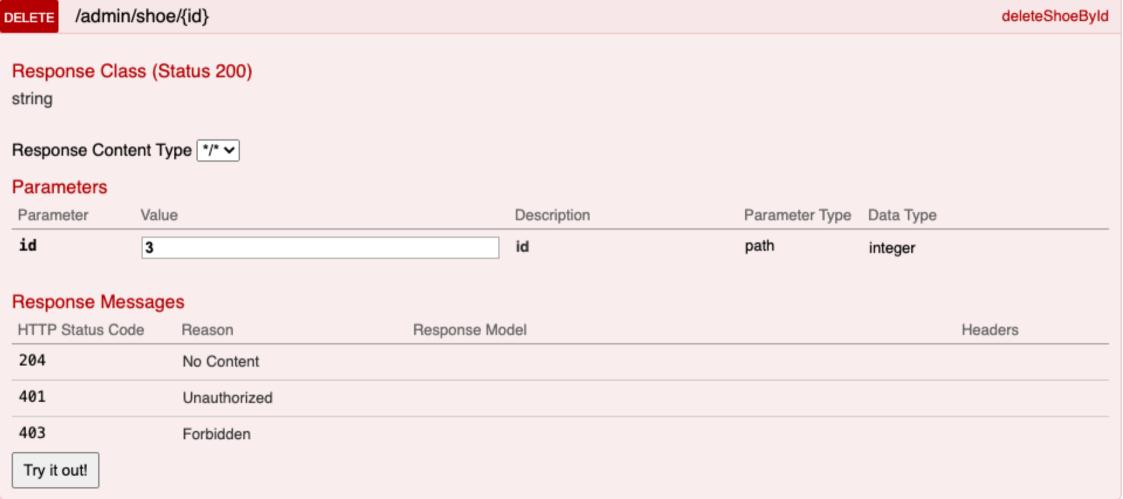

```
Curl
 curl -X DELETE --header 'Accept: text/plain' 'http://localhost:4000/admin/shoe/3'
Request URL
 http://localhost:4000/admin/shoe/3
Request Headers
 {
    "Accept": "*/*"
}
Response Body
   Successfully deleted shoe with id: 3
Response Code
 200
```

#### Curl

```
curl -X GET --header 'Accept: */*' 'http://localhost:4000/admin/shoe/3'
```

### Request URL

```
http://localhost:4000/admin/shoe/3
```

### Request Headers

```
{
   "Accept": "*/*"
}
```

## Response Body

no content

#### Response Code

404

## Response Headers

```
"cache-control": "no-cache, no-store, max-age=0, must-revalidate",
"connection": "keep-alive",
"content-length": "0",
"date": "Mon, 05 Oct 2020 10:25:53 GMT",
"errormessage": ": Shoe not found with Id: 3",
"expires": "0",
"keep-alive": "timeout=60",
"pragma": "no-cache",
"x-content-type-options": "nosniff",
"x-frame-options": "DENY",
"x-xss-protection": "1; mode=block",
"content-type": null
}
```

```
curl -X GET --header 'Accept: application/json' 'http://localhost:4000/admin/shoe/all'
```

#### Request URL

```
http://localhost:4000/admin/shoe/all
```

#### Request Headers

```
{
  "Accept": "*/*"
}
```

#### Response Body

```
"id": 1,
 "name": "Shoe Name 1",
 "category": "Basketball",
 "price": 1000.24
},
{
 "id": 2,
 "name": "Shoe Name 2",
 "category": "Cricket",
 "price": 1100.24
},
 "id": 4,
 "name": "Shoe Name 4",
 "category": "Football",
 "price": 1900.24
```

#### Response Code