

MAJOR PROJECT  
ON

**QUIZ WEB APPLICATION**

*Particularly made for the degree of*

**MASTERS IN COMPUTER APPLICATIONS**



**Submitted to:**  
Mr. Anil Bikash Choudhury  
(HOD MCA)

**Submitted by:**

SHUBHAM GUHA (181001091007)  
ANKIT GUPTA (211001271089)  
DEBASISH PAUL (211001271059)  
ARINDAM DAS (211001271014)  
S.K. ZAHIRUL ISLAM (211001271070)  
SAMRAT SINHA (211001271121)

DEPARTMENT OF COMPUTER APPLICATION,  
TECHNOINDIA UNIVERSITY

**EM - 4, Sector V, Kolkata - 700091, India.**

## **ACKNOWLEDGMENT**

We have taken efforts in this project. However, it would not have been possible without the kind support and help of many individuals. We would like to extend our sincere thanks to all of them.

Then we are thankful to all members of this project, without their support and handwork it could never be possible to make any progress in this project.

Debasish Paul  
Sk Zahirul Islam  
Arindam Das  
Ankit Gupta  
Shubham Guha  
Samrat Sinha

## **ABSTRACT**

The rapid advancement of technology has revolutionized the way we acquire knowledge and evaluate our understanding of various subjects. In this digital age, online quiz exams have emerged as a popular and effective tool for assessing and enhancing one's knowledge. This abstract explores the need for participating in online quiz exams, highlighting their benefits and advantages. Online quiz exams offer convenience, flexibility, and accessibility, enabling individuals from different geographical locations to participate and demonstrate their expertise. They provide a platform for self-assessment and learning, allowing individuals to gauge their understanding of specific topics and identify areas for improvement. Furthermore, online quiz exams promote healthy competition, as participants can compare their performance with others and strive for better results. Additionally, these exams foster a sense of engagement and motivation, as they often incorporate interactive features and immediate feedback, encouraging active learning and knowledge retention.

The entire system was developed using the HTML, CSS, JavaScript, Xampp Server and PHP, SQL as back end. The HTML used here is to design the web page.

Ultimately, the need for participating in online quiz exams lies in their ability to offer a stimulating and rewarding learning experience, promoting continuous personal and professional development in an increasingly interconnected world.

# INTRODUCTION

Welcome to our Quiz Web Application, an exciting platform designed to test your knowledge, challenge your skills, and provide an engaging experience for users of all ages. With a wide range of categories, graphical analysis, and a cool interface, our application is your go-to destination for fun and educational quizzes.

At the heart of our Quiz Web Application are the diverse categories that cater to a variety of interests and subjects. Expand your knowledge, discover new facts, and enjoy the thrill of competing with others in your chosen category.

Test your ability to think quickly and make decisions under pressure as you race against the clock to answer questions.

In addition to the interactive quizzes , our Quiz Web Application offers graphical analysis to help you track your progress and understand your performance. Dive into detailed charts and visual representations that showcase your strengths, areas for improvement, and overall quiz performance. This feature allows you to assess your knowledge growth over time and provides valuable insights into your quiz-taking skills.

To ensure a seamless and personalized experience, our Quiz Web Application includes an admin panel and a user login/logout system. The admin panel empowers administrators to manage quizzes, categories, and user accounts effortlessly. It provides an intuitive interface for creating, editing, and publishing quizzes, ensuring a constantly updated and engaging quiz library. Users, on the other hand, can create personalized accounts, track their scores, save their progress, and compete with friends or other users in a friendly leaderboard competition.

With our user-friendly interface, captivating quizzes, graphical analysis, and comprehensive admin panel, our Quiz Web Application aims to deliver an enjoyable and educational experience for all users. So, dive in, challenge yourself, and embark on a journey of knowledge and excitement. Let the quizzes begin!

# **SYSTEM SPECIFICATION**

## **Hardware Configuration:**

Processor: i3 3rd Gen (above)  
RAM : 8 GB RAM  
Storage : 20 GB HDD  
OS : Windows 10 or above


## **Software Configuration:**

Visual Studio (HTML, CSS, JAVASCRIPT, PHP)  
XAMPP  
MySQL Workbench  
PHP  
Python


# SYSTEM DESIGN

- DFD up to level 2


## Level 0 Diagram –

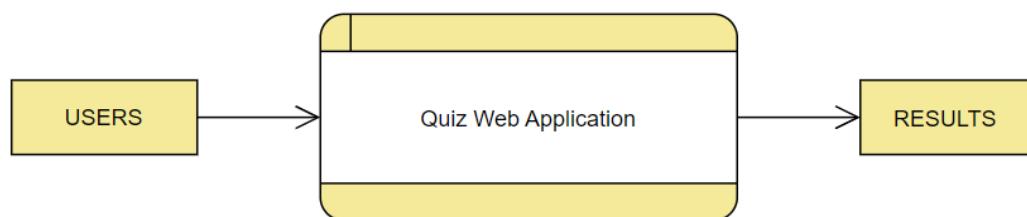


## Level 1 Diagram –

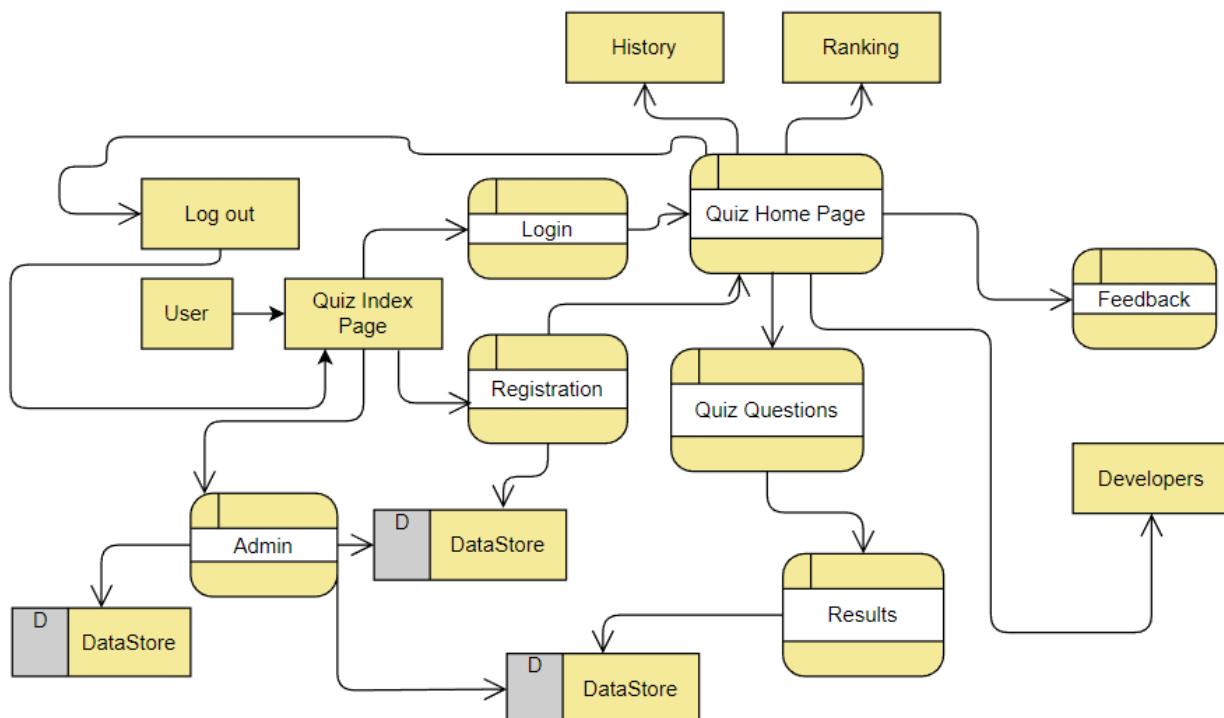

## Level 2 Diagram –

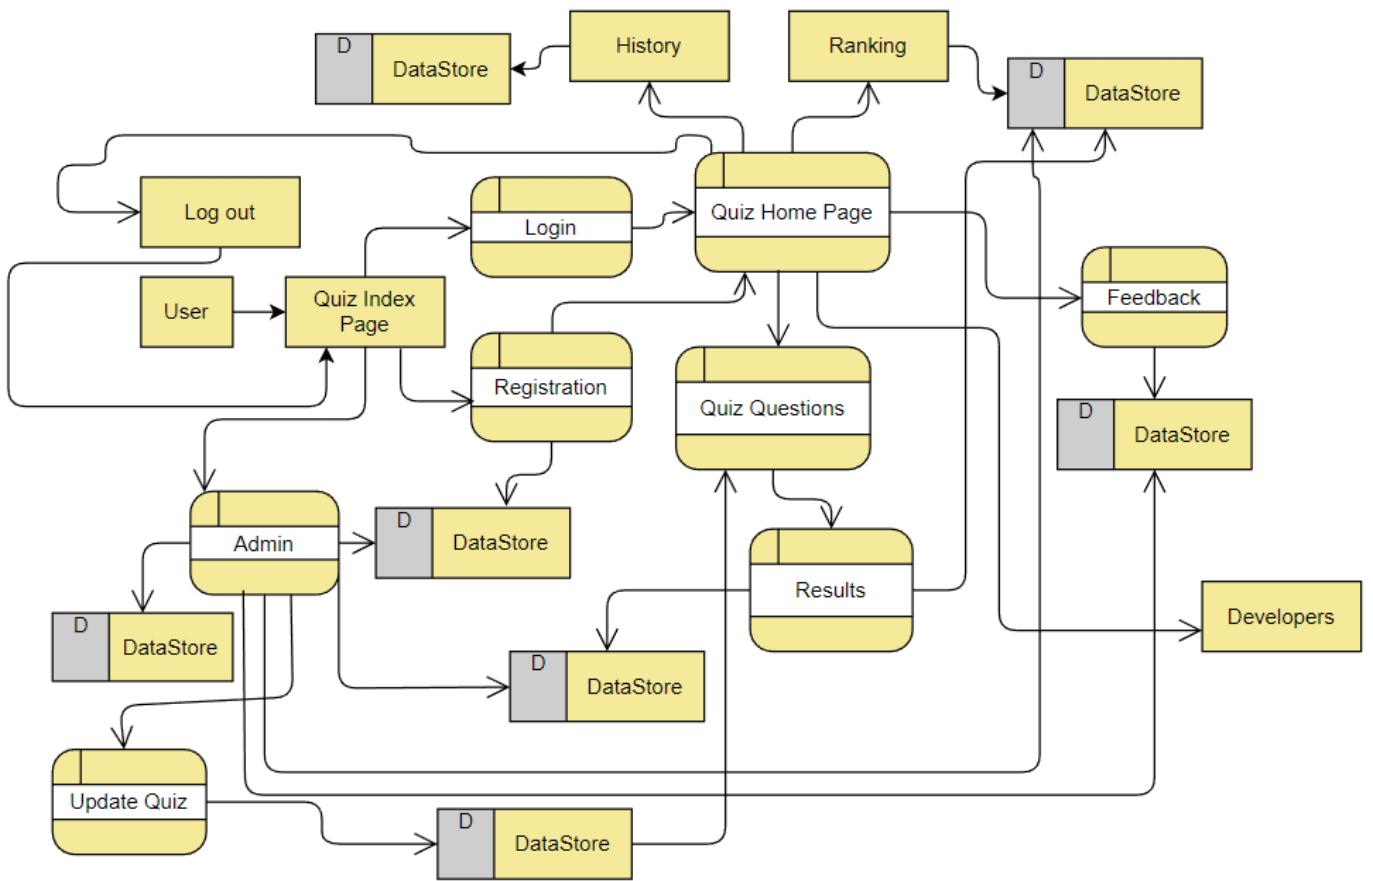


- ERD with proper **cardinality** and **optionality**.

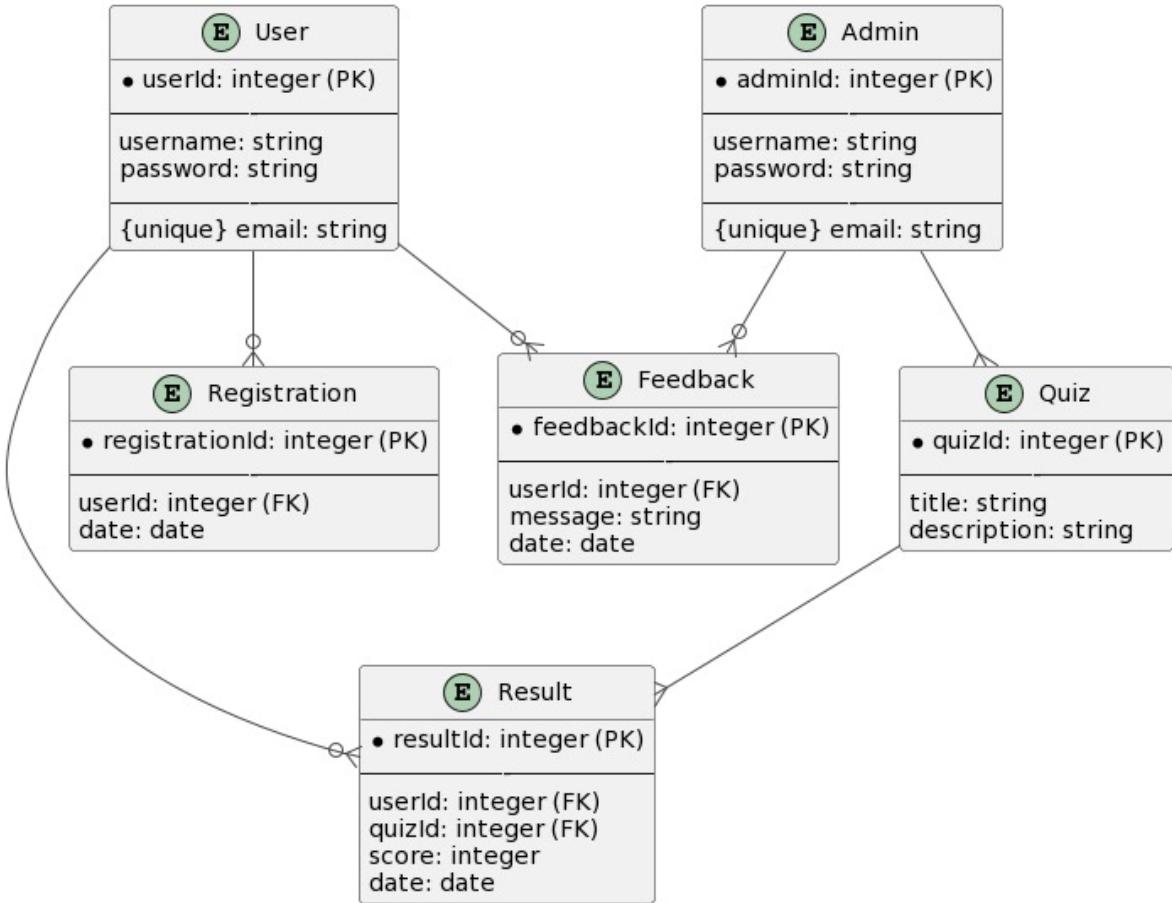


- UML Diagrams:


### i. Use Case Diagram

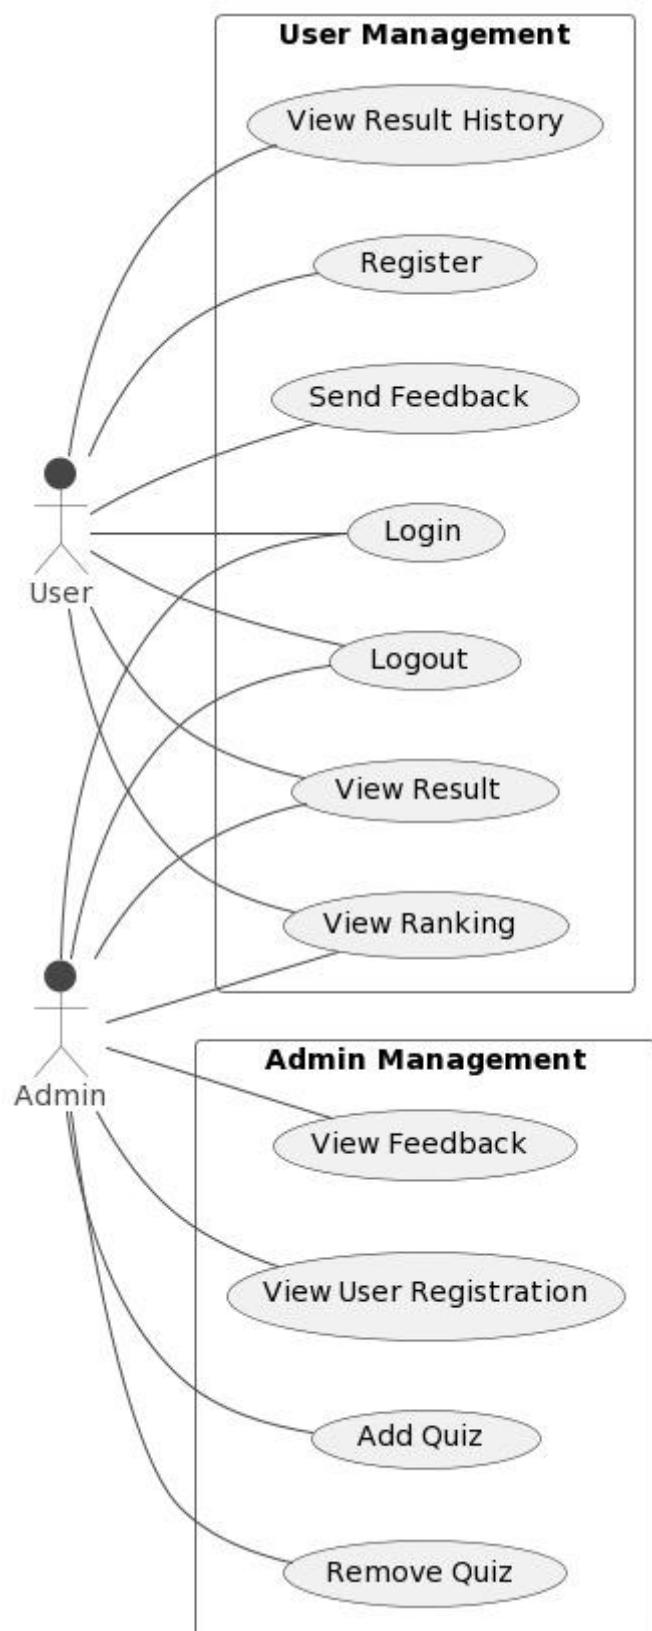


## ii. Activity Diagram

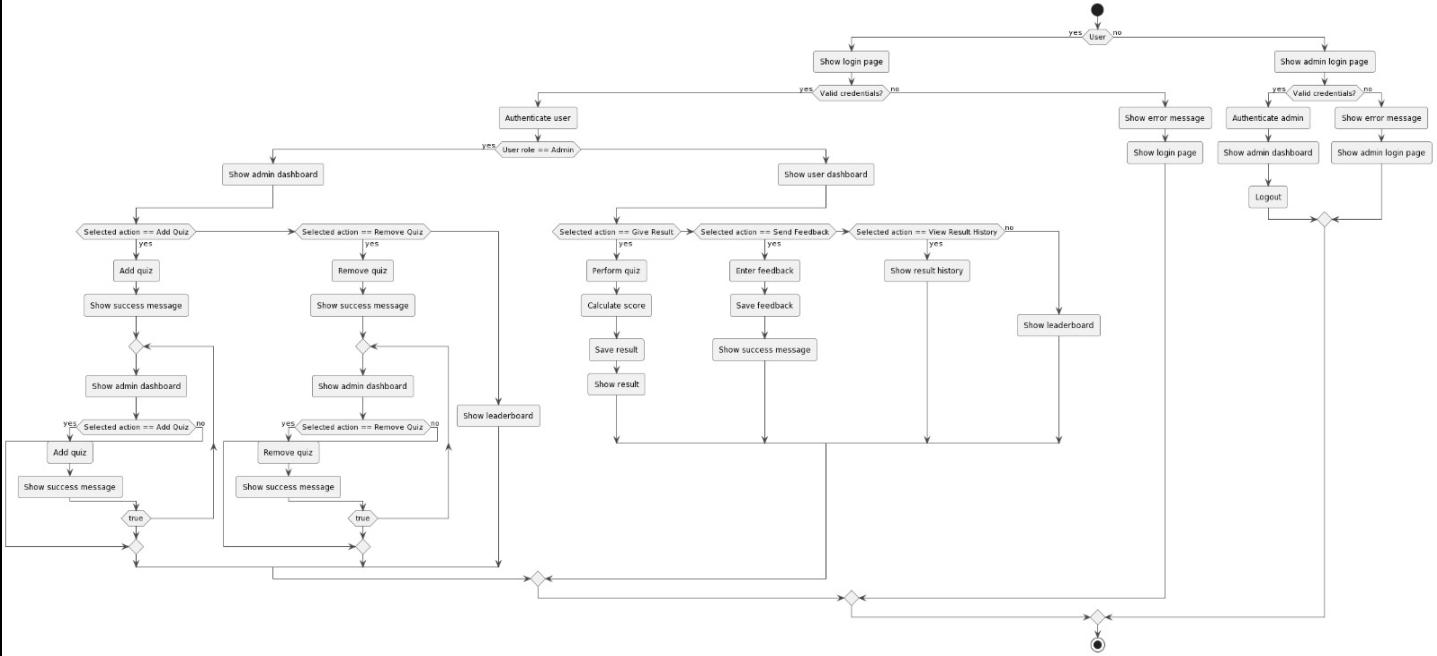

## iii. Sequence Diagram

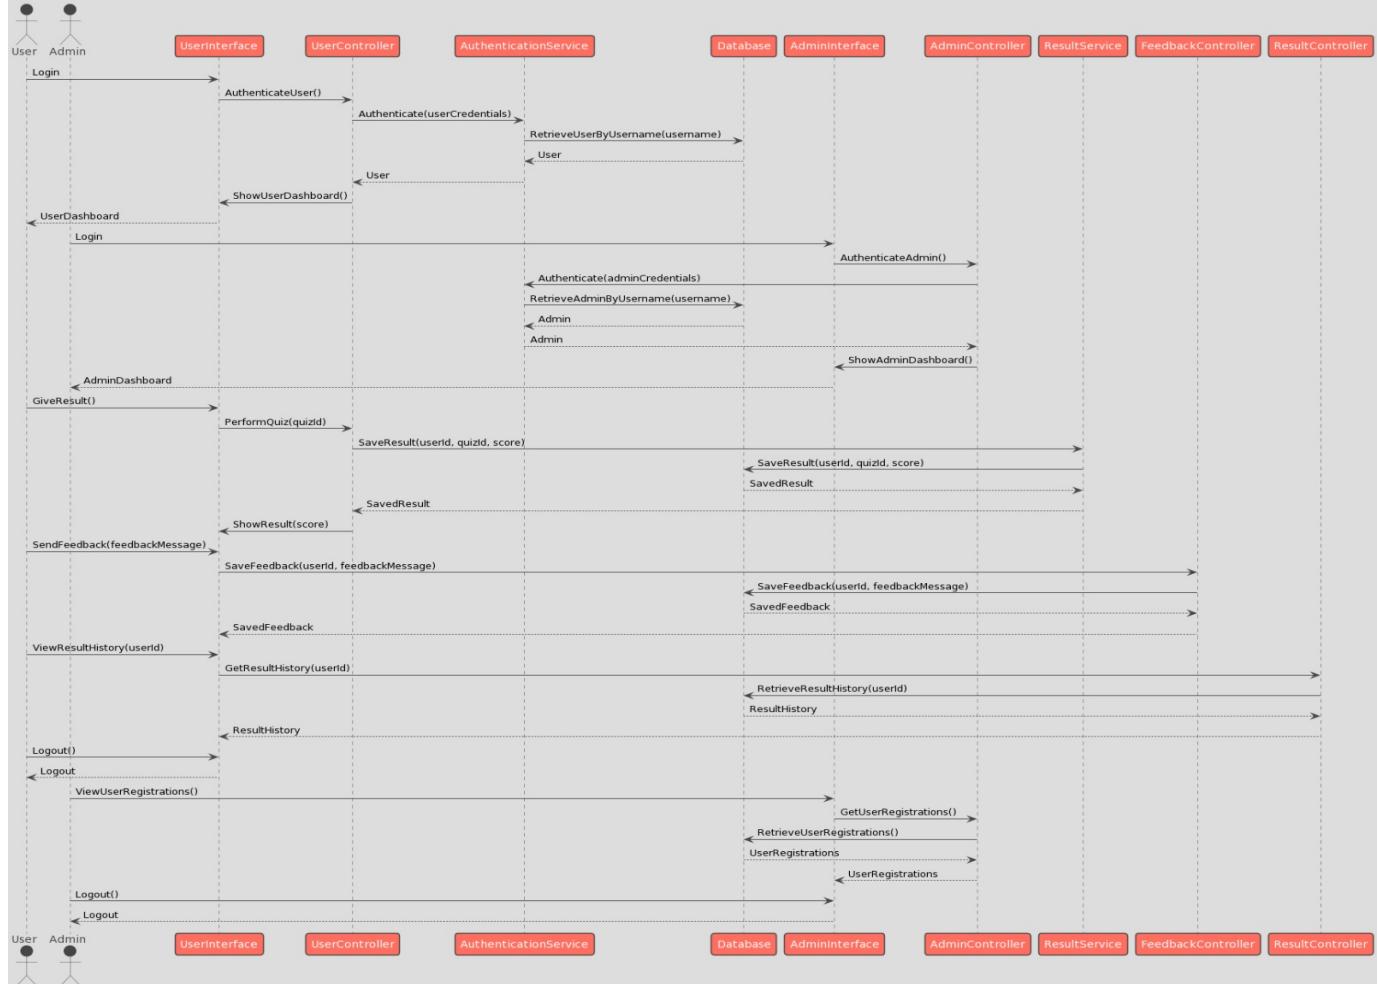

#### iv. Class Diagram

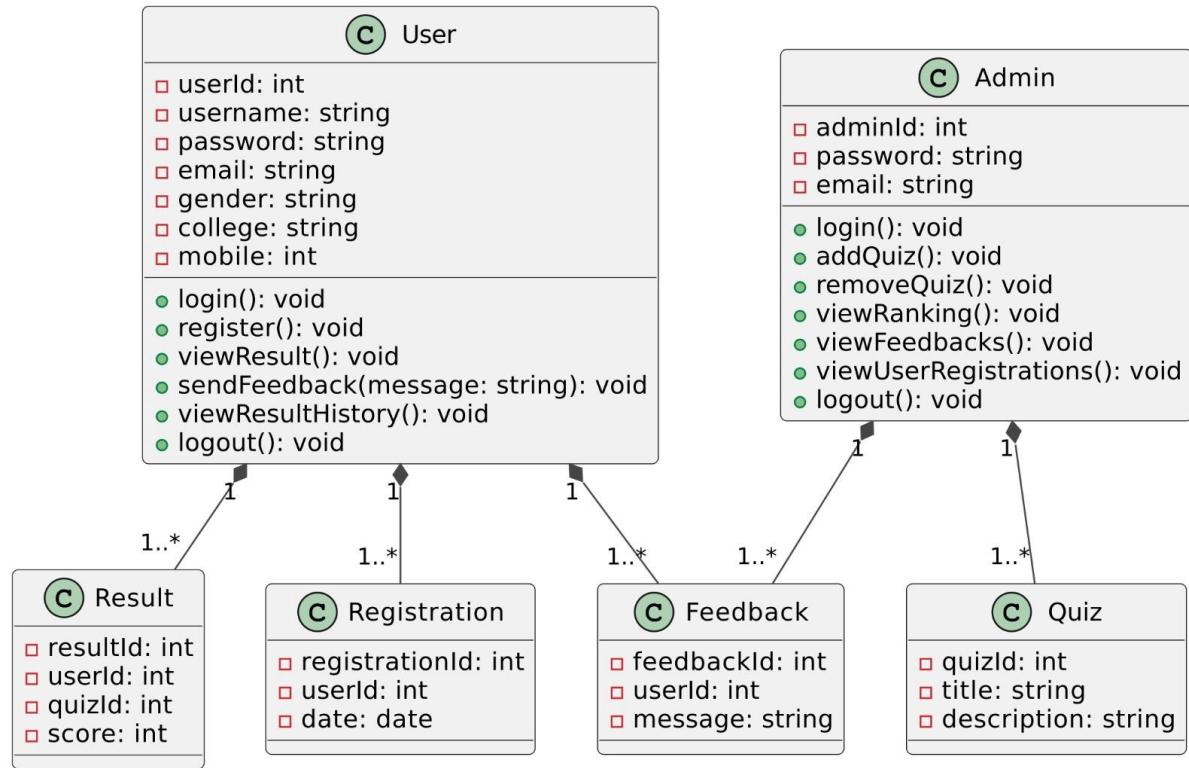

# CODES

## Account.php –

```
<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Transitional//EN" "http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">
<html xmlns="http://www.w3.org/1999/xhtml">

<head>
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-1" />
<meta name="viewport" content="width=device-width, initial-scale=1">

<title>Quiz App MCA</title>
<link rel="stylesheet" href="css/bootstrap.min.css" />
<link rel="stylesheet" href="css/bootstrap-theme.min.css" />
<link rel="stylesheet" href="css/main.css">
<link rel="stylesheet" href="css/font.css">
<script src="js/jquery.js" type="text/javascript"></script>

<script src="js/bootstrap.min.js" type="text/javascript"></script>
<link href="http://fonts.googleapis.com/css?family=Roboto:400,700,300' rel='stylesheet' type='text/css'>
<!--alert message-->
<?php if (@$_GET["w"]) {
    echo '<script>alert("'. @$_GET["w"] . "');</script>';
} ?>
<!--alert message end-->

<style>
@keyframes blink {
    0% { color: #ff0000; }
    20% { color: #ffffff; }
    40% { color: #800080; }
    60% { color: #ff8c00; }
    80% { color: #ffff00; }
    100% { color: #ff0000; }
}
.blinking-slogan {
    animation: blink 6s infinite;
}
</style>
<style>

.feet {
    background-color: #f1f1f1;
    padding: 20px;
    text-align: center;
    position: fixed;
    left: 0;
    bottom: 0;
    width: 100%;
}
</style>

</head>
<?php include_once "dbConnection.php"; ?>

<body>
<div class="header">
<div class="row">

<div class="col-lg-6">
<span class="blinking-slogan" style="font-family: 'typo'; font-size: 35px; margin: 15px;">
    >Quiz App MCA</span>
</div>

<div class="col-md-4 col-md-offset-2">
<?php
    include_once "dbConnection.php";
    session_start();
    if (!isset($_SESSION["email"])) {
        header("location:index.php");
    } else {

```

```

$name = $_SESSION["name"];
$email = $_SESSION["email"];

include_once "dbConnection.php";
echo '<span class="pull-right top title1" ><span class="log1"><span class="glyphicon glyphicon-user" aria-hidden="true"></span>&nbsp;&nbsp;&nbsp;Hello,</span> <a href="account.php?q=1" class="log log1">' .
    $name .
    '</a>&nbsp;&nbsp;<a href="logout.php?q=account.php" class="log"><span class="glyphicon glyphicon-log-out" aria-hidden="true"></span>&nbsp;Signout</button></a></span>';
}
?>
</div>
</div>
</div>
<div class="bg">

<!--navigation menu-->
<nav class="navbar navbar-default title1">
<div class="container-fluid">
    <!-- Brand and toggle get grouped for better mobile display -->
    <div class="navbar-header">
        <button type="button" class="navbar-toggle collapsed" data-toggle="collapse" data-target="#bs-example-navbar-collapse-1" aria-expanded="false">
            <span class="sr-only">Toggle navigation</span>
            <span class="icon-bar"></span>
            <span class="icon-bar"></span>
            <span class="icon-bar"></span>
        </button>
        <a class="navbar-brand" href="#"><b>TIU</b></a>
    </div>
    <!-- Collect the nav links, forms, and other content for toggling -->
    <div class="collapse navbar-collapse" id="bs-example-navbar-collapse-1">
        <ul class="nav navbar-nav">
            <li <?php if (@$_GET["q"] == 1) {
                echo 'class="active"';
            } ?><a href="account.php?q=1"><span class="glyphicon glyphicon-home" aria-hidden="true"></span>&nbsp;Home<span
class="sr-only">(current)</span></a></li>
            <li <?php if (@$_GET["q"] == 2) {
                echo 'class="active"';
            } ?><a href="account.php?q=2"><span class="glyphicon glyphicon-list-alt" aria-hidden="true"></span>&nbsp;History</a></li>
            <li <?php if (@$_GET["q"] == 3) {
                echo 'class="active"';
            } ?><a href="account.php?q=3"><span class="glyphicon glyphicon-stats" aria-hidden="true"></span>&nbsp;Ranking</a></li>
            <!-- <li class="pull-right" > <a href="logout.php?q=account.php" ><span class="glyphicon glyphicon-log-out" aria-
hidden="true"></span>&nbsp;&nbsp;&nbsp;Signout</a></li> -->
        </ul>
    </div><!-- /.navbar-collapse -->
    </div><!-- /.container-fluid -->
</nav><!--navigation menu closed-->
<div class="container"><!--container start-->
    <div class="row">
        <div class="col-md-12">

            <!--home start-->
            <?php if (@$_GET["q"] == 1) {
                ($result = mysqli_query(
                    $con,
                    "SELECT * FROM quiz ORDER BY date DESC"
                )) or die("Error");
                echo '<div class="panel"><div class="table-responsive"><table class="table table-striped title1">
<tr><td><b>S.N.</b></td><td><b>Topic</b></td><td><b>Total question</b></td><td><b>Marks</b></td><td><b>Time
limit</b></td><td></td></tr>';
                $c = 1;
                while ($row = mysqli_fetch_array($result)) {
                    $title = $row["title"];
                    $total = $row["total"];
                    $sahi = $row["sahi"];
                    $time = $row["time"];
                    $eid = $row["eid"];
                    ($q12 = mysqli_query(
                        $con,
                        "SELECT score FROM history WHERE eid='$eid' AND email='$email'"
                    )) or die("Error98");
                    $rowcount = mysqli_num_rows($q12);
                }
            }
        </div>
    </div>
</div>

```

```

if ($rowcount == 0) {
    echo "<tr><td>" .
        $c++ .
        "</td><td>" .
        $title .
        "</td><td>" .
        $total .
        "</td><td>" .
        $sahi * $total .
        "</td><td>" .
        $time .
        '&nbsp;min</td>
<td><b><a href="account.php?q=quiz&step=2&eid=' .
        $eid .
        "&n=1&t=" .
        $total .
        '" class="pull-right btn sub1" style="margin:0px;background:#99cc32"><span class="glyphicon glyphicon-new-window" aria-hidden="true"></span>&nbsp;<span class="title1"><b>Start</b></span></a></b></td></tr>";
} else {
    echo '<tr style="color:#99cc32"><td>' .
        $c++ .
        "</td><td>" .
        $title .
        '&nbsp;<span title="This quiz is already solve by you" class="glyphicon glyphicon-ok" aria-hidden="true"></span></td><td>' .
        $total .
        "</td><td>" .
        $sahi * $total .
        "</td><td>" .
        $time .
        '&nbsp;min</td>
<td><b><a href="update.php?q=quizre&step=25&eid=' .
        $eid .
        "&n=1&t=" .
        $total .
        '" class="pull-right btn sub1" style="margin:0px;background:red"><span class="glyphicon glyphicon-repeat" aria-hidden="true"></span>&nbsp;<span class="title1"><b>Restart</b></span></a></b></td></tr>';
}
}
$c = 0;
echo "</table></div></div>";
} ?>
<!--<span id="countdown" class="timer"></span>
<script>
var seconds = 40;
function secondPassed() {
    var minutes = Math.round((seconds - 30)/60);
    var remainingSeconds = seconds % 60;
    if(remainingSeconds < 10) {
        remainingSeconds = "0" + remainingSeconds;
    }
    document.getElementById('countdown').innerHTML = minutes + ":" + remainingSeconds;
    if(seconds == 0) {
        clearInterval(countdownTimer);
        document.getElementById('countdown').innerHTML = "Buzz Buzz";
    } else {
        seconds--;
    }
}
var countdownTimer = setInterval('secondPassed()', 1000);
</script>-->
<!--home closed-->

<!--quiz start-->
<?php
if (@$_GET["q"] == "quiz" && @$_GET["step"] == 2) {
    $eid = @$_GET["eid"];
    $sn = @$_GET["n"];
    $total = @$_GET["t"];
    $q = mysqli_query(
        $con,
        "SELECT * FROM questions WHERE eid='$eid' AND sn='$sn' "
    );
    echo '<div class="panel" style="margin:5%">';

```

```

while ($row = mysqli_fetch_array($q)) {
    $qns = $row["qns"];
    $qid = $row["qid"];
    echo "<b>Question &nbsp;" .
        $sn .
        "&nbsp;&nbsp;<br />" .
        $qns .
        "</b><br /><br />";
}
$q = mysqli_query($con, "SELECT * FROM options WHERE qid='$qid' ");
echo '<form action="update.php?q=quiz&step=2&cid=' .
    $eid .
    "&n=" .
    $sn .
    "&t=" .
    $total .
    "&qid=" .
    $qid .
    '" method="POST" class="form-horizontal">
<br />';

while ($row = mysqli_fetch_array($q)) {
    $option = $row["option"];
    $optionid = $row["optionid"];
    echo '<input type="radio" name="ans" value="" ' .
        $optionid .
        "'>' .
        $option .
        "<br /><br />";
}
echo '<br /><button type="submit" class="btn btn-primary"><span class="glyphicon glyphicon-lock" aria-hidden="true"></span>&nbsp;Submit</button></form></div>';
//header("location:dash.php?q=4&step=2&eid=$id&n=$total");
}

//result display
if (@$_GET["q"] == "result" && @$_GET["eid"]) {
    $eid = @$_GET["eid"];
    ($q = mysqli_query(
        $con,
        "SELECT * FROM history WHERE eid='$eid' AND email='$email' "
    )) or die("Error157");
    echo '<div class="panel">
<center><h1 class="title" style="color:#660033">Result</h1><center><br /><table class="table table-striped title1" style="font-size:20px;font-weight:1000;">';

while ($row = mysqli_fetch_array($q)) {
    $s = $row["score"];
    $w = $row["wrong"];
    $r = $row["sahi"];
    $qa = $row["level"];
    echo '<tr style="color:#66CCFF"><td>Total Questions</td><td>' .
        $qa .
        '</td></tr>
<tr style="color:#99cc32"><td>right Answer&nbsp;<span class="glyphicon glyphicon-ok-circle" aria-hidden="true"></span></td><td>' .
        $r .
        '</td></tr>
<tr style="color:red"><td>Wrong Answer&nbsp;<span class="glyphicon glyphicon-remove-circle" aria-hidden="true"></span></td><td>' .
        $w .
        '</td></tr>
<tr style="color:#66CCFF"><td>Score&nbsp;<span class="glyphicon glyphicon-star" aria-hidden="true"></span></td><td>' .
        $s .
        '</td></tr>';
}
($q = mysqli_query(
    $con,
    "SELECT * FROM rank WHERE email='$email' "
)) or die("Error157");
while ($row = mysqli_fetch_array($q)) {
    $s = $row["score"];
    echo '<tr style="color:#990000"><td>Overall Score&nbsp;<span class="glyphicon glyphicon-stats" aria-hidden="true"></span></td><td>' .
        $s .
        '</td></tr>';
}

```

```

        }
        echo "</table></div>";
    }
?>
<!--quiz end-->
<?php
//history start
if(@$_GET["q"] == 2) {
($q = mysqli_query(
    $con,
    "SELECT * FROM history WHERE email='".$email' ORDER BY date DESC "
)) or die("Error197");
echo '<div class="panel title">
<table class="table table-striped title1" >
<tr style="color:red"><td><b>S.N.</b></td><td><b>Quiz</b></td><td><b>Question
Solved</b></td><td><b>Right</b></td><td><b>Wrong</b></td><td><b>Score</b></td>';
$c = 0;
while ($row = mysqli_fetch_array($q)) {
$eid = $row["eid"];
$s = $row["score"];
$w = $row["wrong"];
$r = $row["sahi"];
$qa = $row["level"];
($q23 = mysqli_query(
    $con,
    "SELECT title FROM quiz WHERE eid='".$eid' "
)) or die("Error208");
while ($row = mysqli_fetch_array($q23)) {
$title = $row["title"];
}
$c++;
echo "<tr><td> .
$c .
"</td><td> .
$title .
"</td><td> .
$qa .
"</td><td> .
$r .
"</td><td> .
$w .
"</td><td> .
$s .
"</td></tr>";
}
echo "</table></div>";
}

//ranking start
if(@$_GET["q"] == 3) {
($q = mysqli_query(
    $con,
    "SELECT * FROM rank ORDER BY score DESC "
)) or die("Error223");
echo '<div class="panel title"><div class="table-responsive">
<table class="table table-striped title1" >
<tr style="color:red"><td><b>Rank</b></td><td><b>Name</b></td><td><b>Gender</b></td><td><b>College</b></td><td><b>Score</b>
</td></tr>';
$c = 0;
while ($row = mysqli_fetch_array($q)) {
$e = $row["email"];
$s = $row["score"];
($q12 = mysqli_query(
    $con,
    "SELECT * FROM user WHERE email='".$e' "
)) or die("Error231");
while ($row = mysqli_fetch_array($q12)) {
$name = $row["name"];
$gender = $row["gender"];
$college = $row["college"];
}
$c++;
echo '<tr><td style="color:#99cc32"><b>' .
$c .

```

```

        "</b></td><td>" .
        $name .
        "</td><td>" .
        $gender .
        "</td><td>" .
        $college .
        "</td><td>" .
        $s .
        "</td><td>";
    }
    echo "</table></div></div>";
}
?>

</div>
</div>
</div>
</div>

</body>
<!--Footer start-->
<footer>
<div class="feet">
<div class="row footer" >
<div class="col-md-3 box">
<!-- <a href="http://www.projectworlds.in/online-examination" target="_blank">About us</a> -->
</div>
<!-- <div class="col-md-3 box">
<a href="#" data-toggle="modal" data-target="#login">Admin Login</a></div> -->
<!-- <div class="col-md-3 box">
<a href="#" data-toggle="modal" data-target="#developers">Developers</a>
</div> -->
<div class="col-md-3 box">
<a href="feedback.php" target="_blank">Feedback</a>
</div>
</div>
</div>

<!-- Modal For Developers-->
<div class="modal fade title1" id="developers">
<div class="modal-dialog">
<div class="modal-content" style="width: 450px; margin: auto;">
<div class="modal-header">
<button type="button" class="close" data-dismiss="modal">&times;</span><span class="sr-only">Close</span></button>
<h4 class="modal-title" style="font-family:typo' "><span style="color:orange">Developers</span></h4>
</div>

<div class="modal-body">
<p>
<div class="row">
<!-- <div class="col-md-4">

</div> -->
<div class="col-md-8">
<h4 style="color:#202020; font-family:typo' ;font-size:16px">Ankit Gupta (211001271089)</h4>
<h4 style="color:#202020; font-family:typo' ;font-size:16px">Arindam Das (211001271014)</h4>
<h4 style="color:#202020; font-family:typo' ;font-size:16px">Shubham Guha (181001091007)</h4>
<h4 style="color:#202020; font-family:typo' ;font-size:16px">S.K Zahirul Islam (211001271070)</h4>
<h4 style="color:#202020; font-family:typo' ;font-size:16px">Debasish Paul (211001271059)</h4>
<h4 style="color:#202020; font-family:typo' ;font-size:16px">Samrat Sinha (211001271121)</h4>
</p>
</div>

</div><!-- /.modal-content -->
</div><!-- /.modal-dialog -->
</div><!-- /.modal -->

<!--Modal for admin login-->
<div class="modal fade" id="login">
<div class="modal-dialog">
<div class="modal-content">
<div class="modal-header">

```

```

        <button type="button" class="close" data-dismiss="modal"><span aria-hidden="true">&times;</span><span class="sr-only">Close</span></button>
        <h4 class="modal-title"><span style="color:orange;font-family:'typo'>LOGIN</span></h4>
    </div>
    <div class="modal-body title1">
        <div class="row">
            <div class="col-md-3"></div>
            <div class="col-md-6">
                <form role="form" method="post" action="admin.php?q=index.php">
                    <div class="form-group">
                        <input type="text" name="uname" maxlength="20" placeholder="Admin user id" class="form-control" />
                    </div>
                    <div class="form-group">
                        <input type="password" name="password" maxlength="15" placeholder="Password" class="form-control" />
                    </div>
                    <div class="form-group" align="center">
                        <input type="submit" name="login" value="Login" class="btn btn-primary" />
                    </div>
                </form>
            </div>
            <div class="col-md-3"></div>
        </div>
    </div>
    <!--<div class="modal-footer">
        <button type="button" class="btn btn-default" data-dismiss="modal">Close</button>
    </div>-->
    </div><!-- ./modal-content -->
</div><!-- ./modal-dialog -->
</div><!-- ./modal -->
<!--footer end-->
</footer>

</html>

```

## Index.php-

```

<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Transitional//EN" "http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">
<html xmlns="http://www.w3.org/1999/xhtml">
<head>
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-1" />
<meta name="viewport" content="width=device-width, initial-scale=1">

<title>Quiz App MCA</title>
<link rel="stylesheet" href="css/bootstrap.min.css"/>
<link rel="stylesheet" href="css/bootstrap-theme.min.css"/>
<link rel="stylesheet" href="css/main.css">
<link rel="stylesheet" href="css/font.css">
<script src="js/jquery.js" type="text/javascript"></script>

<script src="js/bootstrap.min.js" type="text/javascript"></script>
<link href="http://fonts.googleapis.com/css?family=Roboto:400,700,300" rel='stylesheet' type='text/css'>
<?php if(@$_GET['w']) {echo'<script>alert("@$_GET['w']."'");</script>;} ?>
<script>
function validateForm() { var y = document.forms["form"]["name"].value; var letters = /^[A-Za-z]+$/;if(y == null || y == "") {alert("Name must be filled out.");return false;} var z =document.forms["form"]["college"].value;if(z == null || z == "") {alert("college must be filled out.");return false;} var x = document.forms["form"]["email"].value;var atpos = x.indexOf("@"); var dotpos = x.lastIndexOf(".");if (atpos<1 || dotpos<atpos+2 || dotpos+2>=x.length) {alert("Not a valid e-mail address.");return false;} var a = document.forms["form"]["password"].value;if(a == null || a == ""){alert("Password must be filled out.");return false;} if(a.length<5 || a.length>25){alert("Passwords must be 5 to 25 characters long.");return false;} var b = document.forms["form"]["cpassword"].value;if(a!=b){alert("Passwords must match.");return false;} }
</script>

</head>
<body>
<div class="header">
<div class="row">
<div class="col-lg-6">
<span class="logo">Quiz App MCA</span></div>
<div class="col-md-2 col-md-offset-4">

```

```

<a href="#" class="pull-right btn sub1" data-toggle="modal" data-target="#myModal"><span class="glyphicon glyphicon-log-in" aria-hidden="true"></span>&ampnbsp<span class="title1"><b>Signin</b></span></a></div>
<!--sign in modal start-->
<div class="modal fade" id="myModal">
  <div class="modal-dialog">
    <div class="modal-content title1">
      <div class="modal-header">
        <button type="button" class="close" data-dismiss="modal" aria-label="Close"><span aria-hidden="true">&times;</span></button>
        <h4 class="modal-title title1"><span style="color:orange">Log In</span></h4>
      </div>
      <div class="modal-body">
        <form class="form-horizontal" action="login.php?q=index.php" method="POST">
<fieldset>

<!-- Text input-->
<div class="form-group">
  <label class="col-md-3 control-label" for="email"></label>
  <div class="col-md-6">
    <input id="email" name="email" placeholder="Enter your email-id" class="form-control input-md" type="email">
  </div>
</div>

<!-- Password input-->
<div class="form-group">
  <label class="col-md-3 control-label" for="password"></label>
  <div class="col-md-6">
    <input id="password" name="password" placeholder="Enter your Password" class="form-control input-md" type="password">
  </div>
</div>

</div>
<div class="modal-footer">
  <button type="button" class="btn btn-default" data-dismiss="modal">Close</button>
  <button type="submit" class="btn btn-primary">Log in</button>
</div>
</div><!-- /.modal-content -->
</div><!-- /.modal-dialog -->
</div><!-- /.modal -->
<!--sign in modal closed-->

</div><!--header row closed-->
</div>

<div class="bg1">
<div class="row">

<div class="col-md-7"></div>
<div class="col-md-4 panel">
<!-- sign in form begins -->
  <form class="form-horizontal" name="form" action="sign.php?q=account.php" onSubmit="return validateForm()" method="POST">
<fieldset>

<!-- Text input-->
<div class="form-group">
  <label class="col-md-12 control-label" for="name"></label>
  <div class="col-md-12">
    <input id="name" name="name" placeholder="Enter your name" class="form-control input-md" type="text">
  </div>
</div>

<!-- Text input-->
<div class="form-group">
  <label class="col-md-12 control-label" for="gender"></label>
  <div class="col-md-12">
    <select id="gender" name="gender" placeholder="Enter your gender" class="form-control input-md" >
      <option value="Male">Select Gender</option>
      <option value="M">Male</option>
      <option value="F">Female</option>
    </select>
  </div>
</div>

```

```

<!-- Text input-->


<label class="col-md-12 control-label" for="name"></label>
<div class="col-md-12">
<input id="college" name="college" placeholder="Enter your college name" class="form-control input-md" type="text">
</div>
</div>

<!-- Text input-->


<label class="col-md-12 control-label title1" for="email"></label>
<div class="col-md-12">
<input id="email" name="email" placeholder="Enter your email-id" class="form-control input-md" type="email">
</div>
</div>

<!-- Text input-->


<label class="col-md-12 control-label" for="mob"></label>
<div class="col-md-12">
<input id="mob" name="mob" placeholder="Enter your mobile number" class="form-control input-md" type="number">
</div>
</div>

<!-- Text input-->


<label class="col-md-12 control-label" for="password"></label>
<div class="col-md-12">
<input id="password" name="password" placeholder="Enter your password" class="form-control input-md" type="password">
</div>
</div>

<div class="form-group">
<label class="col-md-12 control-label" for="cpassword"></label>
<div class="col-md-12">
<input id="cpassword" name="cpassword" placeholder="Conform Password" class="form-control input-md" type="password">
</div>
</div>
<?php if(@$_GET['q7']) { echo'<p style="color:red;font-size:15px;">'.@$_GET['q7'];}?>
<!-- Button -->


<label class="col-md-12 control-label" for=""></label>
<div class="col-md-12">
<input type="submit" class="sub" value="sign up" class="btn btn-primary"/>
</div>
</div>

</fieldset>
</form>
</div><!--col-md-6 end-->
</div></div>
</div><!--container end-->

<!--Footer start-->


<!-- <div class="col-md-3 box">
<a href="http://www.projectworlds/online-examination" target="_blank">About us</a>
</div> -->
<div class="col-md-3 box">
<a href="#" data-toggle="modal" data-target="#login">Admin Login</a></div>
<div class="col-md-3 box">
<a href="#" data-toggle="modal" data-target="#developers">Developers</a>
</div>
<div class="col-md-3 box">
<a href="feedback.php" target="_blank">Feedback</a></div></div>
<!-- Modal For Developers-->
<div class="modal fade title1" id="developers">
<div class="modal-dialog">


```

```

<div class="modal-content" style="width: 450px; margin: auto;">
  <div class="modal-header">
    <button type="button" class="close" data-dismiss="modal"><span aria-hidden="true">&times;</span><span class="sr-only">Close</span></button>
    <h4 class="modal-title" style="font-family:'typo' "><span style="color:orange">Masters of Computer Application (MCA)</span></h4>
  </div>

  <div class="modal-body" style="">
    <p>
    <div class="row">
      <!-- <div class="col-md-4">
        
      </div> -->
      <div class="col-md-8">
        <!-- <a href="http://yugeshverma.blogspot.in" style="color:#202020; font-family:'typo' ; font-size:18px" title="Find on Facebook">Yugesh Verma</a> -->
        <!-- <h4 style="color:#202020; font-family:'typo' ; font-size:16px" class="title1">+91 9165063741</h4> -->
        <h4 style="color:#202020; font-family:'typo' ;" >Ankit Gupta (211001271089)</h4>
        <h4 style="color:#202020; font-family:'typo' ;" >Arindam Das (211001271014)</h4>
        <h4 style="color:#202020; font-family:'typo' ;" >Shubham Guha (181001091007)</h4>
        <h4 style="color:#202020; font-family:'typo' ;" >S.K Zahirul Islam (211001271070)</h4>
        <h4 style="color:#202020; font-family:'typo' ;" >Debasish Paul (211001271059)</h4>
        <h4 style="color:#202020; font-family:'typo' ;" >Samrat Sinha (211001271121)</h4>
      </div>
    </div>
    </p>
  </div>

  </div><!-- /.modal-content -->
</div><!-- /.modal-dialog -->
</div><!-- /.modal -->

<!--Modal for admin login-->
<div class="modal fade" id="login">
  <div class="modal-dialog">
    <div class="modal-content">
      <div class="modal-header">
        <button type="button" class="close" data-dismiss="modal"><span aria-hidden="true">&times;</span><span class="sr-only">Close</span></button>
        <h4 class="modal-title"><span style="color:orange;font-family:'typo' ">ADMIN LOGIN</span></h4>
      </div>
      <div class="modal-body title1">
        <div class="row">
          <div class="col-md-3"></div>
          <div class="col-md-6">
            <form role="form" method="post" action="admin.php?q=index.php">
              <div class="form-group">
                <input type="text" name="uname" maxlength="20" placeholder="Admin user id" class="form-control"/>
              </div>
              <div class="form-group">
                <input type="password" name="password" maxlength="15" placeholder="Password" class="form-control"/>
              </div>
              <div class="form-group" align="center">
                <input type="submit" name="login" value="Login" class="btn btn-primary" />
              </div>
            </form>
          </div>
        </div><div class="col-md-3"></div></div>
      </div>
      <!--<div class="modal-footer">
        <button type="button" class="btn btn-default" data-dismiss="modal">Close</button>
      </div>-->
    </div><!-- /.modal-content -->
  </div><!-- /.modal-dialog -->
</div><!-- /.modal -->
<!--footer end-->

</body>
</html>

```

## Dash.php-

```

<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Transitional//EN" "http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">
<html xmlns="http://www.w3.org/1999/xhtml">
<head>
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-1" />
<meta name="viewport" content="width=device-width, initial-scale=1">

<title>DASHBOARD </title>
<link rel="stylesheet" href="css/bootstrap.min.css"/>
<link rel="stylesheet" href="css/bootstrap-theme.min.css"/>
<link rel="stylesheet" href="css/main.css">
<link rel="stylesheet" href="css/font.css">
<script src="js/jquery.js" type="text/javascript"></script>

<script src="js/bootstrap.min.js" type="text/javascript"></script>
<link href="http://fonts.googleapis.com/css?family=Roboto:400,700,300' rel='stylesheet' type='text/css'>

<script>
$(function () {
    $(document).on( 'scroll', function(){
        console.log('scroll top : ' + $(window).scrollTop());
        if($(window).scrollTop()>$(".logo").height())
        {
            $(".navbar").addClass("navbar-fixed-top");
        }
        if($(window).scrollTop()<$(".logo").height())
        {
            $(".navbar").removeClass("navbar-fixed-top");
        }
    });
});</script>
</head>

<body style="background:#eee;">
<div class="header">
<div class="row">
<div class="col-lg-6">
<span class="logo">Quiz App MCA</span></div>
<?php
include_once 'dbConnection.php';
session_start();
$email=$_SESSION['email'];
if(!isset($_SESSION['email'])){
header("location:index.php");

}
else
{
$name = $_SESSION['name'];

include_once 'dbConnection.php';
echo '<span class="pull-right top title1" ><span class="log1"><span class="glyphicon glyphicon-user" aria-hidden="true"></span>&nbsp;&nbsp;&nbsp;Hello,</span> <a href="#" class="log log1"'.$name.'</a>&nbsp;|&nbsp;<a href="logout.php?q=account.php" class="log" ><span class="glyphicon glyphicon-log-out" aria-hidden="true"></span>&nbsp;Signout</button></a></span>';
}?

</div></div>
<!-- admin start-->

<!--navigation menu-->
<nav class="navbar navbar-default title1">
<div class="container-fluid">
<!-- Brand and toggle get grouped for better mobile display -->
<div class="navbar-header">
<button type="button" class="navbar-toggle collapsed" data-toggle="collapse" data-target="#bs-example-navbar-collapse-1" aria-expanded="false">
<span class="sr-only">Toggle navigation</span>
<span class="icon-bar"></span>
<span class="icon-bar"></span>
<span class="icon-bar"></span>
</button>
<a class="navbar-brand" href="dash.php?q=0"><b>Dashboard</b></a>
</div>
<!-- Collect the nav links, forms, and other content for toggling -->

```

```

<div class="collapse navbar-collapse" id="bs-example-navbar-collapse-1">
    <ul class="nav navbar-nav">
        <!-- <li <?php if(@$_GET['q']==0) echo'><a href="dash.php?q=0">Home<span class="sr-only">(current)</span></a></li> -->
        <!-- <li class="dropdown <?php if(@$_GET['q']==4 || @$_GET['q']==5) echo'active"; ?>><a href="#" class="dropdown-toggle" data-toggle="dropdown" role="button" aria-haspopup="true" aria-expanded="false">Quiz<span class="sr-only">(current)</span></a></li>
            <ul class="dropdown-menu">
                <li><a href="dash.php?q=4">Add Quiz</a></li>
                <li><a href="dash.php?q=5">Remove Quiz</a></li>
            </ul> -->

        <li <?php if(@$_GET['q']==3) echo'><a href="dash.php?q=4">Add Quiz</a></li>
        <li <?php if(@$_GET['q']==3) echo'><a href="dash.php?q=5">Remove Quiz</a></li>
        <li <?php if(@$_GET['q']==1) echo'><a href="dash.php?q=1">User</a></li>
        <li <?php if(@$_GET['q']==2) echo'><a href="dash.php?q=2">Ranking</a></li>
        <li <?php if(@$_GET['q']==3) echo'><a href="dash.php?q=3">Feedback</a></li>
        <!-- <li class="dropdown <?php if(@$_GET['q']==4 || @$_GET['q']==5) echo'active"; ?>><a href="#" class="dropdown-toggle" data-toggle="dropdown" role="button" aria-haspopup="true" aria-expanded="false">Quiz<span class="caret"></span></a>
            <ul class="dropdown-menu">
                <li><a href="dash.php?q=4">Add Quiz</a></li>
                <li><a href="dash.php?q=5">Remove Quiz</a></li>
            </ul> -->
        </li></li>

    </ul>
    </div><!-- ./navbar-collapse -->
</div><!-- ./container-fluid -->
</nav>
<!--navigation menu closed-->
<div class="container"><!--container start-->
<div class="row">
<div class="col-md-12">
<!--home start-->

<?php if(@$_GET['q']==0) {

$result = mysqli_query($con,"SELECT * FROM quiz ORDER BY date DESC") or die('Error');
// echo '<div class="panel"><div class="table-responsive"><table class="table table-striped title1">
// <tr><td><b>S.N.</b></td><td><b>Topic</b></td><td><b>Total question</b></td><td><b>Marks</b></td><td><b>Time limit</b></td><td><b></b></td></tr>';
$c=1;
while($row = mysqli_fetch_array($result)) {
    $title = $row['title'];
    $total = $row['total'];
    $sahi = $row['sahi'];
    $time = $row['time'];
    $eid = $row['eid'];
$q12=mysqli_query($con,"SELECT score FROM history WHERE eid='$eid' AND email='".$email"' )or die('Error98');
$rowcount=mysqli_num_rows($q12);
// if($rowcount == 0){
// echo '<tr><td>'.($c++) .'</td><td>'. $title .'</td><td>'. $total .'</td><td>'. $sahi*$total .'</td><td>'. $time .'&nbsp;min</td>
// <td><b><a href="account.php?q=quiz&step=2&eid='.$eid.'&n=1&t='.$total.'" class="pull-right btn sub1" style="margin:0px;background:#99cc32"><span class="glyphicon glyphicon-new-window" aria-hidden="true"></span>&nbsp;<span class="title1"><b>Start</b></span></a></b></td></tr>';
}
// else
//{
// echo '<tr style="color:#99cc32"><td>'.($c++) .'</td><td>'. $title .'&nbsp;<span title="This quiz is already solve by you" class="glyphicon glyphicon-ok" aria-hidden="true"></span></td><td>'. $total .'</td><td>'. $sahi*$total .'</td><td>'. $time .'&nbsp;min</td>
// <td><b><a href="update.php?q=quizre&step=25&eid='.$eid.'&n=1&t='.$total.'" class="pull-right btn sub1" style="margin:0px;background:red"><span class="glyphicon glyphicon-repeat" aria-hidden="true"></span>&nbsp;<span class="title1"><b>Restart</b></span></a></b></td></tr>';
}
$c=0;
echo '</table></div></div>';
echo "<h1>Welcome back, Admin!</h1>";

```

```

}

//ranking start
if(@$_GET['q']== 2)
{
$q=mysqli_query($con,"SELECT * FROM rank ORDER BY score DESC " )or die('Error223');
echo '<div class="panel title"><div class="table-responsive">
<table class="table table-striped title1" >
<tr
style="color:red"><td><b>Rank</b></td><td><b>Name</b></td><td><b>Gender</b></td><td><b>College</b></td><td><b>Score</b>
</td></tr>';
$c=0;
while($row=mysqli_fetch_array($q) )
{
$e=$row['email'];
$s=$row['score'];
$q12=mysqli_query($con,"SELECT * FROM user WHERE email='$e' " )or die('Error231');
while($row=mysqli_fetch_array($q12) )
{
$name=$row['name'];
$gender=$row['gender'];
$college=$row['college'];
}
$c++;
echo '<tr><td style="color:#99cc32"><b>'.$c.'</b></td><td>'.$name.'</td><td>'.$gender.'</td><td>'.$college.'</td><td>'.$s.'</td><td>';
}
echo '</table></div></div>';

?>

<!--home closed-->
<!--users start-->
<?php if(@$_GET['q']==1) {

$result = mysqli_query($con,"SELECT * FROM user") or die('Error');
echo '<div class="panel"><div class="table-responsive"><table class="table table-striped title1" >
<tr><td><b>S.N.</b></td><td><b>Name</b></td><td><b>Gender</b></td><td><b>College</b></td><td><b>Email</b></td><td><b>
Mobile</b></td><td><td></tr>';
$c=1;
while($row = mysqli_fetch_array($result)) {
$name = $row['name'];
$mob = $row['mob'];
$gender = $row['gender'];
$email = $row['email'];
$college = $row['college'];

echo '<tr><td>'.$c++.'</td><td>'.$name.'</td><td>'.$gender.'</td><td>'.$college.'</td><td>'.$email.'</td><td>'.$mob.'</td>
<td><a title="Delete User" href="update.php?demail='.$email.'"><b><span class="glyphicon glyphicon-trash" aria-
hidden="true"></span></b></a></td></tr>';
}
$c=0;
echo '</table></div></div>';

}?>
<!--user end-->

<!--feedback start-->
<?php if(@$_GET['q']==3) {
$result = mysqli_query($con,"SELECT * FROM `feedback` ORDER BY `feedback` `date` DESC") or die('Error');
echo '<div class="panel"><div class="table-responsive"><table class="table table-striped title1" >
<tr><td><b>S.N.</b></td><td><b>Subject</b></td><td><b>Email</b></td><td><b>Date</b></td><td><b>Time</b></td><td><b>By<
/b></td><td><td></td></tr>';
$c=1;
while($row = mysqli_fetch_array($result)) {
$date = $row['date'];
$date= date("d-m-Y",strtotime($date));
$time = $row['time'];
$subject = $row['subject'];
$name = $row['name'];
$email = $row['email'];
$id = $row['id'];
echo '<tr><td>'.$c++.'</td>';
echo '<td><title="Click to open feedback">
<?php if($id==$row['id']) {
echo '<a href="dash.php?q=3&fid='.$id.'>'.$subject.'</a></td><td>'.$email.'</td><td>'.$date.'</td><td>'.$time.'</td><td>'.$name.'</td>
<td><a title="Open Feedback" href="dash.php?q=3&fid='.$id.'"><b><span class="glyphicon glyphicon-folder-open" aria-

```

```

hidden="true"></span></b></a></td>'>
echo '<td><a title="Delete Feedback" href="update.php?fid='.$id.'"><b><span class="glyphicon glyphicon-trash" aria-hidden="true"></span></b></a></td>
</tr>';
}
echo '</table></div></div>';
}
?>
<!--feedback closed-->

<!--feedback reading portion start-->
<?php if(@$_GET['fid']) {
echo '<br />';
$id=@$_GET['fid'];
$result = mysqli_query($con,"SELECT * FROM feedback WHERE id='".$id.'") or die('Error');
while($row = mysqli_fetch_array($result)) {
$name = $row['name'];
$subject = $row['subject'];
$date = $row['date'];
$date= date("d-m-Y",strtotime($date));
$time = $row['time'];
$feedback = $row['feedback'];

echo '<div class="panel"><a title="Back to Archive" href="update.php?q1=2"><b><span class="glyphicon glyphicon-level-up" aria-hidden="true"></span></b></a><h2 style="text-align:center; margin-top:-15px;font-family: "Ubuntu", sans-serif;"><b>'.substr($subject,'</b>').</h2>;';
echo '<div class="mCustomScrollbar" data-mcs-theme="dark" style="margin-left:10px;margin-right:10px; max-height:450px; line-height:35px;padding:5px;"><span style="line-height:35px;padding:5px;">&nbsp;<b>DATE:</b>&nbsp;'.$date.'</span>
<span style="line-height:35px;padding:5px;">&nbsp;<b>Time:</b>&nbsp;'.$time.'</span><span style="line-height:35px;padding:5px;">&nbsp;<b>By:</b>&nbsp;'.$name.'</span><br />'. $feedback.'</div></div>';}
?>
<!--Feedback reading portion closed-->

<!--add quiz start-->
<?php
if(@$_GET['q']==4 && !(@$_GET['step'])) {
echo '
<div class="row">
<span class="title1" style="margin-left:40%;font-size:30px;"><b>Enter Quiz Details</b></span><br /><br />
<div class="col-md-3"></div><div class="col-md-6"> <form class="form-horizontal title1" name="form"
action="update.php?q=addquiz" method="POST">
<fieldset>

<!-- Text input-->
<div class="form-group">
<label class="col-md-12 control-label" for="name"></label>
<div class="col-md-12">
<input id="name" name="name" placeholder="Enter Quiz title" class="form-control input-md" type="text">
</div>
</div>

<!-- Text input-->
<div class="form-group">
<label class="col-md-12 control-label" for="total"></label>
<div class="col-md-12">
<input id="total" name="total" placeholder="Enter total number of questions" class="form-control input-md" type="number">
</div>
</div>

<!-- Text input-->
<div class="form-group">
<label class="col-md-12 control-label" for="right"></label>
<div class="col-md-12">
<input id="right" name="right" placeholder="Enter marks on right answer" class="form-control input-md" min="0" type="number">
</div>
</div>

<!-- Text input-->
<div class="form-group">
<label class="col-md-12 control-label" for="wrong"></label>

```

```

<div class="col-md-12">
  <input id="wrong" name="wrong" placeholder="Enter minus marks on wrong answer without sign" class="form-control input-md" min="0" type="number">

  </div>
</div>

<!-- Text input-->
<div class="form-group">
  <label class="col-md-12 control-label" for="time"></label>
  <div class="col-md-12">
    <input id="time" name="time" placeholder="Enter time limit for test in minute" class="form-control input-md" min="1" type="number">

  </div>
</div>

<!-- Text input-->
<div class="form-group">
  <label class="col-md-12 control-label" for="desc"></label>
  <div class="col-md-12">
    <textarea rows="8" cols="8" name="desc" class="form-control" placeholder="Write description here..."></textarea>
  </div>
</div>

<div class="form-group">
  <label class="col-md-12 control-label" for=""></label>
  <div class="col-md-12">
    <input type="submit" style="margin-left:45%" class="btn btn-primary" value="Submit" class="btn btn-primary"/>
  </div>
</div>

</fieldset>
</form></div>';

}

?>
<!--add quiz end-->

<!--add quiz step2 start-->
<?php
if(@$_GET['q']==4 && (@$_GET['step'])==2 ) {
echo '
<div class="row">
<span class="title1" style="margin-left:40%;font-size:30px;"><b>Enter Question Details</b></span><br /><br />
<div class="col-md-3"></div><div class="col-md-6"><form class="form-horizontal title1" name="form"
action="update.php?q=addqns&n=@$_GET['n'].&eid=@$_GET['eid'].&ch=4 " method="POST">
<fieldset>
';

for($i=1;$i<=@$_GET['n'];$i++)
{
echo '<b>Question number '.$i.' </b><br /><!-- Text input-->
<div class="form-group">
  <label class="col-md-12 control-label" for="qns'.$i.'"></label>
  <div class="col-md-12">
    <textarea rows="3" cols="5" name="qns'.$i.'" class="form-control" placeholder="Write question number '.$i.' here..."></textarea>
  </div>
</div>
<!-- Text input-->
<div class="form-group">
  <label class="col-md-12 control-label" for="'.$i.'1"></label>
  <div class="col-md-12">
    <input id="'.$i.'1" name="'.$i.'1" placeholder="Enter option a" class="form-control input-md" type="text">

  </div>
</div>
<!-- Text input-->
<div class="form-group">
  <label class="col-md-12 control-label" for="'.$i.'2"></label>
  <div class="col-md-12">
    <input id="'.$i.'2" name="'.$i.'2" placeholder="Enter option b" class="form-control input-md" type="text">

```

```

</div>
</div>
<!-- Text input-->
<div class="form-group">
  <label class="col-md-12 control-label" for=".$.i.'3"></label>
  <div class="col-md-12">
    <input id=".$.i.'3" name=".$.i.'3" placeholder="Enter option c" class="form-control input-md" type="text">

  </div>
</div>
<!-- Text input-->
<div class="form-group">
  <label class="col-md-12 control-label" for=".$.i.'4"></label>
  <div class="col-md-12">
    <input id=".$.i.'4" name=".$.i.'4" placeholder="Enter option d" class="form-control input-md" type="text">

  </div>
</div>
<br />
<b>Correct answer</b>:<br />
<select id="ans'.$.i.'" name="ans'.$.i.'" placeholder="Choose correct answer " class="form-control input-md" >
  <option value="a">Select answer for question '.$i.'</option>
  <option value="a">option a</option>
  <option value="b">option b</option>
  <option value="c">option c</option>
  <option value="d">option d</option> </select><br /><br />';
}

echo '<div class="form-group">
  <label class="col-md-12 control-label" for=""></label>
  <div class="col-md-12">
    <input type="submit" style="margin-left:45%" class="btn btn-primary" value="Submit" class="btn btn-primary"/>
  </div>
</div>

</fieldset>
</form></div>';

}

?><!--add quiz step 2 end-->

<!--remove quiz-->
<?php if(@$_GET['q']==5) {

$result = mysqli_query($con,"SELECT * FROM quiz ORDER BY date DESC") or die('Error');
echo '<div class="panel"><div class="table-responsive"><table class="table table-striped title1">
<tr><td><b>S.N.</b></td><td><b>Topic</b></td><td><b>Total question</b></td><td><b>Marks</b></td><td><b>Time limit</b></td><td><b></b></td></tr>';
$c=1;
while($row = mysqli_fetch_array($result)) {
  $title = $row['title'];
  $total = $row['total'];
  $sahi = $row['sahi'];
  $time = $row['time'];
  $eid = $row['eid'];
  echo '<tr><td>'.$c++.</td><td>'.$title.'</td><td>'.$total.'</td><td>'.$sahi*$total.'</td><td>'.$time.'&nbsp;min</td>
  <td><b><a href="update.php?q=rmquiz&eid='.$eid.'" class="pull-right btn sub1" style="margin:0px;background:red"><span class="glyphicon glyphicon-trash" aria-hidden="true"></span>&nbsp;<span class="title1"><b>Remove</b></span></a></b></td></tr>';
}
$c=0;
echo '</table></div></div>';

}
?>

</div><!--container closed-->
</div></div>
</body>
</html>

```

### Feedback.php-

```

<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Transitional//EN" "http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">
<html xmlns="http://www.w3.org/1999/xhtml">

```

```

<head>
<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-1" />
<title>FEEDBACK </title>
<link rel="stylesheet" href="css/bootstrap.min.css"/>
<link rel="stylesheet" href="css/bootstrap-theme.min.css"/>
<link rel="stylesheet" href="css/main.css">
<link rel="stylesheet" href="css/font.css">
<script src="js/jquery.js" type="text/javascript"></script>

<script src="js/bootstrap.min.js" type="text/javascript"></script>
<link href="http://fonts.googleapis.com/css?family=Roboto:400,700,300' rel='stylesheet' type='text/css'>
<!--alert message-->
<?php if(@$_GET['w']) {
{echo'<script>alert(\"".$_GET['w'].\"");</script>';}
?>
<!--alert message end-->

</head>

<body>

<!--header start-->
<div class="row header">
<div class="col-lg-6">
<span class="logo">Quiz App MCA</span></div>
<div class="col-md-2">
</div>
<div class="col-md-4">
<?php
include_once 'dbConnection.php';
session_start();
if(!isset($_SESSION['email'])) {
echo '<a href="#" class="pull-right sub1 btn title3" data-toggle="modal" data-target="#myModal"><span class="glyphicon glyphicon-log-in" aria-hidden="true"></span>&ampnbspSignin</a>&ampnbsp';
} else {
echo '<a href="logout.php?q=feedback.php" class="pull-right sub1 btn title3"><span class="glyphicon glyphicon-log-out" aria-hidden="true"></span>&ampnbspSignout</a>&ampnbsp';
?>
<a href="index.php" class="pull-right btn sub1 title3"><span class="glyphicon glyphicon-home" aria-hidden="true"></span>&ampnbspHome</a>&ampnbsp
</div></div>

<!--sign in modal start-->
<div class="modal fade" id="myModal">
<div class="modal-dialog">
<div class="modal-content title1">
<div class="modal-header">
<button type="button" class="close" data-dismiss="modal" aria-label="Close"><span aria-hidden="true">&times;</span></button>
<h4 class="modal-title title1"><span style="color:orange">Log In</span></h4>
</div>
<div class="modal-body">
<form class="form-horizontal" action="login.php?q=index.php" method="POST">
<fieldset>

<!-- Text input-->
<div class="form-group">
<label class="col-md-3 control-label" for="email"></label>
<div class="col-md-6">
<input id="email" name="email" placeholder="Enter your email-id" class="form-control input-md" type="email">
</div>
</div>

<!-- Password input-->
<div class="form-group">
<label class="col-md-3 control-label" for="password"></label>
<div class="col-md-6">
<input id="password" name="password" placeholder="Enter your Password" class="form-control input-md" type="password">
</div>
</div>

```

```

<div class="modal-footer">
    <button type="button" class="btn btn-default" data-dismiss="modal">Close</button>
    <button type="submit" class="btn btn-primary">Log in</button>
</fieldset>
</form>
</div><!-- /.modal-content -->
</div><!-- /.modal-dialog -->
</div><!-- /.modal -->
<!--sign in modal closed-->

<!--header end-->

<div class="bg1">
<div class="row">
<div class="col-md-3"></div>
<div class="col-md-6 panel" style="background-image:url(image/bg1.jpg); min-height:430px;">
<h2 align="center" style="font-family:'typo'; color:#000066">FEEDBACK/REPORT A PROBLEM</h2>
<div style="font-size:14px">
<?php if(@$_GET['q'])echo '<span style="font-size:18px;"><span class="glyphicon glyphicon-ok" aria-hidden="true"></span>&nbsp;'.@$_GET['q'].</span>';
else
{echo'
<br />
<div class="row">
<div class="col-md-1"></div>
<div class="col-md-10">
<a href="mailto:chiraggoel.53784@gmail.com" style="color:#000000"></a><br /><br />
</div><div class="col-md-1"></div></div>
<p></p>
<form role="form" method="post" action="feed.php?q=feedback.php">
<div class="row">
<div class="col-md-3"><b>Name:</b><br /><br /><b>Subject:</b></div>
<div class="col-md-9">
<!-- Text input-->
<div class="form-group">
    <input id="name" name="name" placeholder="Enter your name" class="form-control input-md" type="text"><br />
    <input id="subject" name="subject" placeholder="Enter subject" class="form-control input-md" type="text">
</div>
<div>
</div>
<!--End of row-->

<div class="row">
<div class="col-md-3"><b>E-Mail address:</b></div>
<div class="col-md-9">
<!-- Text input-->
<div class="form-group">
    <input id="email" name="email" placeholder="Enter your email-id" class="form-control input-md" type="email">
</div>
</div>
<div><!--End of row-->

<div class="form-group">
<textarea rows="5" cols="8" name="feedback" class="form-control" placeholder="Write feedback here..."></textarea>
</div>
<div class="form-group" align="center">
<input type="submit" name="submit" value="Submit" class="btn btn-primary" />
</div>
</form>';}?
</div><!--col-md-6 end-->
<div class="col-md-3"></div></div>
</div><!--container end-->

<!--Footer start-->
<div class="row footer">
<!-- <div class="col-md-3 box">
<a href="http://www.projectworlds.in/online-examination" target="_blank">About us</a>
</div> -->
<div class="col-md-3 box">
<a href="#" data-toggle="modal" data-target="#login">Admin Login</a></div>
<div class="col-md-3 box">
<a href="#" data-toggle="modal" data-target="#developers">Developers</a>

```

```

</div>
<div class="col-md-3 box">
<a href="feedback.php" target="_blank">Feedback</a></div></div>
<!-- Modal For Developers-->
<div class="modal fade title1" id="developers">
<div class="modal-dialog">
<div class="modal-content">
<div class="modal-header">
<button type="button" class="close" data-dismiss="modal"><span aria-hidden="true">&times;</span><span class="sr-only">Close</span></button>
<h4 class="modal-title" style="font-family:typo' "><span style="color:orange">Developers</span></h4>
</div>

<div class="modal-body">
<p>
<div class="row">
<div class="col-md-4">

</div>
<div class="col-md-5">
<a href="http://yugeshverma.blogspot.in" style="color:#202020; font-family:'typo' ; font-size:18px" title="Find on Facebook">Yugesh
Verma</a>
<h4 style="color:#202020; font-family:'typo' ;font-size:16px" class="title1">+91 9165063741</h4>
<h4 style="font-family:'typo' ">vermayugesh323@gmail.com</h4>
<h4 style="font-family:'typo' ">Chhattishgarh insitute of management & Technology ,bhilai</h4></div></div>
</p>
</div>

</div><!-- /.modal-content -->
</div><!-- /.modal-dialog -->
</div><!-- /.modal -->

<!--Modal for admin login-->
<div class="modal fade" id="login">
<div class="modal-dialog">
<div class="modal-content">
<div class="modal-header">
<button type="button" class="close" data-dismiss="modal"><span aria-hidden="true">&times;</span><span class="sr-only">Close</span></button>
<h4 class="modal-title"><span style="color:orange;font-family:'typo' ">LOGIN</span></h4>
</div>
<div class="modal-body title1">
<div class="row">
<div class="col-md-3"></div>
<div class="col-md-6">
<form role="form" method="post" action="admin.php?q=index.php">
<div class="form-group">
<input type="text" name="uname" maxlength="20" placeholder="Admin user id" class="form-control"/>
</div>
<div class="form-group">
<input type="password" name="password" maxlength="15" placeholder="Password" class="form-control"/>
</div>
<div class="form-group" align="center">
<input type="submit" name="login" value="Login" class="btn btn-primary" />
</div>
</form>
</div><div class="col-md-3"></div></div>
</div>
<!--<div class="modal-footer">
<button type="button" class="btn btn-default" data-dismiss="modal">Close</button>
</div>-->
</div><!-- /.modal-content -->
</div><!-- /.modal-dialog -->
</div><!-- /.modal -->
<!--footer end-->

</body>
</html>

```

#### Main.css-

```

body {
    overflow-x: hidden;
    width: 100%;
    font: 15px "Century Gothic", "Times Roman", sans-serif,

```

```
background: #eee;
min-height: 550px;
background-attachment: fixed;
}
.bg {
min-height: 540px;
}
.bg1 {
background: url(../image/quiz.jpg);
min-height: 535px;
}

@font-face {
font-family: "typo";
src: url("../fonts/typo.ttf");
}

@font-face {
font-family: "gothic";
src: url("../fonts/gothics.ttf");
}

.panel {
border-color: #eee;
margin: 40px;
padding: 20px;
font: 15px "Century Gothic", "Times Roman", sans-serif;
}

.title {
font-family: "typo";
}

.header {
background: #202020;
height: 70px;
}
.logo {
font-family: "typo";
font-size: 35px;
color: #fffb33;
margin: 15px;
}

.title1 {
font: 16px "Century Gothic", "Times Roman", sans-serif;
}
.title2 {
font-family: "Ubuntu", sans-serif;
font-size: 20px;
}

.sub1 {
width: 90px;
color: #202020;
background: orange;
font-size: 15px;
height: 35px;
margin: 20px;
padding: 10px;
width: 100px;
}

.sub {
width: 100%;
background-color: #9acd32;
font-size: 20px;
padding: 2px;
margin-top: 15px;
margin-right: 20px;
}
.sub:hover {
color: #fff;
}
```

```

.footer {
    font-size: 15px;
    text-align: right;
    border-top: 1px solid;
    border-color: #323232;
    background-color: #202020;
}
.footer a {
    margin: 25px;
    color: orange;
    text-decoration: none;
    font: 15px "Century Gothic", "Times Roman", sans-serif;
}
.footer a:hover {
    text-decoration: none;
    color: #9acd32;
    border-top: 2px solid;
    border-color: orange;
}
.box {
    padding: 9px;
}
hr {
    color: #000000;
}
.top {
    margin-top: 20px;
}
.log1 {
    font: 15px "Ubuntu", sans-serif;
    color: orange;
    margin-left: 10px;
}

.log {
    margin: 10px;
    margin-right: 60px;
    margin-left: 5px;
    color: orange;
    text-decoration: none;
    font-size: 20px;
    font-size: 15px;
}
.log:hover {
    color: #9acd32;
    border-top: 2px solid;
    border-color: orange;
    text-decoration: none;}
```

## SQL PAGE-

```

-- phpMyAdmin SQL Dump
-- version 5.2.0
-- https://www.phpmyadmin.net/
--
-- Host: 127.0.0.1
-- Generation Time: Jun 21, 2023 at 09:54 AM
-- Server version: 10.4.24-MariaDB
-- PHP Version: 8.1.6

SET SQL_MODE = "NO_AUTO_VALUE_ON_ZERO";
START TRANSACTION;
SET time_zone = "+00:00";

/*!40101 SET @OLD_CHARACTER_SET_CLIENT=@@CHARACTER_SET_CLIENT */;
/*!40101 SET @OLD_CHARACTER_SET_RESULTS=@@CHARACTER_SET_RESULTS */;
/*!40101 SET @OLD_COLLATION_CONNECTION=@@COLLATION_CONNECTION */;
/*!40101 SET NAMES utf8mb4 */;
```

--

```

-- Database: `project`
--
-- -----
-- 
-- Table structure for table `admin`
-- 

CREATE TABLE `admin` (
  `admin_id` int(11) NOT NULL,
  `email` varchar(50) NOT NULL,
  `password` varchar(500) NOT NULL
) ENGINE=InnoDB DEFAULT CHARSET=utf8;

-- 
-- Dumping data for table `admin`
-- 

INSERT INTO `admin` (`admin_id`, `email`, `password`) VALUES
(2, 'admin@admin.com', 'admin');

-- 
-- Table structure for table `answer`
-- 

CREATE TABLE `answer` (
  `qid` text NOT NULL,
  `ansid` text NOT NULL
) ENGINE=InnoDB DEFAULT CHARSET=utf8;

-- 
-- Dumping data for table `answer`
-- 

INSERT INTO `answer` (`qid`, `ansid`) VALUES
('558973f4389ac', '558973f462e61'),
('558973f4c46f2', '558973f4d4abe'),
('558973f1600d', '558973f526fc5'),
('558973f55d269', '558973f57af07'),
('558973f5abb1a', '558973f5e764a'),
('6491cee5805b3', '6491cee581a09'),
('6491cee590f55', '6491cee591b79'),
('6491cee5960b0', '6491cee596c41'),
('6491cee59b13e', '6491cee59c8c2'),
('6491cee5a02a3', '6491cee5a0d3f'),
('6491d04d5b8a7', '6491d04d5c5e5'),
('6491d04d5fc00', '6491d04d6133c'),
('6491d04d640e1', '6491d04d64a2a'),
('6491d04d6840b', '6491d04d68cf7'),
('6491d04d6b9ea', '6491d04d6c207'),
('6491d2301981b', '6491d2301a67d'),
('6491d2301e052', '6491d2301eab5'),
('6491d23021ce8', '6491d23022484'),
('6491d23024bb3', '6491d2302602b'),
('6491d23028572', '6491d23028d8b'),
('6492023acec5d', '6492023ad0e98'),
('6492023ad6a34', '6492023ad74b7'),
('6492023ada845', '6492023adb28c'),
('6492023adf77c', '6492023ae01bc'),
('6492023ae43e2', '6492023ae5e7b');

-- 
-- Table structure for table `feedback`
-- 

CREATE TABLE `feedback` (
  `id` text NOT NULL,
  `name` varchar(50) NOT NULL,
  `email` varchar(50) NOT NULL,
  `subject` varchar(500) NOT NULL,

```

```

`feedback` varchar(500) NOT NULL,
`date` date NOT NULL,
`time` varchar(50) NOT NULL
) ENGINE=InnoDB DEFAULT CHARSET=utf8;

-- 
-- Dumping data for table `feedback`
-- 

INSERT INTO `feedback` (`id`, `name`, `email`, `subject`, `feedback`, `date`, `time`) VALUES
('64919c1557cb7', 'Arindam Das', 'arindamsxs@gmail.com', 'error', 'not good', '2023-06-20', '02:31:17pm'),
('6491a301b7a0b', 'Ankit Gupta', 'ankitsxs@gmail.com', 'RUN ERROR', 'error in page', '2023-06-20', '03:00:49pm'),
('649203919943d', 'Zahirul', 'zahirulpower@gmail.com', 'code ', 'code wrong', '2023-06-20', '09:52:49pm');

-----


-- 
-- Table structure for table `history`
-- 

CREATE TABLE `history` (
`email` varchar(50) NOT NULL,
`eid` text NOT NULL,
`score` int(11) NOT NULL,
`level` int(11) NOT NULL,
`sahi` int(11) NOT NULL,
`wrong` int(11) NOT NULL,
`date` timestamp NOT NULL DEFAULT current_timestamp() ON UPDATE current_timestamp()
) ENGINE=InnoDB DEFAULT CHARSET=utf8;

-- 
-- Dumping data for table `history`
-- 

INSERT INTO `history` (`email`, `eid`, `score`, `level`, `sahi`, `wrong`, `date`) VALUES
('zahirulpower@gmail.com', '55897338a6659', 4, 5, 3, 2, '2023-06-20 14:52:31'),
('arindamsxs@gmail.com', '6491cf2e98e45', 10, 5, 5, 0, '2023-06-20 19:49:33'),
('arindamsxs@gmail.com', '6491d0ed4dc27', 10, 5, 5, 0, '2023-06-21 07:26:08');

-----


-- 
-- Table structure for table `options`
-- 

CREATE TABLE `options` (
`qid` varchar(50) NOT NULL,
`option` varchar(5000) NOT NULL,
`optionid` text NOT NULL
) ENGINE=InnoDB DEFAULT CHARSET=utf8;

-- 
-- Dumping data for table `options`
-- 

INSERT INTO `options` (`qid`, `option`, `optionid`) VALUES
('558973f4389ac', 'containing root file-system required during bootup', '558973f462e44'),
('558973f4389ac', 'Contains only scripts to be executed during bootup', '558973f462e56'),
('558973f4389ac', ' Contains root-file system and drivers required to be preloaded during bootup', '558973f462e61'),
('558973f4389ac', 'None of the above', '558973f462e6b'),
('558973f4c46f2', 'Kernel', '558973f4d4abe'),
('558973f4c46f2', 'Shell', '558973f4d4acf'),
('558973f4c46f2', 'Commands', '558973f4d4ad9'),
('558973f4c46f2', 'Script', '558973f4d4ae3'),
('558973f51600d', 'Boot Loading', '558973f526f9d'),
('558973f51600d', 'Boot Record', '558973f526fb9'),
('558973f51600d', 'Boot Strapping', '558973f526fc5'),
('558973f51600d', 'Booting', '558973f526fce'),
('558973f55d269', 'Quick boot', '558973f57af1'),
('558973f55d269', 'Cold boot', '558973f57af07'),
('558973f55d269', 'Hot boot', '558973f57af17'),
('558973f55d269', 'Fast boot', '558973f57af27'),
('558973f5abb1a', 'bash', '558973f5e7623'),
('558973f5abb1a', 'Csh', '558973f5e7636'),
('558973f5abb1a', 'ksh', '558973f5e7640'),

```

('558973f5abb1a', 'sh', '558973f5e764a'),  
(‘6491cee5805b3’, “Hyper Text Preprocessor”, ‘6491cee581a00’),  
(‘6491cee5805b3’, “Hyper Text Markup Language”, ‘6491cee581a09’),  
(‘6491cee5805b3’, “Hyper Text Multiple Language”, ‘6491cee581a0b’),  
(‘6491cee5805b3’, “Hyper Tool Multi Language”, ‘6491cee581a0d’),  
(‘6491cee590f55’, “Common Style Sheet”, ‘6491cee591b6c’),  
(‘6491cee590f55’, “Colorful Style Sheet”, ‘6491cee591b75’),  
(‘6491cee590f55’, “Computer Style Sheet”, ‘6491cee591b77’),  
(‘6491cee590f55’, “Cascading Style Sheet”, ‘6491cee591b79’),  
(‘6491cee5960b0’, “Hypertext Preprocessor”, ‘6491cee596c41’),  
(‘6491cee5960b0’, “Hypertext Programming”, ‘6491cee596c4d’),  
(‘6491cee5960b0’, “Hypertext Preprogramming”, ‘6491cee596c50’),  
(‘6491cee5960b0’, “Hometext Preprocessor”, ‘6491cee596c53’),  
(‘6491cee59b13e’, “Stylish Question Language”, ‘6491cee59c8b4’),  
(‘6491cee59b13e’, “Stylesheet Query Language”, ‘6491cee59c8be’),  
(‘6491cee59b13e’, “Statement Question Language”, ‘6491cee59c8c0’),  
(‘6491cee59b13e’, “Structured Query Language”, ‘6491cee59c8c2’),  
(‘6491cee5a02a3’, “eXtensible Markup Language”, ‘6491cee5a0d3f’),  
(‘6491cee5a02a3’, “eXecutable Multiple Language”, ‘6491cee5a0d48’),  
(‘6491cee5a02a3’, “eXTra Multi-Program Language”, ‘6491cee5a0d4a’),  
(‘6491cee5a02a3’, “eXamine Multiple Language”, ‘6491cee5a0d4c’),  
(‘6491d04d5b8a7’, “LIFO principle”, ‘6491d04d5c5de’),  
(‘6491d04d5b8a7’, “FIFO principle”, ‘6491d04d5c5e5’),  
(‘6491d04d5b8a7’, “Linear tree”, ‘6491d04d5c5e6’),  
(‘6491d04d5b8a7’, “Ordered array”, ‘6491d04d5c5e7’),  
(‘6491d04d5fc00’, “O(1)”, ‘6491d04d61331’),  
(‘6491d04d5fc00’, “O(n)”, ‘6491d04d6133a’),  
(‘6491d04d5fc00’, “O(logn)”, ‘6491d04d6133c’),  
(‘6491d04d5fc00’, “O(nlogn)”, ‘6491d04d6133e’),  
(‘6491d04d640e1’, “3”, ‘6491d04d64a21’),  
(‘6491d04d640e1’, “2”, ‘6491d04d64a2a’),  
(‘6491d04d640e1’, “1”, ‘6491d04d64a2c’),  
(‘6491d04d640e1’, “4”, ‘6491d04d64a2d’),  
(‘6491d04d6840b’, “Stack”, ‘6491d04d68ceb’),  
(‘6491d04d6840b’, “Linked list”, ‘6491d04d68cf3’),  
(‘6491d04d6840b’, “Array”, ‘6491d04d68cf5’),  
(‘6491d04d6840b’, “Heap”, ‘6491d04d68cf7’),  
(‘6491d04d6b9ea’, “Saving value property”, ‘6491d04d6c1fd’),  
(‘6491d04d6b9ea’, “Storing value property”, ‘6491d04d6c205’),  
(‘6491d04d6b9ea’, “Memoization”, ‘6491d04d6c207’),  
(‘6491d04d6b9ea’, “Tabulation”, ‘6491d04d6c208’),  
(‘6491d2301981b’, “Structured Query List”, ‘6491d2301a67d’),  
(‘6491d2301981b’, “Structure Query Language”, ‘6491d2301a686’),  
(‘6491d2301981b’, “Sample Query Language”, ‘6491d2301a688’),  
(‘6491d2301981b’, “None of these”, ‘6491d2301a689’),  
(‘6491d2301e052’, “FLOAT”, ‘6491d2301ea9’),  
(‘6491d2301e052’, “NUMERIC”, ‘6491d2301eab3’),  
(‘6491d2301e052’, “DECIMAL”, ‘6491d2301eab5’),  
(‘6491d2301e052’, “CHARACTER”, ‘6491d2301eab6’),  
(‘6491d23021ce8’, “TRUNCATE”, ‘6491d2302247c’),  
(‘6491d23021ce8’, “ALTER”, ‘6491d23022482’),  
(‘6491d23021ce8’, “CREATE”, ‘6491d23022483’),  
(‘6491d23021ce8’, “UPDATE”, ‘6491d23022484’),  
(‘6491d23024bb3’, “COMMIT and ROLLBACK”, ‘6491d2302602b’),  
(‘6491d23024bb3’, “UPDATE and TRUNCATE”, ‘6491d23026034’),  
(‘6491d23024bb3’, “SELECT and INSERT”, ‘6491d23026035’),  
(‘6491d23024bb3’, “GRANT and REVOKE”, ‘6491d23026036’),  
(‘6491d23028572’, “DELETE”, ‘6491d23028d7e’),  
(‘6491d23028572’, “REMOVE”, ‘6491d23028d87’),  
(‘6491d23028572’, “DROP”, ‘6491d23028d88’),  
(‘6491d23028572’, “TRUNCATE”, ‘6491d23028d8b’),  
(‘6492023acec5d’, “Wick van Rossum”, ‘6492023ad0e8c’),  
(‘6492023acec5d’, “Rasmus Lerdorf”, ‘6492023ad0e97’),  
(‘6492023acec5d’, “Guido van Rossum”, ‘6492023ad0e98’),  
(‘6492023acec5d’, “Niene Stom”, ‘6492023ad0e9a’),  
(‘6492023ad6a34’, “object-oriented programming”, ‘6492023ad74aa’),  
(‘6492023ad6a34’, “structured programming”, ‘6492023ad74b3’),  
(‘6492023ad6a34’, “functional programming”, ‘6492023ad74b5’),  
(‘6492023ad6a34’, “all of the mentioned”, ‘6492023ad74b7’),  
(‘6492023ada845’, “.python”, ‘6492023adb27d’),  
(‘6492023ada845’, “.pl”, ‘6492023adb287’),  
(‘6492023ada845’, “.p”, ‘6492023adb289’),  
(‘6492023ada845’, “.py”, ‘6492023adb28c’),  
(‘6492023adf77c’, “Capitalized”, ‘6492023ae01b4’),  
(‘6492023adf77c’, “lower case”, ‘6492023ae01ba’),

```

('6492023adf77c', '\"UPPER CASE\"', '6492023ae01bb'),
('6492023adf77c', '\"None of the mentioned\"', '6492023ae01bc'),
('6492023ae43e2', '\" Python code is both compiled and interpreted\"', '6492023ae5e7b'),
('6492023ae43e2', '\"Python code is neither compiled nor interpreted\"', '6492023ae5e85'),
('6492023ae43e2', '\"Python code is only compiled\"', '6492023ae5e86'),
('6492023ae43e2', '\"Python code is only compiled\"', '6492023ae5e88');

-----
-- Table structure for table `questions`
--

CREATE TABLE `questions` (
  `eid` text NOT NULL,
  `qid` text NOT NULL,
  `qns` text NOT NULL,
  `choice` int(10) NOT NULL,
  `sn` int(11) NOT NULL
) ENGINE=InnoDB DEFAULT CHARSET=utf8;

--
-- Dumping data for table `questions`
--

INSERT INTO `questions` (`eid`, `qid`, `qns`, `choice`, `sn`) VALUES
('55897338a6659', '558973f4389ac', 'On Linux, initrd is a file', 4, 1),
('55897338a6659', '558973f4c46f2', 'Which is loaded into memory when system is booted?', 4, 2),
('55897338a6659', '558973f51600d', 'The process of starting up a computer is known as', 4, 3),
('55897338a6659', '558973f55d269', 'Bootstrapping is also known as', 4, 4),
('55897338a6659', '558973f5abb1a', 'The shell used for Single user mode shell is', 4, 5),
('6491cd603dbbe', '6491cee5805b3', '\"What does HTML stand for?\"', 4, 1),
('6491cd603dbbe', '6491cee590f55', '\"What does CSS stand for?\"', 4, 2),
('6491cd603dbbe', '6491cee5960b0', '\"What does PHP stand for?\"', 4, 3),
('6491cd603dbbe', '6491cee59b13e', '\"What does SQL stand for?\"', 4, 4),
('6491cd603dbbe', '6491cee5a02a3', '\"What does XML stand for?\"', 4, 5),
('6491cf2e98e45', '6491d04d5b8a7', '\"Which of the following principle does Queue use?\"', 4, 1),
('6491cf2e98e45', '6491d04d5fc00', '\"The time complexity of Binary Search Algorithm\"', 4, 2),
('6491cf2e98e45', '6491d04d640e1', '\"How many Queues are required to implement a Stack?\"', 4, 3),
('6491cf2e98e45', '6491d04d6840b', '\"Which data structure is the best for implementing a priority queue?\"', 4, 4),
('6491cf2e98e45', '6491d04d6b9ea', '\"In dynamic programming, the technique of storing the previously calculated values is called\"', 4, 5),
('6491d0ed4dc27', '6491d2301981b', '\"What is the full form of SQL?\"', 4, 1),
('6491d0ed4dc27', '6491d2301e052', '\"Which of the following is not a valid SQL type?\"', 4, 2),
('6491d0ed4dc27', '6491d23021ce8', '\"Which of the following is not a DDL command?\"', 4, 3),
('6491d0ed4dc27', '6491d23024bb3', '\" Which of the following are TCL commands?\"', 4, 4),
('6491d0ed4dc27', '6491d23028572', '\" Which statement is used to delete all rows in a table without having the action logged?\"', 4, 5),
('649201229c138', '6492023acec5d', '\"Who developed Python Programming Language?\"', 4, 1),
('649201229c138', '6492023ad6a34', '\"Which type of Programming does Python support?\"', 4, 2),
('649201229c138', '6492023ada845', '\"Which of the following is the correct extension of the Python file?\"', 4, 3),
('649201229c138', '6492023adf77c', '\"All keywords in Python are in _____\"', 4, 4),
('649201229c138', '6492023ae43e2', '\" Is Python code compiled or interpreted?\"', 4, 5);

-----
-- Table structure for table `quiz`
--

CREATE TABLE `quiz` (
  `eid` text NOT NULL,
  `title` varchar(100) NOT NULL,
  `sahi` int(11) NOT NULL,
  `wrong` int(11) NOT NULL,
  `total` int(11) NOT NULL,
  `time` bigint(20) NOT NULL,
  `intro` text NOT NULL,
  `tag` varchar(100) NOT NULL,
  `date` timestamp NOT NULL DEFAULT current_timestamp() ON UPDATE current_timestamp()
) ENGINE=InnoDB DEFAULT CHARSET=utf8;

--
-- Dumping data for table `quiz`
--

INSERT INTO `quiz` (`eid`, `title`, `sahi`, `wrong`, `total`, `time`, `intro`, `tag`, `date`) VALUES

```

```

('55897338a6659', 'Linux:startup', 2, 1, 5, 10, "linux", '2015-06-23 14:54:48'),
('6491cd603dbbe', 'Web', 2, 1, 5, 7, "2023-06-20 16:01:36"),
('6491cf2e98e45', 'Java', 2, 1, 5, 7, "2023-06-20 16:09:18"),
('6491d0ed4dc27', 'Sql', 2, 1, 5, 7, "2023-06-20 16:16:45"),
('649201229c138', 'Python', 2, 1, 5, 7, "2023-06-20 19:42:26");

-- -----
-- Table structure for table `rank`
--

CREATE TABLE `rank` (
  `email` varchar(50) NOT NULL,
  `score` int(11) NOT NULL,
  `time` timestamp NOT NULL DEFAULT current_timestamp() ON UPDATE current_timestamp()
) ENGINE=InnoDB DEFAULT CHARSET=utf8;

-- 
-- Dumping data for table `rank`
--

INSERT INTO `rank` (`email`, `score`, `time`) VALUES
('arindamsxs@gmail.com', 21, '2023-06-21 07:26:08'),
('zahirulpower@gmail.com', 5, '2023-06-20 14:52:31');

-- -----
-- Table structure for table `user`
--

CREATE TABLE `user` (
  `name` varchar(50) NOT NULL,
  `gender` varchar(5) NOT NULL,
  `college` varchar(100) NOT NULL,
  `email` varchar(50) NOT NULL,
  `mob` bigint(20) NOT NULL,
  `password` varchar(50) NOT NULL
) ENGINE=InnoDB DEFAULT CHARSET=utf8;

-- Dumping data for table `user`

INSERT INTO `user` (`name`, `gender`, `college`, `email`, `mob`, `password`) VALUES
('Arindam Das', 'M', 'Techno India University', 'arindamsxs@gmail.com', 9614361390, '5aaf5a889c8ddb3cc145b2268740ce1e'),
('Subham Guha', 'M', 'Techno India University', 'subhamguha@gmail.com', 5641238956, '7781d62a0d08e2cc8380a3d1f'),
('Zahirul', 'M', 'Techno India University', 'zahirulpower@gmail.com', 4567893256, '4528c5a72da8f14550cb533b20658dec');

-- 
-- Indexes for dumped tables
-- Indexes for table `admin`
--

ALTER TABLE `admin`
  ADD PRIMARY KEY (`admin_id`);

-- Indexes for table `user`
--

ALTER TABLE `user`
  ADD PRIMARY KEY (`email`);

-- AUTO_INCREMENT for dumped tables
-- AUTO_INCREMENT for table `admin`
-- 


ALTER TABLE `admin`

  MODIFY `admin_id` int(11) NOT NULL AUTO_INCREMENT, AUTO_INCREMENT=4;
  COMMIT;


/*!40101 SET CHARACTER_SET_CLIENT=@OLD_CHARACTER_SET_CLIENT */;
/*!40101 SET CHARACTER_SET_RESULTS=@OLD_CHARACTER_SET_RESULTS */;
/*!40101 SET COLLATION_CONNECTION=@OLD_COLLATION_CONNECTION */;
```

# SCREENSHOTS


## User Side Login Page

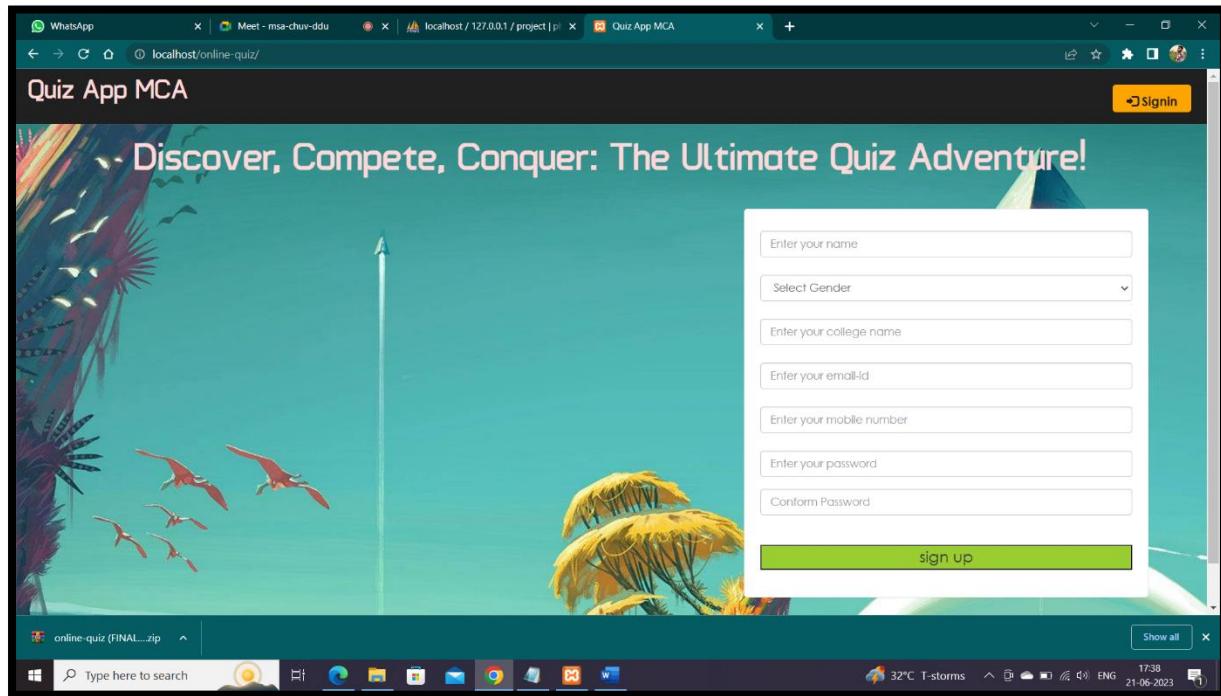


## Developers

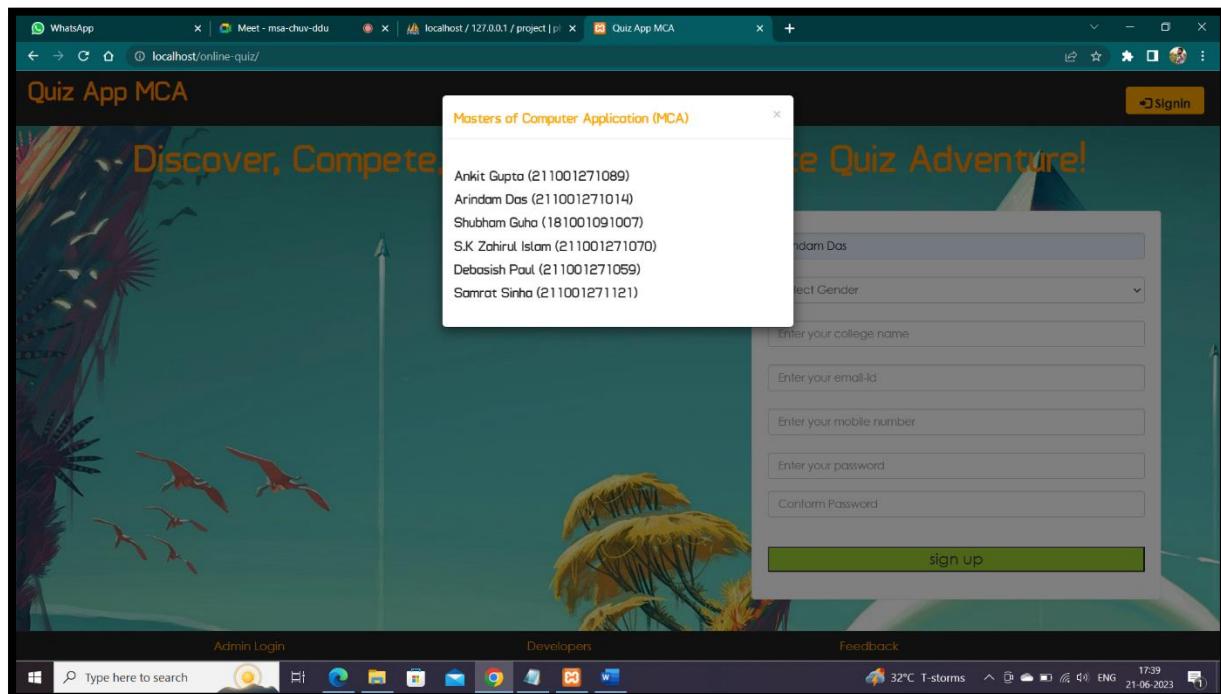

## User Registration

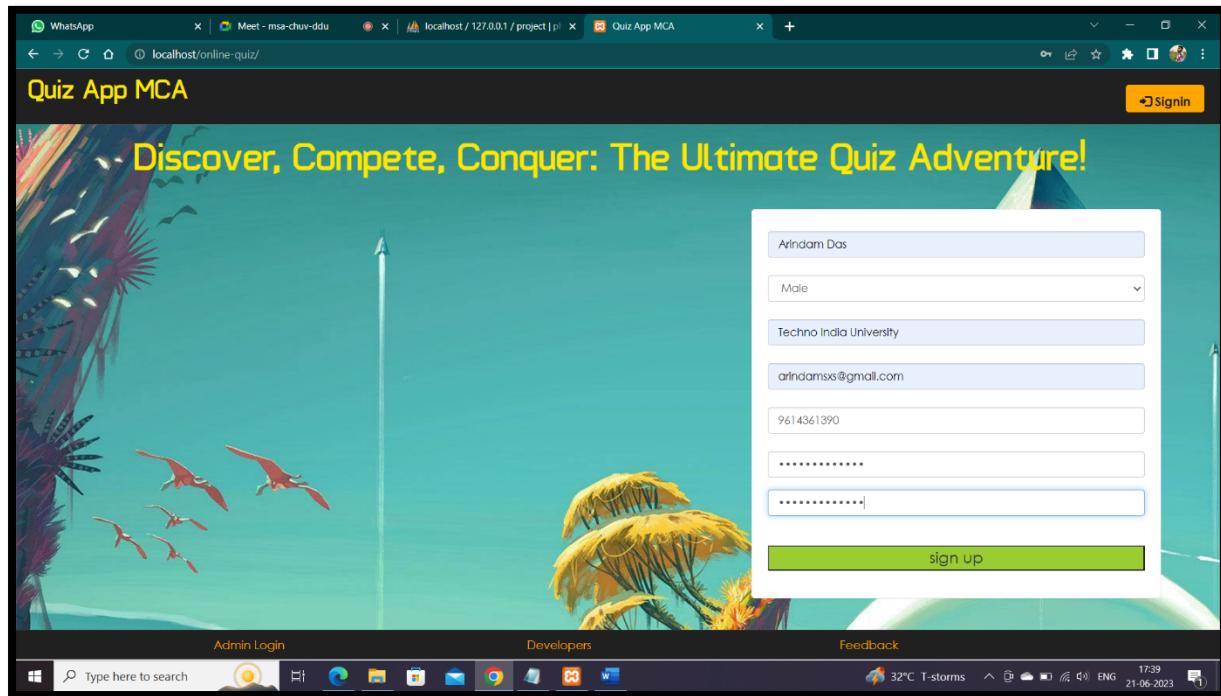

## User Login

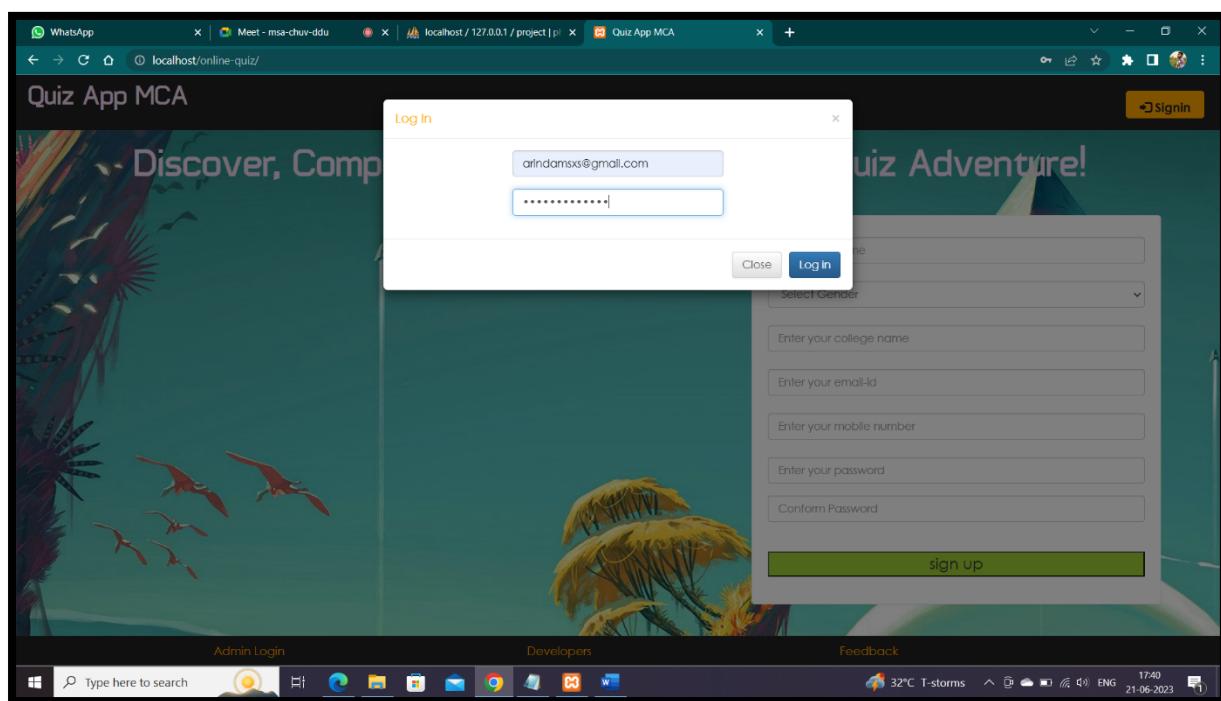

## Quiz Page after user login

The screenshot shows the Quiz App MCA homepage. At the top, there is a navigation bar with links for 'Home' and 'Ranking'. Below this is a table listing five quiz categories:

S.N.	Topic	Total question	Marks	Time limit	Action
1	Python	5	10	7 min	<button>Start</button>
2	Sql	5	10	7 min	<button>Start</button>
3	Java	5	10	7 min	<button>Start</button>
4	Web	5	10	7 min	<button>Start</button>
5	Linux:startup	5	10	10 min	<button>Start</button>

A 'Feedback' button is located at the bottom of the page. The browser's address bar shows the URL `localhost/online-quiz/account.php?q=1`. The taskbar at the bottom of the screen displays various application icons.

## Quiz Page

The screenshot shows a quiz question page. The question is: "Question 1 :: Which of the following principle does Queue use?" with the following options:

- "LIFO principle"
- "FIFO principle"
- "Linear tree"
- "Ordered array"

A 'Submit' button is visible at the bottom of the question box. A 'Feedback' button is located at the bottom of the page. The browser's address bar shows the URL `localhost/online-quiz/account.php?q=quiz&step=2&eid=6491cf2e98e458n=1&t=5`. The taskbar at the bottom of the screen displays various application icons.

The screenshot shows a web browser window titled "Quiz App MCA" with the URL "localhost/online-quiz/account.php?q=quiz&step=2&eid=6491cf2e98e458n=3&t=5". The page displays a question: "Question 3 :: How many Queues are required to implement a Stack?". Four options are listed: "3", "2" (which is selected), "1", and "4". A "Submit" button is at the bottom. The top right corner shows a user profile with "Hello, Arindam Das" and a "Signout" link. The bottom right corner shows system status: 31°C, Mostly cloudy, 01:19, 21-06-2023.

## Quiz Result-

The screenshot shows a web browser window titled "Quiz App MCA" with the URL "localhost/online-quiz/account.php?q=result&eid=6491d0ed4d27". The page displays a "Result" section with the following data:

Total Questions	5
right Answer	3
Wrong Answer	2
Score	4
Overall Score	15

The top right corner shows a user profile with "Hello, Arindam Das" and a "Signout" link. The bottom right corner shows system status: 31°C, Mostly cloudy, 01:21, 21-06-2023.

## History Page for user

The screenshot shows a web browser window titled "Quiz App MCA" with the URL "localhost/online-quiz/account.php?q=2". The page displays a user's history of quizzes taken. The table shows two entries:

S.N.	Quiz	Question Solved	Right	Wrong	Score
1	Sql	5	3	2	4
2	Java	5	5	0	10

Below the table, there is a "Feedback" button. The browser's address bar shows "localhost/online-quiz/account.php?q=2". The taskbar at the bottom indicates it's running on Windows 10, with the date and time as 21-06-2023 01:21.



## Rankings from user side

The screenshot shows a web browser window titled "Quiz App MCA" with the URL "localhost/online-quiz/account.php?q=3". The page displays a ranking table for users:



Rank	Name	Gender	College	Score
1	Arindam Das	M	Techno India University	15
2	Zahirul	M	Techno India University	5

Below the table, there is a "Feedback" button. The browser's address bar shows "localhost/online-quiz/account.php?q=3". The taskbar at the bottom indicates it's running on Windows 10, with the date and time as 21-06-2023 01:21.


## Feedback Page for user

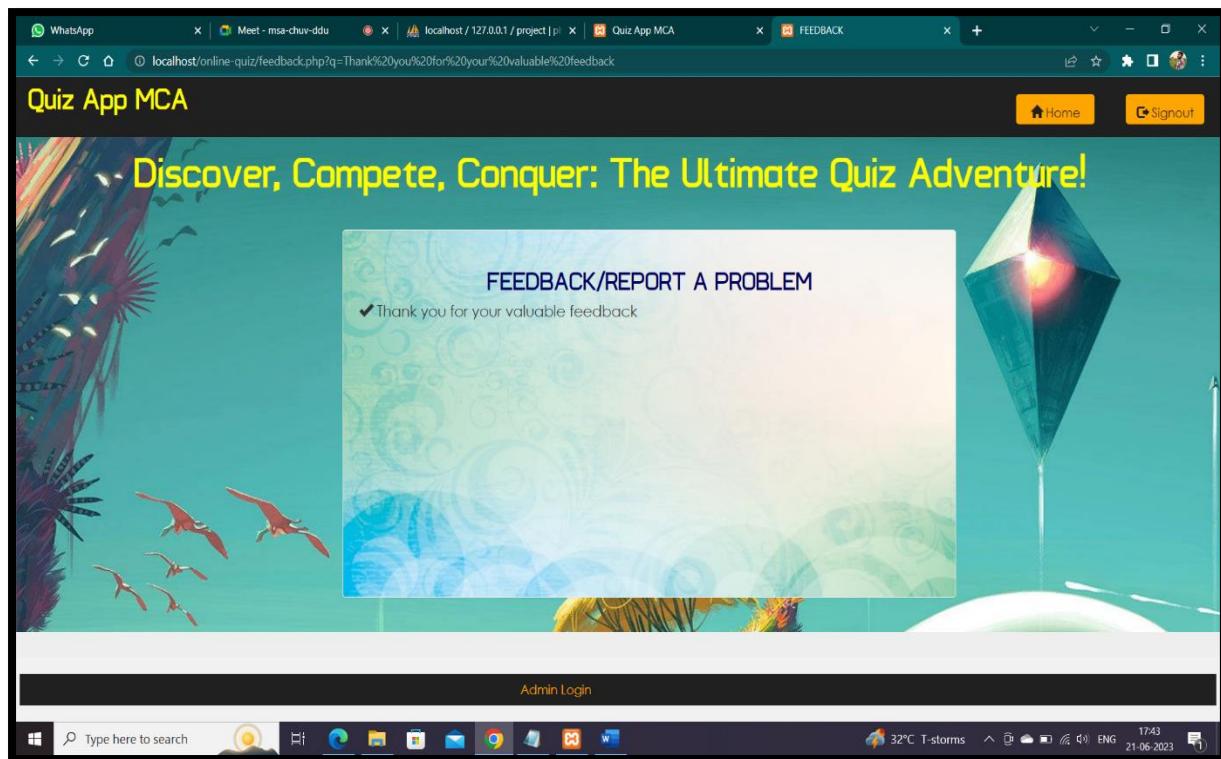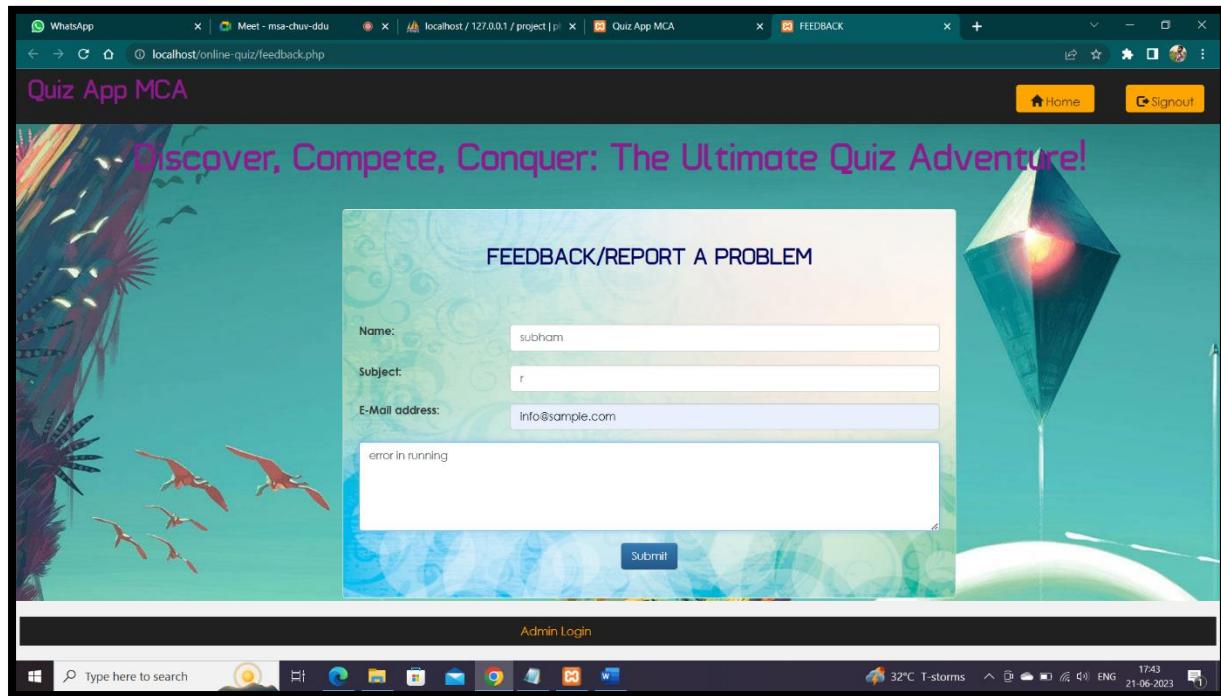

## Admin Side Login

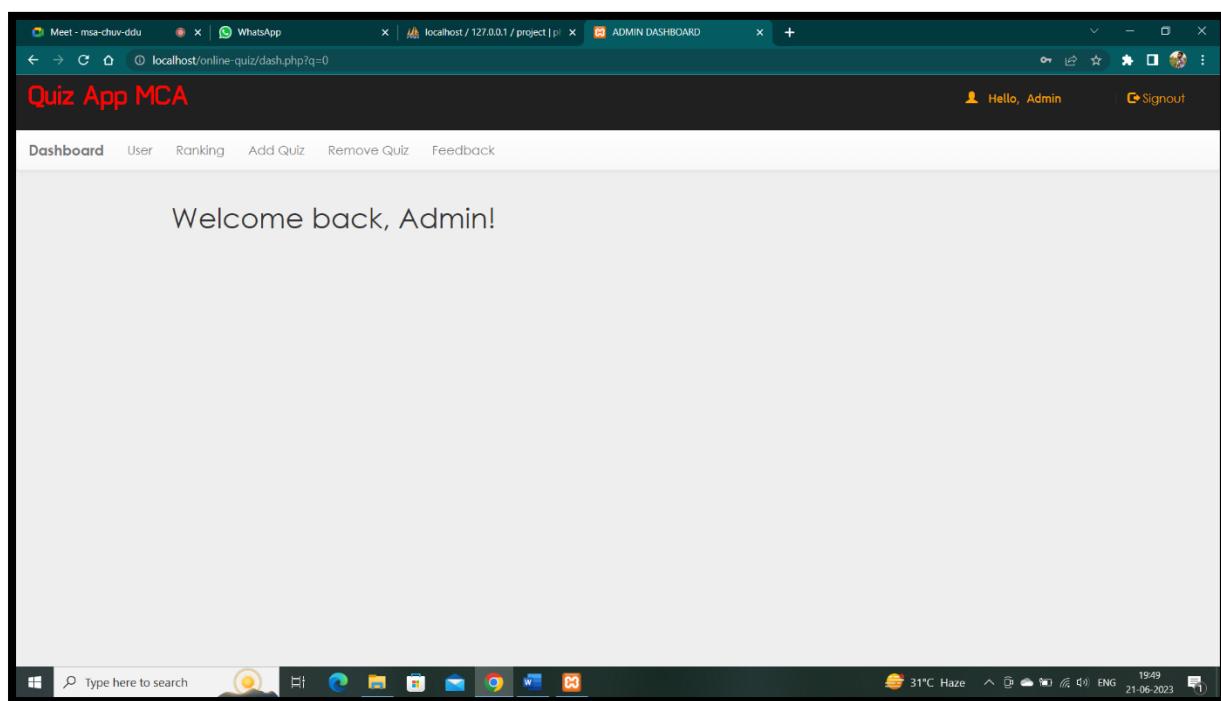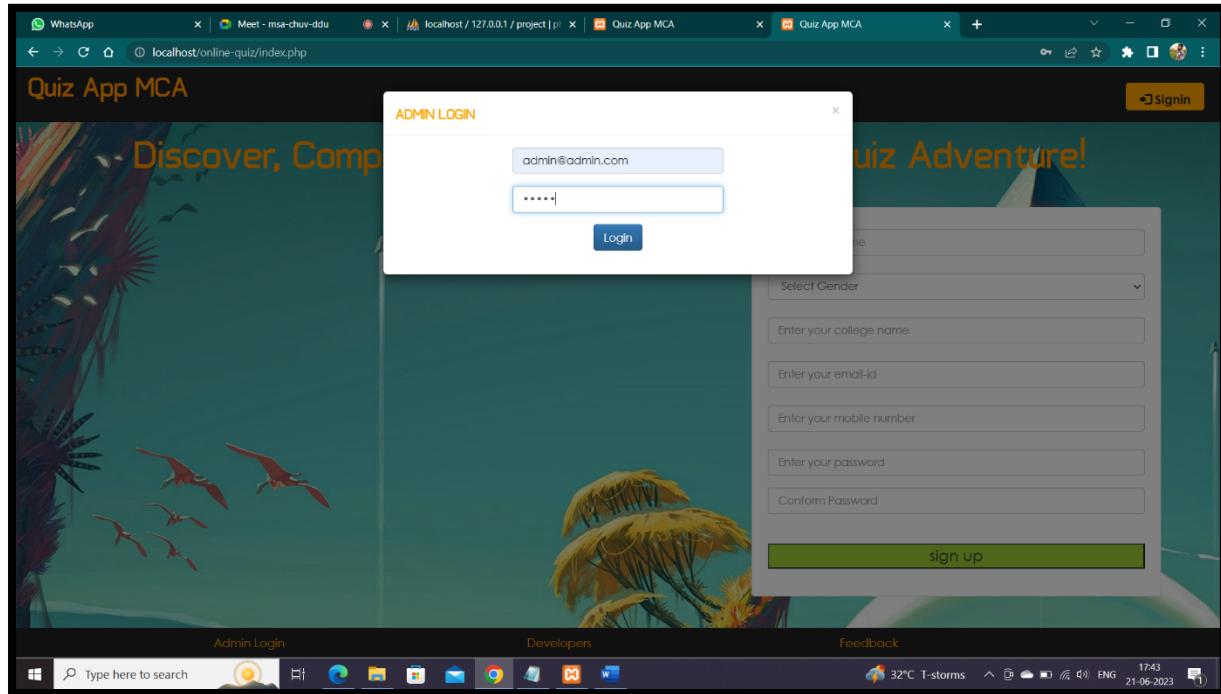

## Admin can view users

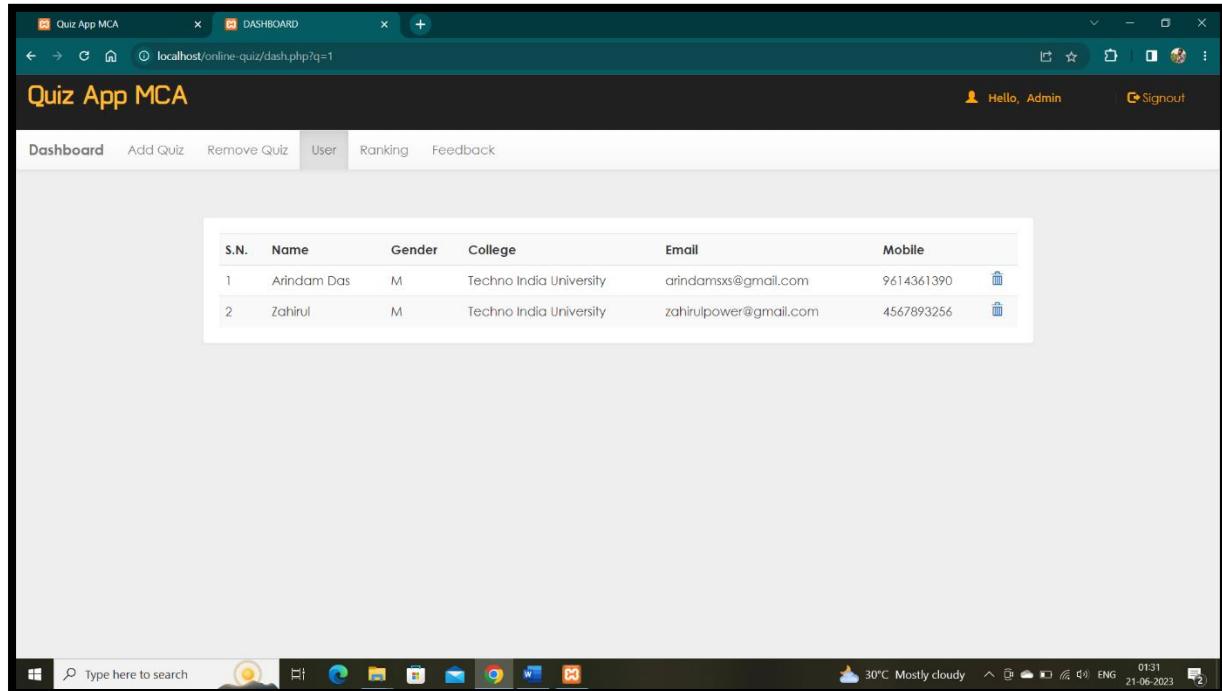


The screenshot shows a Windows desktop environment with a browser window titled "Quiz App MCA DASHBOARD" open at the URL "localhost/online-quiz/dash.php?q=1". The page displays a table of user information:

S.N.	Name	Gender	College	Email	Mobile
1	Arindam Das	M	Techno India University	arindamsxs@gmail.com	9614361390
2	Zahirul	M	Techno India University	zahirulpower@gmail.com	4567893256

The browser toolbar includes "Dashboard", "Add Quiz", "Remove Quiz", "User", "Ranking", and "Feedback". The status bar at the bottom shows system information like weather (30°C Mostly cloudy), date (21-06-2023), and time (01:31).

## Admin can add quiz

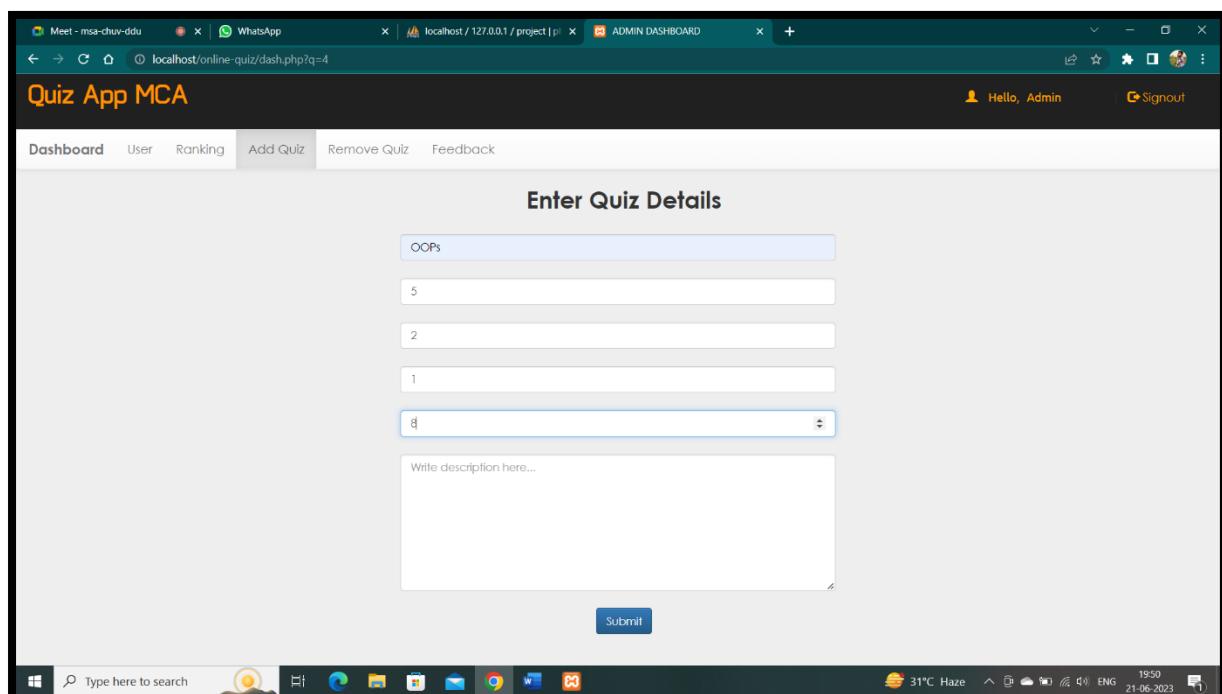

The screenshot shows a Windows desktop environment with a browser window titled "ADMIN DASHBOARD" open at the URL "localhost/127.0.0.1/project|p=4". The page displays a form titled "Enter Quiz Details" for adding a new quiz:

Quiz Details:

- Quiz Name: OOPS
- Quiz Type: 5
- Quiz Duration: 2
- Quiz Marks: 1
- Quiz Description: (Empty text area)
- Submit button

The browser toolbar includes "Dashboard", "User", "Ranking", "Add Quiz", "Remove Quiz", and "Feedback". The status bar at the bottom shows system information like weather (31°C Haze), date (21-06-2023), and time (19:50).

## Admin can remove quiz

The screenshot shows a Windows desktop environment with a browser window titled "ADMIN DASHBOARD" open at "localhost/online-quiz/dash.php?q=2". The page displays a table of quizzes with columns: S.N., Topic, Total question, Marks, Time limit, and a "Remove" button. The quizzes listed are: 1. Linux (5 questions, 10 marks, 10 min), 2. Python (5 questions, 10 marks, 7 min), 3. Sql (5 questions, 10 marks, 7 min), 4. Data Structure and Algorithms (5 questions, 10 marks, 7 min), and 5. Web (5 questions, 10 marks, 7 min). The "Remove" button for each row is a red button with a trash icon.

S.N.	Topic	Total question	Marks	Time limit	
1	Linux	5	10	10 min	
2	Python	5	10	7 min	
3	Sql	5	10	7 min	
4	Data Structure and Algorithms	5	10	7 min	
5	Web	5	10	7 min	

## Admin side Ranking page

The screenshot shows a Windows desktop environment with a browser window titled "DASHBOARD" open at "localhost/online-quiz/dash.php?q=2". The page displays a table of rankings with columns: Rank, Name, Gender, College, and Score. The ranking table shows two entries: 1. Arindam Das (M, Techno India University, 15) and 2. Zahirul (M, Techno India University, 5).

Rank	Name	Gender	College	Score
1	Arindam Das	M	Techno India University	15
2	Zahirul	M	Techno India University	5

## Admin can see feedbacks from user

The screenshot shows a web browser window titled "ADMIN DASHBOARD" with the URL "localhost/127.0.0.1/project". The page title is "Quiz App MCA". The navigation bar includes links for "Dashboard", "User", "Ranking", "Add Quiz", "Remove Quiz", and "Feedback". The "Feedback" tab is currently selected. Below the navigation bar is a table displaying three entries of user feedback:

S.N.	Subject	Email	Date	Time	By
1	error	arinndamsxs@gmail.com	20-06-2023	02:31:17pm	Arindam Das
2	RUN ERROR	ankitsxs@gmail.com	20-06-2023	03:00:49pm	Ankit Gupta
3	code	zahirulpower@gmail.com	20-06-2023	09:52:49pm	Zahirul

The browser's taskbar at the bottom shows other open tabs like "Meet - msa-chuv-ddu", "WhatsApp", and "localhost/127.0.0.1/project". The system tray indicates it's 31°C Haze, 21-06-2023, and 19:51.

## Myphpadmin Screenshots

The screenshot shows a web browser window titled "localhost/127.0.0.1/project" with the URL "localhost/phpmyadmin/index.php?route=/database/structure&db=project". The page title is "phpMyAdmin". The left sidebar shows the database structure for "project", including tables like "admin", "answer", "feedback", "history", "options", "questions", "quiz", "rank", and "user". The main content area displays the "Structure" tab for the "project" database, listing 9 tables and their details:

Action	Rows	Type	Collation	Size	Overhead
Browse Structure Search Insert Empty Drop	1	InnoDB	utf8_general_ci	16.0 Kib	-
Browse Structure Search Insert Empty Drop	25	InnoDB	utf8_general_ci	16.0 Kib	-
Browse Structure Search Insert Empty Drop	3	InnoDB	utf8_general_ci	16.0 Kib	-
Browse Structure Search Insert Empty Drop	3	InnoDB	utf8_general_ci	16.0 Kib	-
Browse Structure Search Insert Empty Drop	100	InnoDB	utf8_general_ci	16.0 Kib	-
Browse Structure Search Insert Empty Drop	25	InnoDB	utf8_general_ci	16.0 Kib	-
Browse Structure Search Insert Empty Drop	5	InnoDB	utf8_general_ci	16.0 Kib	-
Browse Structure Search Insert Empty Drop	2	InnoDB	utf8_general_ci	16.0 Kib	-
Browse Structure Search Insert Empty Drop	3	InnoDB	utf8_general_ci	16.0 Kib	-

The total size of the database is 144.0 Kib. At the bottom, there are buttons for "Create new table" and "Stop sharing". The browser's taskbar at the bottom shows other open tabs like "WhatsApp" and "localhost/127.0.0.1/project". The system tray indicates it's 33°C Mostly cloudy, 21-06-2023, and 16:51.

localhost/phpmyadmin/index.php?route=/sql&pos=0&db=project&table=user

Showing rows 0 - 2 (3 total, Query took 0.0006 seconds.)

	name	gender	college	email	mob	password
1	Arindam Das	M	Techno India University	arindamsxs@gmail.com	9614361390	5aa5a889c8ddb3cc145b2268740ce1e
2	Subham Guha	M	Techno India University	subhamguha@gmail.com	5641238956	7781d62a0d4ff8d9d08e2cc8380a3d1f
3	Zahirul	M	Techno India University	zahirulpower@gmail.com	4567893256	4528c5a72da0f14550cb533b20858dec

Query results operations

Bookmark this SQL query

Label:  Let every user access this bookmark

meet.google.com is sharing your screen. Stop sharing Hide

Console

Type here to search

localhost/phpmyadmin/index.php?route=/sql&pos=0&db=project&table=questions

Showing rows 0 - 24 (25 total, Query took 0.0020 seconds.)

eid	qid	qns	choice	sn
5589733a0659	558973f4309ac	On Linux, initrd is a file	4	1
5589733a0659	558973f4c4812	Which is loaded into memory when system is booted?	4	2
5589733a0659	558973f5f1600d	The process of starting up a computer is known as	4	3
5589733a0659	558973f55d289	Bootstrapping is also known as	4	4
5589733a0659	558973f5ab1a	The shell used for Single user mode shell is:	4	5
6491cd03dbe	6491cee580fb3	"What does HTML stand for?"	4	1
6491cd03dbe	6491cee590f55	"What does CSS stand for?"	4	2
6491cd03dbe	6491cee5960b0	"What does PHP stand for?"	4	3
6491cd03dbe	6491cee59b13e	"What does SQL stand for?"	4	4
6491cd03dbe	6491cee5a02a3	"What does XML stand for?"	4	5
6491cf2e98e45	6491d04d5b8a7	"Which of the following principle does Queue use?"	4	1
6491cf2e98e45	6491d04d5c00	"The time complexity of Binary Search Algorithm"	4	2
6491cf2e98e45	6491d04d640e1	"How many Queues are required to implement a Stack"	4	3
6491cf2e98e45	6491d04d6840b	"Which data structure is used for Breadth First Search?"	4	4

meet.google.com is sharing your screen. Stop sharing Hide


Console

Type here to search

Screenshot of phpMyAdmin showing the 'admin' table in the 'project' database. The table structure is as follows:

	admin_id	email	password
1	2	admin@admin.com	admin

## Graph and xlsx file -

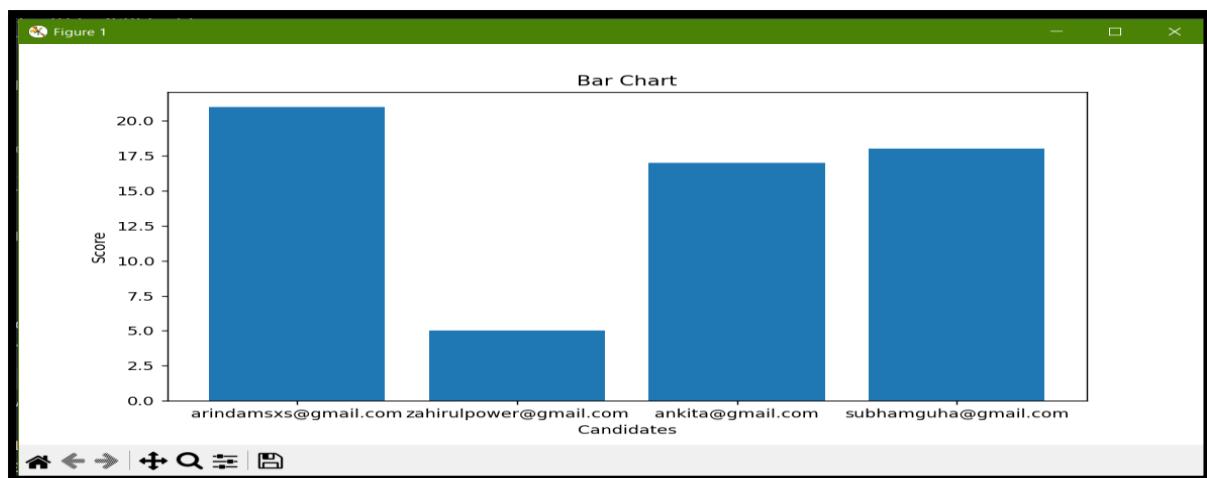

	A	B	C	D	E
1	email	score	time		
2	arindamsxs@gmail.com	21	2023-06-21 12:56:08		
3	zahirulpower@gmail.com	5	2023-06-20 20:22:31		
4	ankita@gmail.com	17	2023-06-21 18:29:34		
5	subhamguha@gmail.com	18	2023-06-21 18:37:11		
6					
7					
8					
9					
10					

## **FUTURE SCOPE**

- We will try to toughen up the questions based on school, college and university levels as per user requirements.
- We will provide detailed graphical analysis about the scores achieved in each subjects for the user logged in.
- We will host the platform on online servers to make it accessible worldwide.
- We will Collab with other competitors in the market.
- We will add the reset password feature on our website.

## **LIMITATIONS**

- Difficult to track due to, we cannot see which questions went incorrect after a quiz is attempted.
- Questions aren't getting shuffled (same questions are getting repeated).
- This website is not capable of handling large amounts of user's data.
- The users won't be able to change the password (he/she have to contact admin).

## **CONCLUSION**

This online quiz application ensures a seamless and personalized experience, our Quiz Web Application includes an admin panel and a user login/logout system. The admin panel empowers administrators to manage quizzes, categories, and user accounts effortlessly. It provides an intuitive interface for creating, editing, and publishing quizzes, ensuring a constantly updated and engaging quiz library. Users, on the other hand, can create personalized accounts, track their scores, save their progress, and compete with friends or other users in a friendly leaderboard competition.

# BIBLOGRAPHY

<http://www.w3.org/1999/xhtml>  
<http://fonts.googleapis.com/css?family=Roboto:400,700,300>  
<http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd>  
<http://fonts.googleapis.com/css?family=Roboto:400,700,300>  
<https://github.com/twbs/bootstrap/blob/master/LICENSE>  
<http://getbootstrap.com>  
<http://jquery.com/>  
<http://sizzlejs.com/>  
<http://jquery.org/license>  
<http://www.w3.org/2000/svg>  
[www.modernizr.com/download](http://www.modernizr.com/download)  
[www.modernizr.com/license](http://www.modernizr.com/license)  
<https://github.com/twbs/bootstrap/blob/master/LICENSE>  
<http://getbootstrap.com>  
<http://themes.googleusercontent.com/static/fonts/opensans/v8/cJZKeOuBrn4kERxqtaUH3T8E0i7KZn-EPnyo3HZu7kw.woff>  
[http://themes.googleusercontent.com/static/fonts/ubuntu/v5/\\_xyN3apAT\\_yRRDeqB3sPRg.woff](http://themes.googleusercontent.com/static/fonts/ubuntu/v5/_xyN3apAT_yRRDeqB3sPRg.woff)  
<http://themes.googleusercontent.com/static/fonts/droidserif/v4/0AKsP294HTD-nvJgucYTalbN6UDyHWBl620a-IRfuBk.woff>