

# Step 1 - NextJS Intro, Pre-requisites

## Pre-requisites

You need to understand basic Frontend before proceeding to this track.

You need to know what **React** is and how you can create a simple application in it

## NextJS Intro

NextJS was a framework that was introduced because of some **minor inconveniences** in React

1. In a React project, you have to maintain a separate Backend project for your API routes
2. React does not provide out of the box routing (you have to use react-router-dom)
3. React is not SEO Optimised
  1. not exactly true today because of React Server components
  2. we'll discuss soon why
4. Waterfalling problem


Let's discuss some of these problems in the next slides

# Step 2 - SEO Optimisation

Google/Bing has a bunch of **crawlers** that hit websites and figure out what the website does.

It ranks it on **Google** based on the HTML it gets back

The crawlers **DONT** usually run your JS and render your page to see the final output.

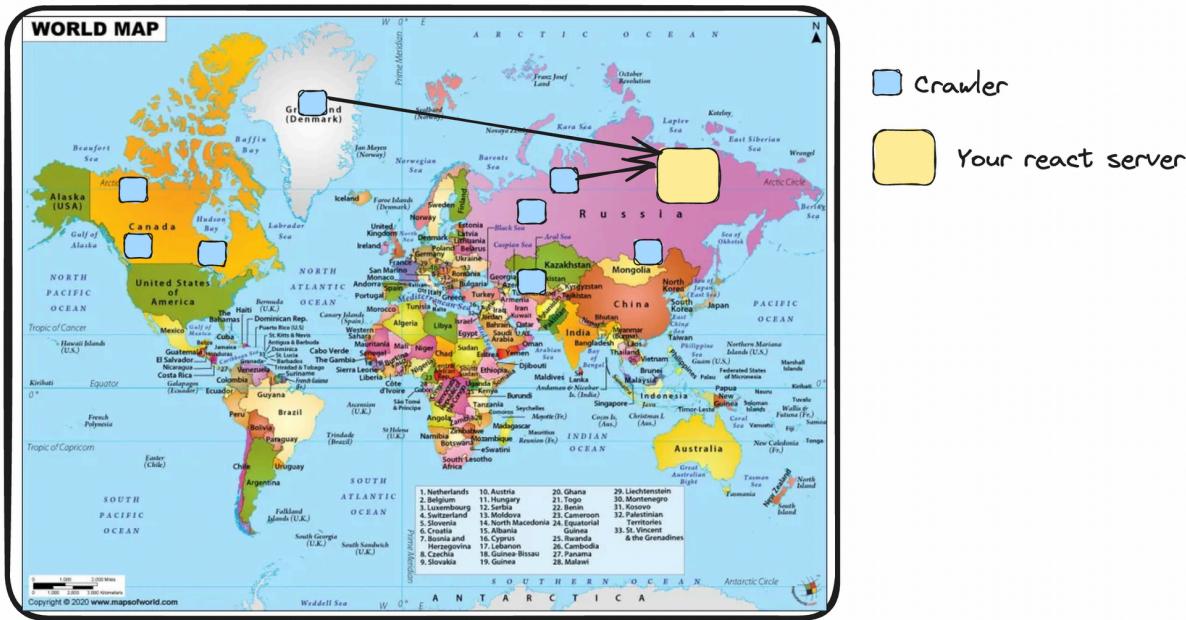

While Googlebot can run JavaScript, **dynamically generated** content is harder for the scraper to index

## Try visiting a react website

What does the **Googlebot** get back when they visit a website written in react?

Try visiting <https://blog-six-tan-47.vercel.app/signup>

Name	X	Headers	Preview	Response	Initiator	Timing
signup	2			<html lang="en">		
index-C5hDLA4v.js	3			<head>		
index-BvT5dujR.css	4			<meta charset="UTF-8" />		
inpage.js	5			<link rel="icon" type="image/svg+xml" href="/vite.svg" />		
vite.svg	6			<meta name="viewport" content="width=device-width, initial-scale=		
vite.svg	7			1"		
	8			<title>Vite + React + TS</title>		
	9			<script type="module" crossorigin src="/assets/index-C5hDLA4v.js"		
	10			</script>		
	11			</head>		
	12			<body>		
	13			<div id="root"></div>		
	14			</body>		
				</html>		

Googlebot has no idea on what the project is. It only sees **Vite + React + TS** in the original HTML response.


Ofcourse when the JS file loads eventually, things get rendered but the **Googlebot** doesn't discover this content very well.

## Step 3 - Waterfalling problem

Let's say you built a blogging website in react, what steps do you think the **request cycle** takes?

The screenshot shows a list of five blog posts on a platform. The first four posts are identical, each with the title "my first blog" and the content "this is my first blog...". The fifth post is different, with the title "my new blog" and the content "my bnew blog...". The fifth post also includes an email address, "ha111sdda@gmail.com", and a partially visible string "m123123123...". The interface includes a "Medium" logo at the top left, a "New" button, and a "h" icon. Each post includes a timestamp of "2nd Feb 2024" and a "1 minute(s) read" indicator.

Post Type	Title	Content	Author	Date	Read Time
1	my first blog	this is my first blog...	Anonymous	2nd Feb 2024	1 minute(s) read
2	my first blog	this is my first blog...	Anonymous	2nd Feb 2024	1 minute(s) read
3	my first blog	this is my first blog...	Anonymous	2nd Feb 2024	1 minute(s) read
4	my new blog	my bnew blog...	Anonymous	2nd Feb 2024	1 minute(s) read
5	my new blog	my bnew blog...	ha111sdda@gmail.com	2nd Feb 2024	1 minute(s) read

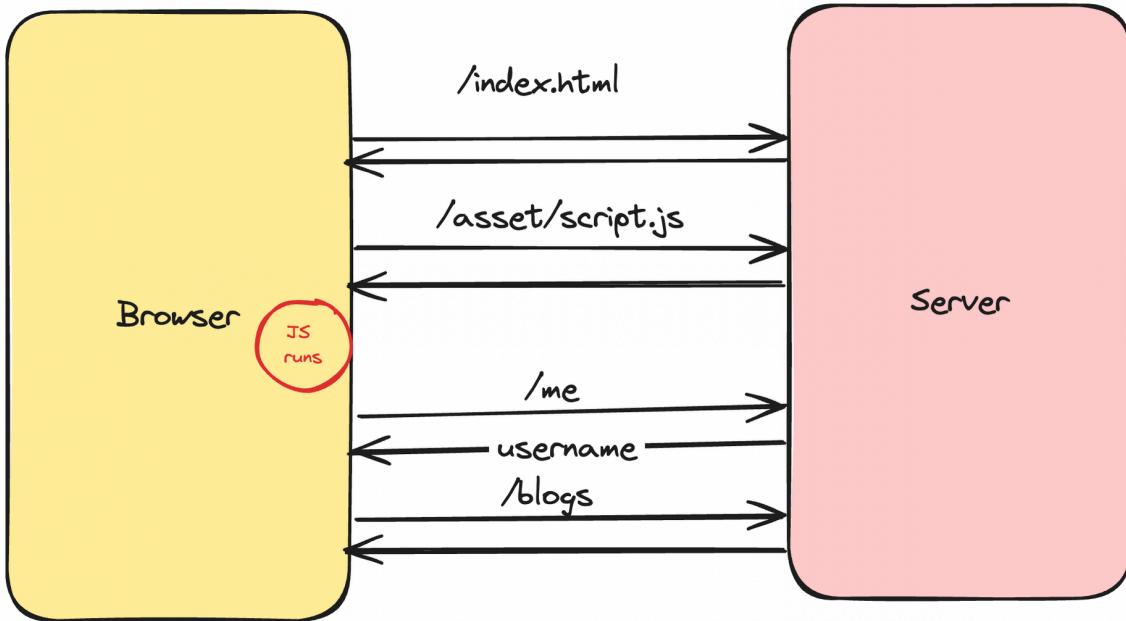


1. Fetching the index.html from the CDN
2. Fetching script.js from CDN
3. Checking if user is logged in (if not, redirect them to /login page)
4. Fetching the actual blogs

There are 4 round trips that happen one after the other (sequentially)



The "waterfalling problem" in React, and more broadly in web development, refers to a scenario where data fetching operations are chained or dependent on each other in a way that leads to inefficient loading behavior.

What does nextjs provide you?

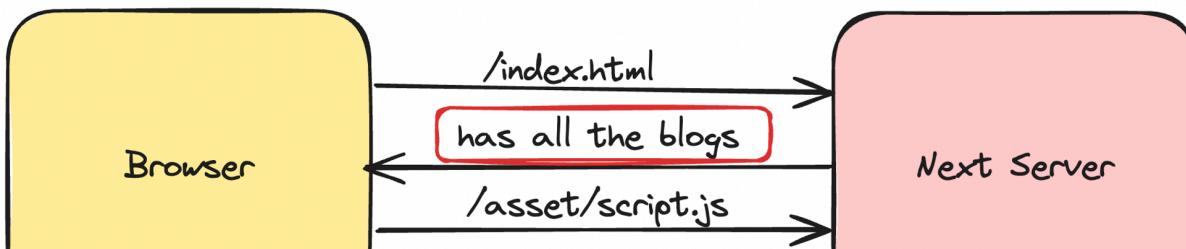

## Step 4 - Next.js offerings

Next.js provides you the following **upsides** over React

1. Server side rendering - Get's rid of SEO problems
2. API routes - Single codebase with frontend and backend
3. File based routing (no need for react-router-dom)
4. Bundle size optimisations, Static site generation
5. Maintained by the Vercel team

Downsides -

1. Can't be distributed via a CDN, always needs a server running that does **server side rendering** and hence is expensive
2. Very opinionated, very hard to move out of it

# Step 5 - Let's bootstrap a simple Next app

```
npx create-next-app@latest
```

Copy

```
→ Projects npx create-next-app@latest
Need to install the following packages:
create-next-app@14.1.1
Ok to proceed? (y) y
✓ What is your project named? ... next-app
✓ Would you like to use TypeScript? ... No / Yes
✓ Would you like to use ESLint? ... No / Yes
✓ Would you like to use Tailwind CSS? ... No / Yes
✓ Would you like to use `src/` directory? ... No / Yes
✓ Would you like to use App Router? (recommended) ... No / Yes
✓ Would you like to customize the default import alias (@/*)? ... No / Yes
Creating a new Next.js app in /Users/harkiratsingh/Projects/next-app.
```

Using npm.

```
Initializing project with template: app-tw
```


Installing dependencies:

```
- react
- react-dom
- next
```

Installing devDependencies:

```
- typescript
- @types/node
- @types/react
- @types/react-dom
- autoprefixer
- postcss
- tailwindcss
- eslint
- eslint-config-next
```

## File structure

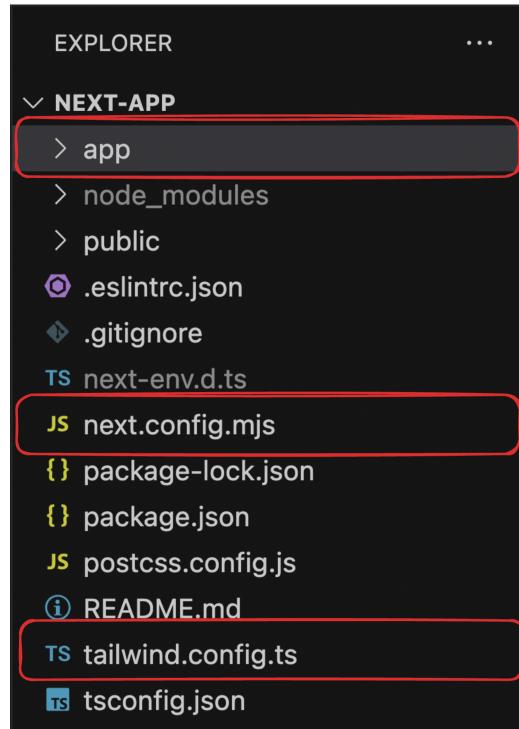

1. next.config.mjs - Nextjs configuration file
2. tailwind.config.js - Tailwind configuration file
3. app - Contains all your code/components/layouts/routes/apis

## Step 6 - Understanding routing in Next

### Routing in React

<https://blog-six-tan-47.vercel.app/signup>

```

function App() {

  return (
    <>
    <BrowserRouter>
      <Routes>
        <Route path="/signup" element={<Signup />} />
        <Route path="/signin" element={<Signin />} />
        <Route path="/blog/:id" element={<Blog />} />
      </Routes>
    </BrowserRouter>
  )
}

```

## Routing in Next.js

Next.js has a `file based router` (<https://nextjs.org/docs/app/building-your-application/routing/defining-routes>)

This means that the way you create your files, describes what renders on a route

1. Let's add a new folder in `app` called `signup`
2. Let's add a file called `page.tsx` inside `app/signup`

### ▼ page.tsx

```

export default function Signup() {
  return (
    <div>
      hi from the signup page
    </div>
  );
}

```

[Copy](#)

1. Start the application locally

```
npm run dev
```

Copy

localhost:3000/signup

hi from the signup page

## Final folder structure




Assignment - Can you add a `signin` route?

# Step 7 - Prettify the signin page

Let's replace the signup page with a prettier one

```
export default function Signin() {  
  return <div className="h-screen flex justify-center flex-col">  
    <div className="flex justify-center">  
      <a href="#" className="block max-w-sm p-6 bg-white border border-gray-200 rounded-lg shadow-md transition-all duration-200 ease-in-out hover:scale-105 hover:shadow-2xl hover:outline-2px outline-white">  
        <div>  
          <div className="px-10">  
            <div className="text-3xl font-extrabold">  
              Sign in  
            </div>  
          </div>  
          <div className="pt-2">  
            <LabelledInput label="Username" placeholder="harkirat@gmail.com" type="text" id="first_name" />  
            <LabelledInput label="Password" type="password" id="password" />  
            <button type="button" className="mt-8 w-full text-white bg-gray-900 py-2 px-4 rounded-lg transition-all duration-200 ease-in-out hover:scale-105 hover:bg-gray-800">Sign in</button>  
          </div>  
        </div>  
      </a>  
    </div>  
  </div>  
}  
  
interface LabelledInputType {  
  label: string;  
  placeholder: string;  
  type?: string;  
}  
  
function LabelledInput({ label, placeholder, type }: LabelledInputType) {  
  return <div>  
    <label className="block mb-2 text-sm text-black font-semibold pt-4">{label}</label>  
    <input type={type || "text"} id="first_name" className="bg-gray-50 border border-gray-300 py-2 px-4 rounded-lg" placeholder={placeholder} />  
  </div>  
}
```

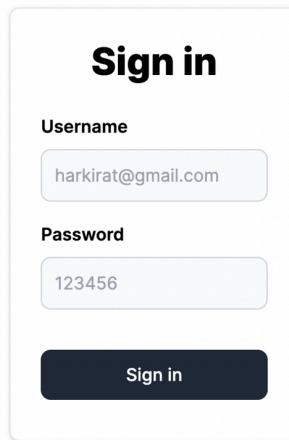

## Step 8 - Server side rendering

Let's try exploring the response from the server on the `/signup` route

1. Run `npm run dev`
2. Visit `http://localhost:3000/signup`
3. Notice the response you get back in your HTML file

The screenshot shows the Chrome DevTools Network tab with the 'Response' tab selected. The request for 'signup' is highlighted. The response body contains the HTML code for a Next.js page, including the title 'Create Next App' and the text 'hi from the signup page'. The text 'hi from the signup page' is highlighted with a red box and an arrow pointing to it.

```

<!DOCTYPE html>
<html lang="en">
<head>
<meta charset="utf-8"/>
<meta name="viewport" content="width=device-width, initial-scale=1"/>
<link rel="preload" href="/_next/static/media/c9a5bc6a7c948fb0-s.p.wof"
<link rel="stylesheet" href="/_next/static/css/app/layout.css?v=170936767660"/>
<link rel="preload" as="script" fetchPriority="low" href="/_next/static/chunks/main-app.js?v=170936767660" async="true"/>
<script src="/_next/static/chunks/app-pages-internals.js" as="script" async="true"></script>
<title>Create Next App</title>
<meta name="description" content="Generated by create next app"/>
<link rel="icon" href="/favicon.ico" type="image/x-icon" sizes="16x16"/>
<meta name="next-size-adjust" />
<script src="/_next/static/chunks/polyfills.js" noModule=""></script>
</head>
<body>hi from the signup page</body>
<script>__NEXT_DATA__ = {"pageName": "signup"};__NEXT_DATA__.pageProps = {}</script>
<script>(self, __NEXT_F__ = self, __NEXT_F__ || []).push([{}]);self.__NEXT_F__.push([{}, null]);</script>
<script></script>

```


Now if **GoogleBot** tries to scrape your page, it'll understand that this is a **signup page** without running any Javascript.

The first **index.html** file it gets back will have context about the page since it was **server side rendered**

## Step 9 - Layouts

You'll notice a file in your **app** folder called **layout.tsx**

Let's see what this does (Ref <https://nextjs.org/docs/app/building-your-application/routing/pages-and-layouts>)

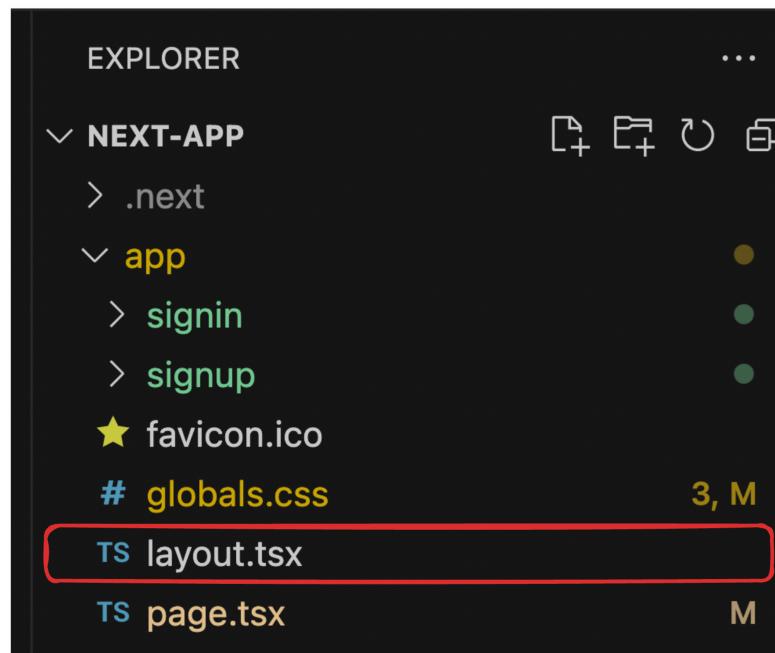

## What are layouts

Layouts let you wrap all child pages inside some logic.

Let's explore `layout.tsx`

```

1 1 import type { Metadata } from "next";
2 2   import { Inter } from "next/font/google";
3 3   import "./globals.css"; → import styles
4
5 5   const inter = Inter({ subsets: ["latin"] });
6
7 7   export const metadata: Metadata = {
8     title: "Create Next App",
9     description: "Generated by create next app",
10    };
11
12 12   export default function RootLayout({
13     children,
14   }: Readonly<{
15     children: React.ReactNode;
16   }>) {
17     return (
18       <html lang="en">
19         <body className={inter.className}> → Adding font globally
20           <children> → The page handler component
21         </body>
22       </html>
23     );
24   }
25 
```

Annotations on the code:

- `import "./globals.css";` → import styles
- `export const metadata: Metadata = { ... }` → metadata of the page
- `<body className={inter.className}>` → Adding font globally
- `<children>` → The page handler component


## Assignment

Try adding a simple `Appbar`

```
return ()  
  <html lang="en">  
    <body className={inter.className}>  
      <div className="p-4 border-b">  
        | Medium  
        </div>  
        {children}  
      </body>  
    </html>  
  );
```

## Step 10 - Layouts in sub routes

What if you want all routes that start with `/signin` to have a `banner` that says `Login now to get 20% off`

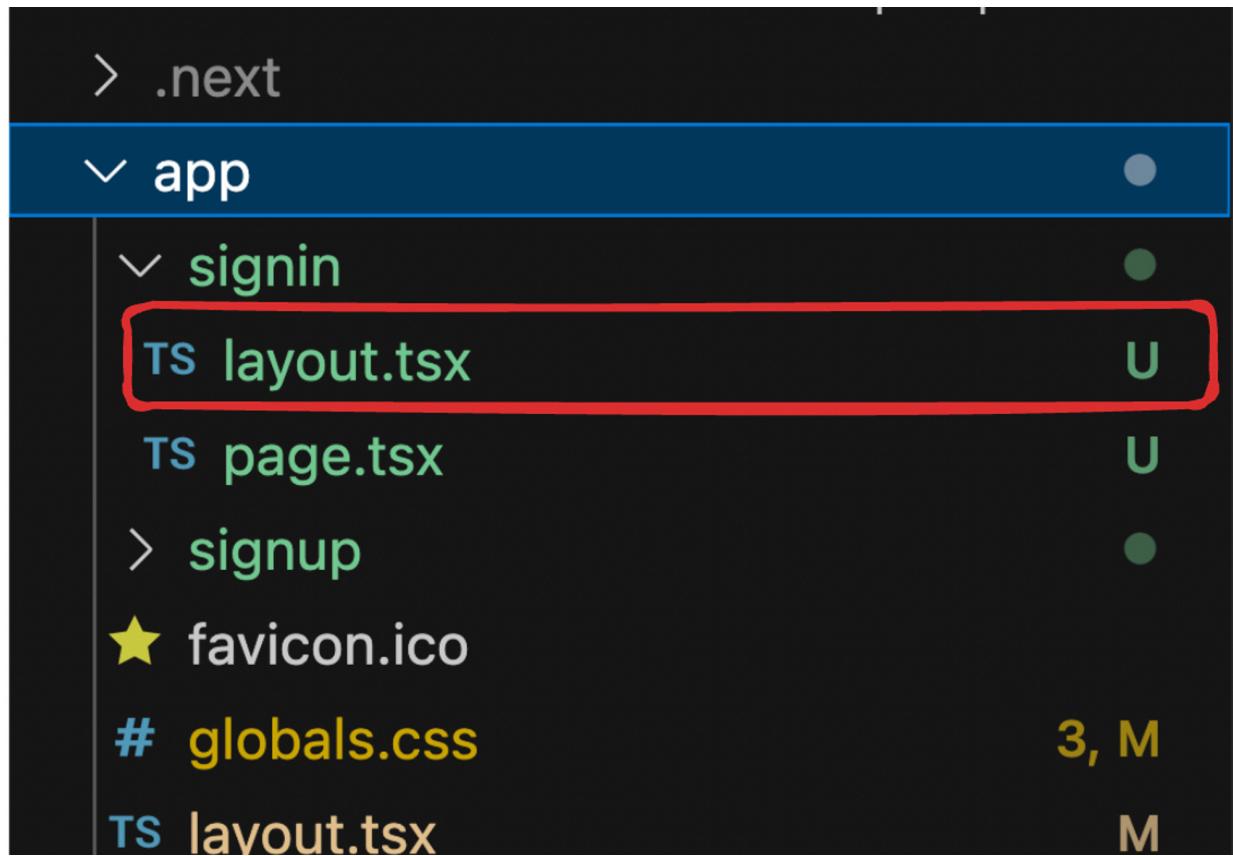


## Step 11 - Merging routes

What if you wan't to get the banner in both `signup` and `signin` ?

### Approach #1

Move both the `signin` and `signup` folder inside a `auth` folder where we have the layout

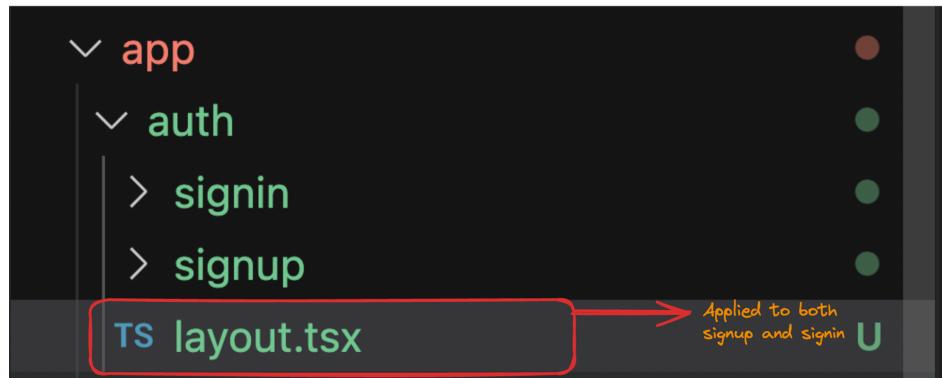


You can access the routes at

<http://localhost:3000/auth/signup> and <http://localhost:3000/auth/signin>

### Approach #2

You can use create a new folder with `( )` around the name.

This folder is `ignored` by the router.

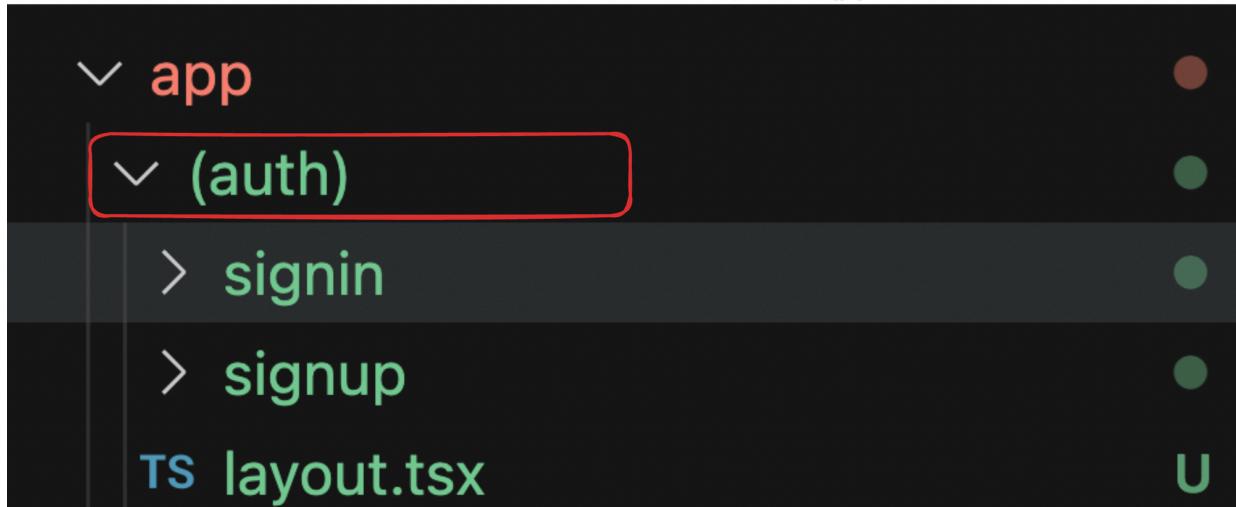

You can access the routes at

`http://localhost:3000/signup` and `http://localhost:3000/signin`

## Step 12 - components directory

You should put all your `components` in a `components` directory and use them in the `app routes` rather than shoving everything in the route handler

1. Create a new folder called `components` in the root of the project
2. Add a new component there called `Signin.tsx`
3. Move the signin logic there
4. Render the `Signin` component in `app/(auth)signin/page.tsx`

Solution

▼ `components/Signin.tsx`

```
export function Signin() {  
    return <div className="h-screen flex justify-center flex-col">  
        <div className="flex justify-center">  
            <a href="#" className="block max-w-sm p-6 bg-white border bo  
                <div>  
                    <div className="px-10">  
                        <div className="text-3xl font-extrabold">  
                            Sign in  
                        </div>  
                    </div>  
                    <div className="pt-2">  
                        <LabelledInput label="Username" placeholder="Userna...>  
                        <LabelledInput label="Password" type="password" placeholder="Passw...>  
                        <button type="button" className="mt-8 w-full bg-blue-500 text-white py-2 px-4 rounded">Sign in</button>  
                    </div>  
                </div>  
            </a>  
        </div>  
    </div>  
}  
  
interface LabelledInputType {  
    label: string;  
    placeholder: string;  
    type?: string;  
}  
  
function LabelledInput({ label, placeholder, type }: LabelledInputTy  
    return <div>  
        <label className="block mb-2 text-sm text-black font-semibol  
            <input type={type || "text"} id="first_name" className="bg-g  
        </div>  
    </div>
```

## ▼ app/(auth)/Signin.tsx

```
import { Signin as SigninComponent } from "@/components/Signin";  
  
export default function Signin() {  
    return <SigninComponent />  
}
```

# Step 13 - Add a button onclick handler

Now try adding a `onClick` handler to the `button` on the signin page

```
<button onClick={() => {  
    console.log("User clicked on signin")  
}} type="button" className="mt-8 w-full text-white bg-gray-800 focus:ring-4 focus:ri|
```

## Step 14 - Client and server components

Ref - <https://nextjs.org/learn/react-foundations/server-and-client-components>

NextJS expects you to identify all your components as either `client` or `server`

As the name suggests

1. Server components are rendered on the server
2. Client components are pushed to the client to be rendered

By default, all components are `server` components.

If you want to mark a component as a `client` component, you need to add the following to the top of the component -


```
"use client"
```

Copy

When should you create `client components` ?

1. Whenever you get an error that tells you that you need to create a client component
2. Whenever you're using something that the server doesn't understand (`useEffect`, `useState`, `onClick`...)

Rule of thumb is to defer the client as much as possible

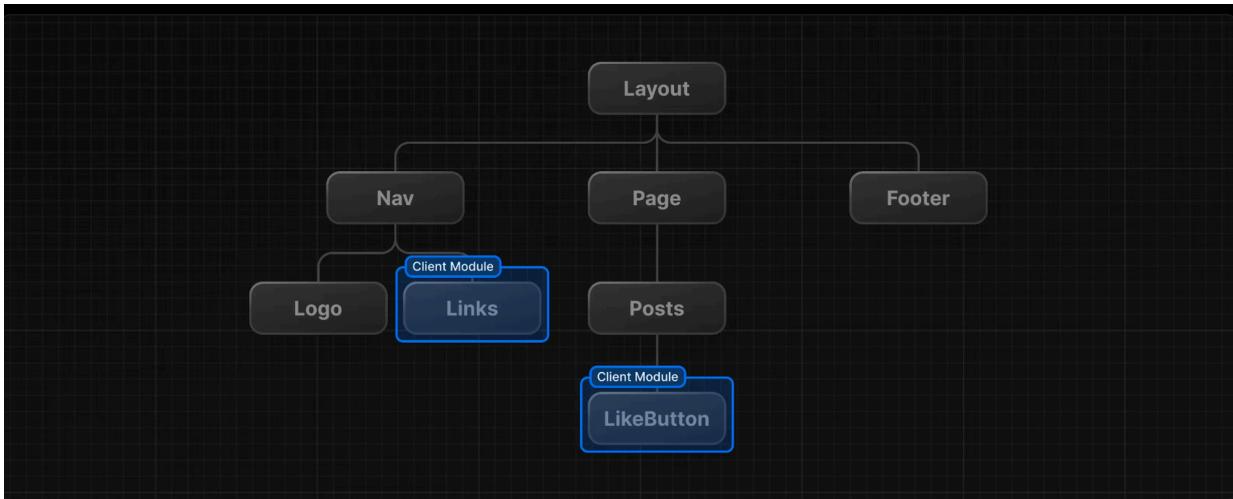

## Assignment

Try updating `components/Signin.tsx` to make it a client component

You will notice that the error goes away

Some nice readings -

<https://github.com/vercel/next.js/discussions/43153>