



## 1. Create an Account in ClearBit system and generate an API Key

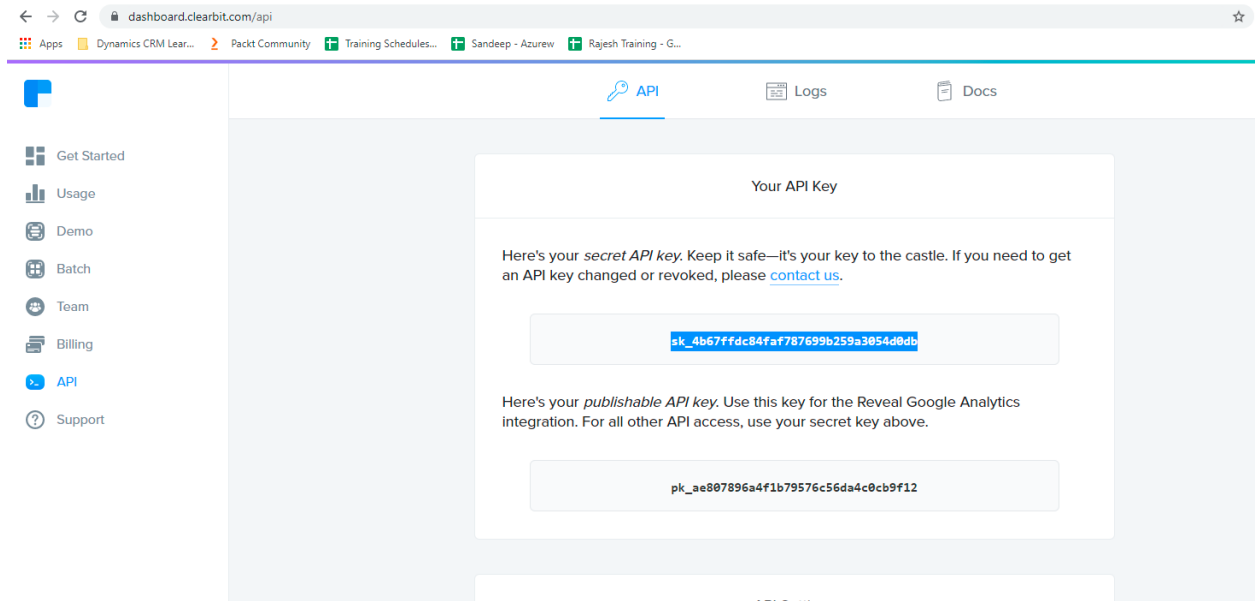

## 2. Login to Power Automate

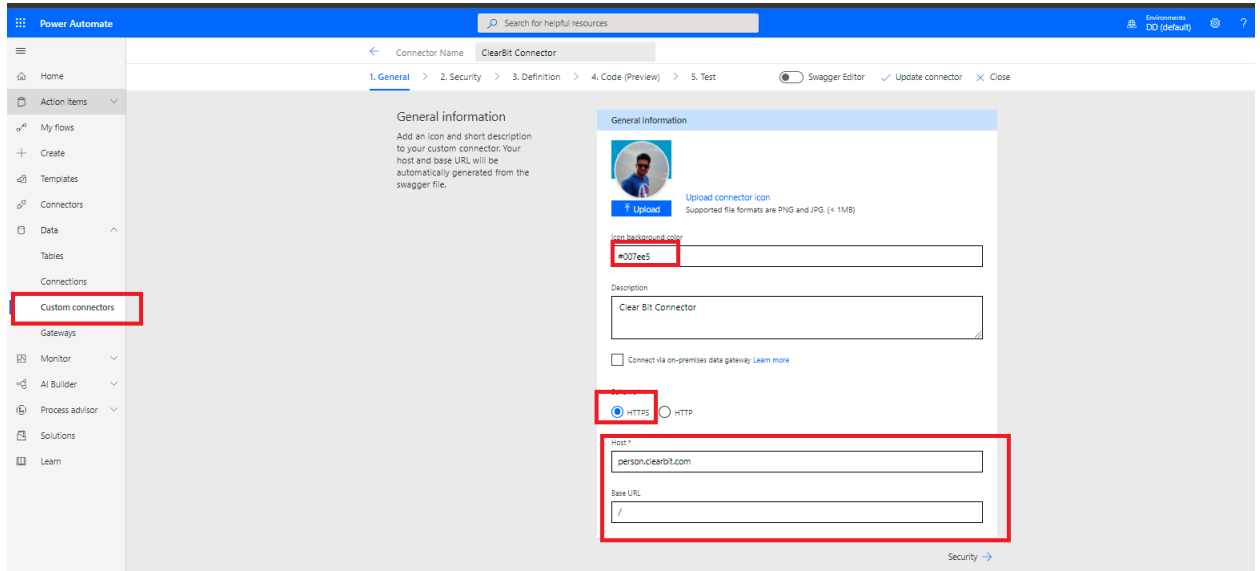

**Power Automate** Search for helpful resources

Connector Name: ClearBit Connector

1. General > 2. Security > 3. Definition > 4. Code (Preview) > 5. Test

**Security**

Choose the authentication type and fill in the required fields to set the security for your custom connector. [Learn more](#)

**Authentication type**

Choose what authentication is implemented by your API \*

API Key

[Edit](#)

**API Key**

Users will be required to provide the API Key when creating a connection

Parameter label \*

API Key

Parameter name \*

Authorization

Parameter location \*

Header

[Edit](#)

[General](#) [Definition](#)

3.

Connector Name: ClearBit Connector

1. General > 2. Security > 3. Definition > 4. Code (Preview) > 5. Test

**Definition**

**Actions (1)**

Actions determine the operations that users can perform. Actions can be used to read, create, update or delete resources in the underlying connector.

1 person

[New action](#)

**Triggers (0)**

Triggers read data in from your connector. A trigger focuses on a particular event that happens, say a new Contact or Order being created and provides the relevant data so that users can take action on that event.

[New trigger](#)

**General**

Summary [Learn more](#)

GetPersonData

Description [Learn more](#)

GetPersonData

Operation ID \*

This is the unique string used to identify the operation.

person

Visibility [Learn more](#)

☒ none ☐ advanced ☐ internal ☐ important

Request

4.

take action on that event.

[+ New trigger](#)

---

✓ **References (0)**

References are reusable parameters used by both actions and triggers.

---

✓ **Policies (0)**

Policies are used to change the behavior of actions and triggers through configuration. You can use one or more policies from a set of predefined templates.

[+ New policy](#)

### Request

It defines the pre-requirements needed in order to make a request. Describes a single operation parameter. A unique parameter is defined by a combination of a name and location.

Request

+ Import from sample

**Verb \***

The verb describes the operations available on a single path.

**GET**

**URL \***

This is the request URL.

https://person.clearbit.com/v2/people/find

**Path**

Path is used together with Path Templating, where the parameter value is actually part of the operation's URL.

**Query**

Query parameters are appended to the URL. For example, in /items?id=###, the query parameter is id.

email ...

**Headers**

These are custom headers that are part of the request.

**Body**

The body is the payload that's appended to the HTTP request. There can only be one body parameter.

5.

## Paste the response

Response paste this

```
{
  "id": "247193a9-33a1-4cc8-a997-9af62dd8da61",
  "name": {
    "fullName": "Alex MacCaw",
    "givenName": "Alex",
    "familyName": "MacCaw"
  },
  "email": "alex@alexmaccaw.com",
  "location": "San Francisco, CA, US",
  "timeZone": "America/Los_Angeles",
  "utcOffset": -7,
  "geo": {
    "city": "San Francisco",
    "state": "California",
    "stateCode": "CA",
    "country": "United States",
    "countryCode": "US",
    "lat": 37.7749295,
    "lng": -122.4194155
  },
  "bio": "👤 Founded @clearbit\n🏢 Building @reflectnotes\n💡 Investing via https://earlgray.capital\n📖 https://themanagershandbook.com/\n\nTea, Earl Grey, hot. 🍵",
  "site": "http://alexmaccaw.com",
  "avatar": "https://dlt543dypk8bqh.cloudfront.net/v1/avatars/247193a9-33a1-4cc8-a997-9af62dd8da61",
  "employment": {
```

```

        "domain": "alexmaccaw.com",
        "name": "Alex MacCaw",
        "title": "CEO",
        "role": "leadership",
        "subRole": "ceo",
        "seniority": "executive"
    },
    "facebook": {
        "handle": "amaccaw"
    },
    "github": {
        "handle": "maccman",
        "id": 2142,
        "avatar": "https://avatars.githubusercontent.com/u/2142?v=4",
        "company": "Clearbit",
        "blog": "http://alexmaccaw.com",
        "followers": 3594,
        "following": 115
    },
    "twitter": {
        "handle": "maccaw",
        "id": 2006261,
        "bio": "👤 Founded @clearbit\n🔗 Building @reflectnotes\n📺 Investing via https://earlgrey.capital\n📖 https://themanagershandbook.com/\n\nTea, Earl Grey, hot. 🍵",
        "followers": 29059,
        "following": 2451,
        "statuses": 12127,
        "favorites": 14408,
        "location": "Atlantic",
        "site": "http://alexmaccaw.com",
        "avatar": "https://pbs.twimg.com/profile_images/1418421541054918657/ng4Kyv5G.jpg"
    },
    "linkedin": {
        "handle": "pub/alex-maccaw/78/929/ab5"
    },
    "googleplus": {
        "handle": null
    },
    "gravatar": {
        "handle": "maccman",
        "urls": [
            {
                "value": "http://alexmaccaw.com",
                "title": "Personal Website"
            }
        ],
        "avatar": "https://secure.gravatar.com/avatar/994909da96d3afaf4daaf54973914b64",
        "avatars": [
            {
                "url": "https://secure.gravatar.com/avatar/994909da96d3afaf4daaf54973914b64",
                "type": "thumbnail"
            }
        ]
    },
    "fuzzy": false,
    "emailProvider": false,
    "indexedAt": "2021-09-08T20:25:31.199Z"
}

```

## Test operation

Test a specified operation of this custom connector using the selected connection. You must update the custom connector in order to test recent changes.

### Connections

Selected connection \*

ClearBit Connector (Created at 2021-11-25T02:45:11.9851427Z)

+ New connection

## Operations (1)

These are the operations defined by your custom connector. This includes actions and triggers.

✓ 1 person

### person

email

Sumit.icfai196@gmail.com

Test operation

### Request Response

#### Status

OK (200)

#### Headers

```
{
  "content-encoding": "gzip",
  "content-type": "application/json",
  "date": "Thu, 25 Nov 2021 02:53:09 GMT",
  "transfer-encoding": "chunked",
  "vary": "Accept-Encoding"
}
```

#### Body

```
{
  "id": "7eec1f1b-fb5c-440c-b447-88ee3860a083",
  "name": {
    "fullName": "Sumit Gupta",
    "givenName": "Sumit",
    "familyName": "Gupta"
  },
  "email": "sumit.icfai196@gmail.com",
  "location": "Hyderabad, Telangana, IN",
  "timeZone": "Asia/Kolkata",
  "utcOffset": 5,
  "geo": {
    "city": "Hyderabad",
    "state": "Telangana"
  }
}
```

### Schema validation