APS performance across preprocessing conditions

Higher is better | Same supplied training and test rows

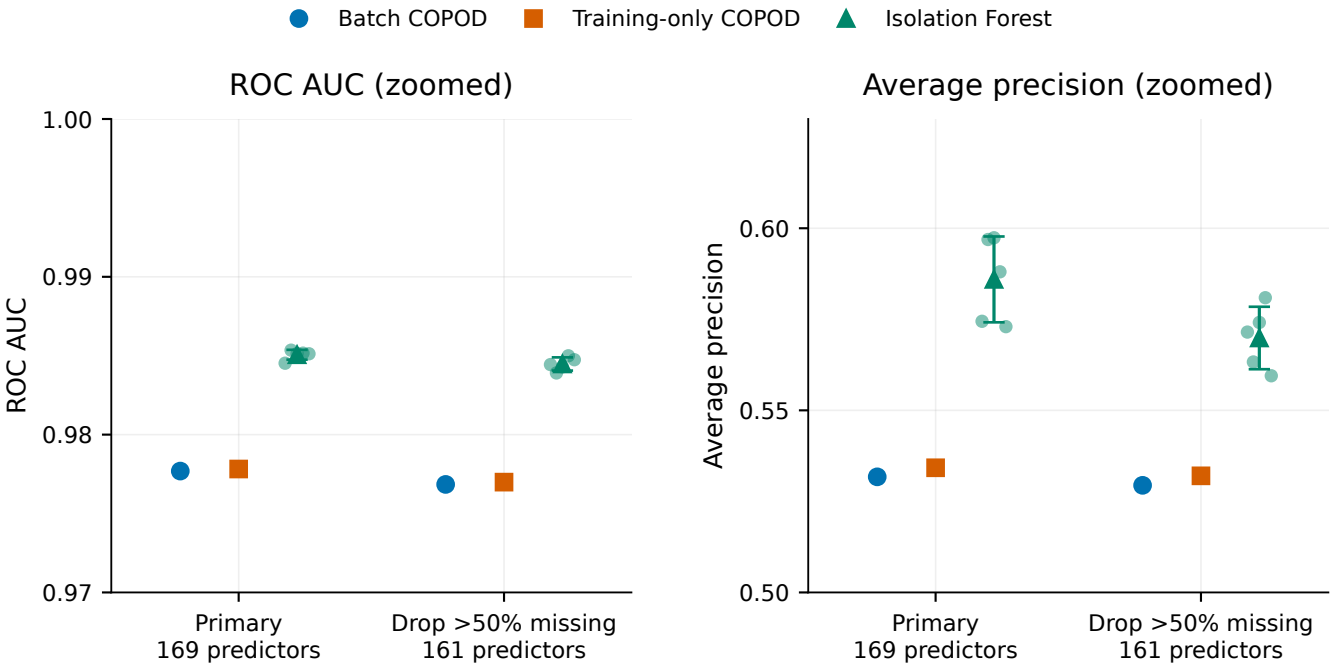

IF: small dots = all five seeds; large symbols = means; bars = +/-1 sample SD.

SD measures fitting randomness, not a confidence interval. COPOD has one deterministic run.

Axes are zoomed; full metric ranges are 0-1. References outside the axes: ROC 0.50; AP 0.02344.

60,000 training / 16,000 test rows; 375 APS-positive test cases. All rows retained.

Batch COPOD uses train + test features; training-only COPOD and IF use training features only.