

# High Dimensional Statistics IV MATH4287 - Mini Project Report

qvns53

2025-12-16

## R Markdown

Chang (1983)

This is an R Markdown document. Markdown is a simple formatting syntax for authoring HTML, PDF, and MS Word documents. For more details on using R Markdown see <http://rmarkdown.rstudio.com>.


When you click the **Knit** button a document will be generated that includes both content as well as the output of any embedded R code chunks within the document. You can embed an R code chunk like this:

```
summary(cars)
```

```
##      speed          dist
## Min.   : 4.0   Min.   :  2.00
## 1st Qu.:12.0   1st Qu.: 26.00
## Median :15.0   Median : 36.00
## Mean   :15.4   Mean   : 42.98
## 3rd Qu.:19.0   3rd Qu.: 56.00
## Max.   :25.0   Max.   :120.00
```

## Including Plots

You can also embed plots, for example:

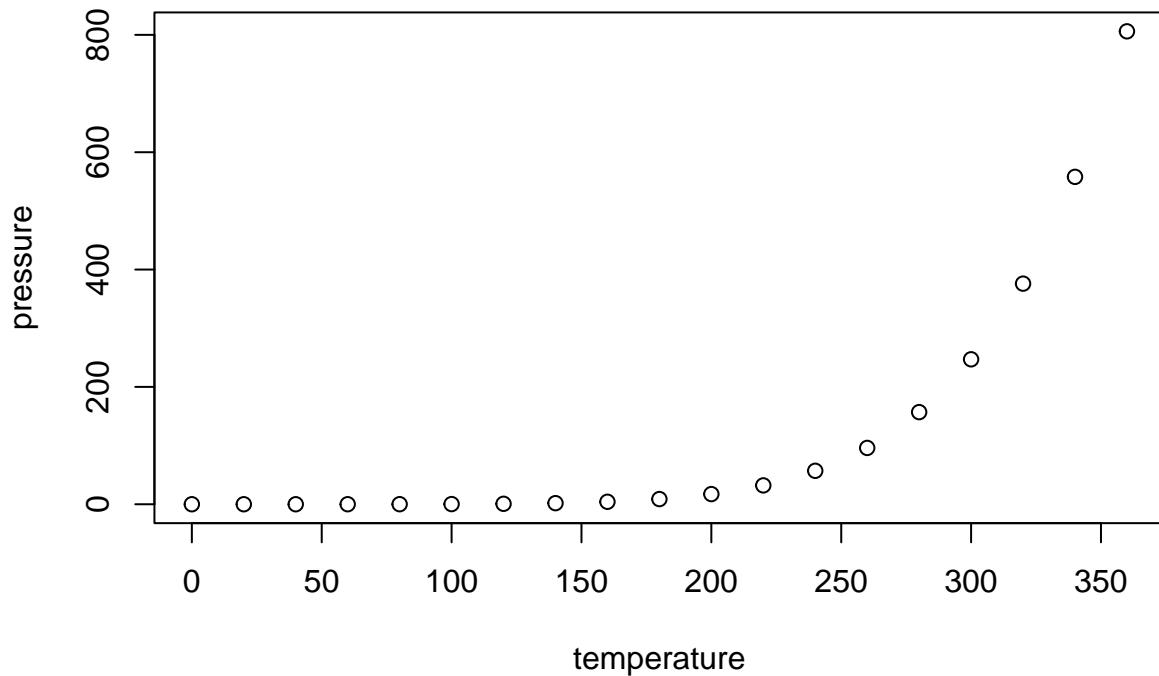

Note that the `echo = FALSE` parameter was added to the code chunk to prevent printing of the R code that generated the plot.

Chang, Wei-Chien. 1983. “On Using Principal Components Before Separating a Mixture of Two Multivariate Normal Distributions.” *Journal of the Royal Statistical Society: Series C (Applied Statistics)* 32 (3): 267–75. <https://doi.org/10.2307/2347949>.