

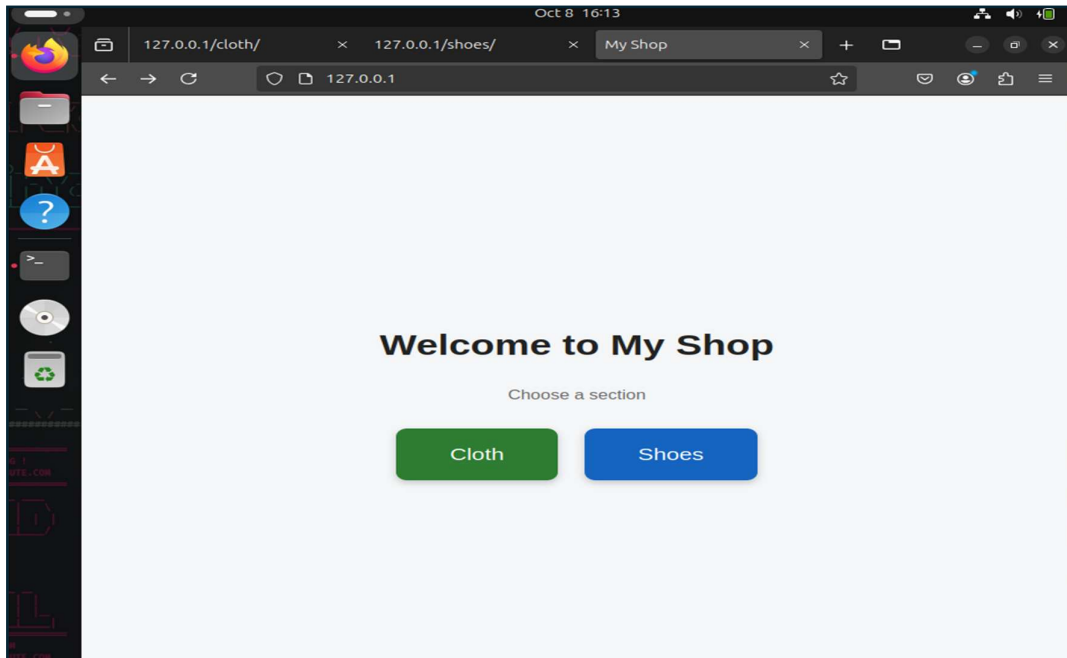


Nginx


Out put in ip 127.0.0.1

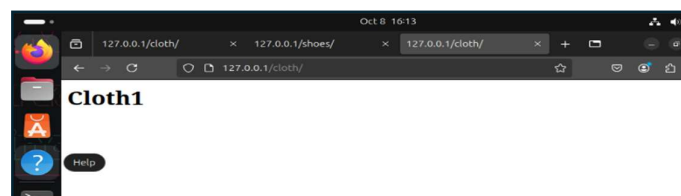

Then click in cloth butoon

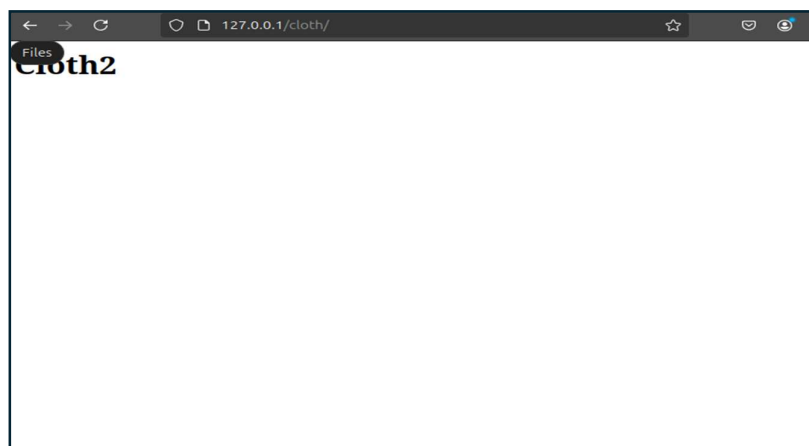

When I cut it back to home page not in cloth 2
then I click shoes

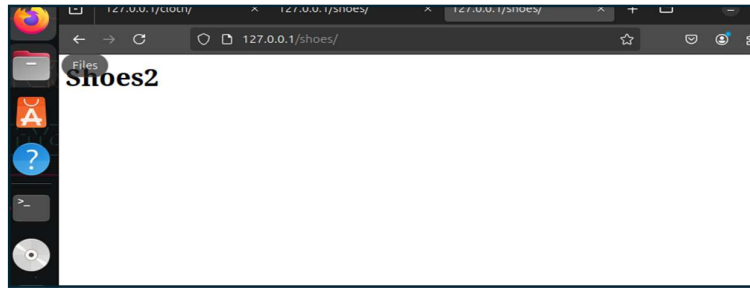

How I create

`sudo apt update && sudo apt install -y nginx`

for n in cloth1 cloth2 shoes1 shoes2; do

`sudo mkdir -p /var/www/$n`

`echo "<h1>${n^}</h1><p>← Back to
home</p>" | sudo tee /var/www/$n/index.html > /dev/null`
done

nginx code

```
server {  
    listen 80;  
    add_header Cache-Control "no-store" always;  
  
    location / { root /var/www/front; index index.html; }  
  
    location = /cloth { return 301 /cloth/; }  
    location = /shoes { return 301 /shoes/; }  
  
    location /cloth/ {  
        proxy_pass http://cloth_pool/;  
        proxy_set_header Host $host;  
        proxy_set_header X-Real-IP $remote_addr;  
        proxy_set_header X-Forwarded-For $proxy_add_x_forwarded_for;  
    }  
  
    location /shoes/ {  
        proxy_pass http://shoes_pool/;  
        proxy_set_header Host $host;  
        proxy_set_header X-Real-IP $remote_addr;  
        proxy_set_header X-Forwarded-For $proxy_add_x_forwarded_for;  
    }  
}
```

```
sudo rm -f /etc/nginx/sites-enabled/default
```

```
sudo nano /etc/nginx/conf.d/shop.conf
```

backends

```
server { listen 127.0.0.1:8081; root /var/www/cloth1; add_header  
X-Served-By cloth1; }
```

```
server { listen 127.0.0.1:8082; root /var/www/cloth2; add_header  
X-Served-By cloth2; }
```

```
server { listen 127.0.0.1:8083; root /var/www/shoes1; add_header  
X-Served-By shoes1; }
```

```
server { listen 127.0.0.1:8084; root /var/www/shoes2; add_header  
X-Served-By shoes2; }
```

loadbalancer

```
upstream cloth_pool {  
    server 127.0.0.1:8081;  
    server 127.0.0.1:8082;  
}
```

```
upstream shoes_pool {  
    server 127.0.0.1:8083;  
    server 127.0.0.1:8084;  
}
```

reverse proxy

```
server {  
    listen 80;  
    add_header Cache-Control "no-store" always;
```

```
location / { root /var/www/front; index index.html; }
```

```
location = /cloth { return 301 /cloth/; }
```

```
location = /shoes { return 301 /shoes/; }
```

```
location /cloth/ {
```

```
    proxy_pass http://cloth_pool/;
```

```
    proxy_set_header Host $host;
```

```
    proxy_set_header X-Real-IP $remote_addr;
```

```
    proxy_set_header X-Forwarded-For
```

```
$proxy_add_x_forwarded_for;
```

```
}
```

```
location /shoes/ {
```

```
    proxy_pass http://shoes_pool/;
```

```
    proxy_set_header Host $host;
```

```
    proxy_set_header X-Real-IP $remote_addr;
```

```
    proxy_set_header X-Forwarded-For
```

```
$proxy_add_x_forwarded_for;
```

```
}
```

```
}
```

Test the load balancer

```
for i in 1 2 3 4; do curl --noproxy "*" -s http://127.0.0.1/cloth/;
done
```

```
for i in 1 2 3 4; do curl --noproxy "*" -s http://127.0.0.1/shoes/;
done
```

```
for i in 1 2 3 4; do curl --noproxy "*" -sI http://127.0.0.1/cloth/ |
grep X-Served-By; done
```

in fire fox

<http://127.0.0.1/> ---my main user attraction file

http://127.0.0.1/cloth/

http://127.0.0.1/shoes/

Check that the servers are running

```
systemctl is-active nginx
```

```
systemctl is-active ssh
```

```
sudo systemctl status nginx --no-pager | head -5
```

```
sudo ss -tlnp | grep -E ':80 |:808[1-4]|:22 '
```

Password-less SSH authenticationls ~/.ssh/id_ed25519

~/.ssh/id_ed25519.pub

```
sudo apt install -y openssh-server
```

```
sudo systemctl enable --now ssh
```

```
ssh-keygen -t ed25519 -C "shuvajit.das@cubastion.com"
```

Push to GitHub

```
cd ~/nginx-load-balancer-shop
```

```
git init -b main
```

```
git config user.name "Shuva-Cubastion"
```

```
git config user.email "shuvajit.das@cubastion.com"
```

```
git add .
```

```
git commit -m "Nginx load balancer shop: reverse proxy, cloth and shoes pools, front page"
```

```
git remote add origin git@github.com:Shuva-Cubastion/nginx-load-balancer-shop.git
```

```
git push -u origin main
```