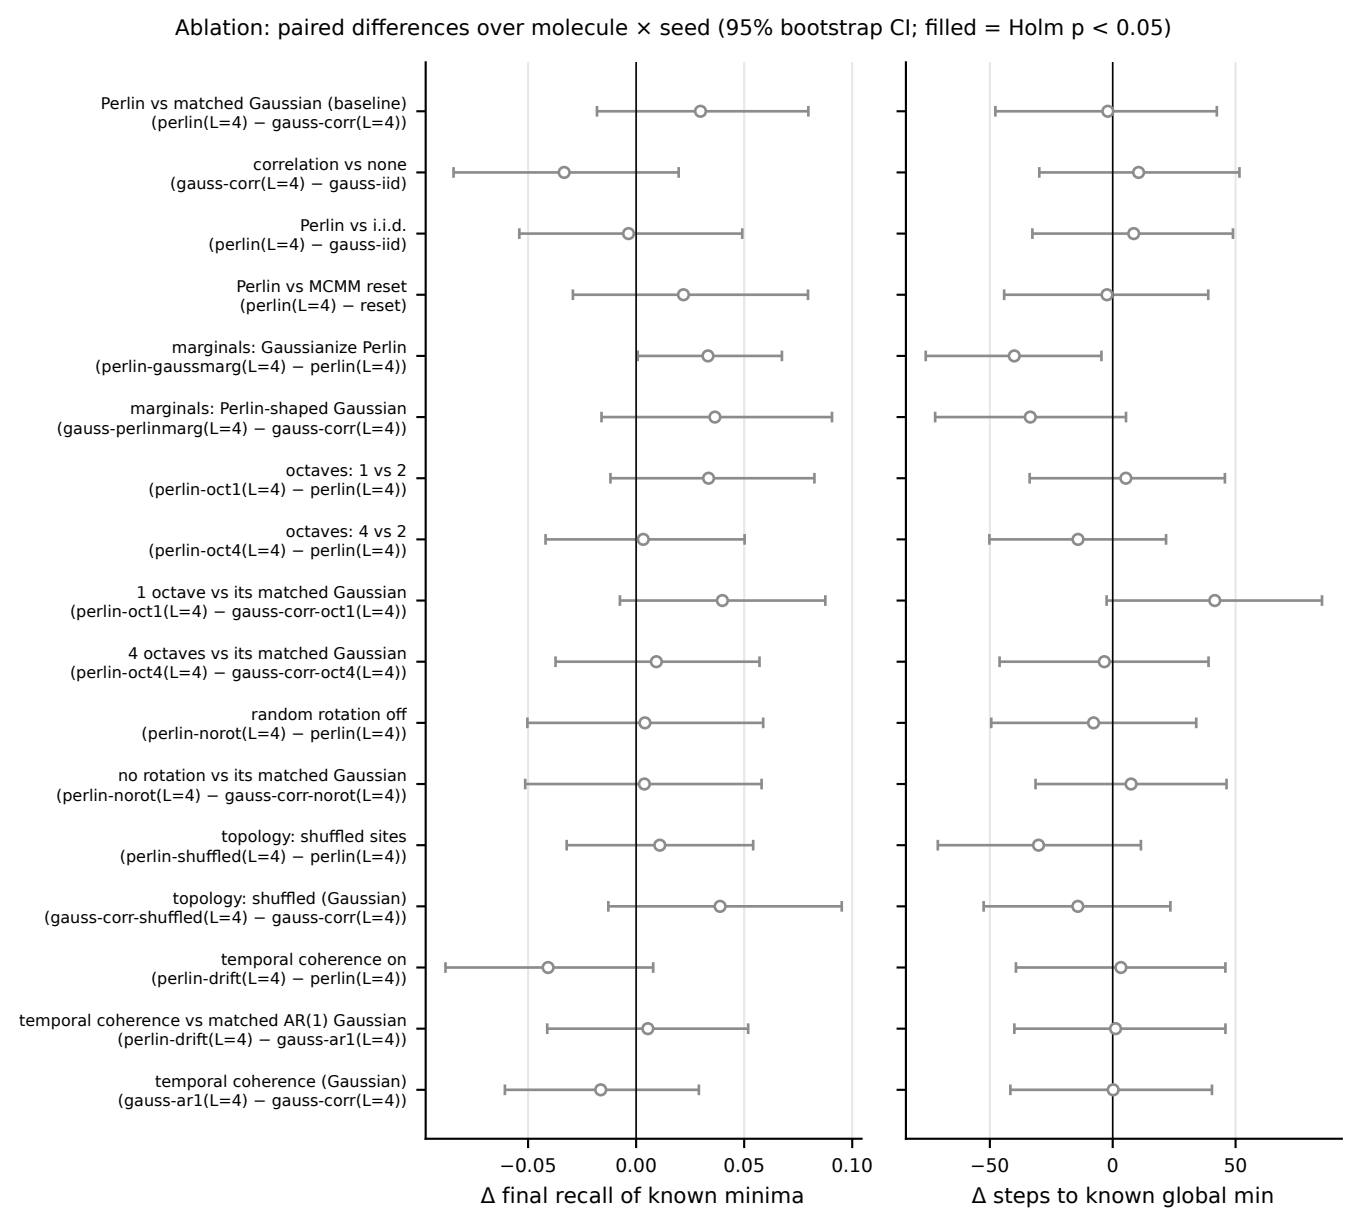
Ablation: paired differences over molecule × seed (95% bootstrap CI; filled = Holm p < 0.05)
Perlin vs matched Gaussian (baseline)
(perlin(L=4) − gauss-corr(L=4))
correlation vs none
(gauss-corr(L=4) − gauss-iid)
Perlin vs i.i.d.
(perlin(L=4) − gauss-iid)
Perlin vs MCMM reset
(perlin(L=4) − reset)
marginals: Gaussianize Perlin
(perlin-gaussmarg(L=4) − perlin(L=4))
marginals: Perlin-shaped Gaussian
(gauss-perlinmarg(L=4) − gauss-corr(L=4))
octaves: 1 vs 2
(perlin-oct1(L=4) − perlin(L=4))
octaves: 4 vs 2
(perlin-oct4(L=4) − perlin(L=4))
1 octave vs its matched Gaussian
(perlin-oct1(L=4) − gauss-corr-oct1(L=4))
4 octaves vs its matched Gaussian
(perlin-oct4(L=4) − gauss-corr-oct4(L=4))
random rotation off
(perlin-norot(L=4) − perlin(L=4))
no rotation vs its matched Gaussian
(perlin-norot(L=4) − gauss-corr-norot(L=4))
topology: shuffled sites
(perlin-shuffled(L=4) − perlin(L=4))
topology: shuffled (Gaussian)
(gauss-corr-shuffled(L=4) − gauss-corr(L=4))
temporal coherence on
(perlin-drift(L=4) − perlin(L=4))
temporal coherence vs matched AR(1) Gaussian
(perlin-drift(L=4) − gauss-ar1(L=4))
temporal coherence (Gaussian)
(gauss-ar1(L=4) − gauss-corr(L=4))
−0.05
0.00
0.05
0.10
Δ final recall of known minima
−50
0
50
Δ steps to known global min