

* Handling Imbalanced Dataset.


DATASET

CLASSIFICATION

→ O/P → categories

↓
Binary classification
Yes/No.

1000 datapoints

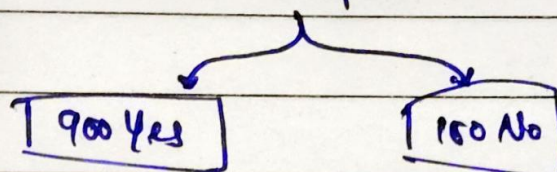

$900:100 = 9:1$

↓
Model ⇒ Biased.

- i. Up sampling
- ii. Down sampling.

Note:

In up sampling, increase the datapoints from minority.

In down sampling decrease the datapoints from majority.