

## BOOTSTRAP PROGRAM

```
<html lang="en">

<head>

  <title>Bootstrap Example</title>

  <meta charset="utf-8">

  <meta name="viewport" content="width=device-width, initial-scale=1">

  <link rel="stylesheet"
href="https://maxcdn.bootstrapcdn.com/bootstrap/3.4.1/css/bootstrap.min.css">

  <script src="https://ajax.googleapis.com/ajax/libs/jquery/3.6.1/jquery.min.js"></script>

  <script src="https://maxcdn.bootstrapcdn.com/bootstrap/3.4.1/js/bootstrap.min.js"></script>

  <style>

    .navbar {

      margin-bottom: 0;

      border-radius: 0;

    }

    footer {

      background-color: #f2f2f2;

      padding: 25px;

    }

    h1{

      background-color:grey;

      color:white;

    }

    body,pre{

      background-color:black;

      color:white;}

  </style>

</html>
```

```

</style>

</head>

<body>

<div class="container-fluid">

<h1 class="text-center">Hackone</h1>

<nav class="navbar navbar-inverse">

  <div class="container-fluid">

    <div class="navbar-header" color="red">

      <button type="button" class="navbar-toggle" data-toggle="collapse" data-target="#myNavbar">

        <span class="icon-bar">pp</span>

        <span class="icon-bar">ji</span>

        <span class="icon-bar">hi</span>

      </button>

    </div>

    <div class="collapse navbar-collapse" id="myNavbar">

      <ul class="nav navbar-nav">

        <li class="active"><div class="dropdown">

          <button class="btn btn-dark dropdown-toggle" type="button" data-toggle="dropdown"
color="red">Hackone

          <span class="caret"></span></button>

          <ul class="dropdown-menu">

            <li><a href="#">white hat</a></li>

            <li><a href="#">black hat</a></li>

            <li><a href="#">grey hat </a></li>

          </ul>

        </div></li>

        <li><a href="#">Solutions</li>

        <li><a href="#">company</a></li>

```

<li><a href="#">Resources</a></li>

</ul>

<div class="text-right">

<button type="button" class="btn btn-danger" ><a href="C:/Users/DELL/Desktop/psd  
folder/psd bootstrap forms.html">Login</a></button>

</div>

<br>

<div class="text-right">

<button type="button" class="btn btn-primary">Contact Us</button>

</div>

</div>

</div>

</div>

<div class="row">

<div class="col-sm-3" style="background-color:black;"> </div>

<div class="col-sm-6" style="background-color:black;">

<div class="row">

<div class="col-sm-6" style="background-color:black;"><b><pre >join the community<h2  
>

Join the world's

largest hacking

community

```
<button type="button" class="btn btn-primary"><a href="C:/Users/DELL/Desktop/psd folder/sample bootstrap.html">Join</a></button>
```

```
</h2></pre></b>
```

```
</div>
```

```
    <div class="col-sm-6" style="background-color:black;"></div>
```

```
    </div>
```

```
</div>
```

```
<div class="col-sm-3" style="background-color:black;"> </div>
```

```
</div>
```

```
</nav>
```

```
<br>
```

```
<br>
```

```
<div class="container">
```

```
<p><center>Hacktivity only showcases activity for public programs. Hacker activity populates on the  
Hacktivity feed when disclosed and undisclosed reports are marked as: 1. Closed 2. Disclosed 3.  
Bounty awarded 4. Swag awarded You and other hackers can also publish your findings from  
external sources outside of HackerOne.</center></p>
```

```
<br><br><p>At HackThisSite, we have always tried to be a safe, welcoming place for people from  
every walk of life. This year we would like you to join us in celebrating LGBTQ+ Pride Month for the  
month of June. Pride is a reminder that while a lot of progress has been made over the past few  
decades, the fight is far from over and your help is needed.
```

You may wonder why people are flying those rainbow flags every year shouting that they are proud. Why do they feel the need to announce it, and why does there need to be a whole month for it? In the perfect world, this would not be necessary.

On June 28, 1969 at the Stonewall Inn in Manhattan, New York, a riot happened. This riot would be the tipping point, starting the path for equality. This was the start of the Stonewall Riots, a violent stand against the police criminalizing LGBTQ+ identities. Pride is a celebration, yes; but it is also a protest against the struggles people face while living in a homophobic society. It's a celebration of people's identities, in a world that discourages people from doing so. Pride is resistance.

Prior to the Stonewall Riots, being gay or queer was seen as a sickness. Something to be corrected. Sometimes it was even criminalized. This line of thinking unfortunately continued for quite some time, and even has remnants today. In the 1950s, not long before the Stonewall Riots, Robert Galbraith Heath was experimenting on deep brain stimulation in a hope to “cure” homosexuality. This process later became known as Conversion Therapy and has yet to be outlawed in many parts of the world.

At a time when more and more people are finding the courage to come out and be proud of who they truly are, it is disheartening to see that people all over the world are being pushed out against their will and ostracized, and sometimes killed, for being themselves.

This year, there have been over 250 anti-LGBTQ+ bills introduced in state legislatures across the United States, and this trend is increasing across the world, too. Most of the laws target transgender people, specifically young people in sports. Doctors are finding it a real possibility that providing life-affirming care may be criminalized. These proposed laws are cruel, unnecessary, and blatant discrimination. Unfortunately, some have passed, and in some nations not being straight is a criminal offense, even punishable by death. At such a crucial point in the fight for equality, we cannot let up. In the U.S. alone, more than half the states allow the use of the "Gay Panic" defense. This is unacceptable. Just when the LGBTQ+ community was finally beginning to gain small steps forward in civil rights, those may soon be gone.

The time to fight back is now, more than ever. There are hundreds of LGBTQ+ rights organizations around the world that you can join and find out what you can do to make sure LGBTQ+ persons get the equal and equitable rights they justly deserve. In the U.S., GLAAD is one of many such organizations. The American Psychological Association provides a great guide for finding your Senators and Congresspersons and tips for how to communicate with them. Your help is needed, please act now.

Pride is not just for people to stand up and let their presence be known. Pride is a reminder of what people who are not LGBTQ+ can do to be an ally, to be supportive and provide a safe place. Pride is a reminder that the fight is not over.

</p>

</div>

<table class="table table-dark table-responsive">

<thead>

<tr>

```
<th scope="col">s.no</th>

<th scope="col">Center Name</th>

<th scope="col">location</th>

<th scope="col">contact ID</th>

</tr>

</thead>

<tbody>

<tr>

  <th scope="row">1</th>

  <td>Luffy</td>

  <td>Mumbai</td>

  <td>luffy@mail</td>

</tr>

<tr>

  <th scope="row">2</th>

  <td>Zoro</td>

  <td>chennai</td>

  <td>Zoro@mail</td>

</tr>

<tr>

  <th scope="row">3</th>

  <td>Sanji</td>

  <td>bombay</td>

  <td>sanji@mail</td>

</tr>

</tbody>


</table>
```



</div>

</body>


</html>

## OUTPUT

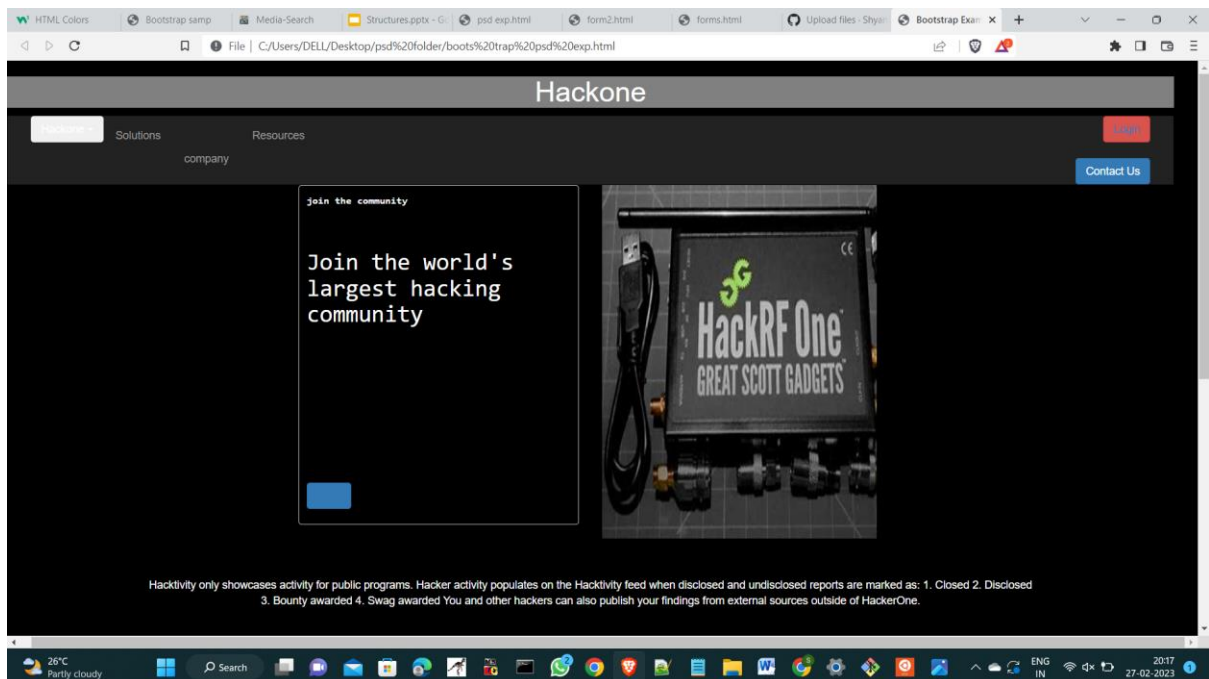

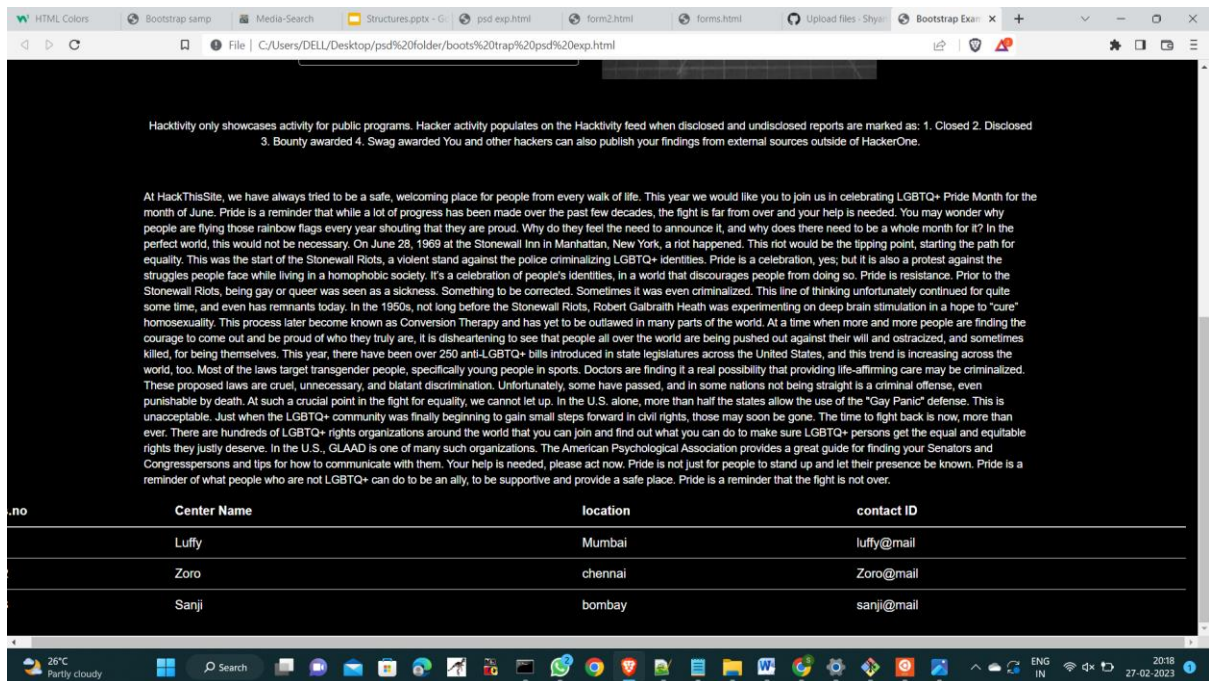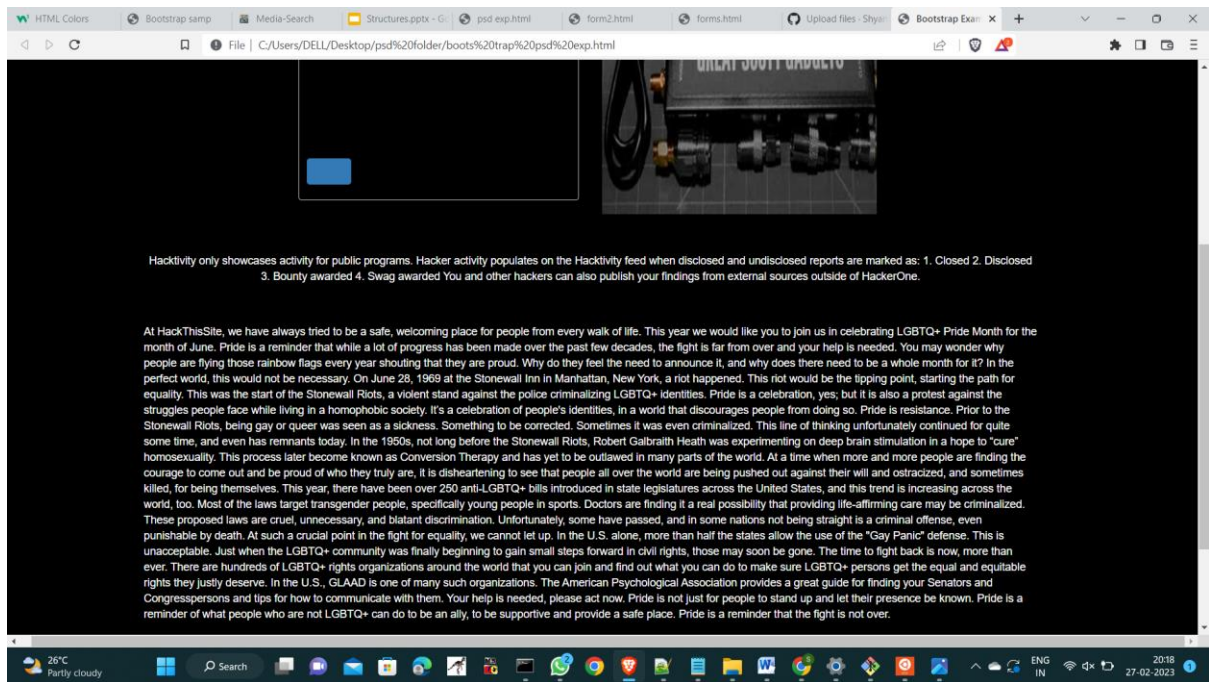



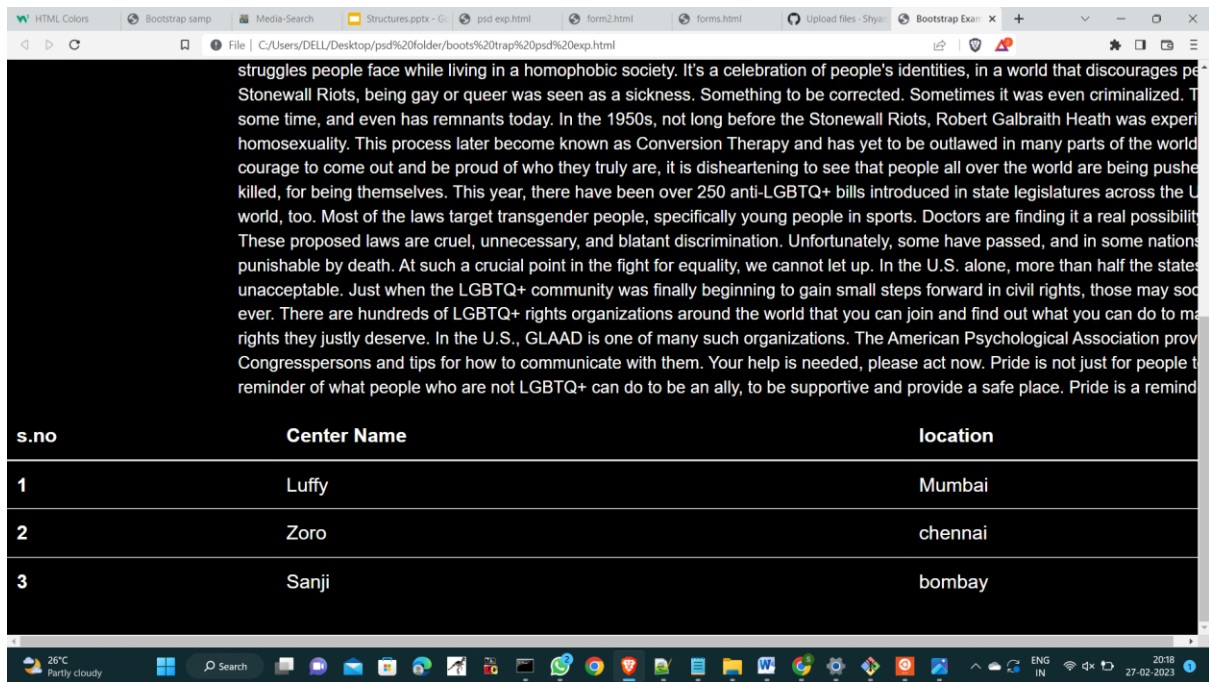

## BOOTSTRAP FORMS

```
<html>
```

```
<head>
```

```
<meta name="viewport" content="width=device-width, initial-scale=1">
```

```
<link rel="stylesheet"
href="https://maxcdn.bootstrapcdn.com/bootstrap/3.4.1/css/bootstrap.min.css">
```

```
<script src="https://ajax.googleapis.com/ajax/libs/jquery/3.6.1/jquery.min.js"></script>
```

```
<script src="https://maxcdn.bootstrapcdn.com/bootstrap/3.4.1/js/bootstrap.min.js"></script>
```

```
<style>
```

```
body {font-family: Arial, Helvetica, sans-serif; background-color:black;color:white;}
```

```
form {border: 3px solid #f1f1f1;}
```

```
input[type=text], input[type=password] {  
    width: 100%;  
    padding: 12px 20px;  
    margin: 8px 0;  
    display: inline-block;  
    border: 1px solid #ccc;  
    box-sizing: border-box;  
}
```

```
button {  
    background-color: #04AA6D;  
    color: white;  
    padding: 14px 20px;  
    margin: 8px 0;  
    border: none;  
    cursor: pointer;  
    width: 100%;  
}
```

```
button:hover {  
    opacity: 0.8;  
}
```

```
.cancelbtn {  
    width: auto;  
    padding: 10px 18px;  
    background-color: #f44336;
```

```
}
```

```
.imgcontainer {  
  text-align: center;  
  margin: 24px 0 12px 0;  
}
```

```
img.avatar {  
  width: 40%;  
  border-radius: 50%;  
}
```

```
.container {  
  padding: 16px;  
}
```

```
span.psw {  
  float: right;  
  padding-top: 16px;  
}
```

```
@media screen and (max-width: 300px) {  
  span.psw {  
    display: block;  
    float: none;  
  }  
}
```

```
.cancelbtn {  
  width: 100%;
```

```
}  
}  
</style>  
</head>  
<body>  
  
<h2>Login Form</h2>  
  
<form action="/action_page.php" method="post">  
  <div class="imgcontainer">  
      
  </div>  
  
  <div class="container ">  
    <label for="uname"><b>Username</b></label>  
    <input type="text" placeholder="Enter Username" name="uname" required>  
  
    <label for="psw"><b>Password</b></label>  
    <input type="password" placeholder="Enter Password" name="psw" required>  
  
    <button type="submit">Login</button>  
  
    <label>  
      <input type="checkbox" checked="checked" name="remember"> Remember me  
    </label>  
  </div>  
  
  <div class="container" style="background-color:#f1f1f1">
```

```
<button type="button" class="cancelbtn">Cancel</button>
```

```
<span class="psw"><a href="#">Forget password?</a></span>
```


```
</div>
```



```
</form>
```

```
</body>
```

```
</html>
```

## OUTPUT

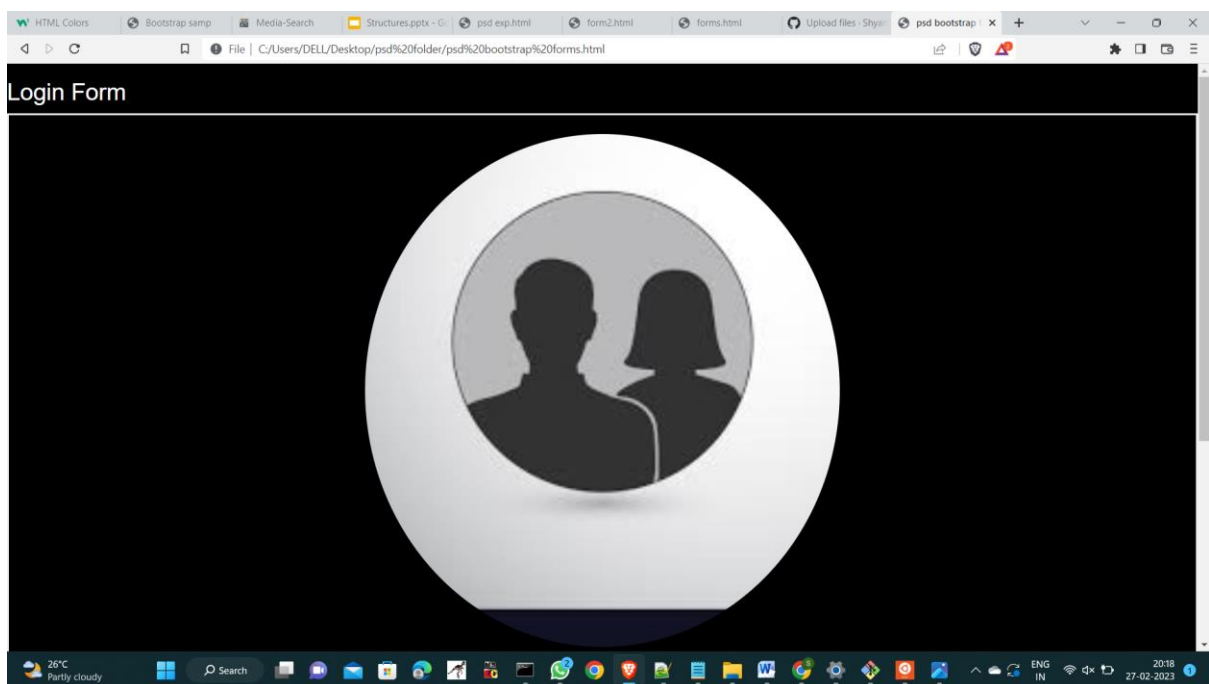

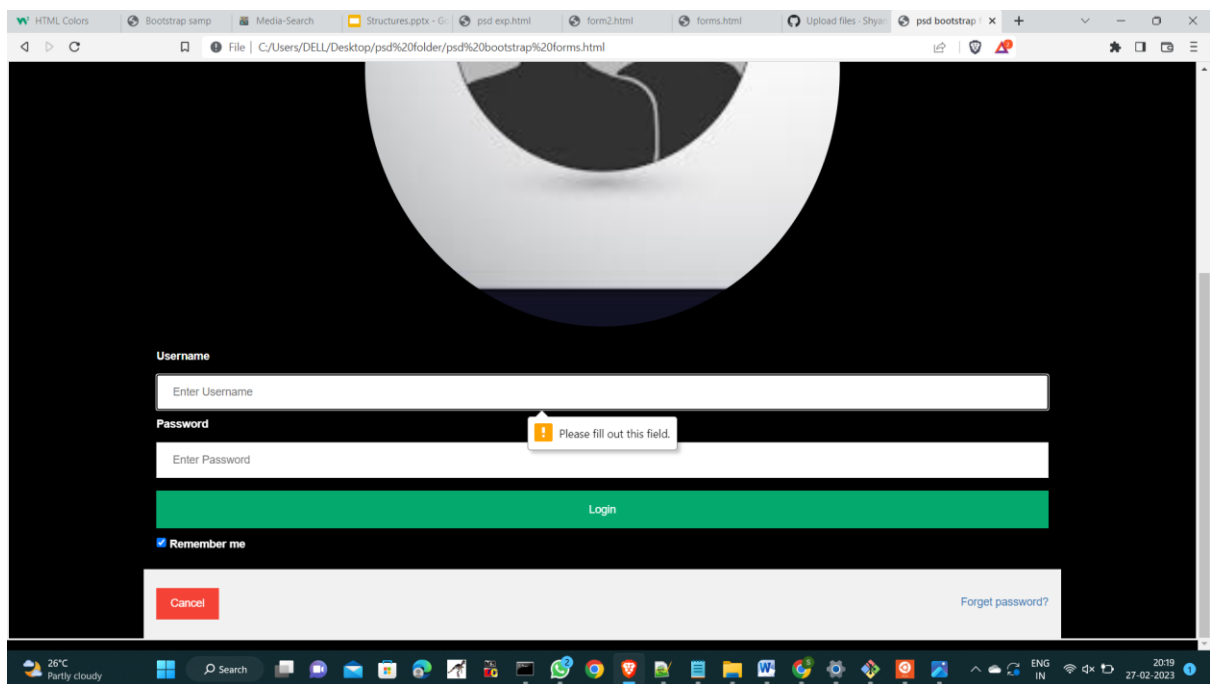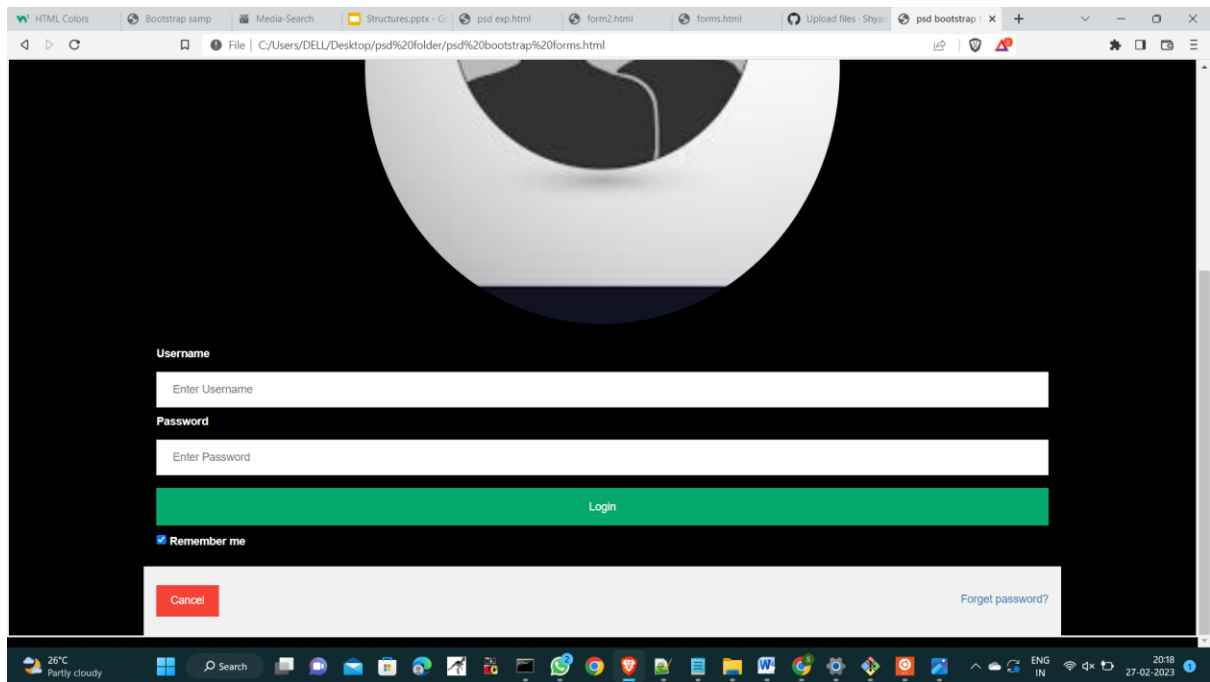

## BOOTSTRAP FORMS

```
<html lang="en">

<head>

  <title>Bootstrap samp</title>

  <meta charset="utf-8">

  <meta name="viewport" content="width=device-width, initial-scale=1">

  <link rel="stylesheet"
href="https://maxcdn.bootstrapcdn.com/bootstrap/3.4.1/css/bootstrap.min.css">

  <script src="https://ajax.googleapis.com/ajax/libs/jquery/3.6.1/jquery.min.js"></script>

  <script src="https://maxcdn.bootstrapcdn.com/bootstrap/3.4.1/js/bootstrap.min.js"></script>

  <style>

    section {font-family: Arial, Helvetica, sans-serif;color:white;}

  </style>

</head>

<body>

<section class="vh-100" style="background-color: black;">

  <div class="container">

    <div class="row align-items-center">

      <div class="col">

        <div class="card text-black" style="border-radius: 25px;">

          <div class="row ">

            <div class="col-md-10 col-lg-6">

              <p class="text-center h1 fw-bold mb-5 mx-1 mx-md-4 mt-4">Sign up</p>
```

```
<form class="mx-1 mx-md-4">
```

```
<div class="d-flex flex-row align-items-center mb-4">
```

```
<i class="fas"></i>
```

```
<div class="form-outline mb-0">
```

```
<input type="text" id="form3Example1c" class="form-control" />
```

```
<label class="form-label" for="form3Example1c">Your Name</label>
```

```
</div>
```

```
</div>
```

```
<div class="d-flex flex-row align-items-center mb-4">
```

```
<i class="fas"></i>
```

```
<div class="form-outline flex-fill mb-0">
```

```
<input type="email" id="form3Example3c" class="form-control" />
```

```
<label class="form-label" for="form3Example3c">Your Email</label>
```

```
</div>
```

```
</div>
```

```
<div class="d-flex flex-row align-items-center mb-4">
```

```
<i class="fas"></i>
```

```
<div class="form-outline flex-fill mb-0">
```

```
<input type="password" id="form3Example4c" class="form-control" />
```

```
<label class="form-label" for="form3Example4c">Password</label>
```

```
</div>
```

```
</div>
```

```
<div class="d-flex flex-row align-items-center mb-4">
```



```

        <i class="fas "></i>

        <div class="form-outline flex-fill mb-0">

            <input type="password" id="form3Example4cd" class="form-control" />

            <label class="form-label" for="form3Example4cd">Repeat your password</label>

        </div>

    </div>

    <div class="form-check d-flex mb-5">

        <input class="form-check-input me-2" type="checkbox" value="" id="form2Example3c"
/>

        <label class="form-check-label" for="form2Example3">

            I agree all statements in <a href="#">Terms of service</a>

        </label>

    </div>

    <div class="d-flex mx-4 mb-3 mb-lg-4">

        <button type="button" class="btn btn-primary btn-lg">Register</button>

    </div>

</form>

</div>


<div class="col-md-10 col-lg-6 align-items-center ">

```

[illegible]

## The screenshot shows a web browser window with multiple tabs. The active tab is titled 'Bootstrap samp' and the address bar shows the file path 'C:\Users\DELL\Desktop\psd%20folder\sample%20bootstrap.html'. The main content area is split into two panels. The left panel has a black background and features a 'Sign up' form with white input fields for 'Your Name', 'Your Email', and 'Password', followed by a 'Repeat your password' field. Below the fields is a checkbox labeled 'I agree all statements in Terms of service' and a blue 'Register' button. The right panel has a white background and contains a cartoon illustration of a man with blue skin, yellow hair, and glasses, wearing a green shirt and holding a blue bag. A pink speech bubble with two horizontal lines is next to him. The Windows taskbar at the bottom shows the date as 27-02-2023 and the time as 10:18.

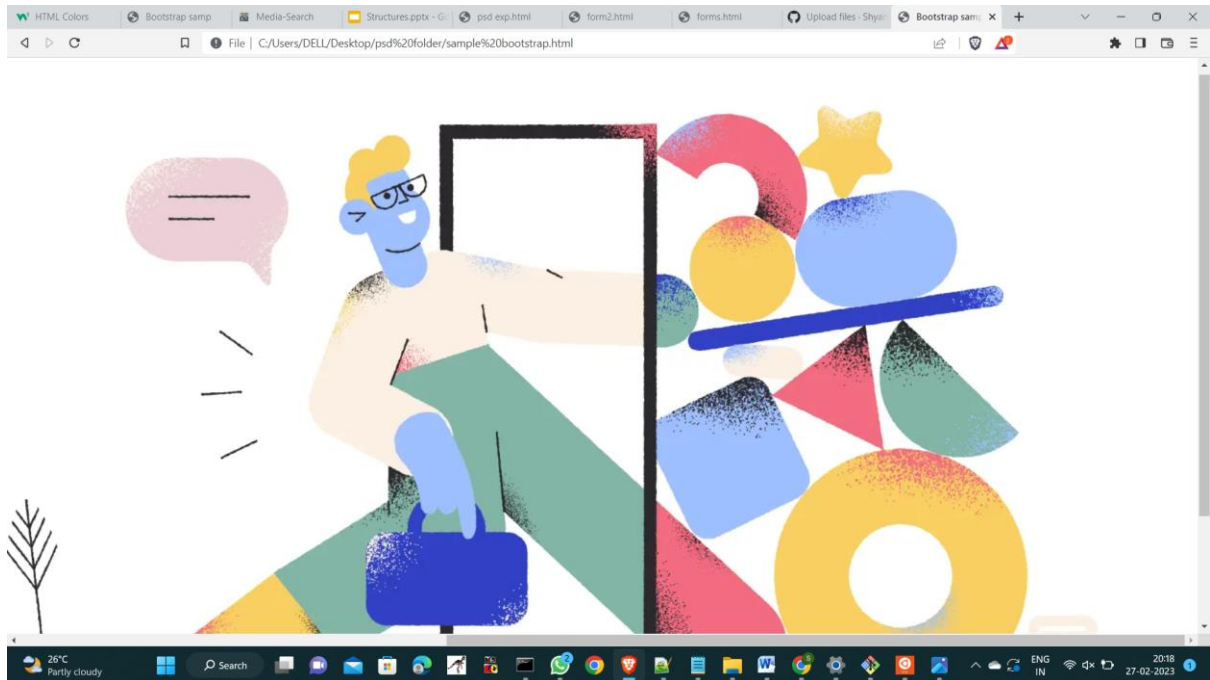

Sign up

Your Name

Your Email

Password

Repeat your password

☒ I agree all statements in [Terms of service](#)