

718 Michael R. Douglas and Cristoforo Fraser-Taliente

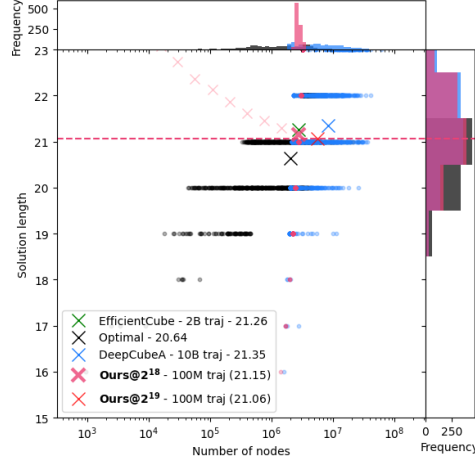


Figure 1: Average solution length against number of nodes expanded, for 1000 initial states randomly scrambled between 1000-10000 times. We report results with a ball radius $R = 5$, and no T -calibration. For beam width 2^7 or greater, we are able to solve all states.

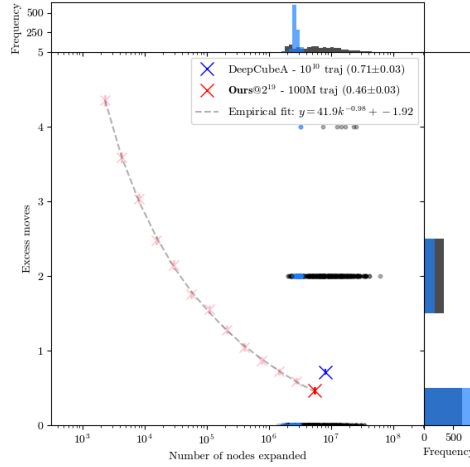


Figure 2: Average solution length vs beam width. We find a best fit given by $E = 41.9 \log_2(B)^{-1} - 1.92$, where B is the beam width (trivially related to the number of nodes). Excesses are always even due to parity. We report results with a ball radius $R = 5$, and no T -calibration.