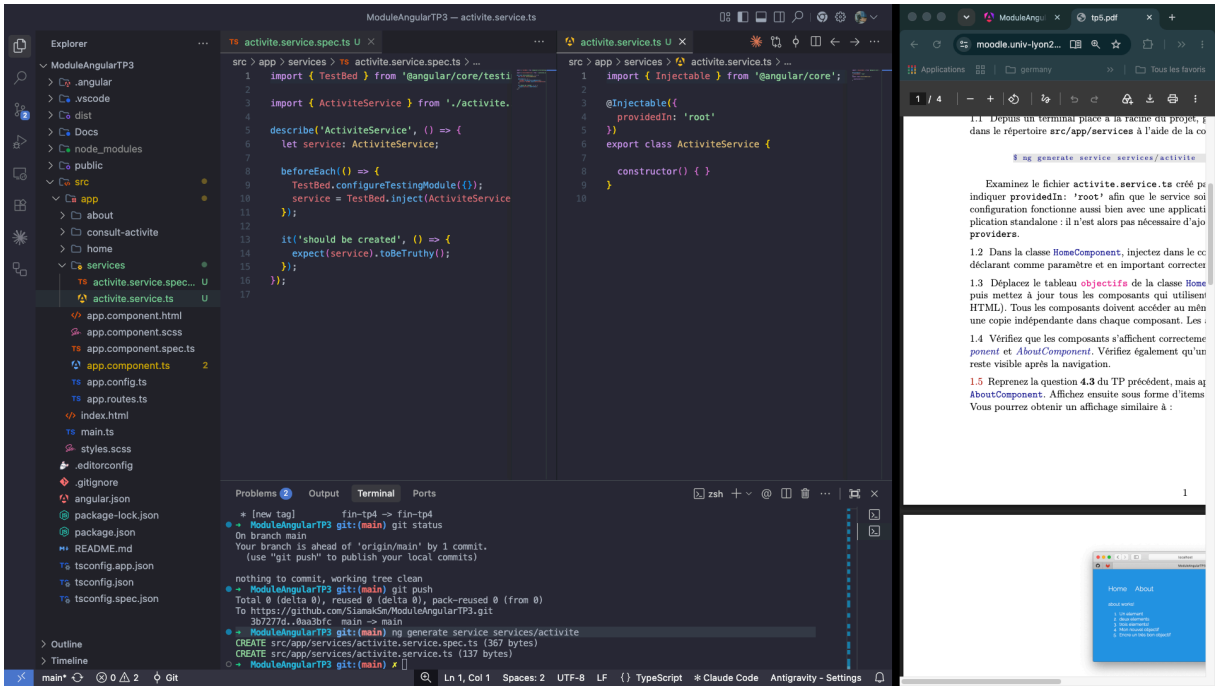
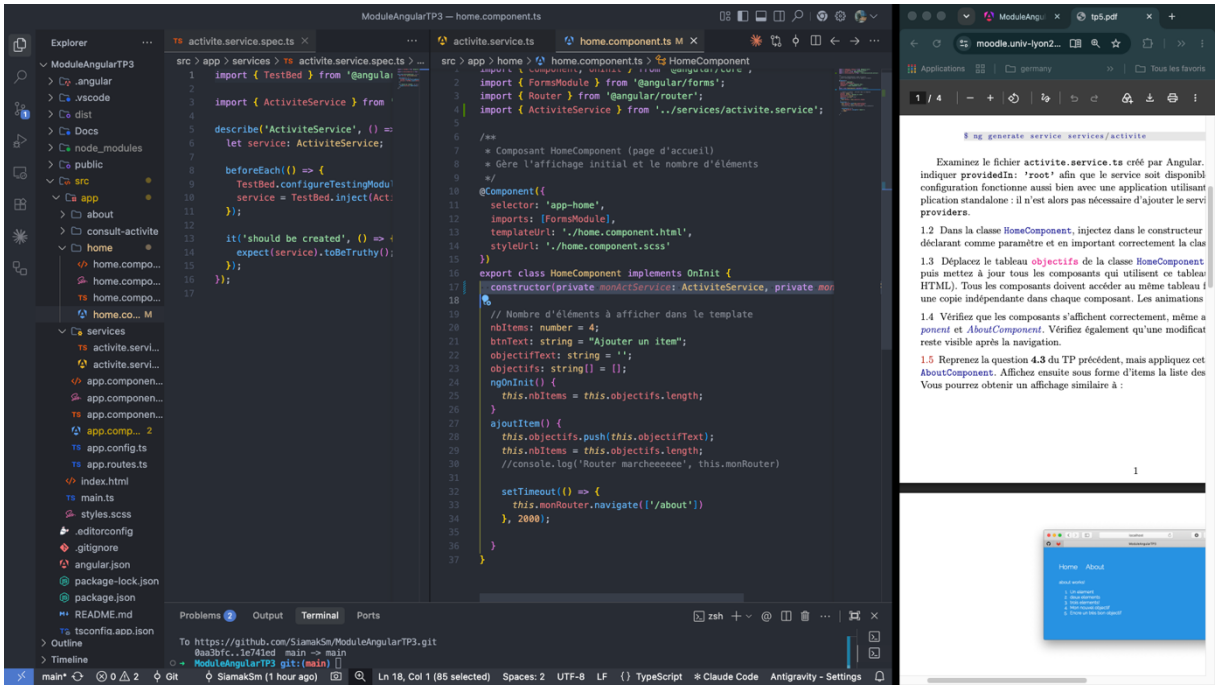
Champs d’application TP5 MOLOUDI Mohammad DT

Partie I:

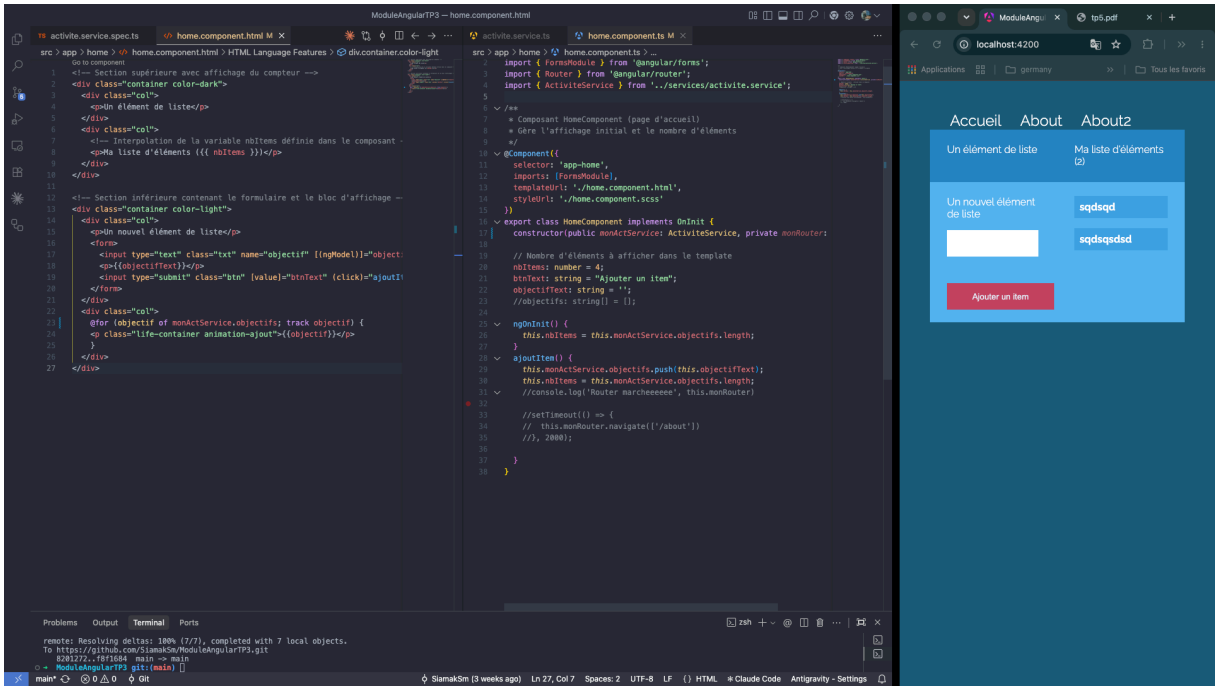
1.1



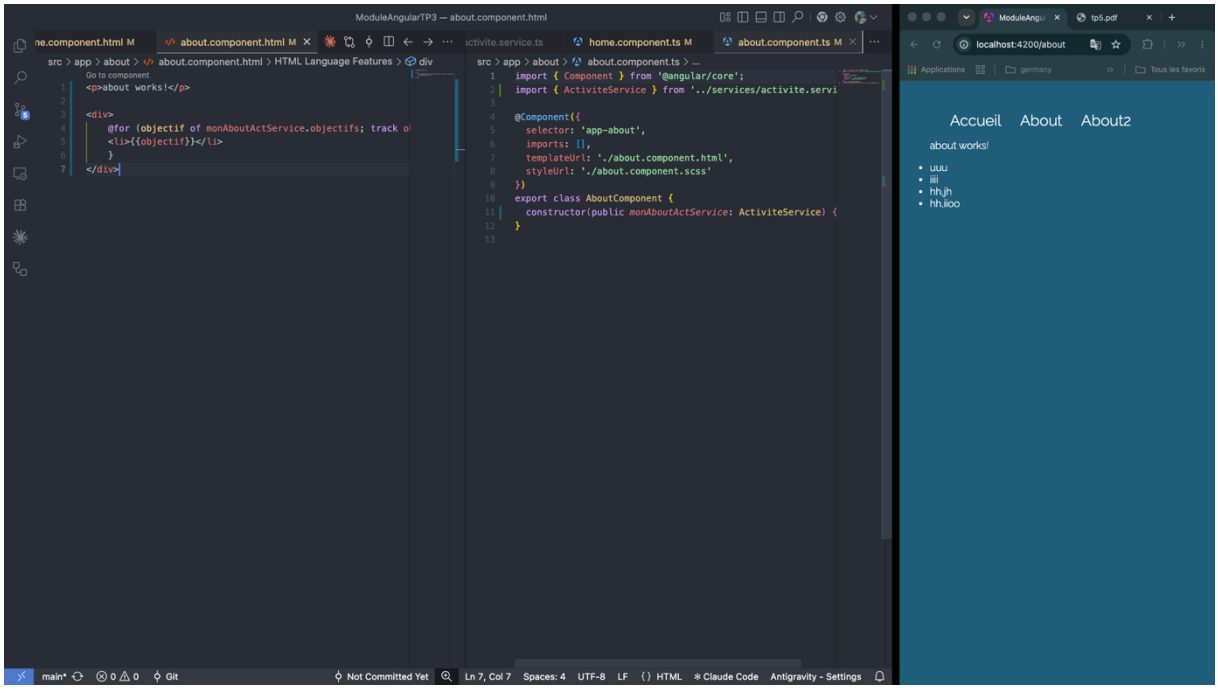
1.2

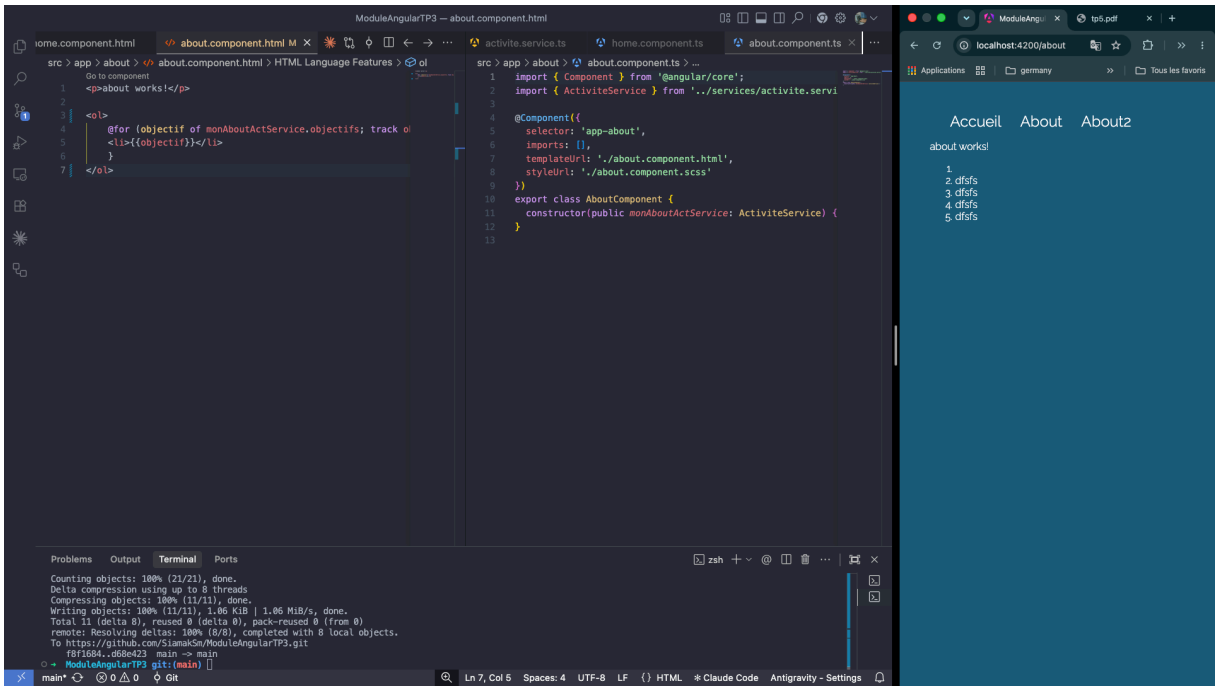


1.3 et 1.4


Accueil
About
About2
Un élément de liste
Ma liste d'éléments (2)
Un nouvel élément de liste
sqdsqd
sqdsqsdsd
Ajouter un item

1.5

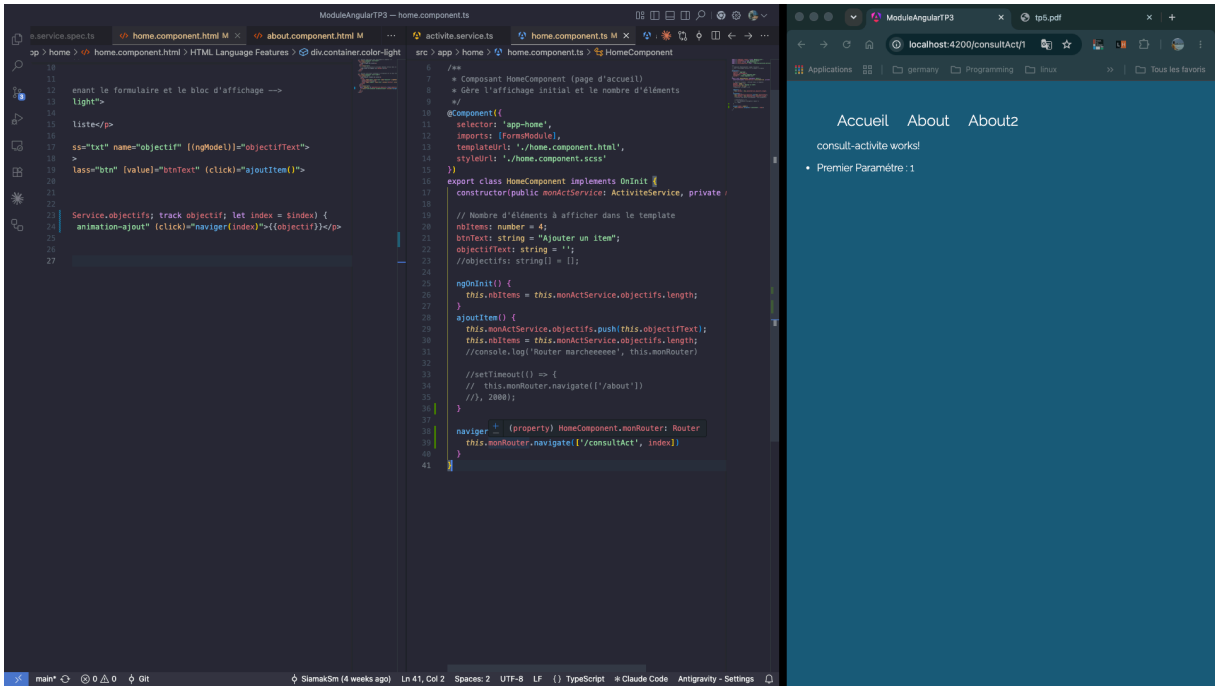

Accueil
About
About2
about works!
uuu
iii
hhjh
hhiioo


ModuleAngularTP3 — about.component.html
about.component.html
about.component.ts
about works!

@for (objectif of monAboutActService.objectifs; track o
{{objectif}}
}

import { Component } from '@angular/core';
import { ActiviteService } from '../services/activite.servi
@Component({
selector: 'app-about',
imports: [],
templateUrl: './about.component.html',
styleUrls: './about.component.scss'
})
export class AboutComponent {
constructor(public monAboutActService: ActiviteService) {
}
Problems
Output
Terminal
Ports
Counting objects: 100% (21/21), done.
Delta compression using up to 8 threads
Compressing objects: 100% (11/11), done.
Writing objects: 100% (11/11), 1.06 KiB | 1.06 MiB/s, done.
Total 11 (delta 8), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (8/8), completed with 8 local objects.
To https://github.com/SiamakSm/ModuleAngularTP3.git
f0f1604..d68e423 main -> main
ModuleAngularTP3 git:(main)
Ln 7, Col 5
Spaces: 4
UTF-8
LF
HTML
Claude Code
Antigravity - Settings
localhost:4200/about
Accueil
About
About2
about works!
1
2 dfsfs
3 dfsfs
4 dfsfs
5 dfsfs

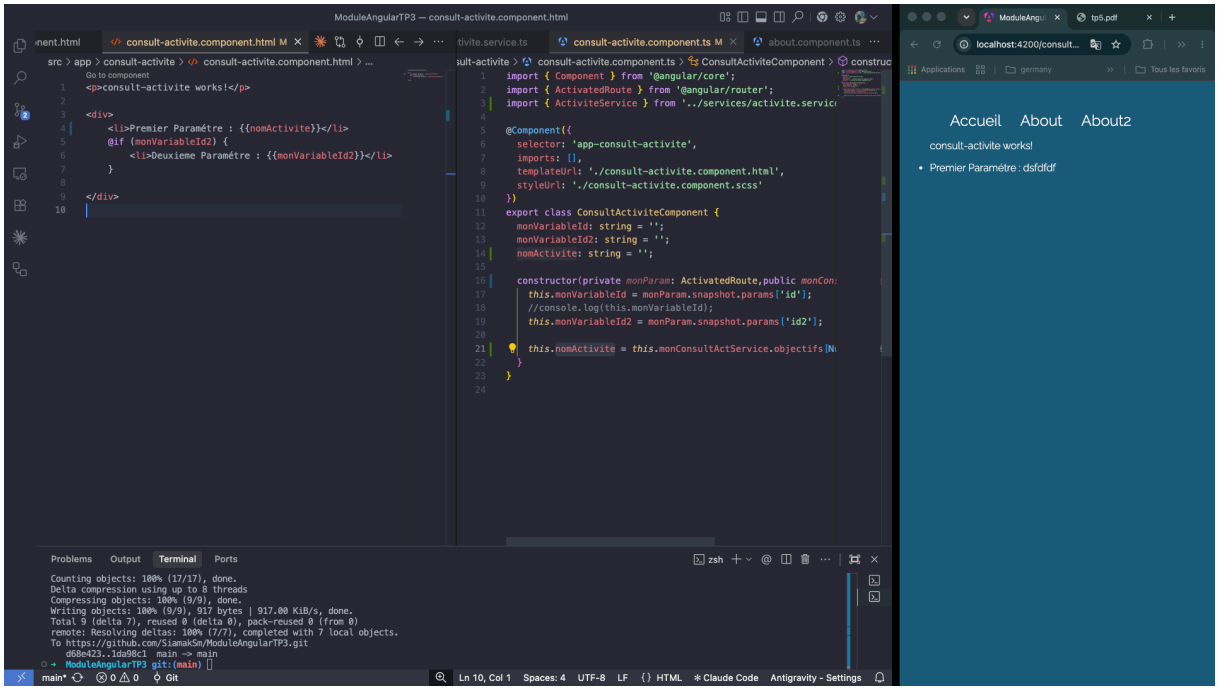
1.6


ModuleAngularTP3 — home.component.ts
home.component.html
about.component.html
activite.service.ts
home.component.ts
about.component.ts
about works!

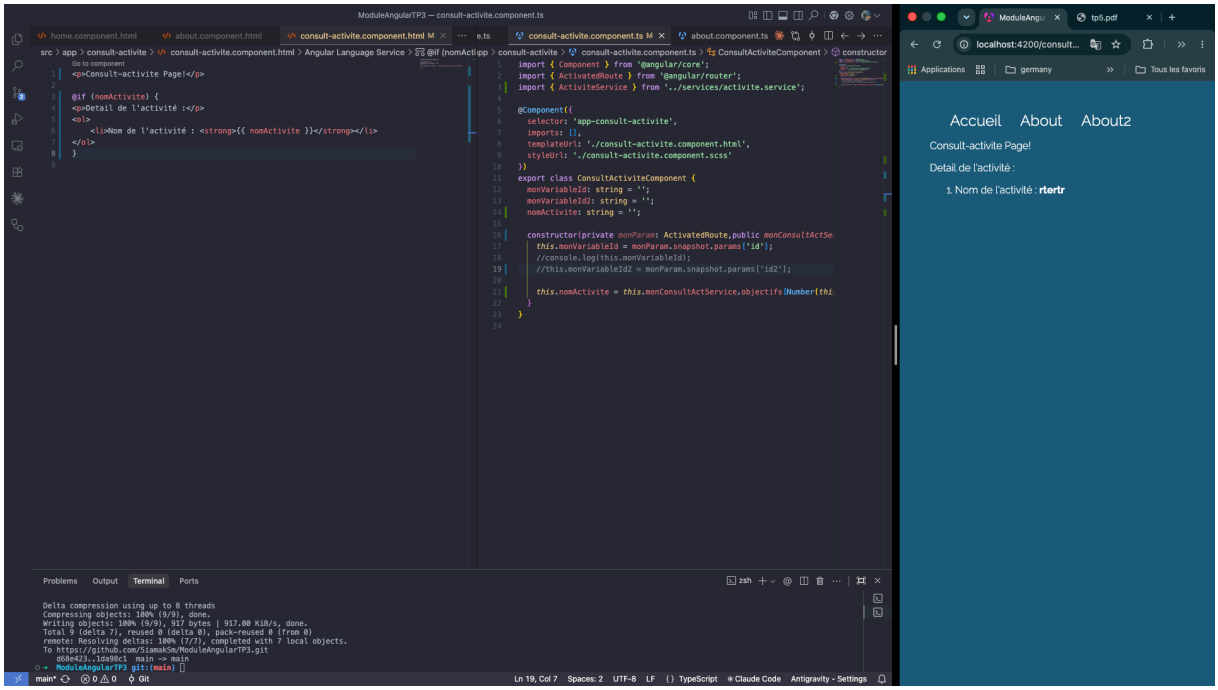
{{objectif}}

import { Component } from '@angular/core';
import { ActiviteService } from '../services/activite.servi
@Component({
selector: 'app-about',
imports: [],
templateUrl: './about.component.html',
styleUrls: './about.component.scss'
})
export class AboutComponent {
constructor(public monAboutActService: ActiviteService) {
}
Problems
Output
Terminal
Ports
Counting objects: 100% (21/21), done.
Delta compression using up to 8 threads
Compressing objects: 100% (11/11), done.
Writing objects: 100% (11/11), 1.06 KiB | 1.06 MiB/s, done.
Total 11 (delta 8), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (8/8), completed with 8 local objects.
To https://github.com/SiamakSm/ModuleAngularTP3.git
f0f1604..d68e423 main -> main
ModuleAngularTP3 git:(main)
Ln 7, Col 5
Spaces: 4
UTF-8
LF
HTML
Claude Code
Antigravity - Settings
localhost:4200/consultAct/1
Accueil
About
About2
consult-activite works!
Premier Paramètre : 1

1.7

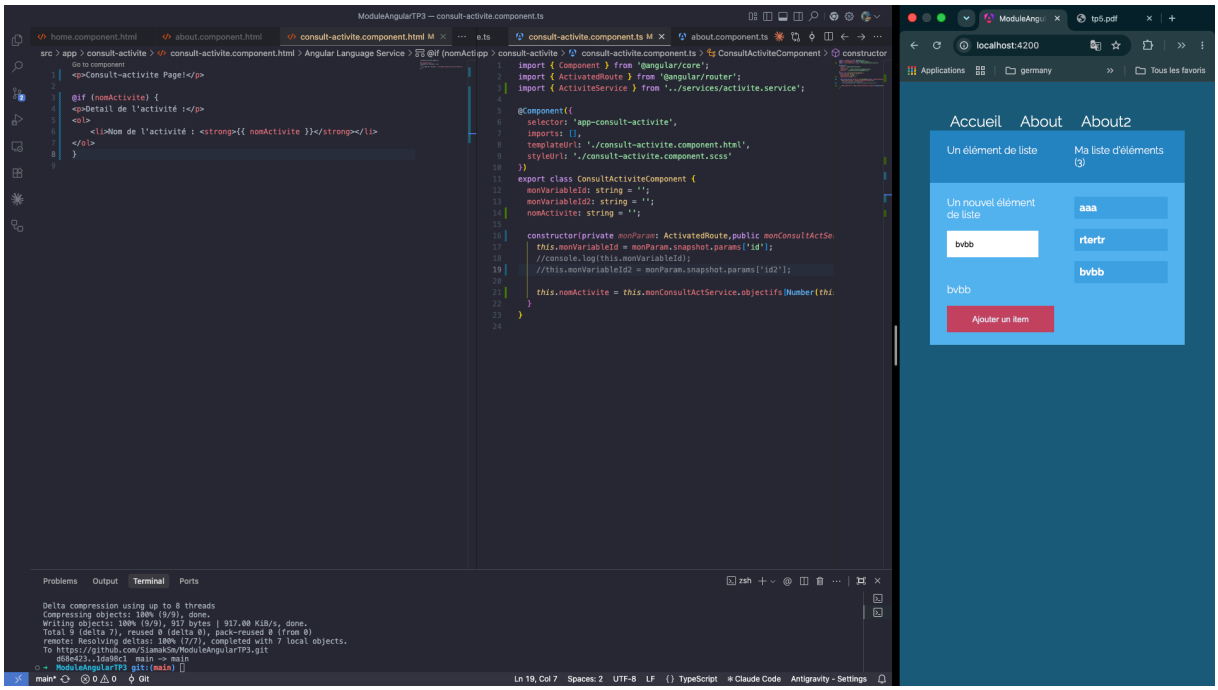

ModuleAngularTP3 — consult-activite.component.html
consult-activite.component.html
consult-activite.component.ts
consult-activite works!
Premier Paramétre : {{nomActivite}}
@if (monVariableId2) {
Deuxieme Paramétre : {{monVariableId2}}
}

import { Component } from '@angular/core';
import { ActivatedRoute } from '@angular/router';
import { ActiviteService } from '../services/activite.service';
@Component({
selector: 'app-consult-activite',
imports: [],
templateUrl: './consult-activite.component.html',
styleUrl: './consult-activite.component.scss'
})
export class ConsultActiviteComponent {
monVariableId: string = '';
monVariableId2: string = '';
nomActivite: string = '';
constructor(private monParam: ActivatedRoute,public monCons
this.monVariableId = monParam.snapshot.params['id'];
//console.log(this.monVariableId);
this.monVariableId2 = monParam.snapshot.params['id2'];
this.nomActivite = this.monConsultActService.objectifs[N
}
}
Problems
Output
Terminal
Ports
Counting objects: 100% (17/17), done.
Delta compression using up to 8 threads
Compressing objects: 100% (9/9), done.
Writing objects: 100% (9/9), 917 bytes | 917.00 KiB/s, done.
Total 9 (delta 7), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (7/7), completed with 7 local objects.
To https://github.com/SiamakSm/ModuleAngularTP3.git
d68e423..1da98c1 main -> main
ModuleAngularTP3 git:(main)
Ln 10, Col 1
Spaces: 4
UTF-8
LF
HTML
Claude Code
Antigravity - Settings
localhost:4200/consult...
Accueil
About
About2
consult-activite works!
Premier Paramétre : dsfdfdf


ModuleAngularTP3 — consult-activite.component.ts
consult-activite.component.html
consult-activite.component.ts
Consult-activite Page!
@if (nomActivite) {
Detail de l'activité :

Nom de l'activité : {{ nomActivite }}

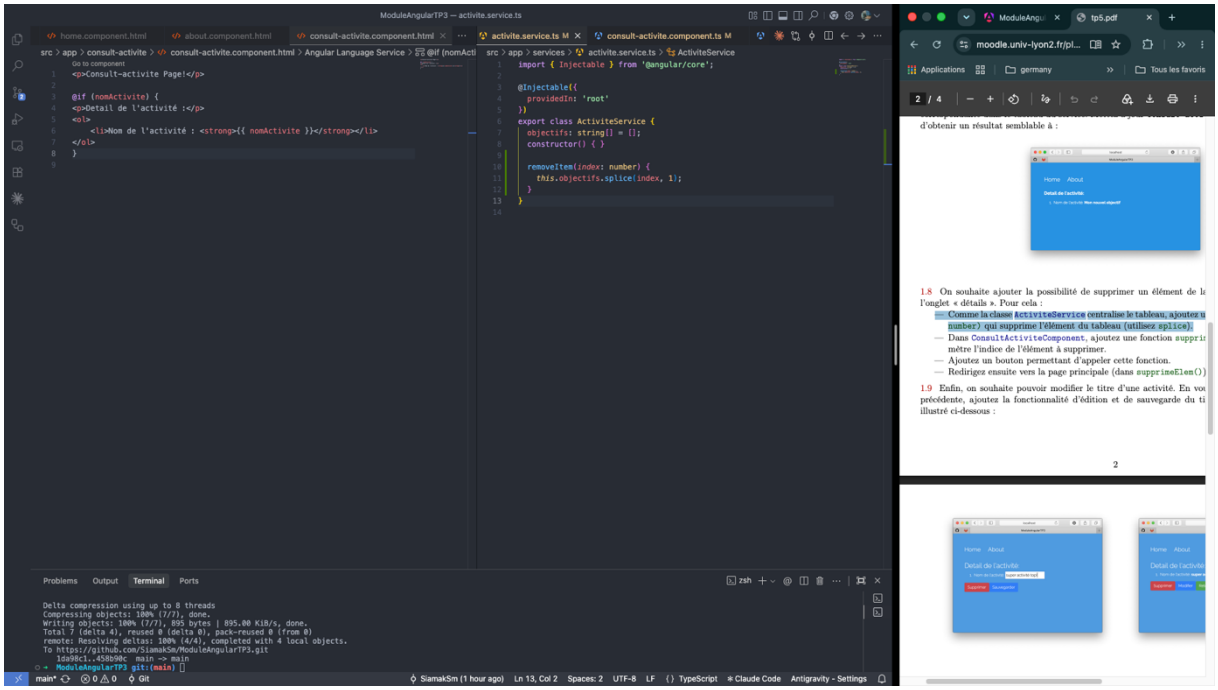
}
import { Component } from '@angular/core';
import { ActivatedRoute } from '@angular/router';
import { ActiviteService } from '../services/activite.service';
@Component({
selector: 'app-consult-activite',
imports: [],
templateUrl: './consult-activite.component.html',
styleUrl: './consult-activite.component.scss'
})
export class ConsultActiviteComponent {
monVariableId: string = '';
monVariableId2: string = '';
nomActivite: string = '';
constructor(private monParam: ActivatedRoute,public monConsultActSe
this.monVariableId = monParam.snapshot.params['id'];
//console.log(this.monVariableId);
//this.monVariableId2 = monParam.snapshot.params['id2'];
this.nomActivite = this.monConsultActService.objectifs[Number(thi
}
}
Problems
Output
Terminal
Ports
Delta compression using up to 8 threads
Compressing objects: 100% (9/9), done.
Writing objects: 100% (9/9), 917 bytes | 917.00 KiB/s, done.
Total 9 (delta 7), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (7/7), completed with 7 local objects.
To https://github.com/SiamakSm/ModuleAngularTP3.git
d68e423..1da98c1 main -> main
ModuleAngularTP3 git:(main)
Ln 19, Col 7
Spaces: 2
UTF-8
LF
TypeScript
Claude Code
Antigravity - Settings
localhost:4200/consult...
Accueil
About
About2
Consult-activite Page!
Detail de l'activité :
1. Nom de l'activité : rtertr


ModuleAngularTP3 — consult-activite.component.ts
home.component.html
about.component.html
consult-activite.component.html M
e.ts
consult-activite.component.ts M
about.component.ts
src > app > consult-activite > consult-activite.component.html > Angular Language Service > @if (nomActi
Go to component
Consult-activite Page!
@if (nomActivite) {
Detail de l'activité :

Nom de l'activité : {{ nomActivite }}

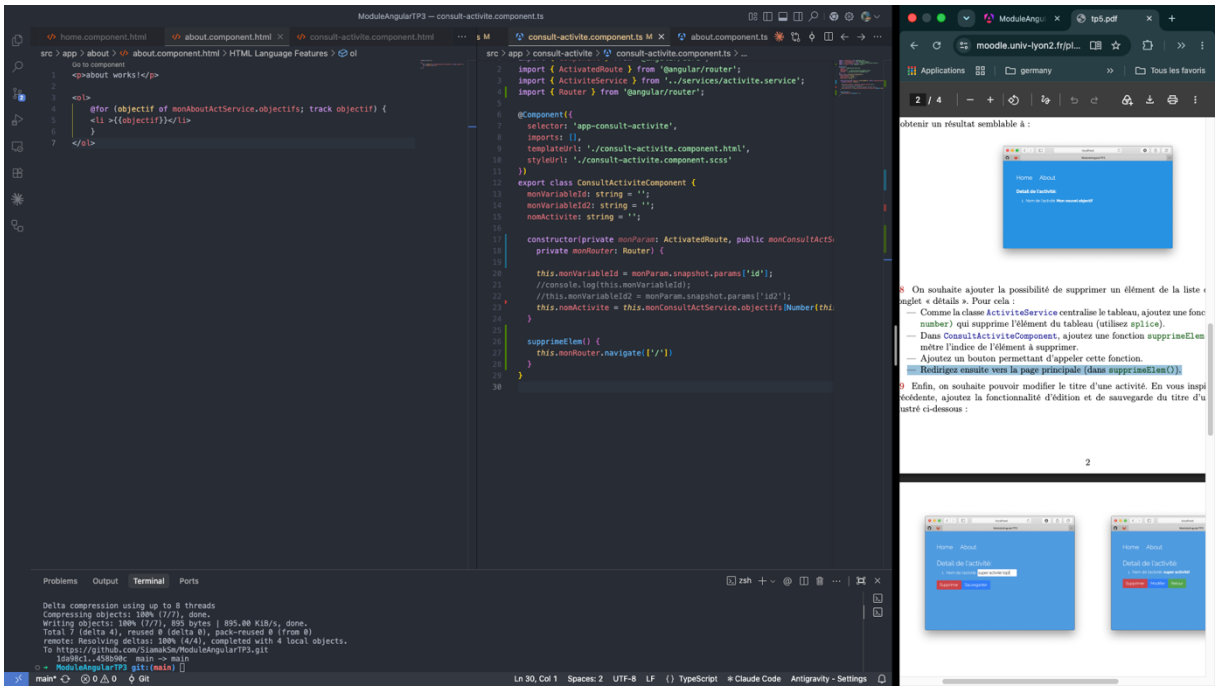
}
src > app > consult-activite > consult-activite.component.ts > ConsultActiviteComponent > constructor
import { Component } from '@angular/core';
import { ActivatedRoute } from '@angular/router';
import { ActiviteService } from '../services/activite.service';
@Component({
selector: 'app-consult-activite',
imports: [],
templateUrl: './consult-activite.component.html',
styleUrl: './consult-activite.component.scss'
})
export class ConsultActiviteComponent {
monVariableId: string = '';
monVariableId2: string = '';
nomActivite: string = '';
constructor(private monParam: ActivatedRoute,public monConsultActSe
this.monVariableId = monParam.snapshot.params['id'];
//console.log(this.monVariableId);
//this.monVariableId2 = monParam.snapshot.params['id2'];
this.nomActivite = this.monConsultActService.objectifs[Number(thi
}
}
Problems
Output
Terminal
Ports
zsh
Delta compression using up to 8 threads
Compressing objects: 100% (9/9), done.
Writing objects: 100% (9/9), 917 bytes | 917.00 KiB/s, done.
Total 9 (delta 7), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (7/7), completed with 7 local objects.
To https://github.com/SiamakSm/ModuleAngularTP3.git
d68e423..1da98c1 main -> main
ModuleAngularTP3 git:(main)
main*
Git
Ln 19, Col 7
Spaces: 2
UTF-8
LF
TypeScript
Claude Code
Antigravity - Settings
ModuleAngu
tp5.pdf
localhost:4200
Applications
germany
Tous les favoris
Accueil
About
About2
Un élément de liste
Ma liste d'éléments (3)
Un nouvel élément de liste
bvbb
bvbb
Ajouter un item
aaa
rtertr
bvbb

1.8


ModuleAngularTP3 — activite.service.ts
home.component.html
about.component.html
consult-activite.component.html
activite.service.ts M
consult-activite.component.ts M
src > app > consult-activite > consult-activite.component.html > Angular Language Service > @if (nomActi
Go to component
Consult-activite Page!
@if (nomActivite) {
Detail de l'activité :

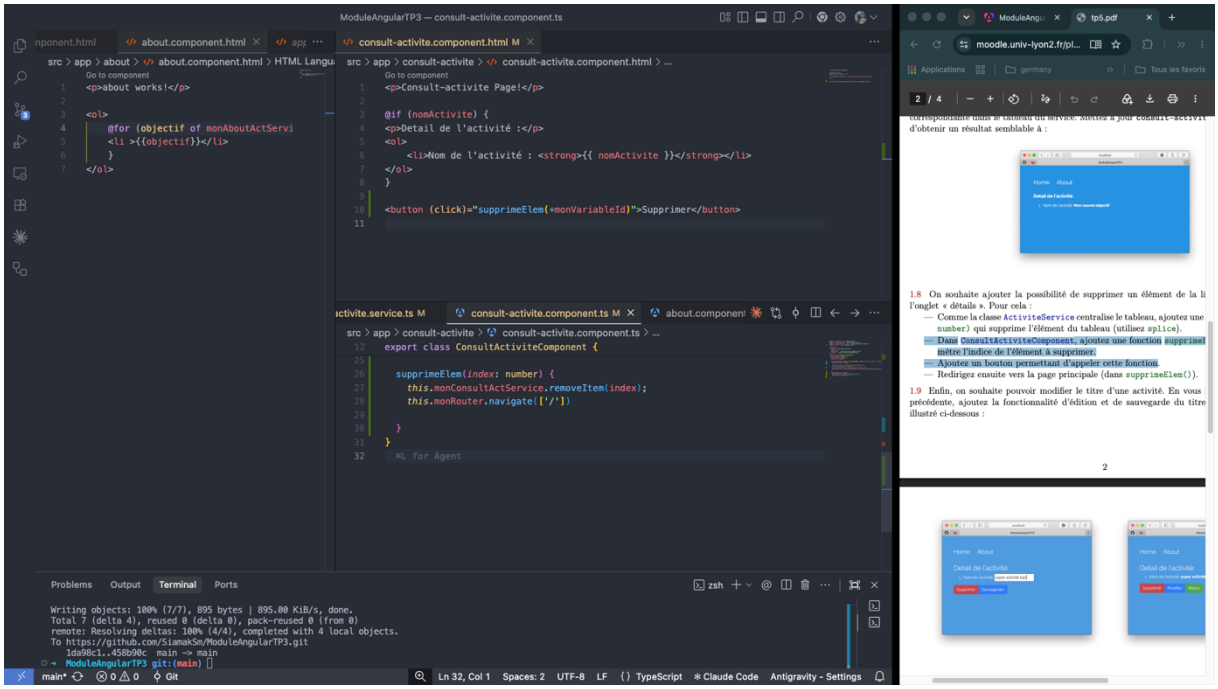
Nom de l'activité : {{ nomActivite }}

}
src > app > services > activite.service.ts > ActiviteService
import { Injectable } from '@angular/core';
@Injectable({
providedIn: 'root'
})
export class ActiviteService {
objectifs: string[] = [];
constructor() { }
removeItem(index: number) {
this.objectifs.splice(index, 1);
}
}
Problems
Output
Terminal
Ports
zsh
Delta compression using up to 8 threads
Compressing objects: 100% (7/7), done.
Writing objects: 100% (7/7), 895 bytes | 895.00 KiB/s, done.
Total 7 (delta 4), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (4/4), completed with 4 local objects.
To https://github.com/SiamakSm/ModuleAngularTP3.git
1da98c1..458b90c main -> main
ModuleAngularTP3 git:(main)
main*
Git
SiamakSm (1 hour ago)
Ln 13, Col 2
Spaces: 2
UTF-8
LF
TypeScript
Claude Code
Antigravity - Settings
ModuleAngu
tp5.pdf
moodle.univ-lyon2.fr/pl...
Applications
germany
Tous les favoris
2 / 4
d'obtenir un résultat semblable à :
1.8 On souhaite ajouter la possibilité de supprimer un élément de la
l'onglet « détails ». Pour cela :
— Comme la classe ActiviteService centralise le tableau, ajoutez u
number) qui supprime l'élément du tableau (utilisez splice).
— Dans ConsultActiviteComponent, ajoutez une fonction suppri
mètre l'indice de l'élément à supprimer.
— Ajoutez un bouton permettant d'appeler cette fonction.
— Redirigez ensuite vers la page principale (dans supprimeElem())
1.9 Enfin, on souhaite pouvoir modifier le titre d'une activité. En vo
précédente, ajoutez la fonctionnalité d'édition et de sauvegarde du ti
illustré ci-dessous :
2


ModuleAngularTP3 — consult-activite.component.ts
home.component.html
about.component.html
consult-activite.component.html
consult-activite.component.ts M
about.component.ts
src > app > about > about.component.html > HTML Language Features > ol
Go to component
about works!

@for (objectif of monAboutActService.objectifs; track objectif) {
{{objectif}}
}

src > app > consult-activite > consult-activite.component.ts > ...
import { ActivatedRoute } from '@angular/router';
import { ActiviteService } from '../services/activite.service';
import { Router } from '@angular/router';
@Component({
selector: 'app-consult-activite',
imports: [],
templateUrl: './consult-activite.component.html',
styleUrl: './consult-activite.component.scss'
})
export class ConsultActiviteComponent {
monVariableId: string = '';
monVariableId2: string = '';
nomActivite: string = '';
constructor(private monParam: ActivatedRoute, public monConsultActS
private monRouter: Router) {
this.monVariableId = monParam.snapshot.params['id'];
//console.log(this.monVariableId);
//this.monVariableId2 = monParam.snapshot.params['id2'];
this.nomActivite = this.monConsultActService.objectifs[Number(thi
}
supprimeElem() {
this.monRouter.navigate(['/'])
}
}
Problems
Output
Terminal
Ports
Delta compression using up to 8 threads
Compressing objects: 100% (7/7), done.
Writing objects: 100% (7/7), 895 bytes | 895.00 KiB/s, done.
Total 7 (delta 4), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (4/4), completed with 4 local objects.
To https://github.com/SiamakSm/ModuleAngularTP3.git
1da98c1..458b90c main -> main
ModuleAngularTP3 git:(main)
main*
Ln 30, Col 1
Spaces: 2
UTF-8
LF
{} TypeScript
Claude Code
Antigravity - Settings
tp5.pdf
moodle.univ-lyon2.fr/pl...
Applications
germany
Tous les favoris
2 / 4
obtenir un résultat semblable à :
Home
About
Detail de l'activité
1. Nom de l'activité Mon nouvel objectif
8 On souhaite ajouter la possibilité de supprimer un élément de la liste
onglet « détails ». Pour cela :
— Comme la classe ActiviteService centralise le tableau, ajoutez une fonc
number) qui supprime l'élément du tableau (utilisez splice).
— Dans ConsultActiviteComponent, ajoutez une fonction supprimeElem
mètre l'indice de l'élément à supprimer.
— Ajoutez un bouton permettant d'appeler cette fonction.
— Redirigez ensuite vers la page principale (dans supprimeElem()).
9 Enfin, on souhaite pouvoir modifier le titre d'une activité. En vous inspi
précédente, ajoutez la fonctionnalité d'édition et de sauvegarde du titre d'u
ustré ci-dessous :
2
Home
About
Detail de l'activité
1. Nom de l'activité super activité test
Supprimer
Modifier
Retour

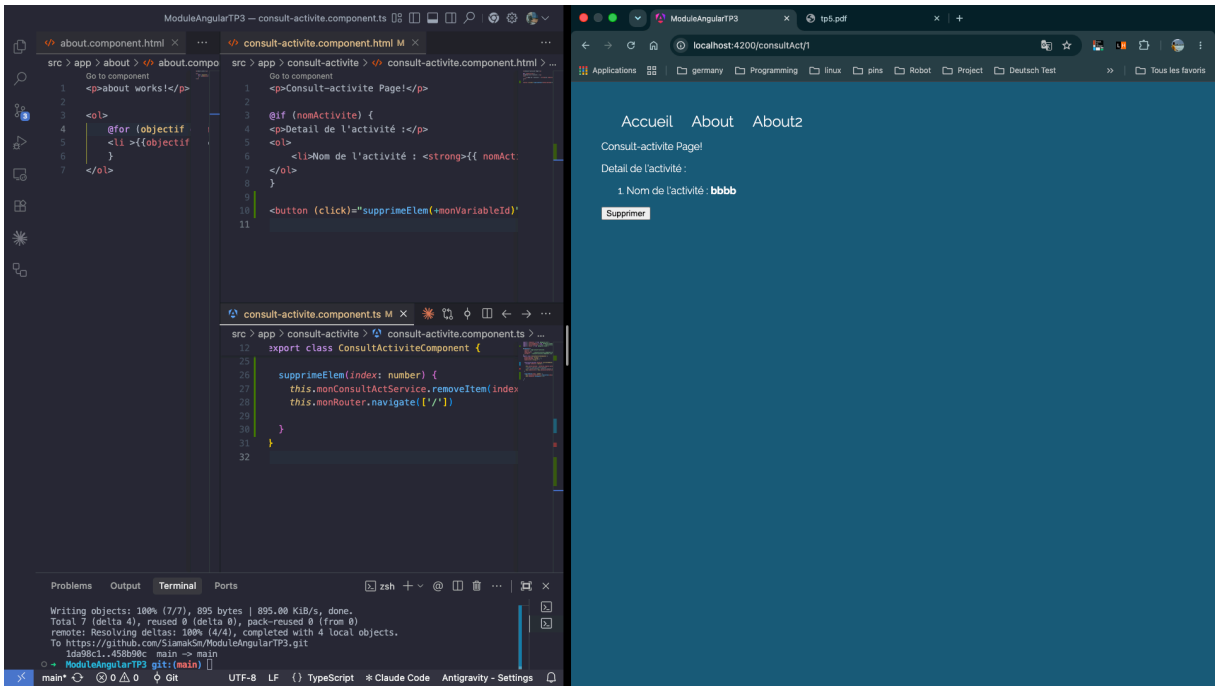

ModuleAngularTP3 — consult-activite.component.ts
about.component.html
consult-activite.component.ts M
src > app > about > about.component.html > HTML Langu
Go to component
about works!

@for (objectif of monAboutActServi
{{objectif}}
}

src > app > consult-activite > consult-activite.component.html > ...
Go to component
Consult-activite Page!
@if (nomActivite) {
Detail de l'activité :

Nom de l'activité : {{ nomActivite }}

}
<button (click)="supprimeElem(+monVariableId)">Supprimer</button>
consult-activite.component.ts M
about.component
src > app > consult-activite > consult-activite.component.ts > ...
export class ConsultActiviteComponent {
supprimeElem(index: number) {
this.monConsultActService.removeItem(index);
this.monRouter.navigate(['/'])
}
}
Problems
Output
Terminal
Ports
Writing objects: 100% (7/7), 895 bytes | 895.00 KiB/s, done.
Total 7 (delta 4), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (4/4), completed with 4 local objects.
To https://github.com/SiamakSm/ModuleAngularTP3.git
1da98c1..458b90c main -> main
ModuleAngularTP3 git:(main)
main*
Ln 32, Col 1
Spaces: 2
UTF-8
LF
{} TypeScript
Claude Code
Antigravity - Settings
tp5.pdf
moodle.univ-lyon2.fr/pl...
2 / 4
d'obtenir un résultat semblable à :
Home
About
Detail de l'activité
1. Nom de l'activité Mon nouvel objectif
1.8 On souhaite ajouter la possibilité de supprimer un élément de la li
l'onglet « détails ». Pour cela :
— Comme la classe ActiviteService centralise le tableau, ajoutez une
number) qui supprime l'élément du tableau (utilisez splice).
— Dans ConsultActiviteComponent, ajoutez une fonction supprimeE
mètre l'indice de l'élément à supprimer.
— Ajoutez un bouton permettant d'appeler cette fonction.
— Redirigez ensuite vers la page principale (dans supprimeElem()).
1.9 Enfin, on souhaite pouvoir modifier le titre d'une activité. En vous
précédente, ajoutez la fonctionnalité d'édition et de sauvegarde du titre
illustré ci-dessous :
2
Home
About
Detail de l'activité
1. Nom de l'activité super activité
Supprimer
Modifier
Retour

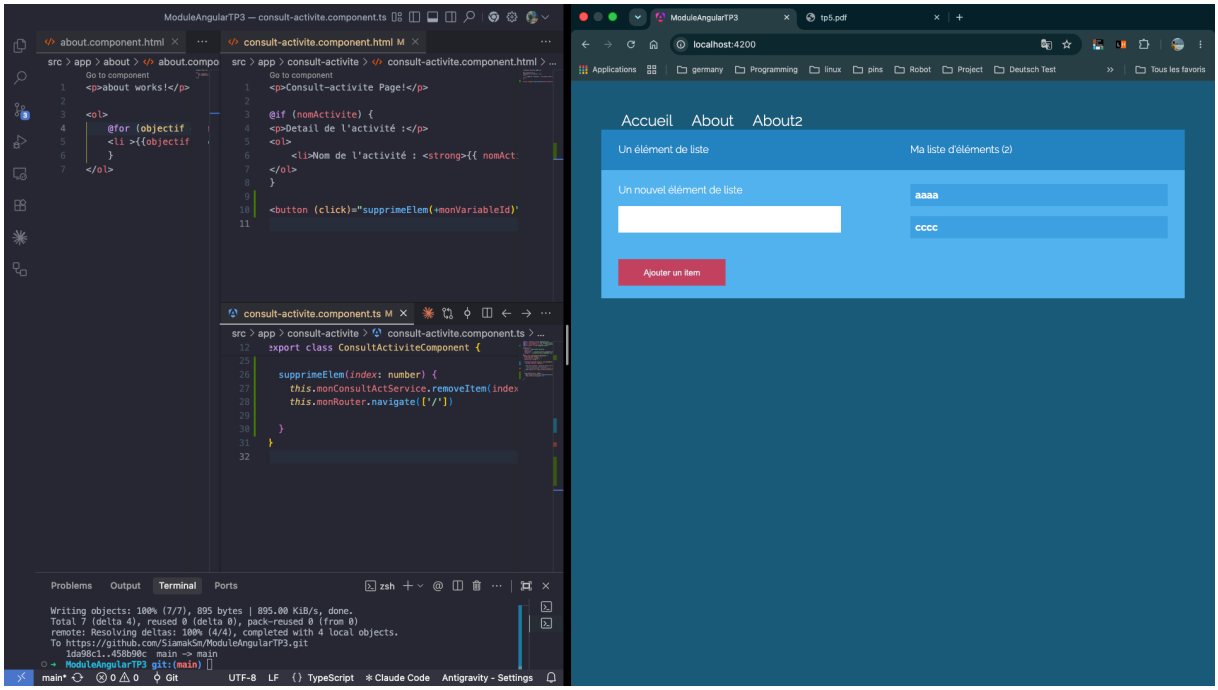

ModuleAngularTP3 — consult-activite.component.ts
about.component.html
consult-activite.component.html M
about works!

@for (objectif
{{objectif
}

Consult-activite Page!
@if (nomActivite) {
Detail de l'activité :

Nom de l'activité : {{ nomAct

}
<button (click)="supprimeElem(+monVariableId)"
consult-activite.component.ts M
export class ConsultActiviteComponent {
supprimeElem(index: number) {
this.monConsultActService.removeItem(index
this.monRouter.navigate(['/'])
}
}
Problems
Output
Terminal
Ports
zsh
Writing objects: 100% (7/7), 895 bytes | 895.00 KiB/s, done.
Total 7 (delta 4), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (4/4), completed with 4 local objects.
To https://github.com/SiamakSm/ModuleAngularTP3.git
1da98c1..458b90c main -> main
ModuleAngularTP3 git:(main)
main*
UTF-8
LF
TypeScript
Claude Code
Antigravity - Settings
ModuleAngularTP3
tp5.pdf
localhost:4200/consultAct/1
Applications
germany
Programming
linux
pins
Robot
Project
Deutsch Test
Tous les favoris
Accueil
About
About2
Consult-activite Page!
Detail de l'activité :
1. Nom de l'activité : bbbb
Supprimer


ModuleAngularTP3 — consult-activite.component.ts
about.component.html
consult-activite.component.html M
about works!

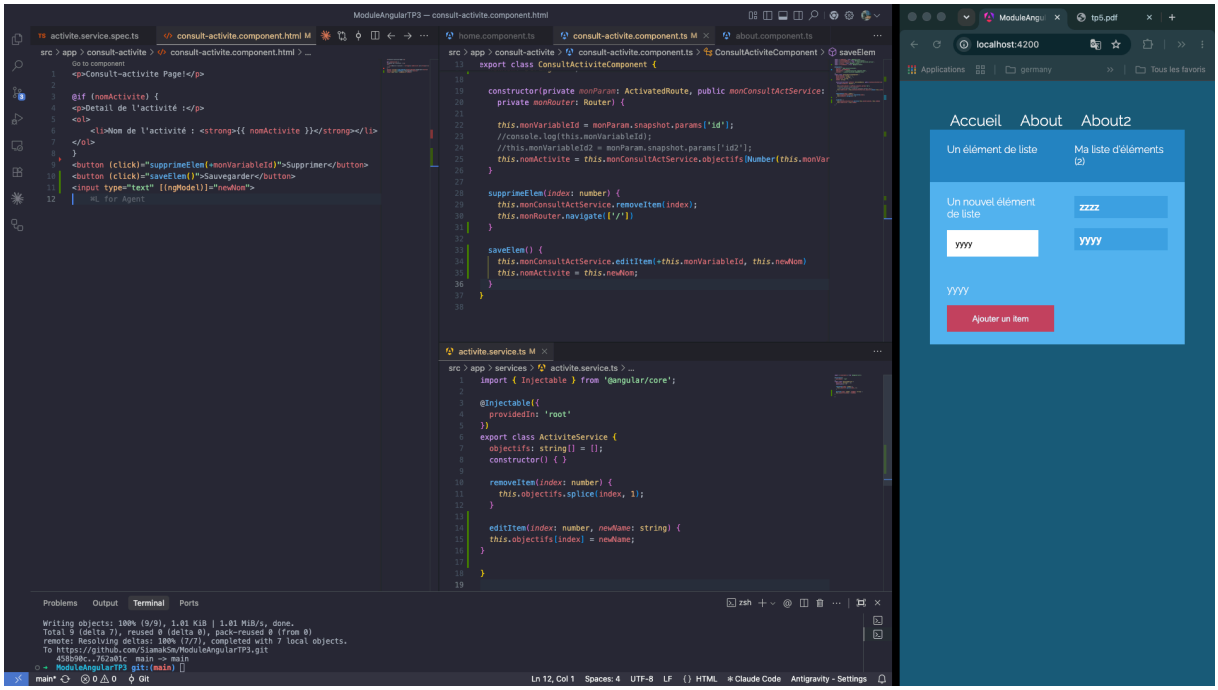
@for (objectif
{{objectif
}

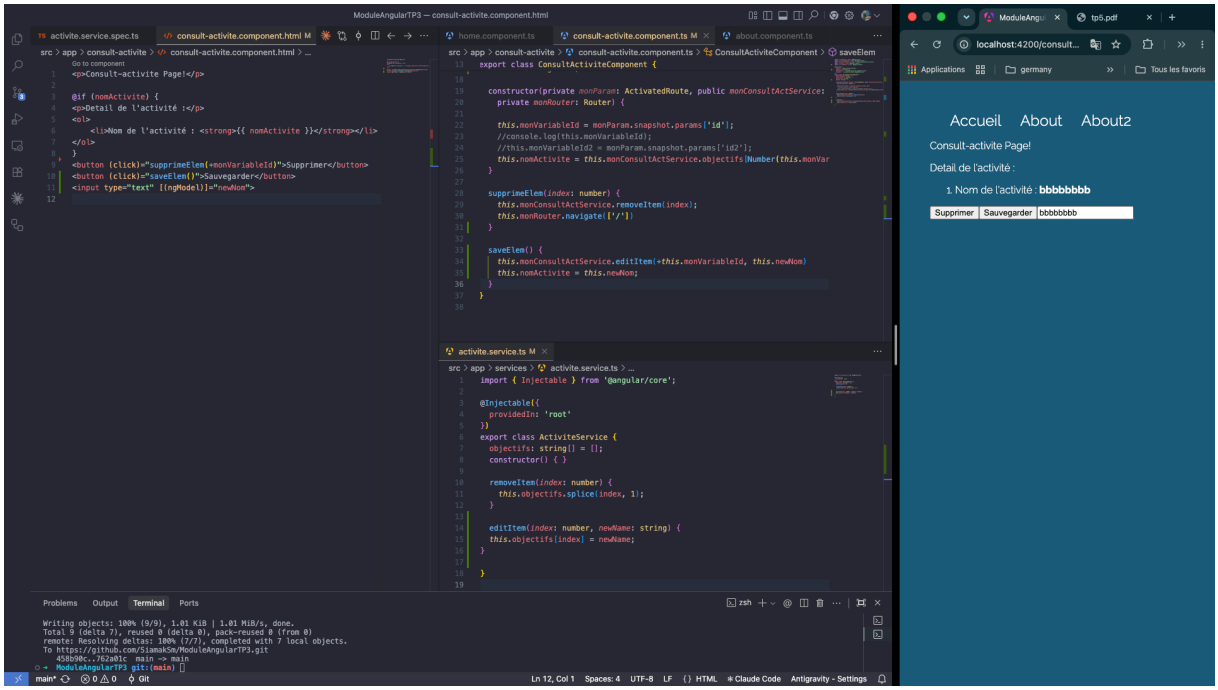
Consult-activite Page!
@if (nomActivite) {
Detail de l'activité :

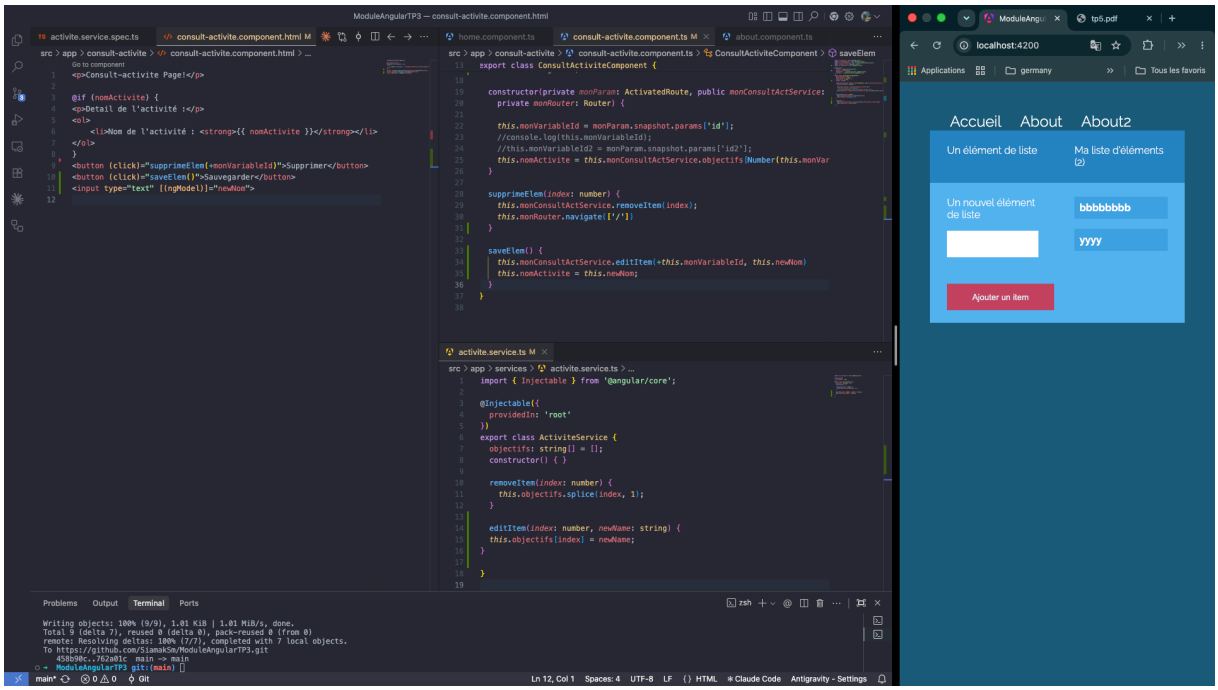
Nom de l'activité : {{ nomAct

}
<button (click)="supprimeElem(+monVariableId)"
consult-activite.component.ts M
export class ConsultActiviteComponent {
supprimeElem(index: number) {
this.monConsultActService.removeItem(index
this.monRouter.navigate(['/'])
}
}
Problems
Output
Terminal
Ports
zsh
Writing objects: 100% (7/7), 895 bytes | 895.00 KiB/s, done.
Total 7 (delta 4), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (4/4), completed with 4 local objects.
To https://github.com/SiamakSm/ModuleAngularTP3.git
1da98c1..458b90c main -> main
ModuleAngularTP3 git:(main)
main*
UTF-8
LF
TypeScript
Claude Code
Antigravity - Settings
ModuleAngularTP3
tp5.pdf
localhost:4200
Applications
germany
Programming
linux
pins
Robot
Project
Deutsch Test
Tous les favoris
Accueil
About
About2
Un élément de liste
Ma liste d'éléments (2)
Un nouvel élément de liste
aaaa
cccc
Ajouter un item

1.9


ModuleAngularTP3 — consult-activite.component.html
activite.service.spec.ts
consult-activite.component.html M
home.component.ts
consult-activite.component.ts M
about.component.ts
activite.service.ts M
Problems
Output
Terminal
Ports
Writing objects: 100% (9/9), 1.01 KiB | 1.01 MiB/s, done.
Total 9 (delta 7), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (7/7), completed with 7 local objects.
To https://github.com/SiamakSm/ModuleAngularTP3.git
ModuleAngularTP3 git:(main)
Ln 12, Col 1
Spaces: 4
UTF-8
LF
HTML
Claude Code
Antigravity - Settings
localhost:4200
Accueil
About
About2
Un élément de liste
Ma liste d'éléments (2)
Un nouvel élément de liste
zzzz
yyyy
yyyy
yyyy
Ajouter un item


ModuleAngularTP3 — consult-activite.component.html
activite.service.spec.ts
consult-activite.component.html M
home.component.ts
consult-activite.component.ts M
about.component.ts
activite.service.ts M
Problems
Output
Terminal
Ports
Writing objects: 100% (9/9), 1.01 KiB | 1.01 MiB/s, done.
Total 9 (delta 7), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (7/7), completed with 7 local objects.
To https://github.com/SiamakSm/ModuleAngularTP3.git
ModuleAngularTP3 git:(main)
Ln 12, Col 1
Spaces: 4
UTF-8
LF
HTML
Claude Code
Antigravity - Settings
localhost:4200/consult...
Accueil
About
About2
Consult-activite Page!
Detail de l'activité :
1. Nom de l'activité : bbbbbbbb
Supprimer
Sauvegarder
bbbbbbb



Partie II:

Fin de TP5.