


Assignment No: 05

Problem Statement: Create a private bucket in AWS. Upload a file and Check by presigned URL whether you can access the file or not.

Step 1: Open Amazon S3 Service

Log in to the AWS Management Console. In the search bar at the top, type S3 and open the Amazon S3 service. This is where all buckets and stored files are managed.

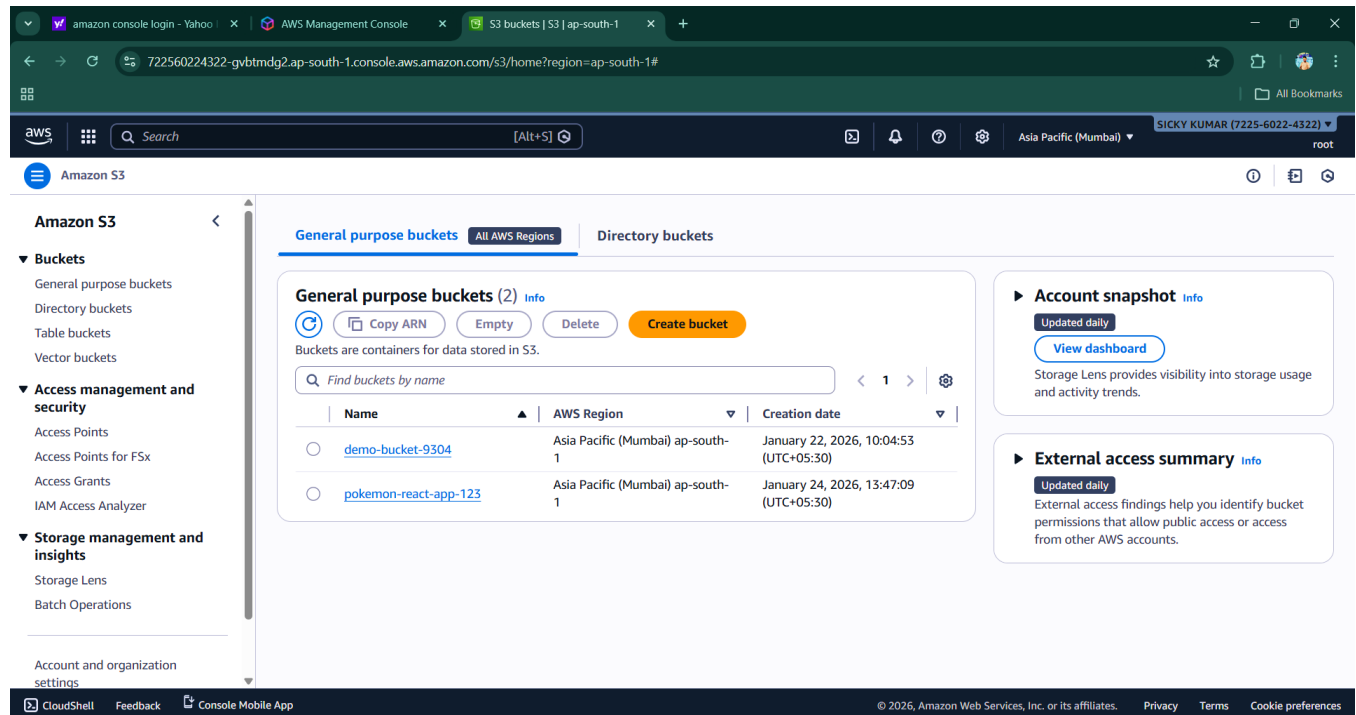


The screenshot shows the Amazon S3 console interface. The top navigation bar includes the AWS logo, a search bar, and the user's name 'SICKY KUMAR (7225-6022-4322)'. The main content area is titled 'Amazon S3' and shows 'General purpose buckets (2)'. A table lists the buckets:

Name	AWS Region	Creation date
demo-bucket-9304	Asia Pacific (Mumbai) ap-south-1	January 22, 2026, 10:04:53 (UTC+05:30)
pokemon-react-app-123	Asia Pacific (Mumbai) ap-south-1	January 24, 2026, 13:47:09 (UTC+05:30)

Buttons for 'Copy ARN', 'Empty', 'Delete', and 'Create bucket' are visible. The left sidebar contains navigation links for 'Buckets', 'Access management and security', and 'Storage management and insights'.

Step 2: Create a Private S3 Bucket

Click Create bucket. Provide a unique bucket name (private-bucket-9304) and select a region. Keep Block all public access enabled to ensure the bucket remains private. Click Create bucket to finish.

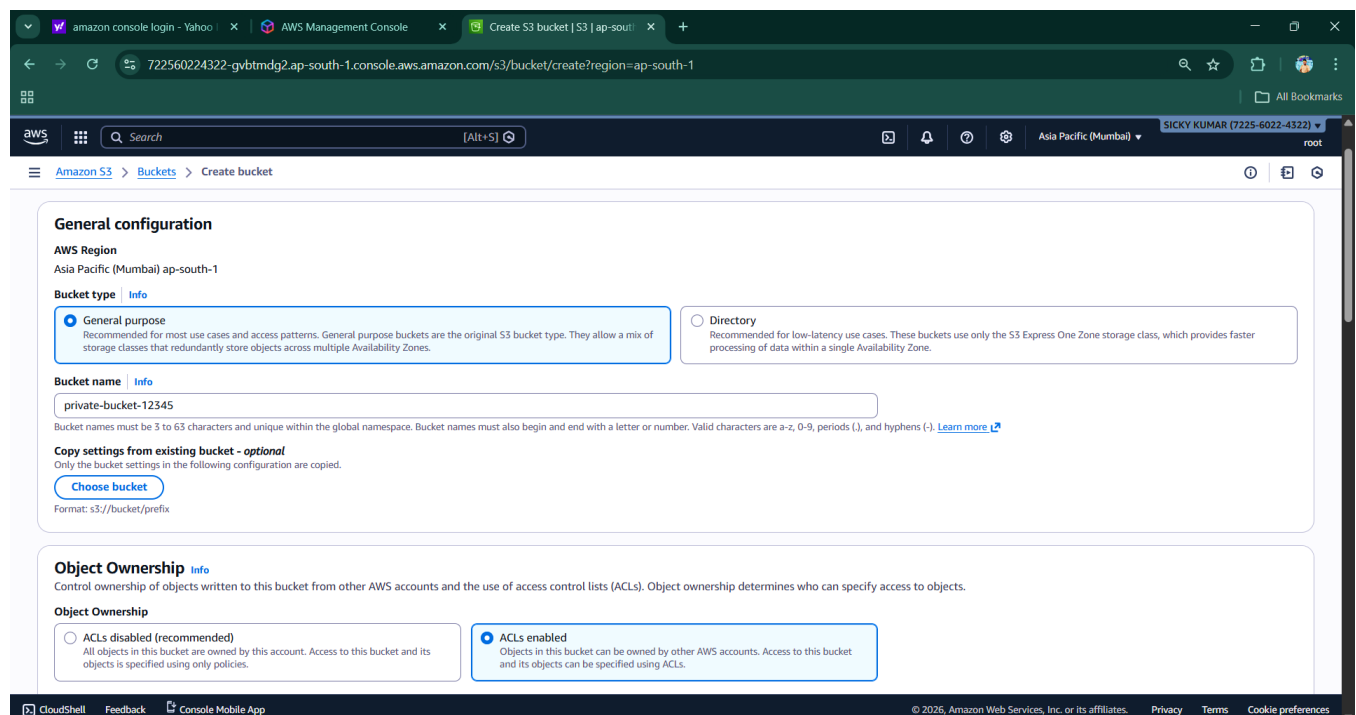

The screenshot shows the 'Create S3 bucket' wizard. The 'General configuration' section is active, showing the following details:

- AWS Region:** Asia Pacific (Mumbai) ap-south-1
- Bucket type:** General purpose (selected). Recommended for most use cases and access patterns.
- Bucket name:** private-bucket-12345. Bucket names must be 3 to 63 characters and unique within the global namespace.
- Copy settings from existing bucket - optional:** Only the bucket settings in the following configuration are copied. (Choose bucket button)
- Object Ownership:** ACLs disabled (recommended) is selected. All objects in this bucket are owned by this account.

The bottom of the wizard shows the 'Object Ownership' section with 'ACLs disabled (recommended)' selected.

amazon console login - Yahoo | AWS Management Console | Create S3 bucket | S3 | ap-sou-1

722560224322-gvbtmdg2.ap-south-1.console.aws.amazon.com/s3/bucket/create?region=ap-south-1

Amazon S3 > Buckets > Create bucket

Block Public Access settings for this bucket

Public access is granted to buckets and objects through access control lists (ACLs), bucket policies, access point policies, or all. In order to ensure that public access to this bucket and its objects is blocked, turn on Block all public access. These settings apply only to this bucket and its access points. AWS recommends that you turn on Block all public access, but before applying any of these settings, ensure that your applications will work correctly without public access. If you require some level of public access to this bucket or objects within, you can customize the individual settings below to suit your specific storage use cases. [Learn more](#)

☒ **Block all public access**
Turning this setting on is the same as turning on all four settings below. Each of the following settings are independent of one another.

- ☒ **Block public access to buckets and objects granted through new access control lists (ACLs)**
S3 will block public access permissions applied to newly added buckets or objects, and prevent the creation of new public access ACLs for existing buckets and objects. This setting doesn't change any existing permissions that allow public access to S3 resources using ACLs.
- ☒ **Block public access to buckets and objects granted through any access control lists (ACLs)**
S3 will ignore all ACLs that grant public access to buckets and objects.
- ☒ **Block public access to buckets and objects granted through new public bucket or access point policies**
S3 will block new bucket and access point policies that grant public access to buckets and objects. This setting doesn't change any existing policies that allow public access to S3 resources.
- ☒ **Block public and cross-account access to buckets and objects through any public bucket or access point policies**
S3 will ignore public and cross-account access for buckets or access points with policies that grant public access to buckets and objects.

Bucket Versioning

Versioning is a means of keeping multiple variants of an object in the same bucket. You can use versioning to preserve, retrieve, and restore every version of every object stored in your Amazon S3 bucket. With versioning, you can easily recover from both unintended user actions and application failures. [Learn more](#)

Bucket Versioning

☒ Enable

CloudShell Feedback Console Mobile App © 2026, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

amazon console login - Yahoo | AWS Management Console | S3 buckets | S3 | ap-south-1

722560224322-gvbtmdg2.ap-south-1.console.aws.amazon.com/s3/buckets?region=ap-south-1

Amazon S3 > Buckets

Successfully created bucket "private-bucket-9304"
To upload files and folders, or to configure additional bucket settings, choose [View details](#).

General purpose buckets **All AWS Regions** **Directory buckets**

General purpose buckets (3)

Buckets are containers for data stored in S3.

Find buckets by name

Name	AWS Region	Creation date
demo-bucket-9304	Asia Pacific (Mumbai) ap-south-1	January 22, 2026, 10:04:53 (UTC+05:30)
pokemon-react-app-123	Asia Pacific (Mumbai) ap-south-1	January 24, 2026, 13:47:09 (UTC+05:30)
private-bucket-9304	Asia Pacific (Mumbai) ap-south-1	January 28, 2026, 17:35:37 (UTC+05:30)

Account snapshot
Updated daily
Storage Lens provides visibility into storage usage and activity trends. [View dashboard](#)

External access summary
Updated daily
External access findings help you identify bucket permissions that allow public access or access from other AWS accounts.

CloudShell Feedback Console Mobile App © 2026, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

Step 3: Upload a File to the Bucket

Open the newly created bucket and click **Upload**. Add a file from your system (for example, sample.txt) and complete the upload. The file is stored securely inside the private bucket.

amazon console login - Yahoo | AWS Management Console | Upload objects - S3 bucket pri- |

722560224322-gvbtmdg2.ap-south-1.console.aws.amazon.com/s3/upload/private-bucket-9304?region=ap-south-1

Amazon S3

Upload succeeded
For more information, see the [Files and folders](#) table.
After you navigate away from this page, the following information is no longer available.

Summary

Destination s3://private-bucket-9304	Succeeded 1 file, 5.7 MB (100.00%)	Failed 0 files, 0 B (0%)
--	--	------------------------------------

Files and folders **Configuration**

Files and folders (1 total, 5.7 MB)


Find by name

Name	Folder	Type	Size	Status	Error
React.js cheatsheet.pdf	-	application/pdf	5.7 MB	Succeeded	-

CloudShell Feedback Console Mobile App © 2026, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences



Step 4: Verify That the File Is Private

Click the uploaded file and copy its **Object URL**. Paste the URL into a browser. You will receive an **Access Denied** error, confirming the file is not publicly accessible.

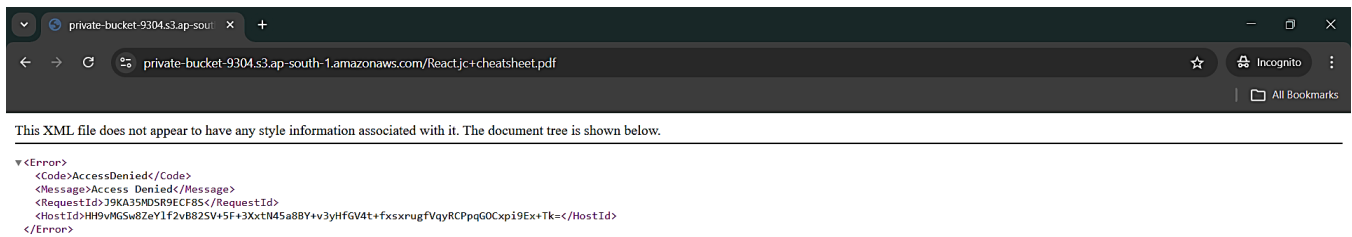

Step 5: Generate a Presigned URL


Select the file, click **Actions**, and choose **Share with a presigned URL**. Set an expiration time (for example, 2 minutes) and generate the URL. This URL provides temporary access to the private file.

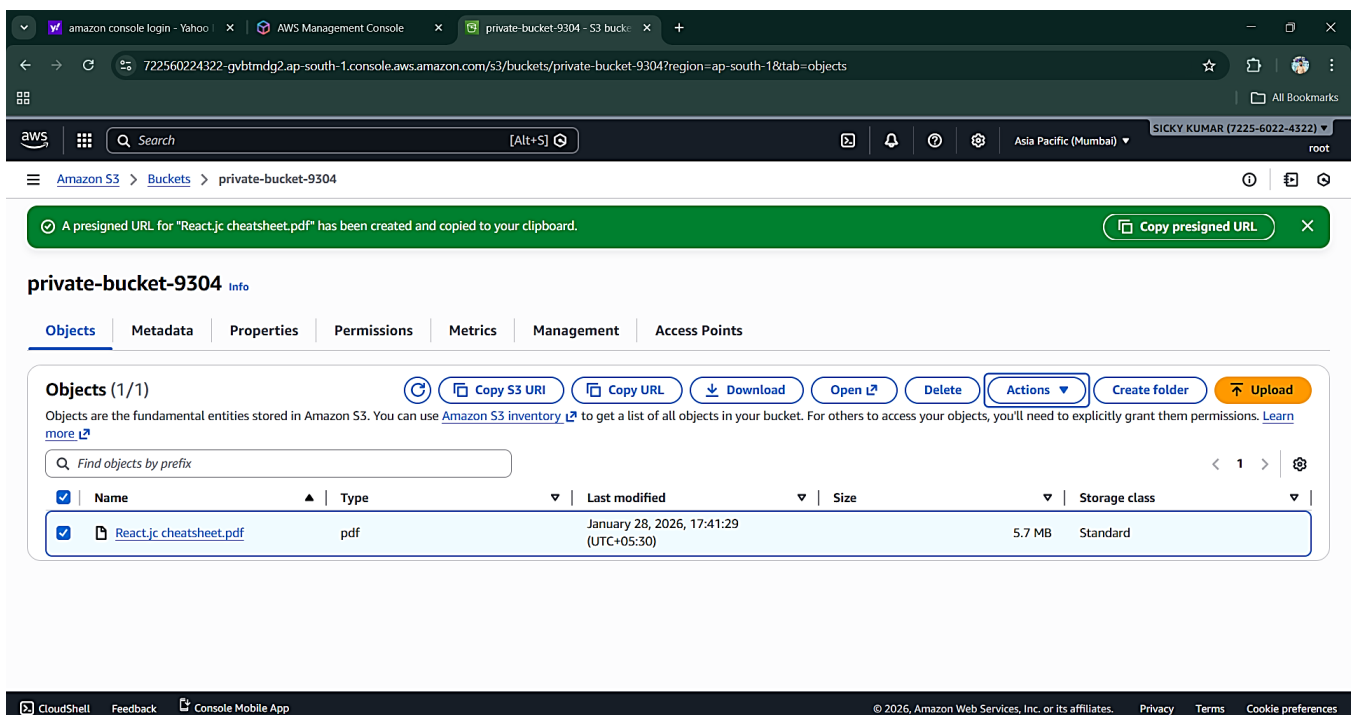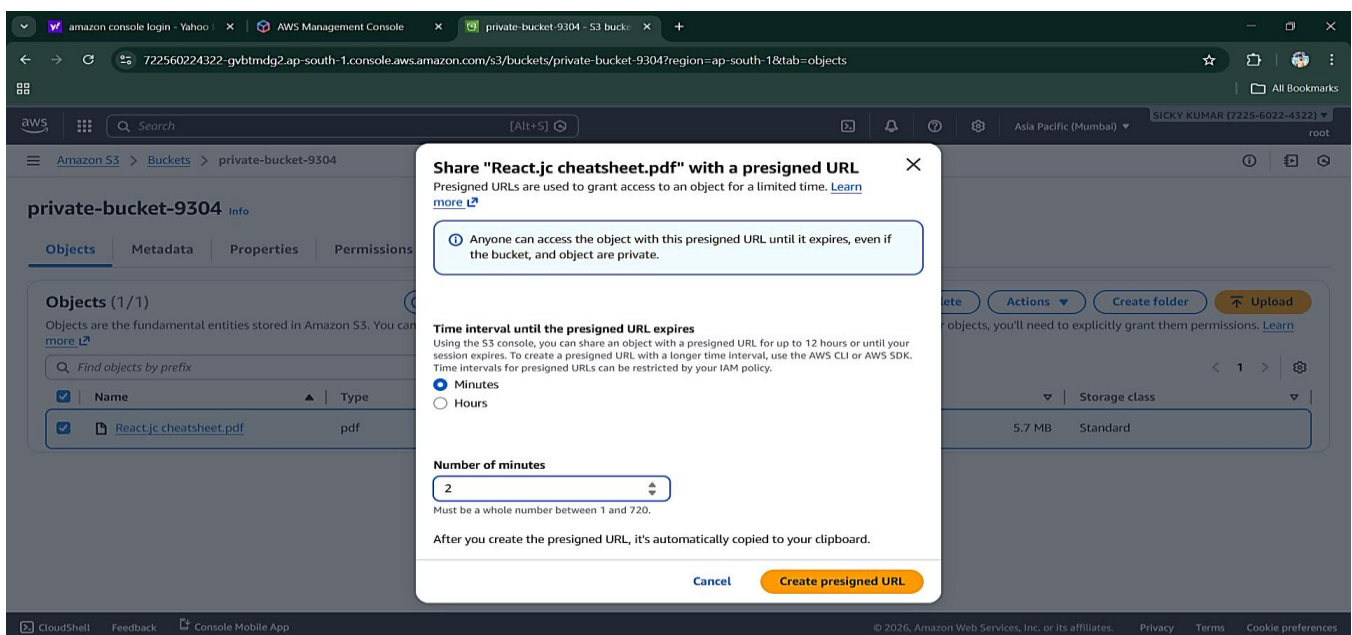

Assignment No: 06

Problem Statement: How to upload a static website on S3**Step 1: Create an S3 Bucket for the Website**Click **Create bucket**.Enter a **unique bucket name** (demo-static-9304).Choose a region and click **Create bucket**.

This bucket will store the website files.

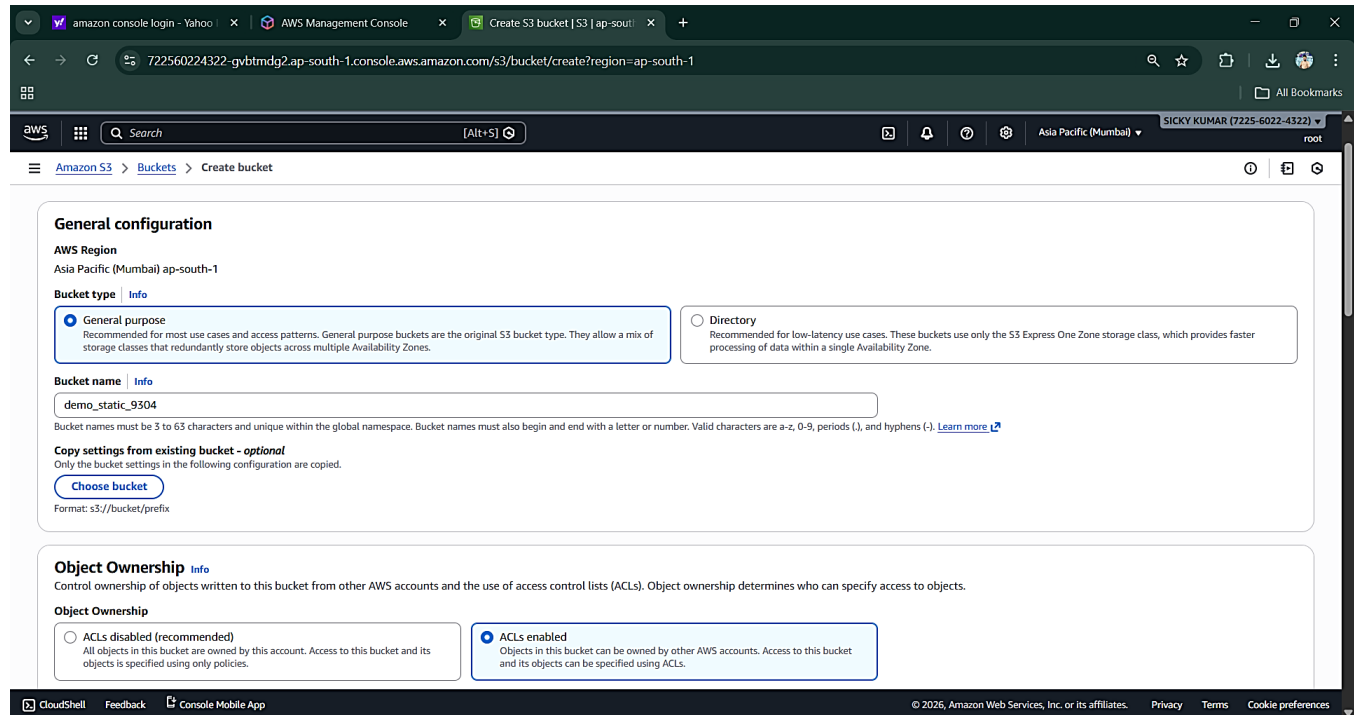

amazon console login - Yahoo | AWS Management Console | Create S3 bucket | S3 | ap-south-1

722560224322-gvbtmdg2.ap-south-1.console.aws.amazon.com/s3/bucket/create?region=ap-south-1

Search [Alt+S]

Amazon S3 > Buckets > Create bucket

General configuration

AWS Region
Asia Pacific (Mumbai) ap-south-1

Bucket type [Info](#)

☒ **General purpose**
Recommended for most use cases and access patterns. General purpose buckets are the original S3 bucket type. They allow a mix of storage classes that redundantly store objects across multiple Availability Zones.

☐ **Directory**
Recommended for low-latency use cases. These buckets use only the S3 Express One Zone storage class, which provides faster processing of data within a single Availability Zone.

Bucket name [Info](#)
demo_static_9304

Bucket names must be 3 to 63 characters and unique within the global namespace. Bucket names must also begin and end with a letter or number. Valid characters are a-z, 0-9, periods (.), and hyphens (-). [Learn more](#)

Copy settings from existing bucket - optional
Only the bucket settings in the following configuration are copied.

[Choose bucket](#)

Format: s3://bucket/prefix

Object Ownership [Info](#)

Control ownership of objects written to this bucket from other AWS accounts and the use of access control lists (ACLs). Object ownership determines who can specify access to objects.


Object Ownership

☐ **ACLs disabled (recommended)**
All objects in this bucket are owned by this account. Access to this bucket and its objects is specified using only policies.

☒ **ACLs enabled**
Objects in this bucket can be owned by other AWS accounts. Access to this bucket and its objects can be specified using ACLs.

CloudShell Feedback Console Mobile App

© 2026, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

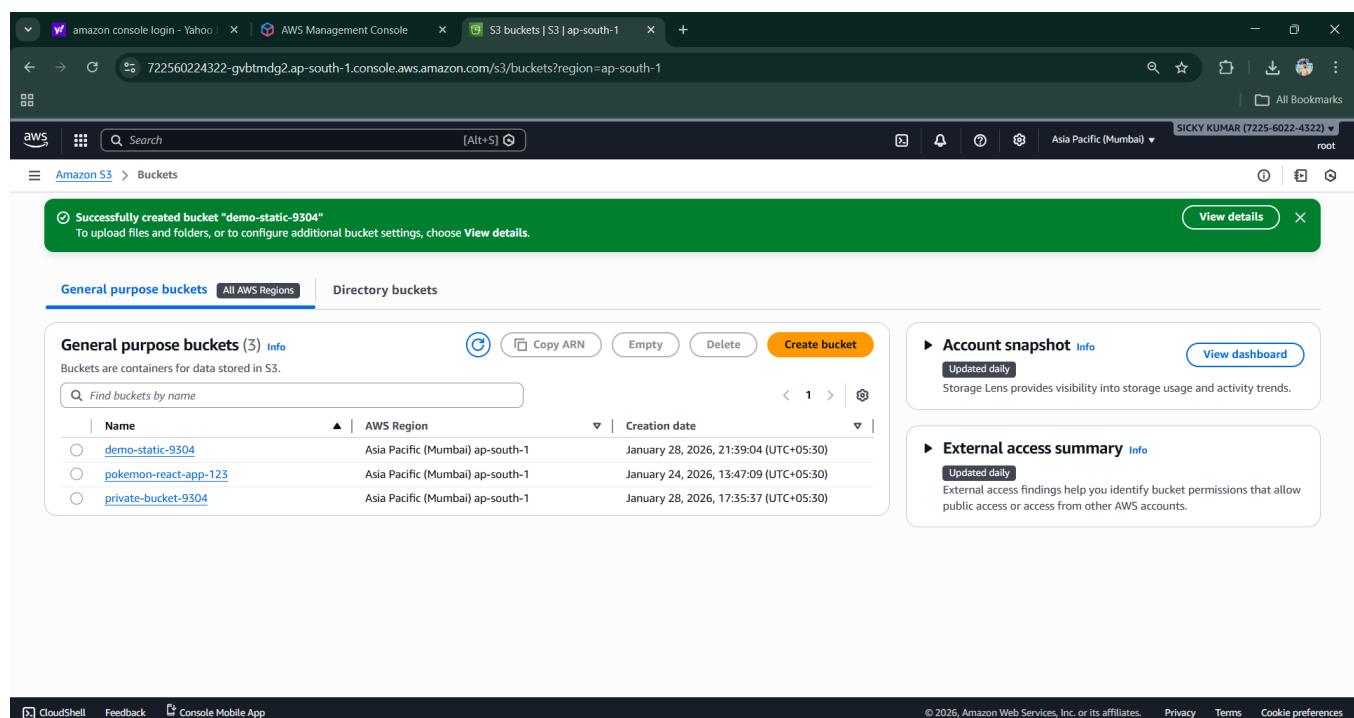

amazon console login - Yahoo | AWS Management Console | S3 buckets | S3 | ap-south-1

722560224322-gvbtmdg2.ap-south-1.console.aws.amazon.com/s3/buckets?region=ap-south-1

Search [Alt+S]

Amazon S3 > Buckets

Successfully created bucket "demo-static-9304"
To upload files and folders, or to configure additional bucket settings, choose [View details](#).

General purpose buckets [All AWS Regions](#) Directory buckets

General purpose buckets (3) [Info](#)

Buckets are containers for data stored in S3.

[Find buckets by name](#)

Name	AWS Region	Creation date
demo-static-9304	Asia Pacific (Mumbai) ap-south-1	January 28, 2026, 21:39:04 (UTC+05:30)
pokemon-react-app-123	Asia Pacific (Mumbai) ap-south-1	January 24, 2026, 13:47:09 (UTC+05:30)
private-bucket-9304	Asia Pacific (Mumbai) ap-south-1	January 28, 2026, 17:35:37 (UTC+05:30)

[Copy ARN](#) [Empty](#) [Delete](#) [Create bucket](#)

Account snapshot [Info](#)

[View dashboard](#)

Updated daily
Storage Lens provides visibility into storage usage and activity trends.


External access summary [Info](#)

Updated daily
External access findings help you identify bucket permissions that allow public access or access from other AWS accounts.

CloudShell Feedback Console Mobile App

© 2026, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

Step 2: Open the bucket → CLICK ON Upload file → Add a file → select file → Upload → click on it → copy the URL → open it on new window → error occurs.

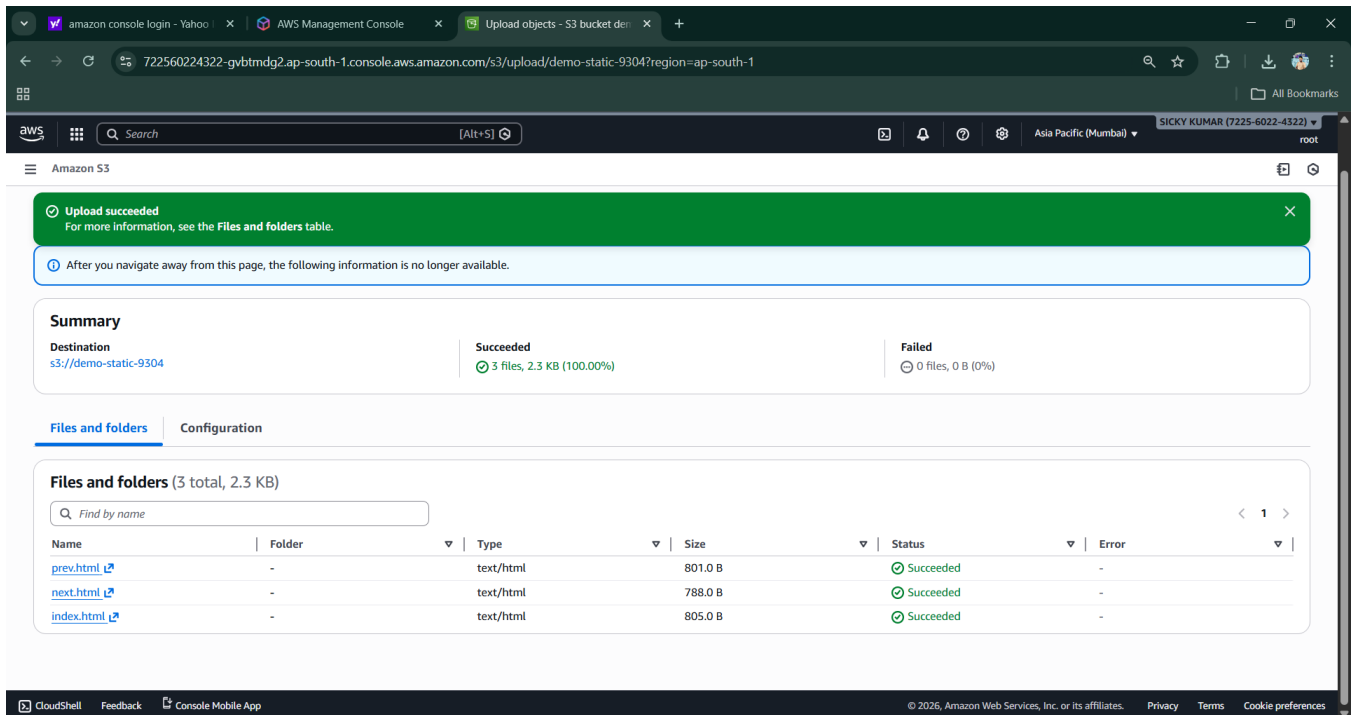

amazon console login - Yahoo | AWS Management Console | Upload objects - S3 bucket de | +

722560224322-gvbtmdg2.ap-south-1.console.aws.amazon.com/s3/upload/demo-static-9304?region=ap-south-1

Search [Alt+S]

Amazon S3

Upload succeeded
For more information, see the [Files and folders table](#).

After you navigate away from this page, the following information is no longer available.

Summary

Destination s3://demo-static-9304	Succeeded 3 files, 2.3 KB (100.00%)	Failed 0 files, 0 B (0%)
---	---	------------------------------------

Files and folders | Configuration


Files and folders (3 total, 2.3 KB)

Find by name

Name	Folder	Type	Size	Status	Error
prev.html	-	text/html	801.0 B	Succeeded	-
next.html	-	text/html	788.0 B	Succeeded	-
index.html	-	text/html	805.0 B	Succeeded	-

CloudShell Feedback Console Mobile App

© 2026, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

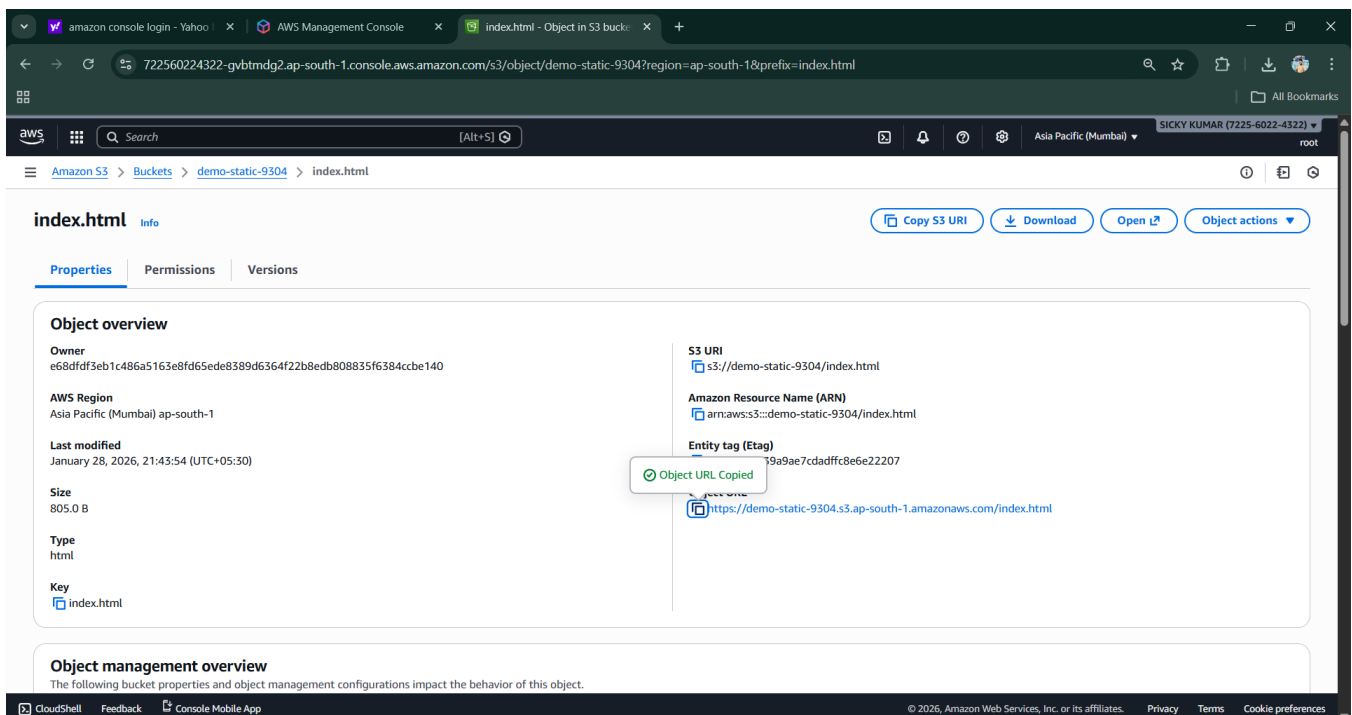

amazon console login - Yahoo | AWS Management Console | index.html - Object in S3 bucket | +

722560224322-gvbtmdg2.ap-south-1.console.aws.amazon.com/s3/object/demo-static-9304?region=ap-south-1&prefix=index.html

Search [Alt+S]

Amazon S3 > Buckets > demo-static-9304 > index.html

index.html Info

Copy S3 URI Download Open Object actions

Properties | Permissions | Versions

Object overview

Owner e68dfdf3eb1c486a5163e8fd65ede8389d6364f22b8edb808835f6384ccbe140	S3 URI s3://demo-static-9304/index.html
AWS Region Asia Pacific (Mumbai) ap-south-1	Amazon Resource Name (ARN) arn:aws:s3:::demo-static-9304/index.html
Last modified January 28, 2026, 21:43:54 (UTC+05:30)	Entity tag (Etag) 9a9ae7cdadffc8e6e22207
Size 805.0 B	Key index.html
Type html	

Object management overview
The following bucket properties and object management configurations impact the behavior of this object.

CloudShell Feedback Console Mobile App

© 2026, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences



demo-static-9304.s3.ap-south-1 | +

https://demo-static-9304.s3.ap-south-1.amazonaws.com/index.html

This XML file does not appear to have any style information associated with it. The document tree is shown below.

```
<?xml version="1.0" encoding="UTF-8" ?>
<Error>
  <Code>AccessDenied</Code>
  <Message>Access Denied</Message>
  <RequestId>XAGM3T5N5NPBT385</RequestId>
  <HostId>5XdcyI12T5V+wY0IUm2QW05/UuavGsiliJ9k8qZL5i0FG37cF7JM0dsYtbbH4e0BzDmRAoerQW0ZLYxnK0BS3iHSjoQW</HostId>
</Error>
```

Step 3: To fix the error → go to bucket permission → Uncheck Block Public Access → Then enabled ACL → Check Everyone option → check the acknowledgement → Save the changes

