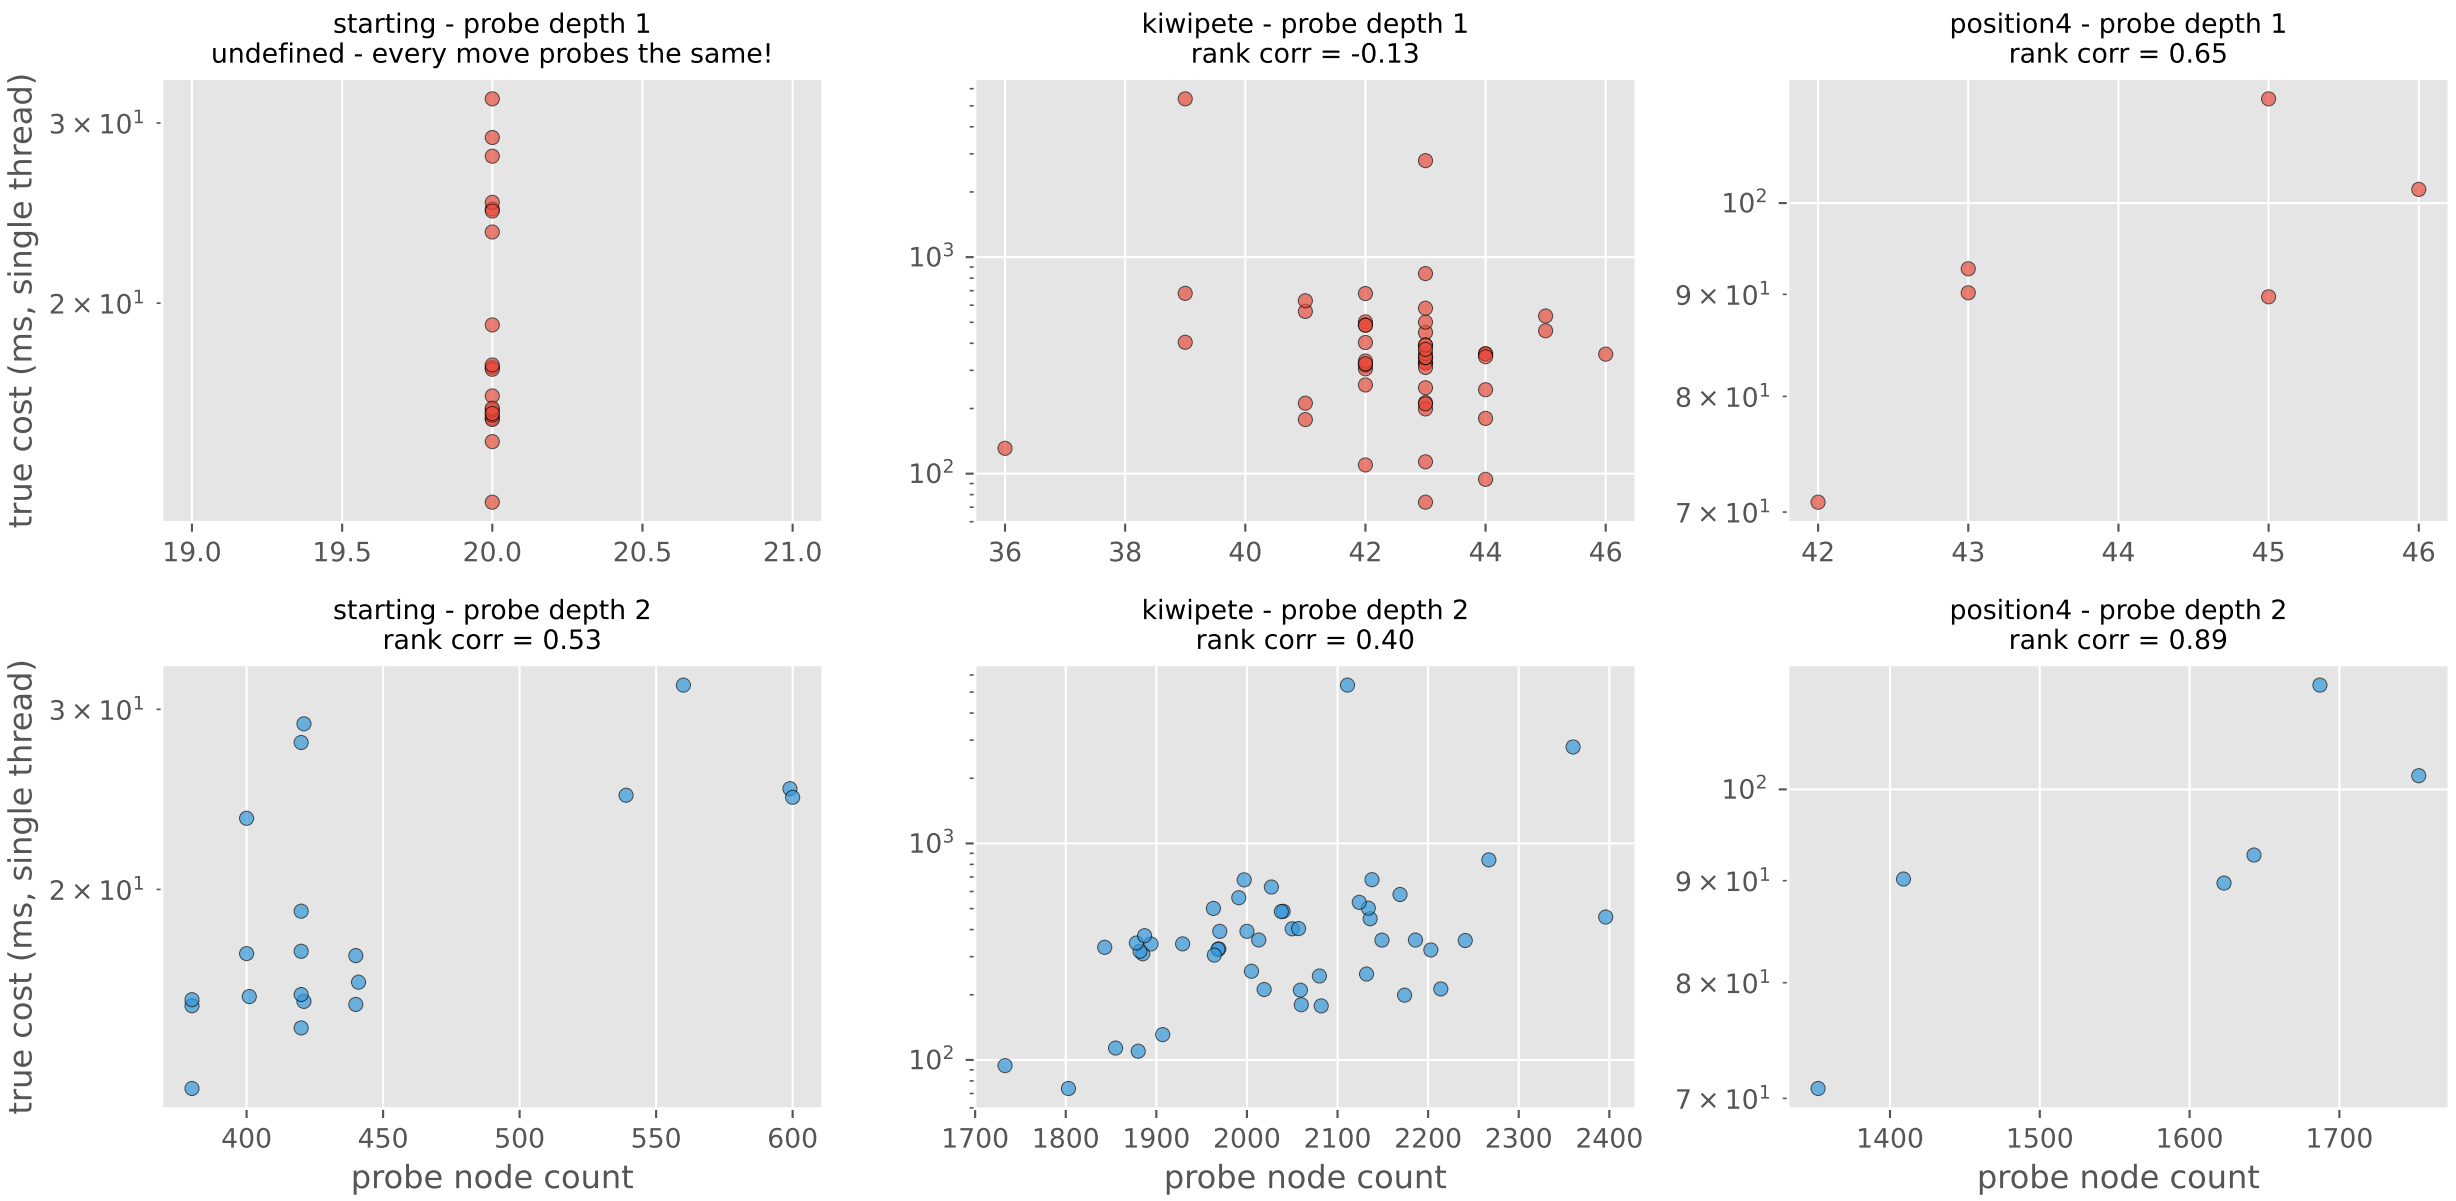
Can a shallow probe predict real search cost?
depth 1 (top, red) is noise - depth 2 (bottom, blue) has a weak real signal
starting - probe depth 1
undefined - every move probes the same!
kiwipete - probe depth 1
rank corr = -0.13
position4 - probe depth 1
rank corr = 0.65
starting - probe depth 2
rank corr = 0.53
kiwipete - probe depth 2
rank corr = 0.40
position4 - probe depth 2
rank corr = 0.89
true cost (ms, single thread)
probe node count