



Monitoring AWS Logins

Explore AWS authentication, common IAM threats, and SIEM detection options.

1. How many times did Thomas fail to log in to the AWS console?

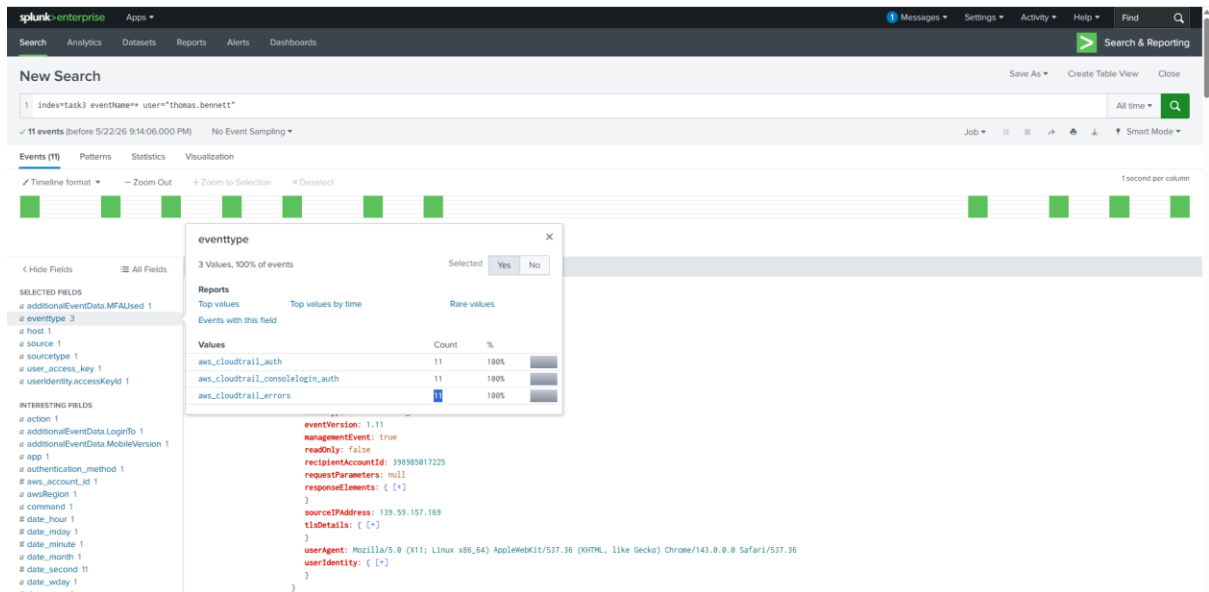


2. Which other user logged in to the AWS console without MFA?

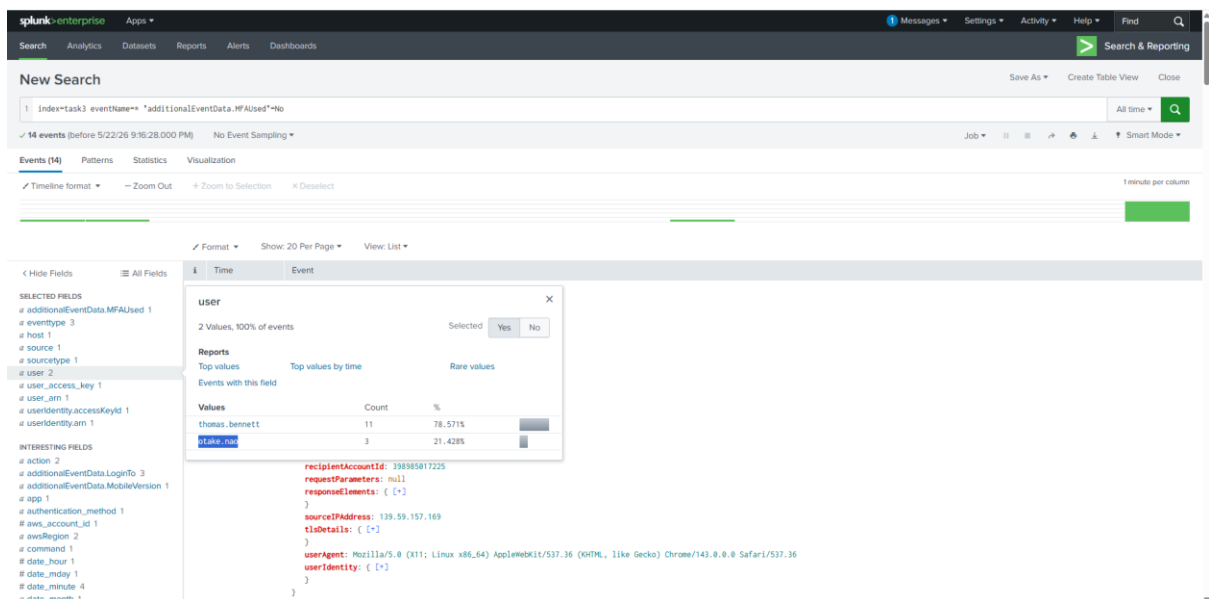

Task – 4

1. What access key ID of Michael was used in the attack?

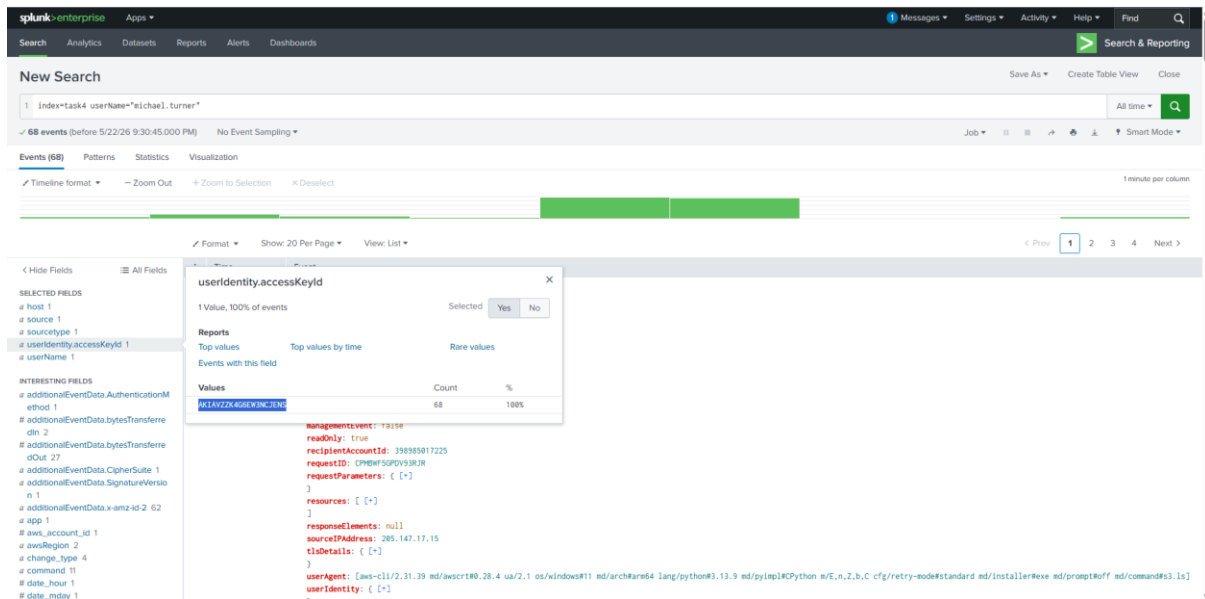


The screenshot shows the Splunk Enterprise interface with a search query: `index=task4 username="eichae".turner"`. The search results show 68 events. A field picker is open, showing the field `userIdentity.accessKeyId` selected. The field details pane shows the following values:

Values	Count	%
AKIAVZZXAG6EWINJG	68	100%

The field details pane also shows a sample event:

```
{
  "event": {
    "managementEvent": true,
    "readOnly": true,
    "recipientAccountId": 39898817225,
    "requestId": "CHWFSPOV3R3R",
    "requestParameters": {
      "resources": [
        "*"
      ],
      "responseElements": null,
      "sourceIPAddress": 285.147.17.15,
      "titleDetails": {
        "userIdentity": {
          "arn": "arn:aws:iam::39898817225:user/turner",
          "clientId": "CHWFSPOV3R3R",
          "principalId": "AIDVZZXAG6EWINJG"
        }
      }
    }
  }
}
```

2. What is the name of the S3 bucket accessed by the attackers?

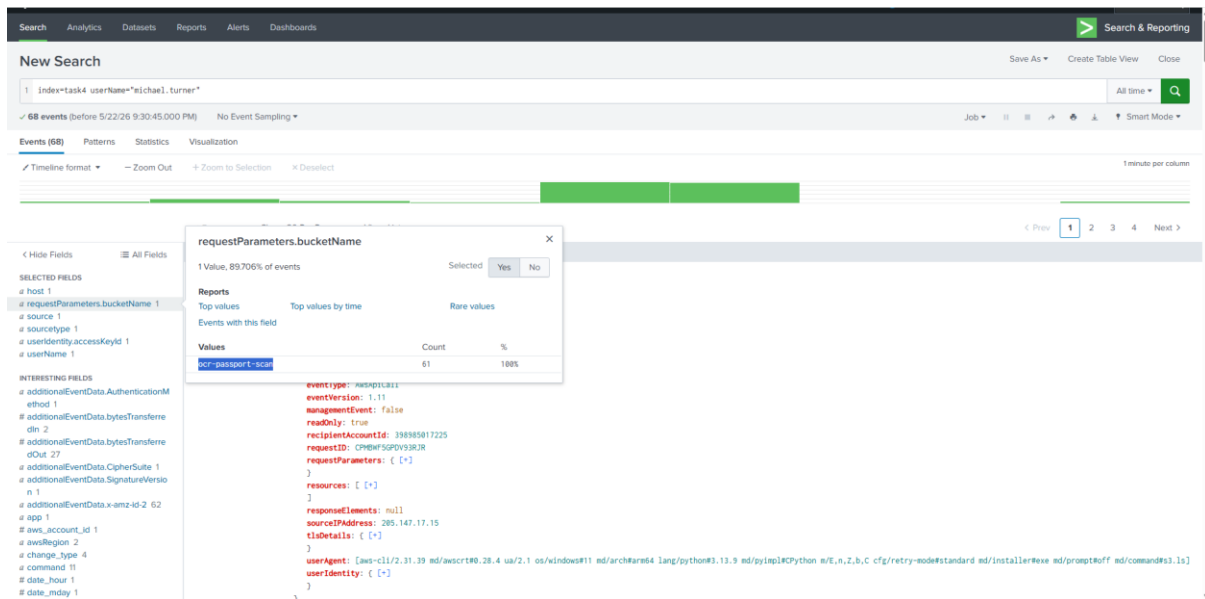

The screenshot shows the Splunk Enterprise interface with a search query: `index=task4 username="eichae".turner"`. The search results show 68 events. A field picker is open, showing the field `requestParameters.bucketName` selected. The field details pane shows the following values:

Values	Count	%
acp-passport-scan	61	100%

The field details pane also shows a sample event:

```
{
  "event": {
    "managementEvent": false,
    "readOnly": true,
    "recipientAccountId": 39898817225,
    "requestId": "CHWFSPOV3R3R",
    "requestParameters": {
      "resources": [
        "*"
      ],
      "responseElements": null,
      "sourceIPAddress": 285.147.17.15,
      "titleDetails": {
        "userIdentity": {
          "arn": "arn:aws:iam::39898817225:user/turner",
          "clientId": "CHWFSPOV3R3R",
          "principalId": "AIDVZZXAG6EWINJG"
        }
      }
    }
  }
}
```

3. How many files were exfiltrated and deleted by the adversary?

The screenshot shows a Splunk search interface with the query `index=*task4 userName="michael.turner"`. The search results show 68 events. A table titled "Top 10 Values" is displayed, showing the most common event names and their counts. The events are listed in a table with columns for event name, count, and percentage.

eventName	Count	%
DeleteObject	26	38.235%
GetObject	26	38.235%
ListObjects	8	11.765%
DescribeDBClusters	1	1.47%
DescribeInstances	1	1.47%
GetCallerIdentity	1	1.47%
ListAttachedUserPolicies	1	1.47%
ListBuckets	1	1.47%
ListUserPolicies	1	1.47%
ListUsers	1	1.47%

The "eventName" field is highlighted in the search results, and the "requestParameters.bucketName" field is also visible in the event details.

4. Which file was uploaded to the bucket at the end of the attack?


The screenshot shows a Splunk search interface with the query `index=*task4 userName="michael.turner" requestParameters.bucketName="ocr-passport-scan"`. The search results show 61 events. A table titled "Top 10 Values" is displayed, showing the most common event names and their counts. The events are listed in a table with columns for event name, count, and percentage.

eventName	Count	%
DeleteObject	26	38.235%
GetObject	26	38.235%
ListObjects	8	11.765%
DescribeDBClusters	1	1.47%
DescribeInstances	1	1.47%
GetCallerIdentity	1	1.47%
ListAttachedUserPolicies	1	1.47%
ListBuckets	1	1.47%
ListUserPolicies	1	1.47%
ListUsers	1	1.47%

The "requestParameters.bucketName" field is highlighted in the search results, and the "requestParameters.bucketName" field is also visible in the event details.


5. Which AWS service was used most by the user who did not use access keys?

Answer Example: Amazon Redshift

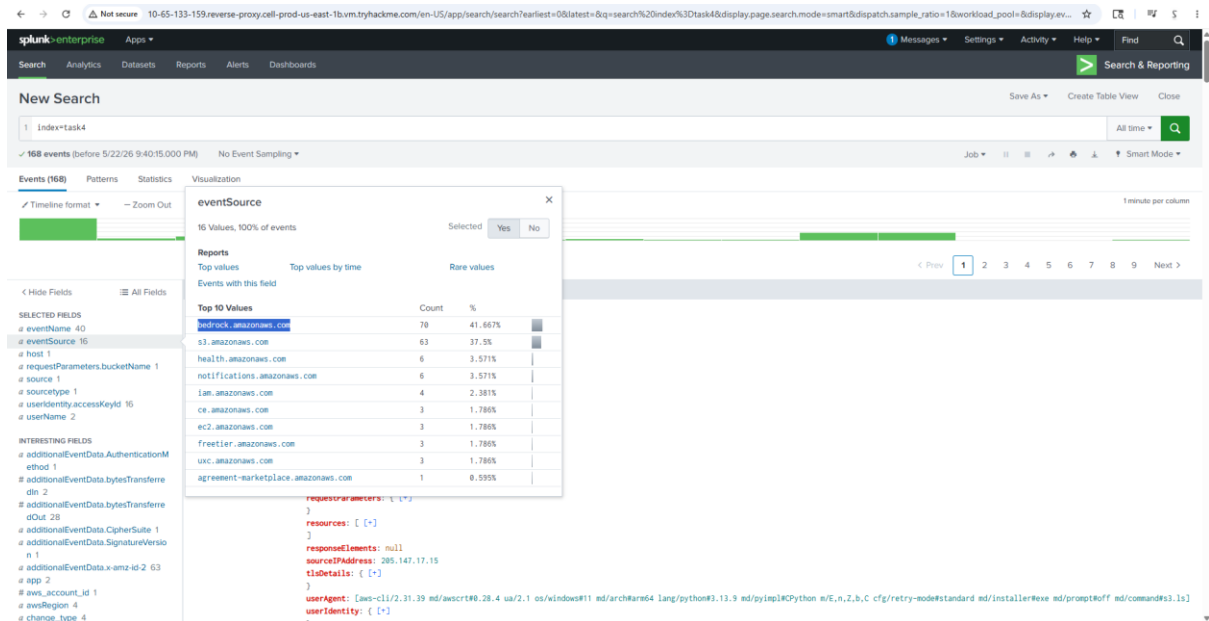

Task -5

1. Which EC2 instance ID used the UserAvatarsProcessor role?

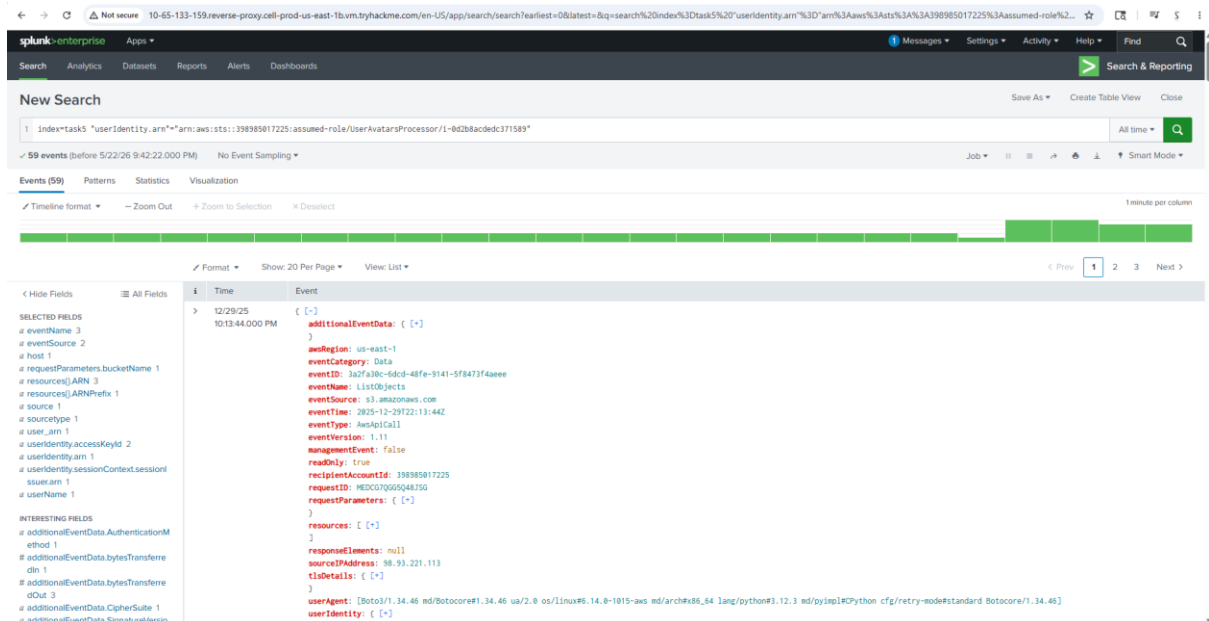

2. Someone assumed the EU-RemoteSupport IAM role.

How did they name the role session?

The screenshot shows a Splunk search interface. On the left, there's a sidebar with 'Hide Fields' and 'All Fields' options. The main panel displays a list of events. A modal window titled 'userName' is open, showing a table of values for the 'userName' field. The table has columns for 'Values', 'Count', and '%'. The values are 'sarah.braug' (2 counts, 20%) and 'root' (1 count, 10%).

Values	Count	%
sarah.braug	2	20%
root	1	10%

Task – 6

1. Under which ARN does the Splunk integration authenticate?

SOC Note: This is an exceptionally insecure configuration!

The screenshot shows a Splunk search interface. On the left, there's a sidebar with 'Hide Fields' and 'All Fields' options. The main panel displays a list of events. A modal window titled 'useridentity.arn' is open, showing a table of values for the 'useridentity.arn' field. The table has columns for 'Values', 'Count', and '%'. The values are 'arn:aws:iam::39898507225:root' (236 counts, 100%).

Values	Count	%
arn:aws:iam::39898507225:root	236	100%

2. When was the over-privileged integration access key created?

Answer Example: 2025-12-25 15:30:45

spunk-enterprise

Apps

Messages

Settings

Activity

Help

Find

Search

Analytics

Datasets

Reports

Alerts

Dashboards

Search & Reporting

New Search

Save As

Create Table View

Close

1

Index=task& eventName=CreateAccessKey

All time

1 event (before 5/22/26 9:52:15.000 PM)

No Event Sampling

Job

11

Smart Mode

Events (1)

Patterns

Statistics

Visualization

Timeline format

Zoom Out

Zoom to Selection

Deselect

1 millisecond per column

Format

Show: 20 Per Page

View: List

< Hide Fields

All Fields

SELECTED FIELDS

a eventCategory 1

a eventName 1

a eventSource 1

a eventTime 1

a host 1

a source 1

a sourcetype 1

a start_time 1

a user_arm 1

a userIdentity.accessKeyId 1

a userIdentity.arn 1

a userName 1

INTERESTING FIELDS

a action 1

a app 1

a aws_account_id 1

a awsRegion 1

a change_type 1

a command 1

a date_hour 1

a date_mday 1

a date_minute 1

eventTime

1 Value, 100% of events

Selected Yes No

Reports

Top values

Top values by time

Rare values

Values

Count

%

2025-12-29T19:59:23Z

1

100%

requestID: fd5655d-88df-4187-ad3e-773c0856a911

requestParameters: null

responseElements: [{}]

sessionCredentialFromConsole: true

sourceAddress: 78.88.227.8

tidetails: [{}]

userAgent: Mozilla/5.0 (Windows NT 10.0; Win64; x64) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/143.0.0.0 Safari/537.36

userIdentity: [{}]

10-65-133-159:reverse-proxy:cell-prod-us-east-1b.vrn.bryhackme.com/en-US/app/search?earliest=0&latest=&q=search index%3Dtask& eventName%3DCreateAccessKey&display.page.search.mode=smart&dispatch.sample_ratio=1&workload_pool=&display.events.fields=%5B%22host%22%22source%22%22sourcetype%22%22userName%22%22userIdentity...