Clamp fixture

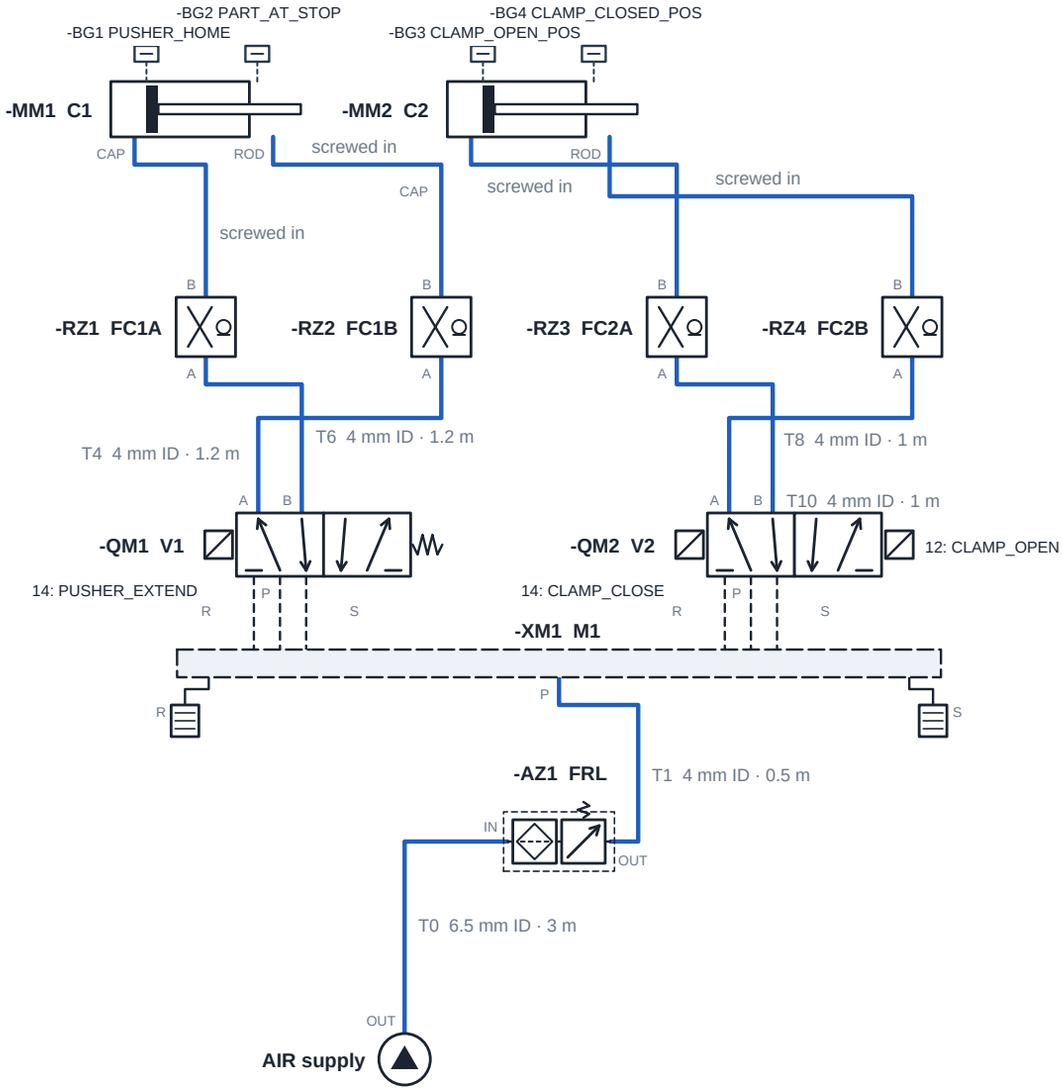

Parts

tag	name	description	part number
-AZ1	FRL	filter-regulator unit, set 6 bar	SMC AW20-02BG
-BG1	B1	position sensor PNP, on -MM1 retracted, signal PUSHER_HOME	FESTO SMT-8M-A-PS-24V-E-0,3-M8D
-BG2	B2	position sensor PNP, on -MM1 extended, signal PART_AT_STOP	FESTO SMT-8M-A-PS-24V-E-0,3-M8D
-BG3	B3	position sensor 2-wire, on -MM2 retracted, signal CLAMP_OPEN_POS	SMC D-M9B
-BG4	B4	position sensor 2-wire, on -MM2 extended, signal CLAMP_CLOSED_POS	SMC D-M9B
-MM1	C1	cylinder Ø20 x 50 mm, double-acting, rod Ø8	FESTO DSNU-20-50-P-A
-MM2	C2	cylinder Ø32 x 20 mm, double-acting, rod Ø16	SMC CDQ2B32-20DZ
-QM1	V1	5/2 valve, solenoid actuated, spring return, C 0.72 L/(s·bar), coil 24 V DC 0.4 W	SMC SY3120-5LZ-C6
-QM2	V2	5/2 valve, solenoid actuated, solenoid return, C 0.72 L/(s·bar), coil 24 V DC 0.4 W	SMC SY3220-5LZ-C6
-RZ1	FC1A	speed controller (throttle-check), meter-out, C 0.7	SMC AS2201F-01-06
-RZ2	FC1B	speed controller (throttle-check), meter-out, C 0.7	SMC AS2201F-01-06
-RZ3	FC2A	speed controller (throttle-check), meter-out, C 0.7	SMC AS2201F-01-06
-RZ4	FC2B	speed controller (throttle-check), meter-out, C 0.7	SMC AS2201F-01-06
-XM1	M1	valve manifold base, 2 stations, common supply and exhaust (SY3000)	SMC SS5Y3-20-02-Q
-XM1:R	S_M1_R	exhaust silencer	SMC AN10-01
-XM1:S	S_M1_S	exhaust silencer	SMC AN10-01

Project	Fixture shop demo: clamp fixture
Title	**Clamp fixture**
Ticket	**T-0001**
Revision	**A**
Date	2026-11-12
Drawn by	eitri 0.8.0
Approved by	
eitri checks	87 pass, 1 warn, 0 fail, 0 not run
Sheet	1 / 1

Symbols: ISO 1219-1 style. Designations: EN 81346-2 class codes as used by Festo Didactic (TP 101 workbook 541088, p. XXIII): -MM cylinder, -QM directional valve, -BG sensor, -AZ air preparation, -XM distributor; -RZ flow control (inferred); silencers by valve port. Pressures gauge; tube labels give the bore (ID) and length; signal names as in the I/O list. Generated by eitri: check against the parts' datasheets before release.