


Date: July-19th-2025

Welcome

Everyone

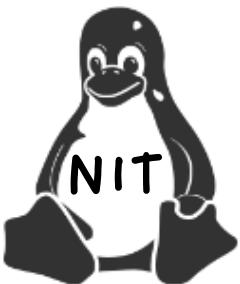


MASTERING LINUX!

Date: July-19th-2025

ORIENTATION

PRESENTATION: Welcome to NIT

**“Smallness of means, greatness of purpose and Astounding
Results”**



CHAPTER 1

NIT ACADEMY – The Road to Career Change!

Using the rules and strategies in this section you will gain confidence and a deep insight in setting up yourself for success

- Introductions
- Training Team
- Let us get to know you all!
- Physical Machine Requirements
- Virtual Machine Provisioning & Configuration
- What you will learn?
- Why will you learn?
- Soft Skills
- Fair Student Agreement
- Interview and Job Placement

NEXUS TEAM

Date: July-19th-2025

Semeon Monehin



Executive Director

Nadeem Siddiqi



Director

Frederic Turlan



Executive Director

Bilal Mufti



Marketing & Sales

Bradford Laney



Attorney

Salmah Siddiqi



PR and Production

NIT TRAINING TEAM

Date: July-19th-2025



Yasin Sekabira



Nadeem Siddiqi

Lead Instructor

- Bachelors in Computer Science
- MSc in Computer Science
- CEO / CTO for number of IT Start-ups
- Fin-Tech Experience
- Data Center and Network Management

Program Lead

- Bachelors in Engineering
- Post Bachelors in ML/AI
- CEO / CTO for number of Start-ups
- Expertise in System Admin and Data Center
- Fin-Tech Experience
- Server and Network Management

Welcome, New Students!



Introduce Yourself

Share your name, background, and interests to help everyone get acquainted and foster connections.

Course Goals and Expectations

Discuss your aspirations and what you hope to accomplish in this course to set a clear purpose.

Supportive Community Building


Building a supportive learning community enhances engagement and success in our PowerPoint-based Zoom sessions.

About our Program

10-12 weeks (learn absolutely free)

RHCSA – exam \$500 taken at home

Empowering an IT Ecosystem Careers

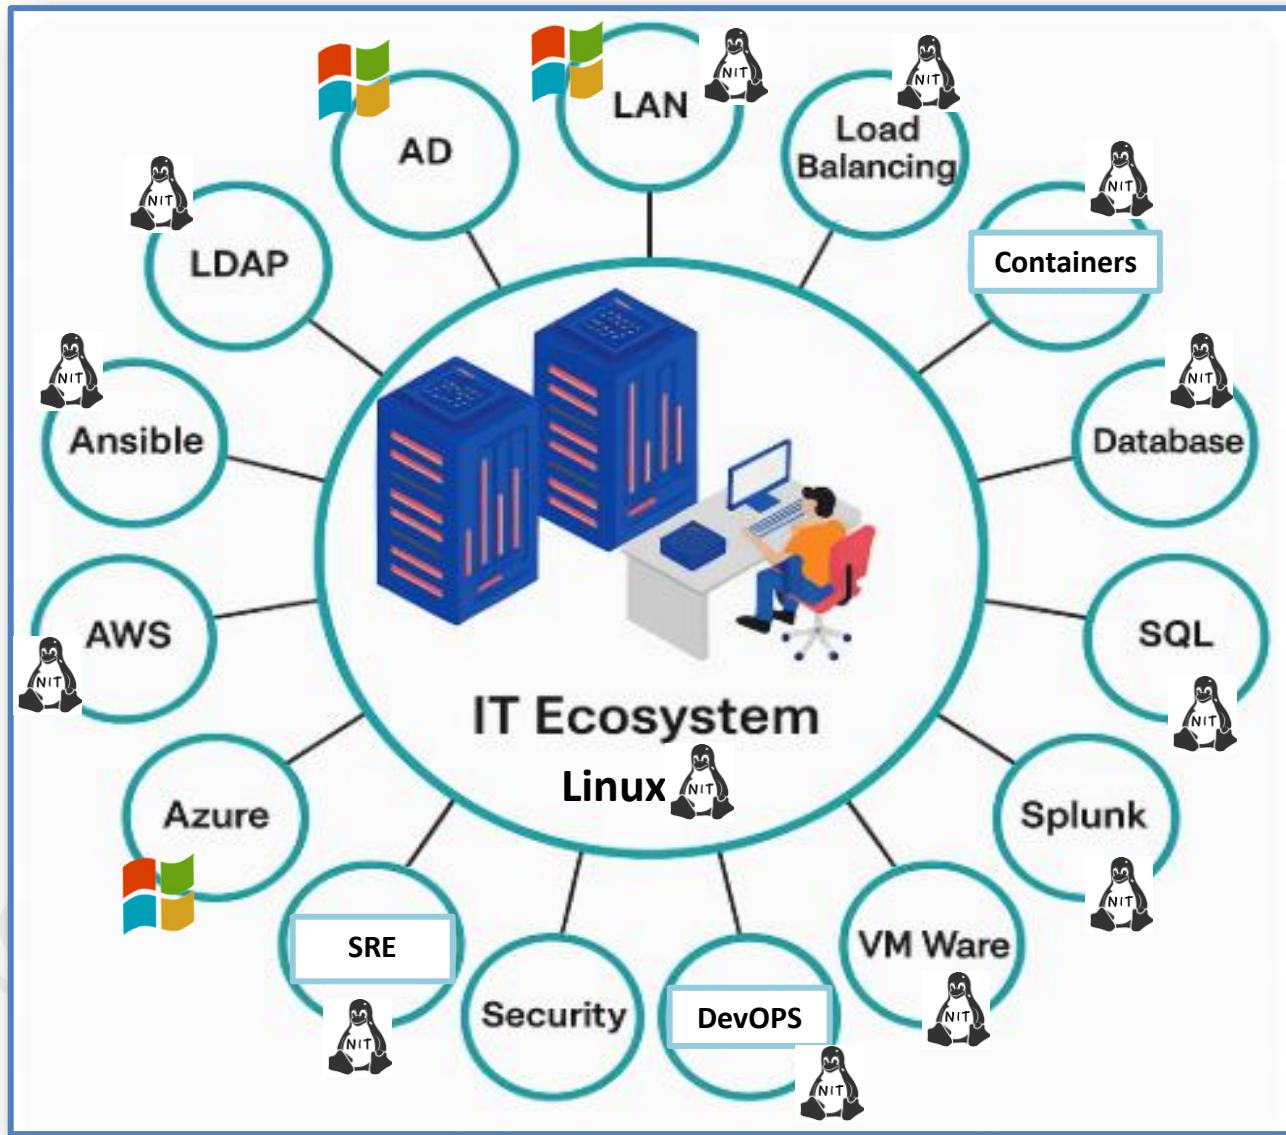



RedHat (RH124/RH134) Exam

Date: July-19th-2025

- **Access the command line**
Log in to a Linux system and run simple commands from the shell.
- **Manage files from the command line**
Copy, move, create, delete, and organize files from the Bash shell.
- **Get help in Red Hat Enterprise Linux**
Resolve problems by using local help systems.
- **Create, view, and edit text files**
Create, view, and edit text files from command output or in a text editor.
- **Manage local users and groups**
Create, manage, and delete local users and groups, and administer local password policies.
- **Control access to files**
Set Linux file-system permissions on files and interpret the security effects of different permission settings.
- **Monitor and Control services and daemons**
Control and monitor network services and system daemons with the systemd service.
- **Configure and secure SSH**
Configure secure command-line services on remote systems with OpenSSH.
- **Analyze and store logs**
Locate and accurately interpret system event logs for troubleshooting purposes.
- **Manage networking**
Configure network interfaces and settings on Red Hat Enterprise Linux servers.
- **Archive and transfer files**
Archive and copy files from one system to another.
- **Install and Update Software Packages**
Download, install, update, and manage software packages from Red Hat and DNF package repositories..
- **Access Linux file systems**
Access, inspect, and use existing file systems on storage that is attached to a Linux server.

Core Technologies and Certifications



Practical Linux Training

Students receive hands-on Linux experience, preparing for **RHCSA certification** and foundational IT skills essential for the industry.

Cloud Technology Training

Training includes AWS Cloud readiness and skill development, helping students secure competitive IT roles.

Automation With Ansible and Scripting

Students learn Ansible and scripting to automate IT tasks, enabling remote work and meeting high job market demand – **RHCSE Certification**

July

Su	Mo	Tu	We	Th	Fr	Sa
		1	2	3	4	5
6	7	8	9	10	11	12
13	14	Linux Class Start-Date			19	
20	21	22	23	24	25	26
27	28	29	30	31		

August

Su	Mo	Tu	We	Th	Fr	Sa
					1	2
3	4	5	6	7	8	9
10	11	12	13	14	15	16
17	18	19	20	21	22	23
24	25	26	27	28	29	30
31						

September

Su	Mo	Tu	We	Th	Fr	Sa
	1	2	3	4	5	6
7	8	9	10	11	12	13
14	15	16	17	18	19	20
21	22	23	24	25	26	27
28	Linux Class End-Date					

October

Su	Mo	Tu	We	Th	Fr	Sa
			1	2	3	4
5	6	7	8	9	10	11
12	13	14	15	16	17	18
19	20	21	22	23	24	25
26	27	28	29	30	31	

KEY / LEGEND


- Regular Classes / Modules
- Lab work / Practical's / Quiz / TBD
- Ready for Job - TBD

VIRTUALIZATION SUPPORT

Date: July-19th-2025



Laptop (Windows or MAC)

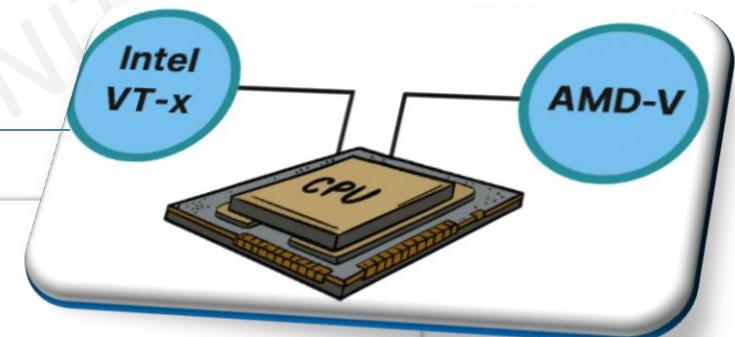

Where This is Used:


You'll see this label on:

- System requirements for installing virtualization platforms
- Requirements for running 64-bit operating systems in virtual machines
- BIOS/UEFI settings where VT-x/AMD-V needs to be enabled for VM support

Inside the Computer: How Speed Affects Performance

Date: July-19th-2025

Laptop (Windows or MAC)

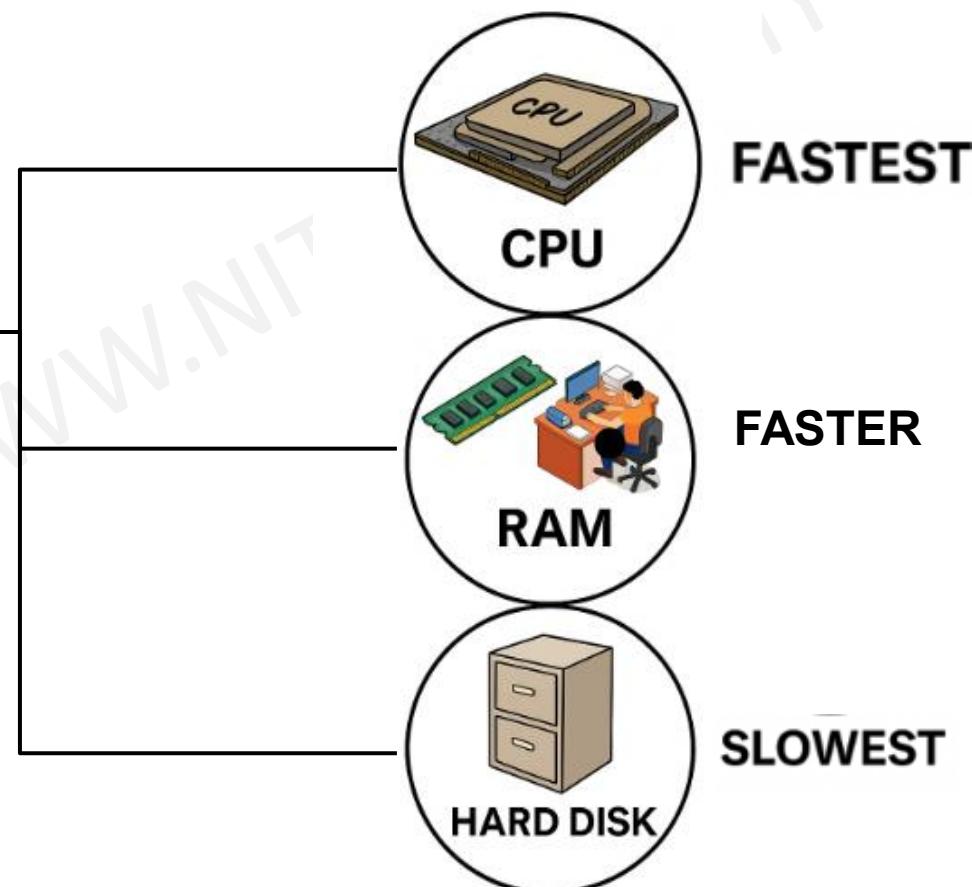

VIRTUAL MACHINE REQUIREMENTS

Date: July-19th-2025



ORACLE VIRTUAL BOX



Laptop w/Windows



ISO Images:
RHEL 9
Rocky Linux 9

20GB Free Space

1 CPU

1GB RAM

UBER/LYFT – HOW TECHNOLOGY WORKS


Date: July-19th-2025

Rider Requests a Ride



1

Rider plans and initiates Request for Trip using Uber/Lyft APP

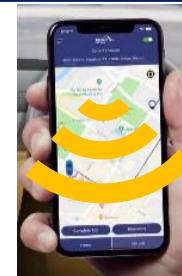


2


Uber/Lyft Command Control Center receives & processes request => SYS CALL



WHY LEARN LINUX?

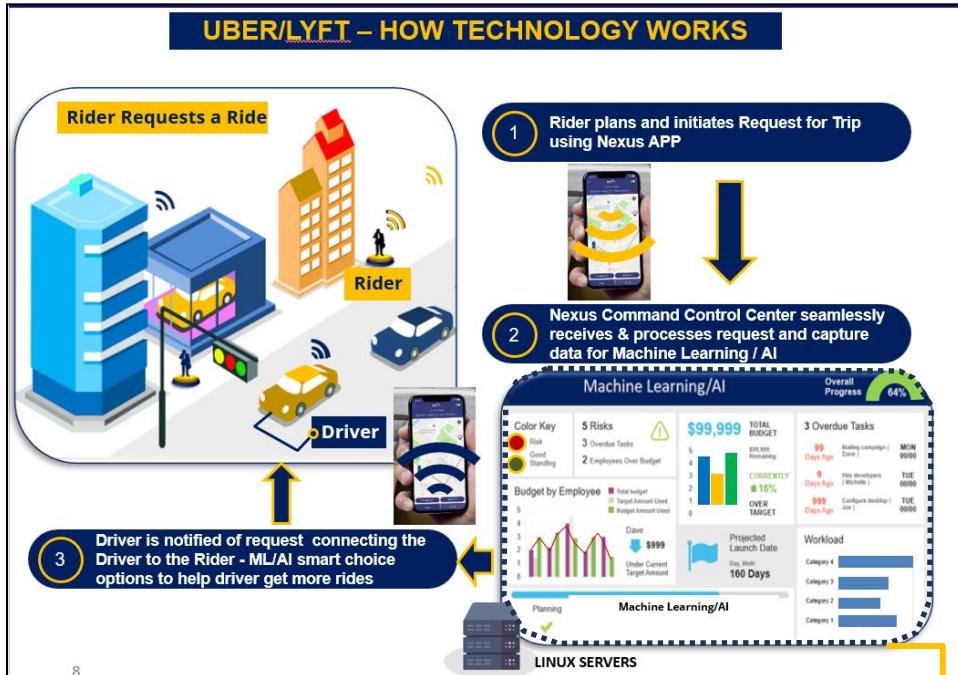

(Linux System Admin)

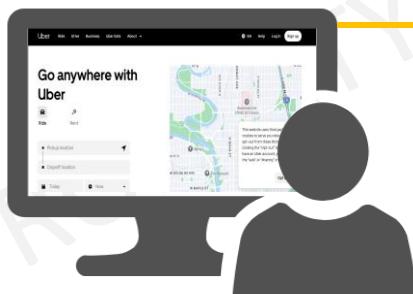

App Servers

Web Servers

Linux Servers

App



FAIR STUDENT AGREEMENT

Date: July-19th-2025

A FAIR STUDENT AGREEMENT SHALL BE PROVIDED IN THE MONTH OF SEPTEMBER TO ALL STUDENTS.

THOS WHO WANT US TO HELP THEM WITH RESUME AND JOB INTERVIEWS WILL HAVE TO SIGN THE DOCUMENT.

**YOU OWE US \$6000 ONCE YOU HAVE YOUR JOB.
PLEASE HONOR AND RESPECT OUR HARD WORK
BY HONORING THE AGREEMENT ONCE YOU GET
YOUR JOB.**



Achieve IT Career Success




Resume Tailored for IT

- Receive expert help to create a resume that showcases your IT skills and experience for technology-focused roles.

Interview Preparation Support

- Get prepared for IT job interviews with tailored practice, boosting your confidence and performance in interviews.

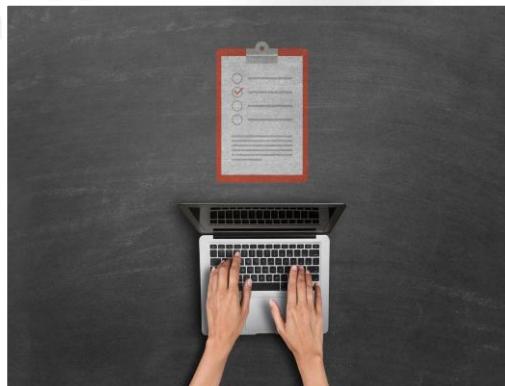

Job Search Strategies

- Learn proven strategies for finding and securing your desired IT job, increasing your chances of employment success.

WINDOWS ADOPTING LINUX!

```
Command Prompt X + ▾
Microsoft Windows [Version 10.0.22631.4602]
(c) Microsoft Corporation. All rights reserved.

C:\Users\ekust>wsl --list
Windows Subsystem for Linux has no installed distributions.
Distributions can be installed by visiting the Microsoft Store:
https://aka.ms/wslstore

C:\Users\ekust>wsl --list --all
Windows Subsystem for Linux has no installed distributions.
Distributions can be installed by visiting the Microsoft Store:
https://aka.ms/wslstore
```

https://aka.ms/wslstore
Distributions can be installed by visiting the Microsoft Store:
Windows Subsystem for Linux has no installed distributions.




OPERATING SYSTEM (OS):

USER MANAGEMENT

DISK (FILE) MANAGEMENT


MEMORY MANAGEMENT

PROCESS MANAGEMENT

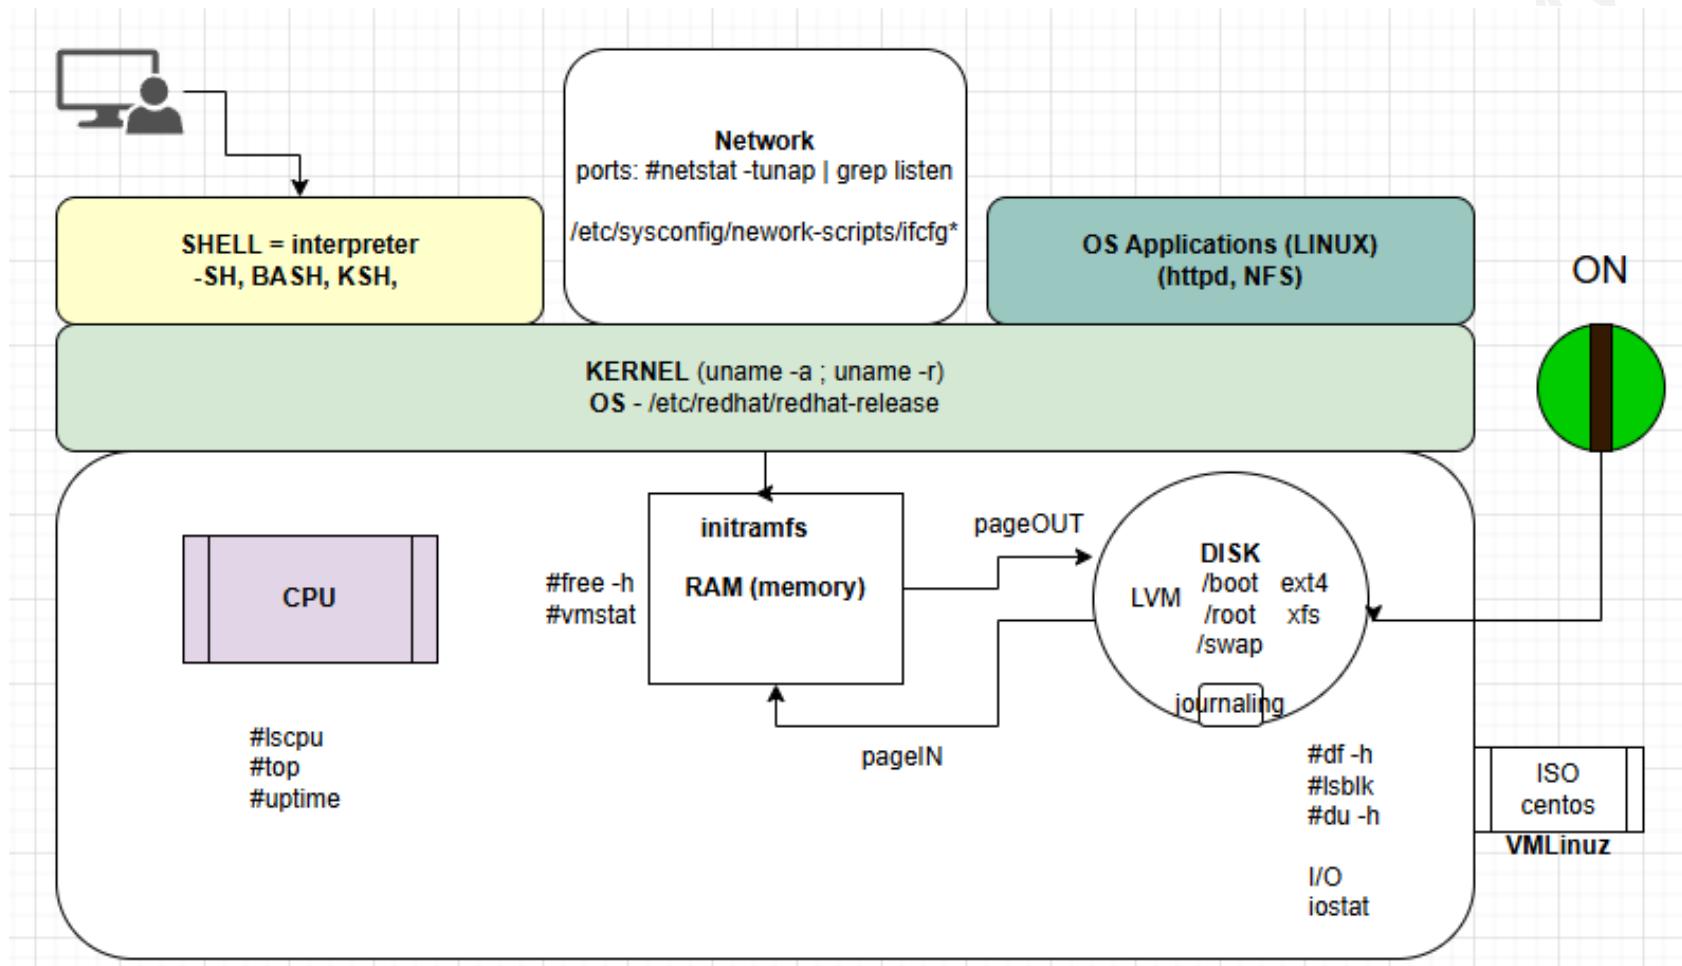

INTRODUCTION TO SERVERS/VIRTUALIZATION

PROPERTY OF NIT ACADEMY




CHAPTER 2 INTRODUCTION TO SERVERS/COMPUTERS

Using the rules and strategies in this section you will gain confidence and a deep insight in setting up yourself for success


- Basics of Networking?
- Data Center and Servers?
- What is a Server?
- Types of Operating Systems
- Virtualization
- Linux Distros.
- DevOPS

BASIC NETWORK - HOME

A home AT&T router is primarily a network device, not a general-purpose server. However, it may provide limited server-like functions for network management.

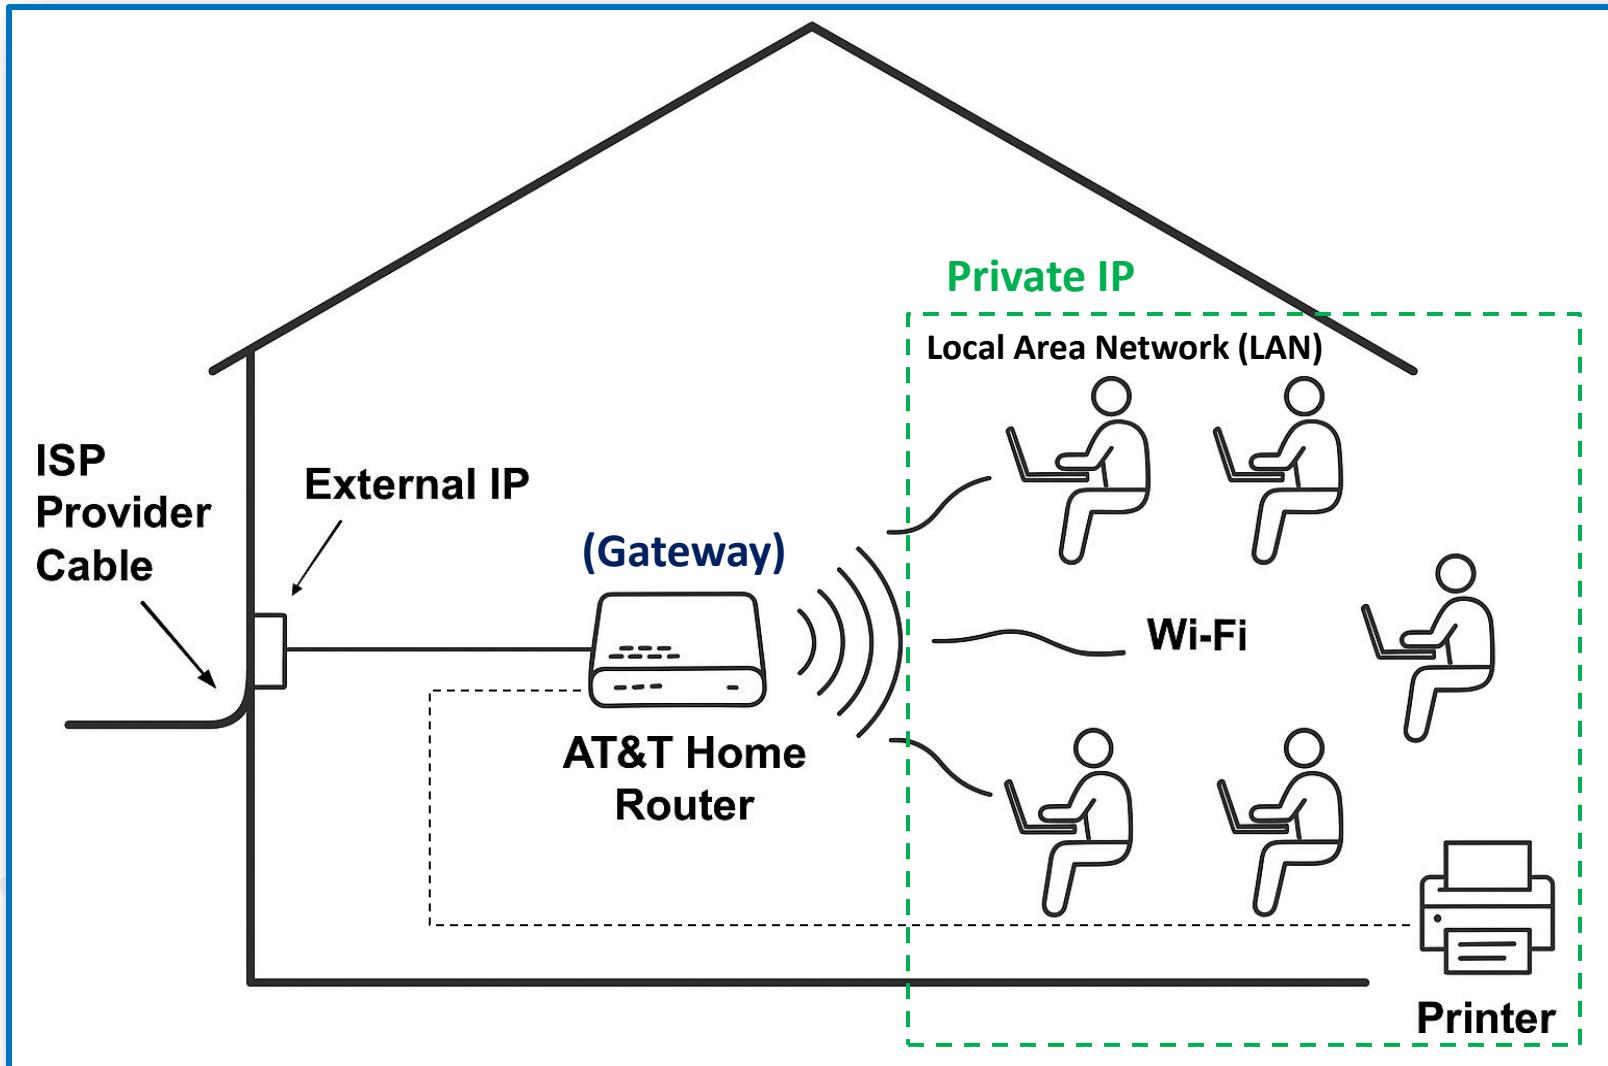

WHERE IS THE SERVER?

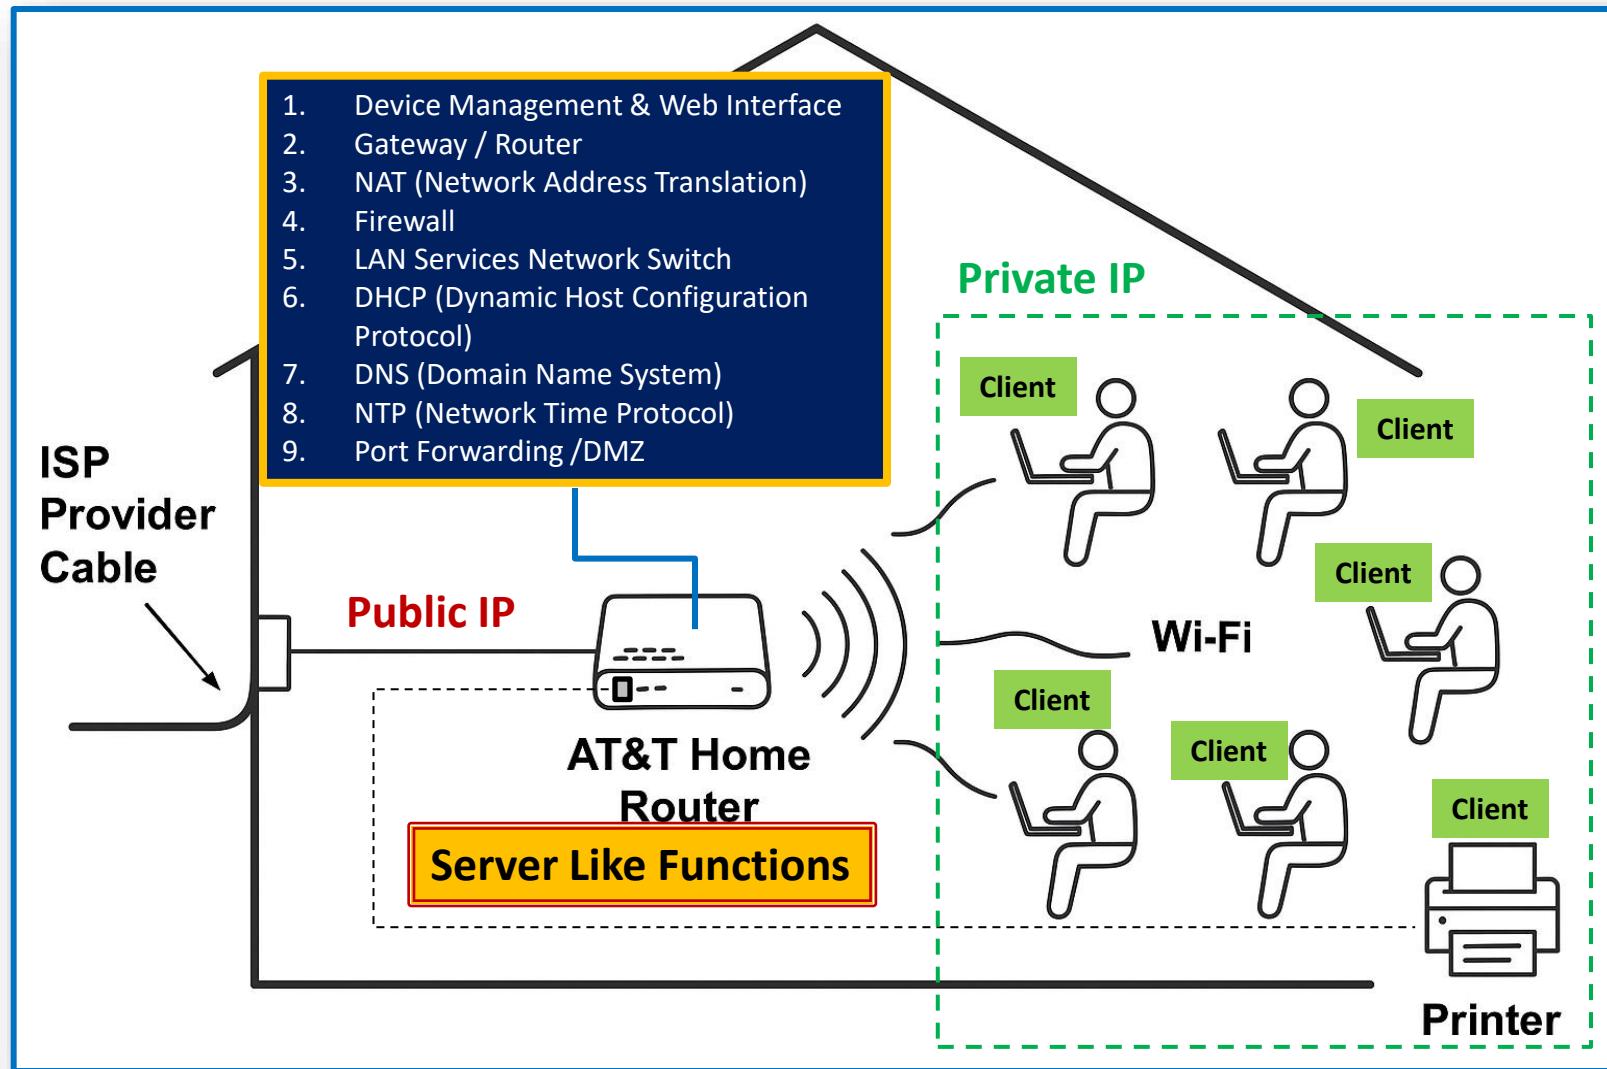

1. Internet Gateway (WAN to LAN translation)

- Connects your home network to the AT&T internet backbone via fiber or DSL.
- Handles **external IP** on WAN (public) side and **local IPs** on LAN side.

2. Wi-Fi Access Point

- Provides **wireless connectivity** (Wi-Fi 2.4GHz and 5GHz or 6GHz on newer models).
- Allows devices like phones, laptops, smart TVs, and tablets to access the network.

3. DHCP Server

- Assigns **dynamic IP addresses** to devices in your home (e.g., 192.168.1.x).
- Manages IP leases and device identification.

4. NAT (Network Address Translation)

- Allows multiple home devices to share **one public IP**.
- Keeps internal IPs hidden from the outside world.

5. Firewall

- Filters incoming/outgoing traffic for **security**.
- Blocks unsolicited inbound traffic unless port forwarding or DMZ is configured.

6. DNS Forwarding

- Forwards DNS requests to AT&T's or user-specified DNS servers.
- Speeds up domain name resolution within the local network.

11. VoIP (if supported)

- Some AT&T routers provide ports for **digital home phones**.
- Uses AT&T's VoIP service over the internet.

10. Device Management & Web Interface

- Accessed via <http://192.168.1.254> (default)
- Lets you:
 - View connected devices
 - Change Wi-Fi settings
 - Update firmware
 - Monitor usage and errors

9. Parental Controls & QoS (limited)

- Some AT&T routers offer:
 - Content filtering
 - MAC filtering
 - Bandwidth prioritization** (QoS) for devices like VoIP phones or gaming consoles

8. LAN Services (Ethernet Switching)


- Has multiple **Ethernet ports** for connecting printers, PCs, or smart TVs.
- Functions as a basic **network switch**.

7. Port Forwarding / DMZ

- Enables hosting of services like game servers or security cameras.
- Allows custom rules for exposing specific ports to the internet.

DATA CENTER


Powered by

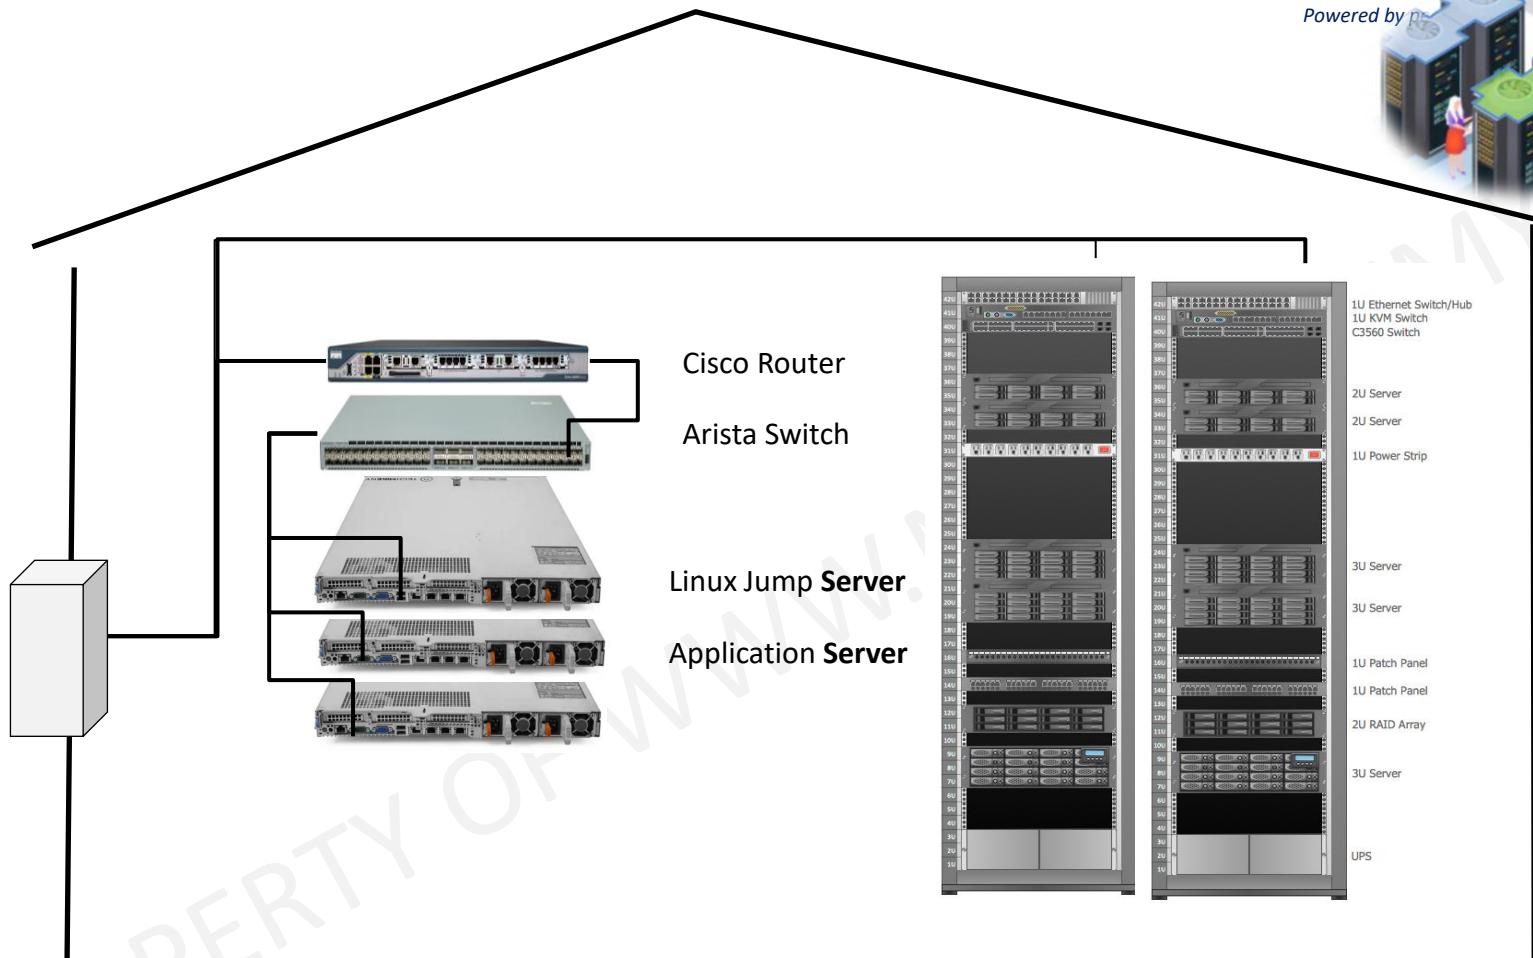

A **server** is a device or **software** that provides **specific services** to clients on a network — such as:


1. File hosting (like an FTP server)
2. Web hosting (like Apache or Nginx)
3. Email services
4. Media streaming (like Plex),
5. DNS or DHCP services (beyond basic routing)

DATA CENTER (DC) = AWS = AZURE

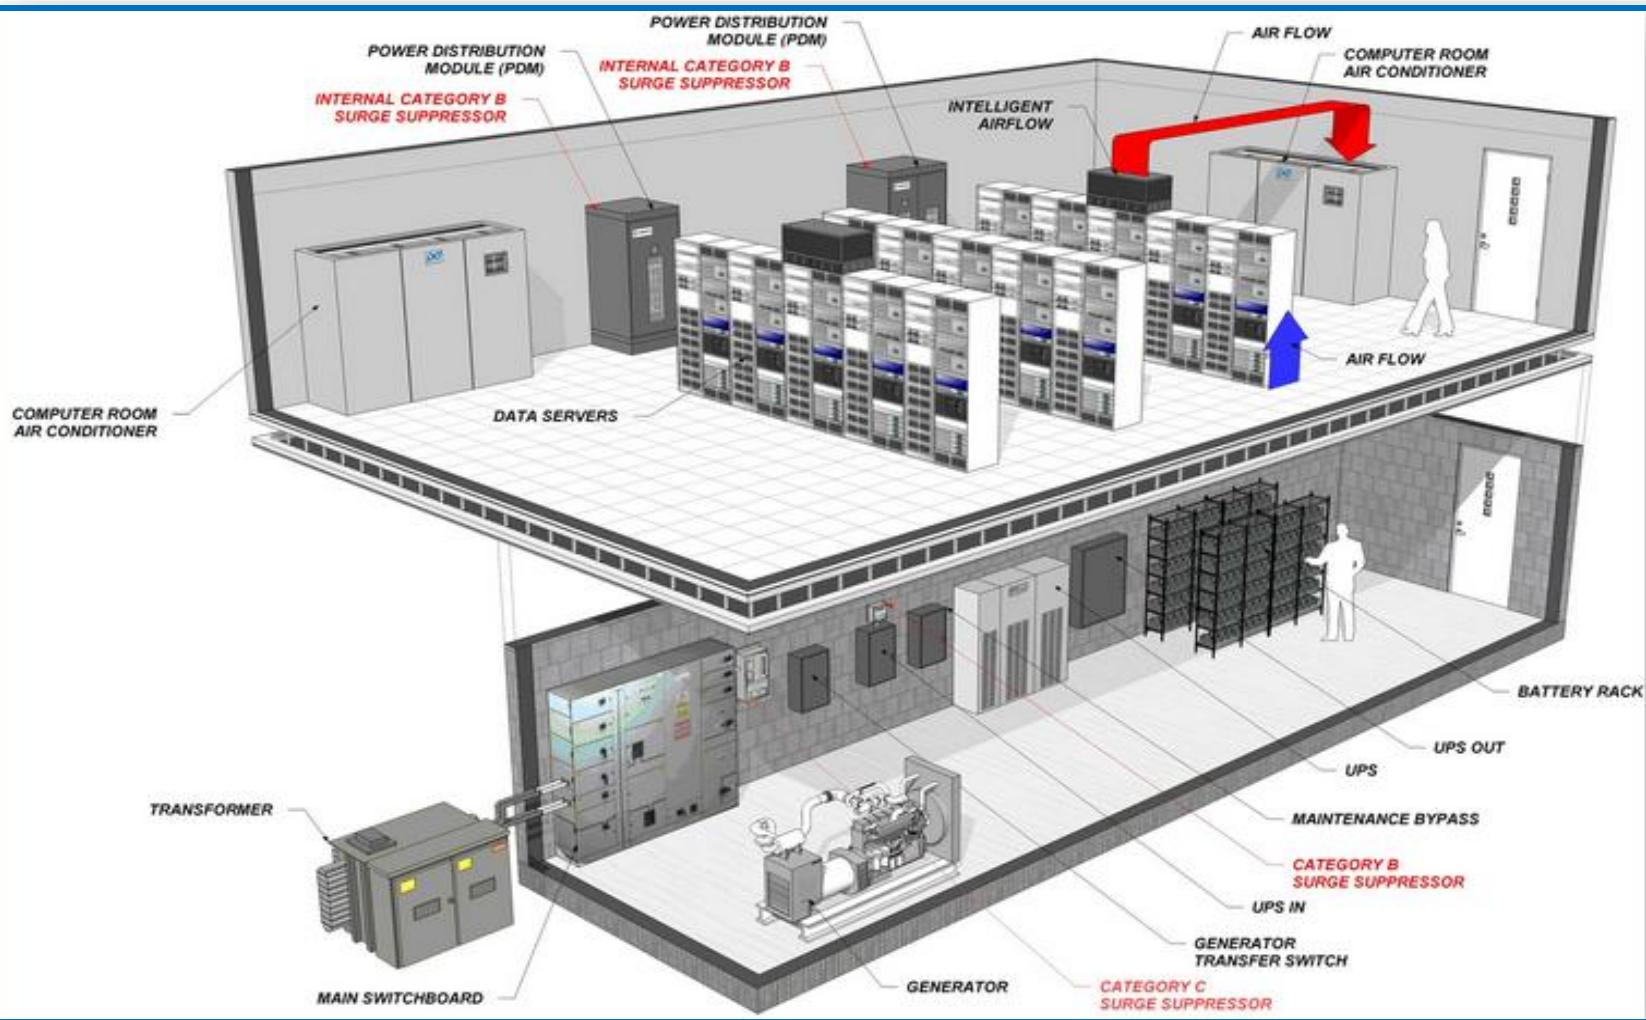

COMPUTER = SERVER

Important Questions

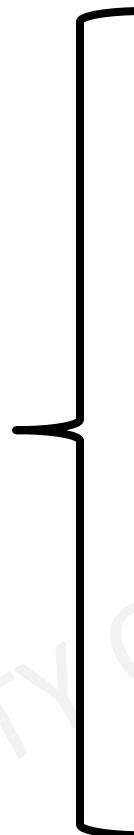

What is a Computer ?

What is a Server ?

Server vs. Laptop: Key Differences



Performance and Reliability

Servers are built for continuous operation, high reliability, and to manage multiple user requests simultaneously.

Portability and Design

Laptops are designed for portability, featuring built-in displays, keyboards, and batteries for mobile computing.

Hardware and Storage Capacity

Servers typically offer more powerful hardware and greater storage capacity than laptops, supporting demanding workloads.

UNDERSTAND THE DIFFERENCE

LAPTOP / DESKTOP COMPUTER



SERVER




Aspect	Computer	Server
Purpose	Personal tasks	Serving resources to clients
Hardware	Consumer-grade	Server-grade (ECC RAM, redundancy)
Software	Desktop OS	Server OS
Usage	Individual	Multi-client
Uptime	Not designed for 24/7 operation	Designed for continuous operation

In short, a server is a specialized type of computer with hardware and software optimized for providing services reliably and efficiently over a network.

Server Overview

<https://techmikeny.com/products/dell-powerededge-r640-10-12-bay-2-5-1u-server>

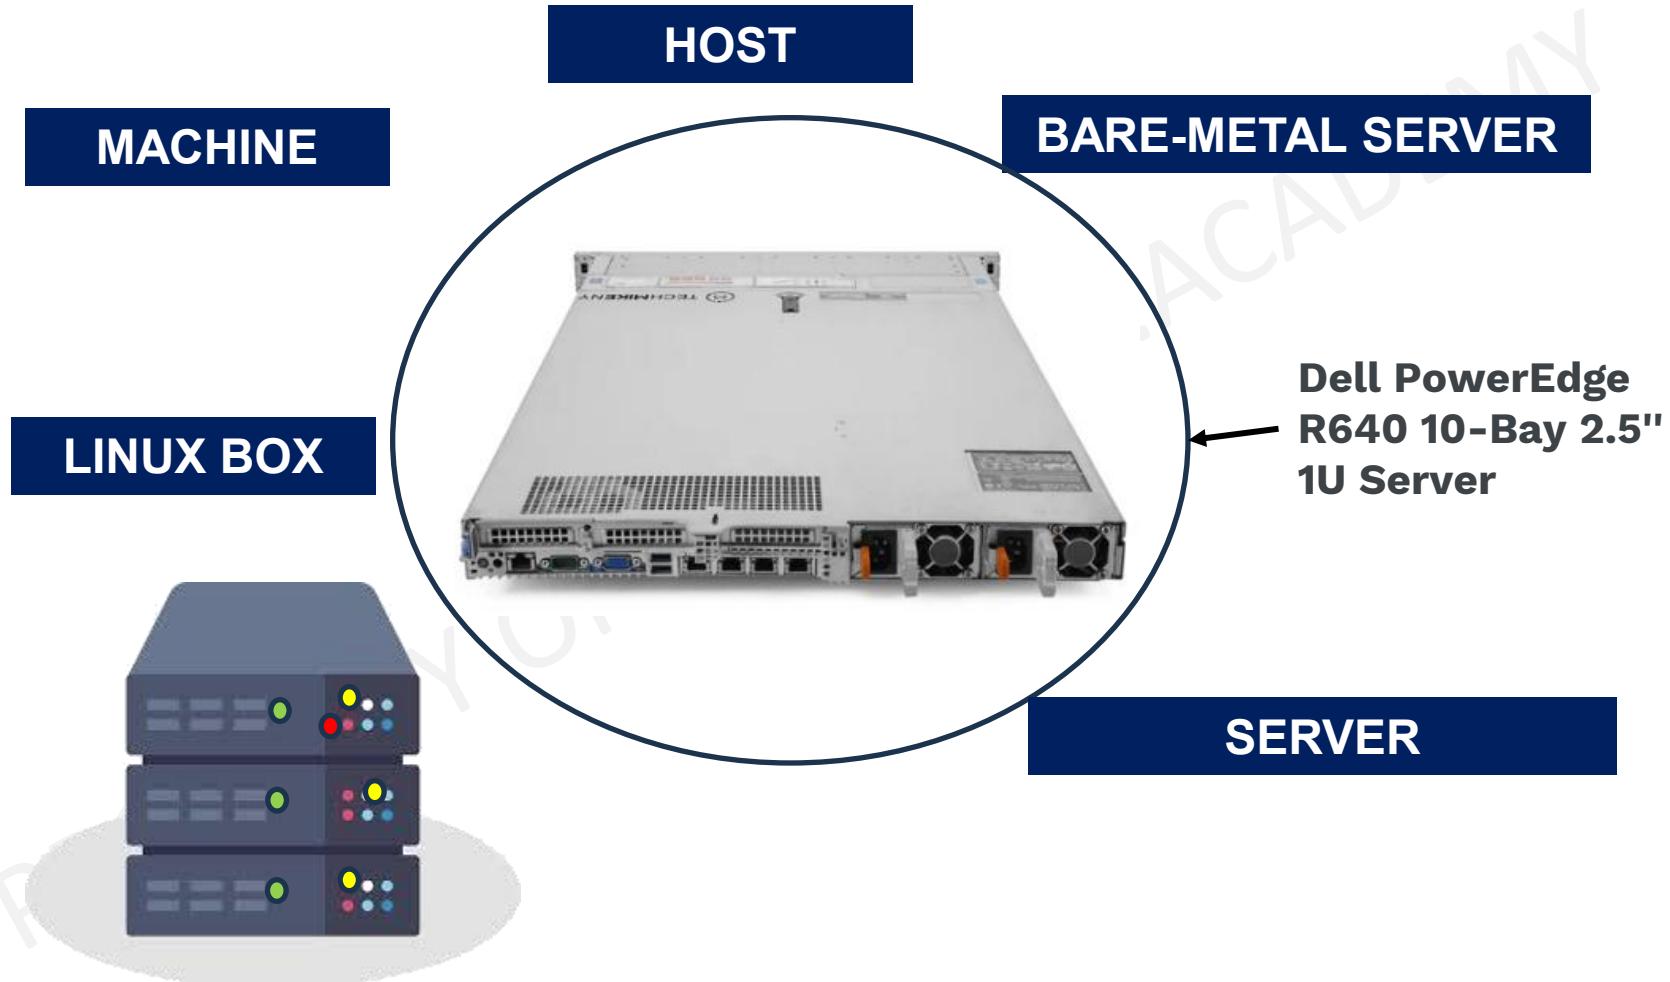

What is inside a Server?



HARDWARE

1. Mechanical Parts



SOFTWARE

1. Operating System
2. Device Drivers
3. Applications /Packages / Programs



What Hardware is Important to Us?

NIC/NDC



Network Interface Card

CPU




Central Processing Unit
(CPU)

Memory



Random Access Memory
(RAM)

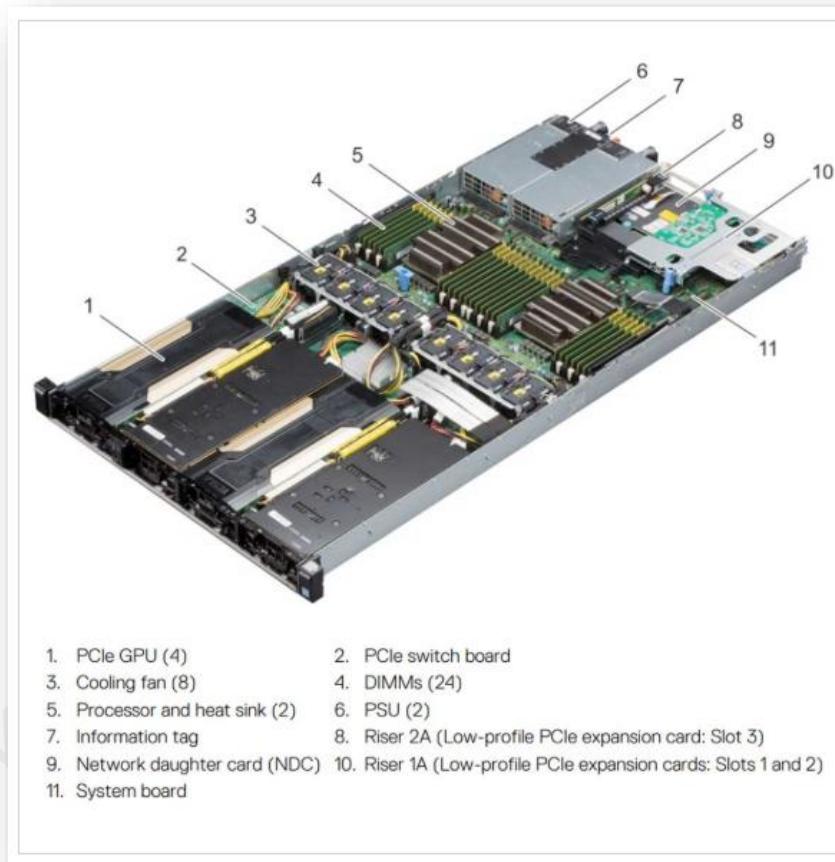

GPU

Disk



Hard Disk
(HD)

iDRAC



RAID



WHAT HAPPENS WHEN YOU TURN YOUR COMPUTER?


BIOS: Input/Output System (BIOS)

In computing, BIOS refers to a firmware interface that initializes hardware during the booting process and provides runtime services for operating systems. It's a critical component of a computer's startup routine.

Fundamental Similarities



BIOS Settings can be accessed by Powering the computer ON and pressing "ESC+F10" for HP

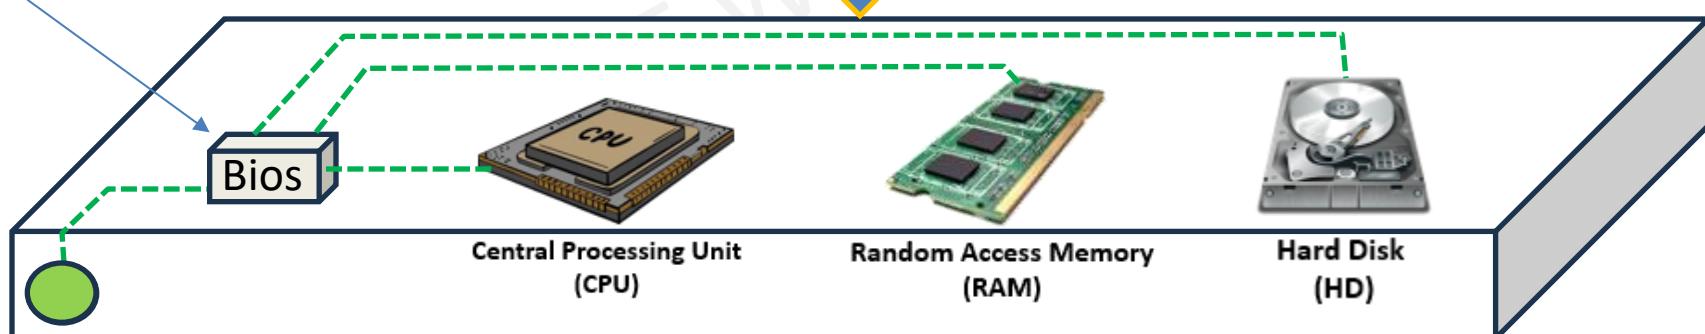


Power On Self–Test (POST): when the computer is powered ON, the BIOS performs a POST to ensure all hardware components (CPU, RAM, etc.) are functioning properly

FUNDAMENTAL DIFFERENCE BETWEEN PERSONAL COMPUTERS AND SERVERS?

Feature	Explanation
iDRAC Controller	Dell servers include a dedicated out-of-band management controller (iDRAC) to manage the system remotely—even if the OS is down. Desktops don't have this.
Advanced POST Diagnostics	PowerEdge servers perform extensive hardware checks (e.g., RAID controllers, ECC memory, redundant PSUs).
BIOS Boot Manager and One-Time Boot	Server BIOS includes more boot management options—booting from SAN, PXE over multiple NICs, virtual media, etc.
RAID Controllers (e.g., PERC)	Servers may boot from logical drives created by RAID controllers. RAID BIOS initialization is an extra step.
Lifecycle Controller	Dell servers include a Lifecycle Controller for firmware updates, system setup, and OS deployment—not found on desktops.
Redundancy Checks	Dual power supplies, failover NICs, ECC memory error logs—all these are validated during POST.
PXE Boot Common in Servers	Network booting using PXE (Preboot Execution Environment) is more common in data center servers for OS provisioning.


SIMPLIFIED SERVER BOOT PROCESS

Loading the Operating System

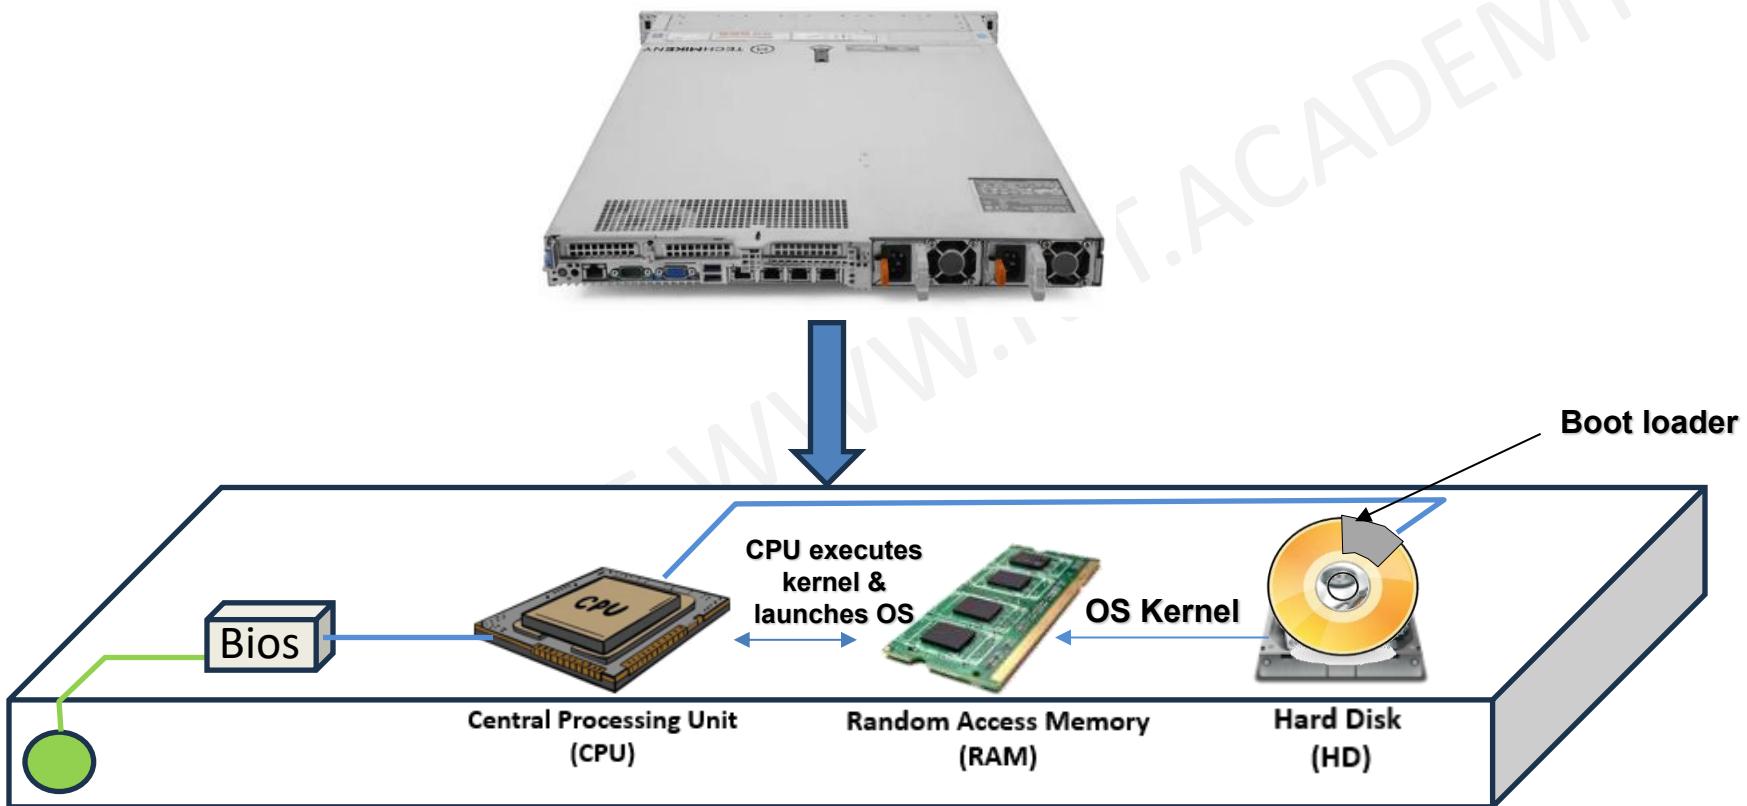

INTRODUCTION TO VIRTUALIZATION


Important Questions

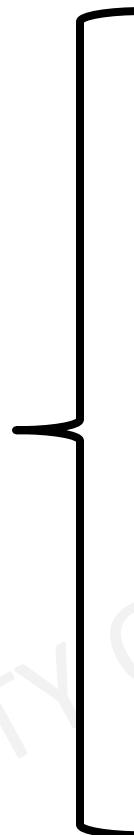


What is Virtualization ?

Why use Virtualization ?


Single Operating System

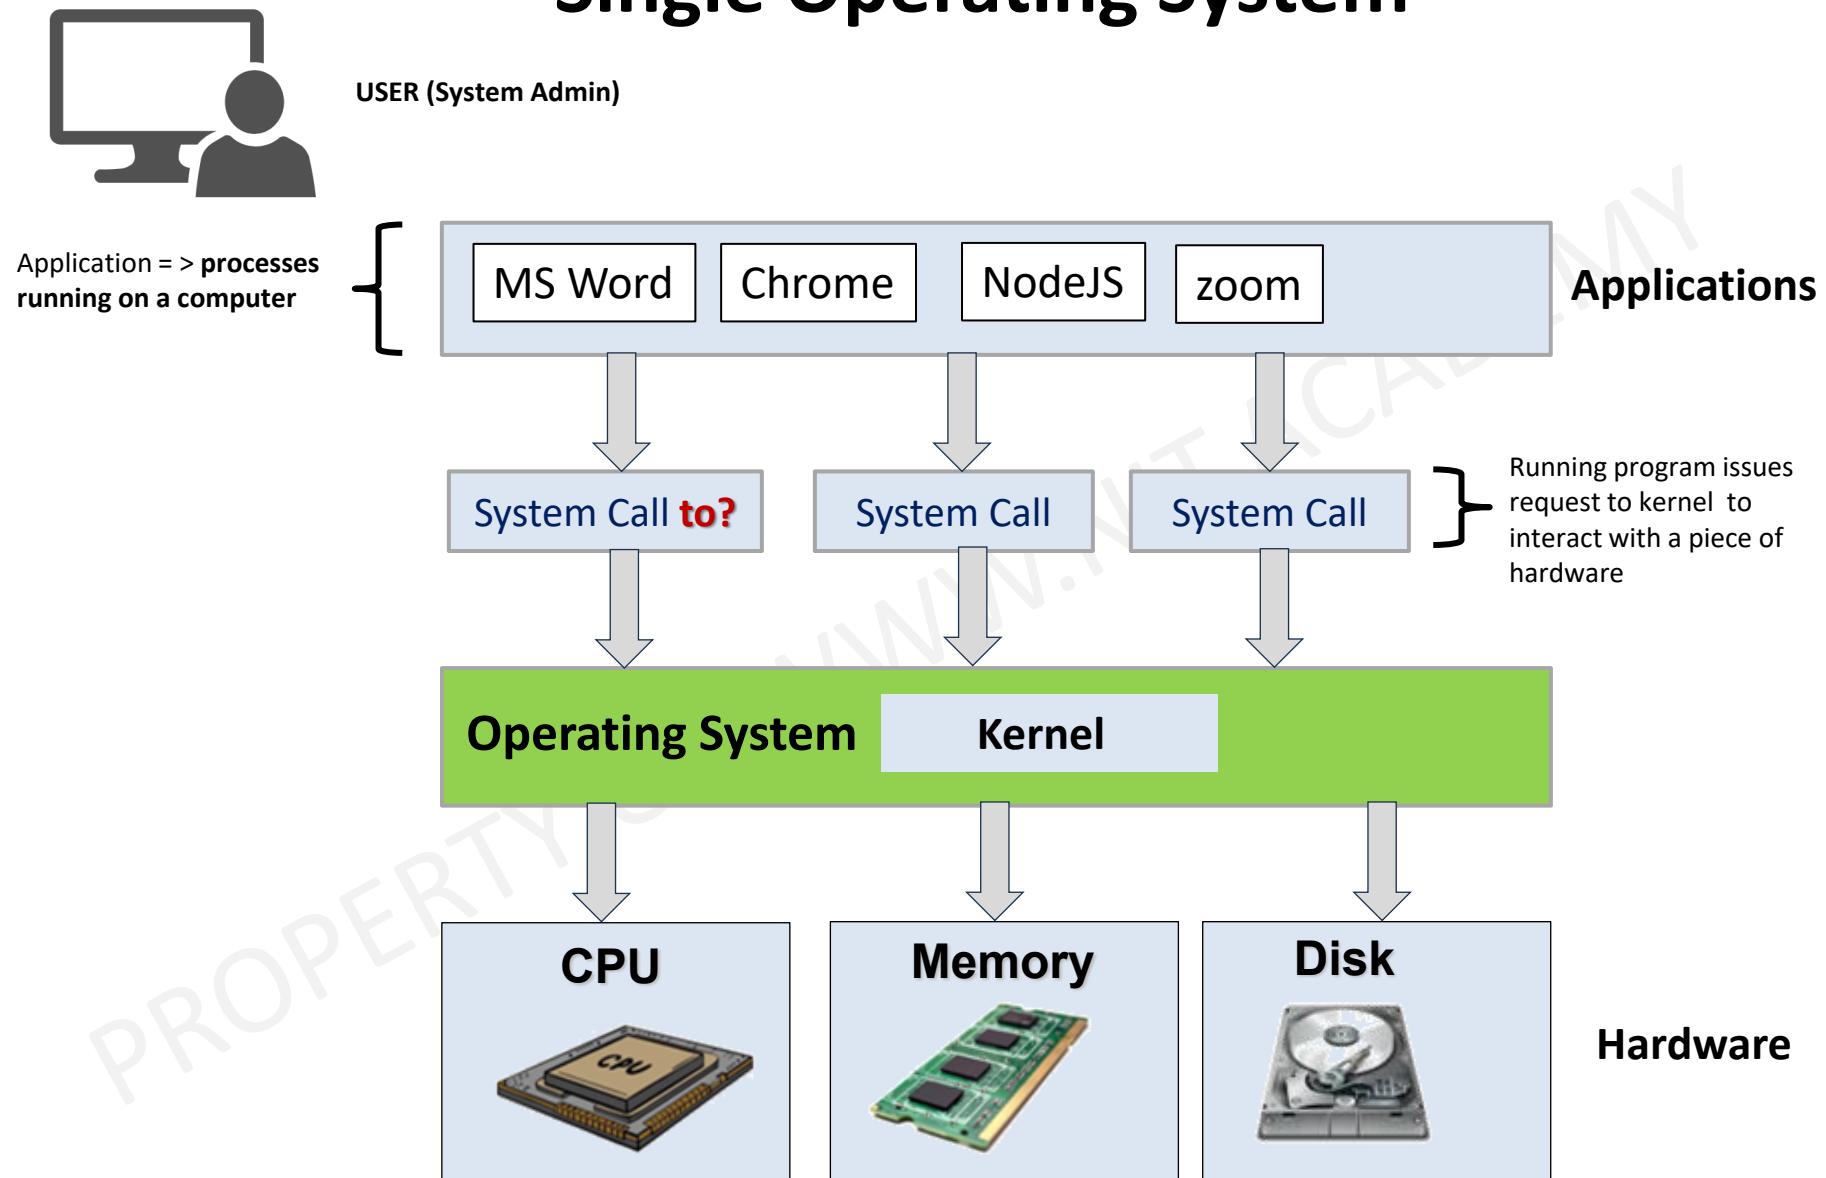

The need for multiple operating systems

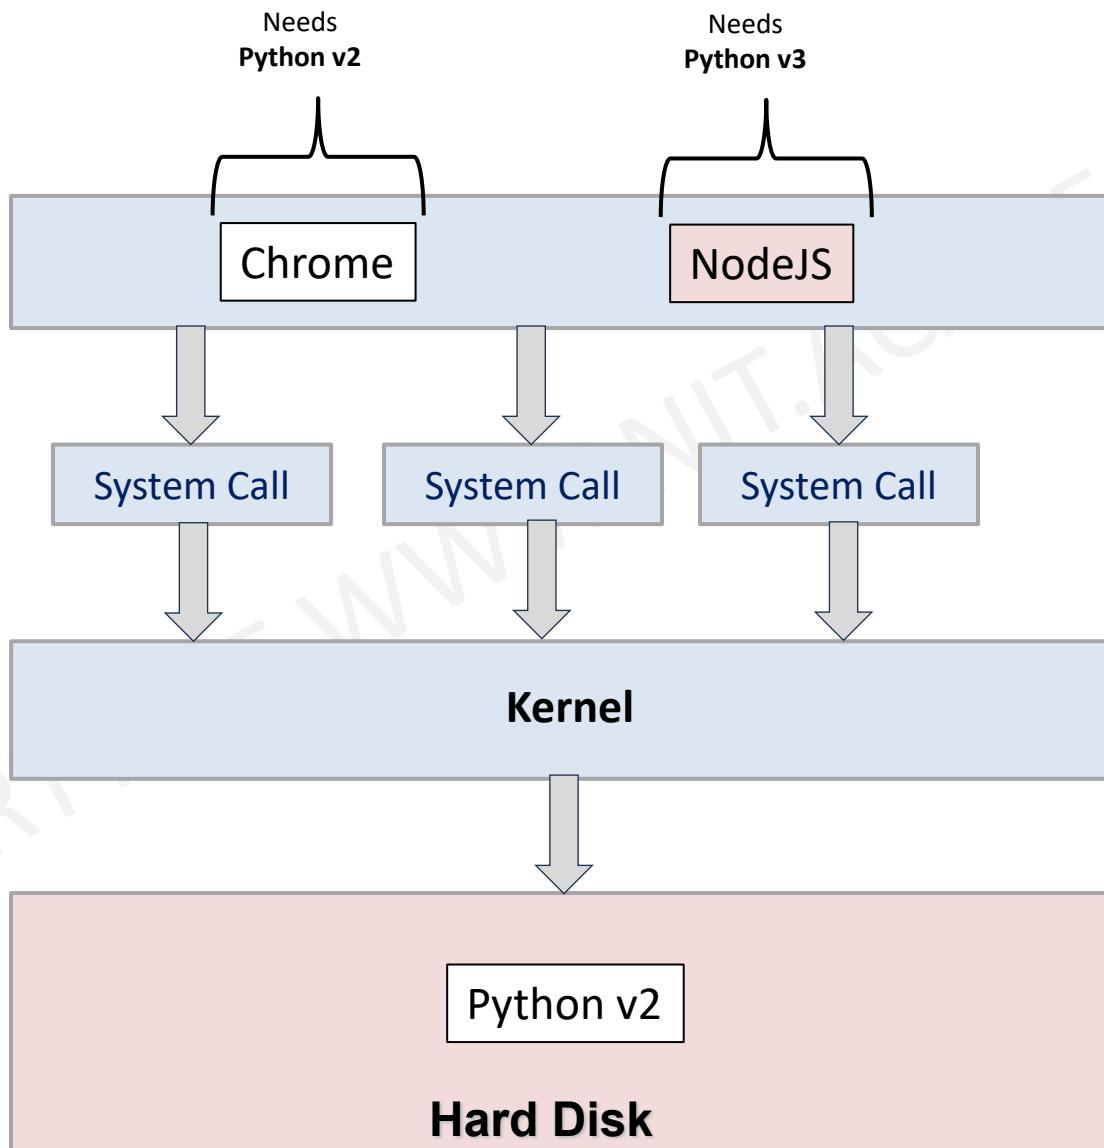

Partitioning / Virtualization

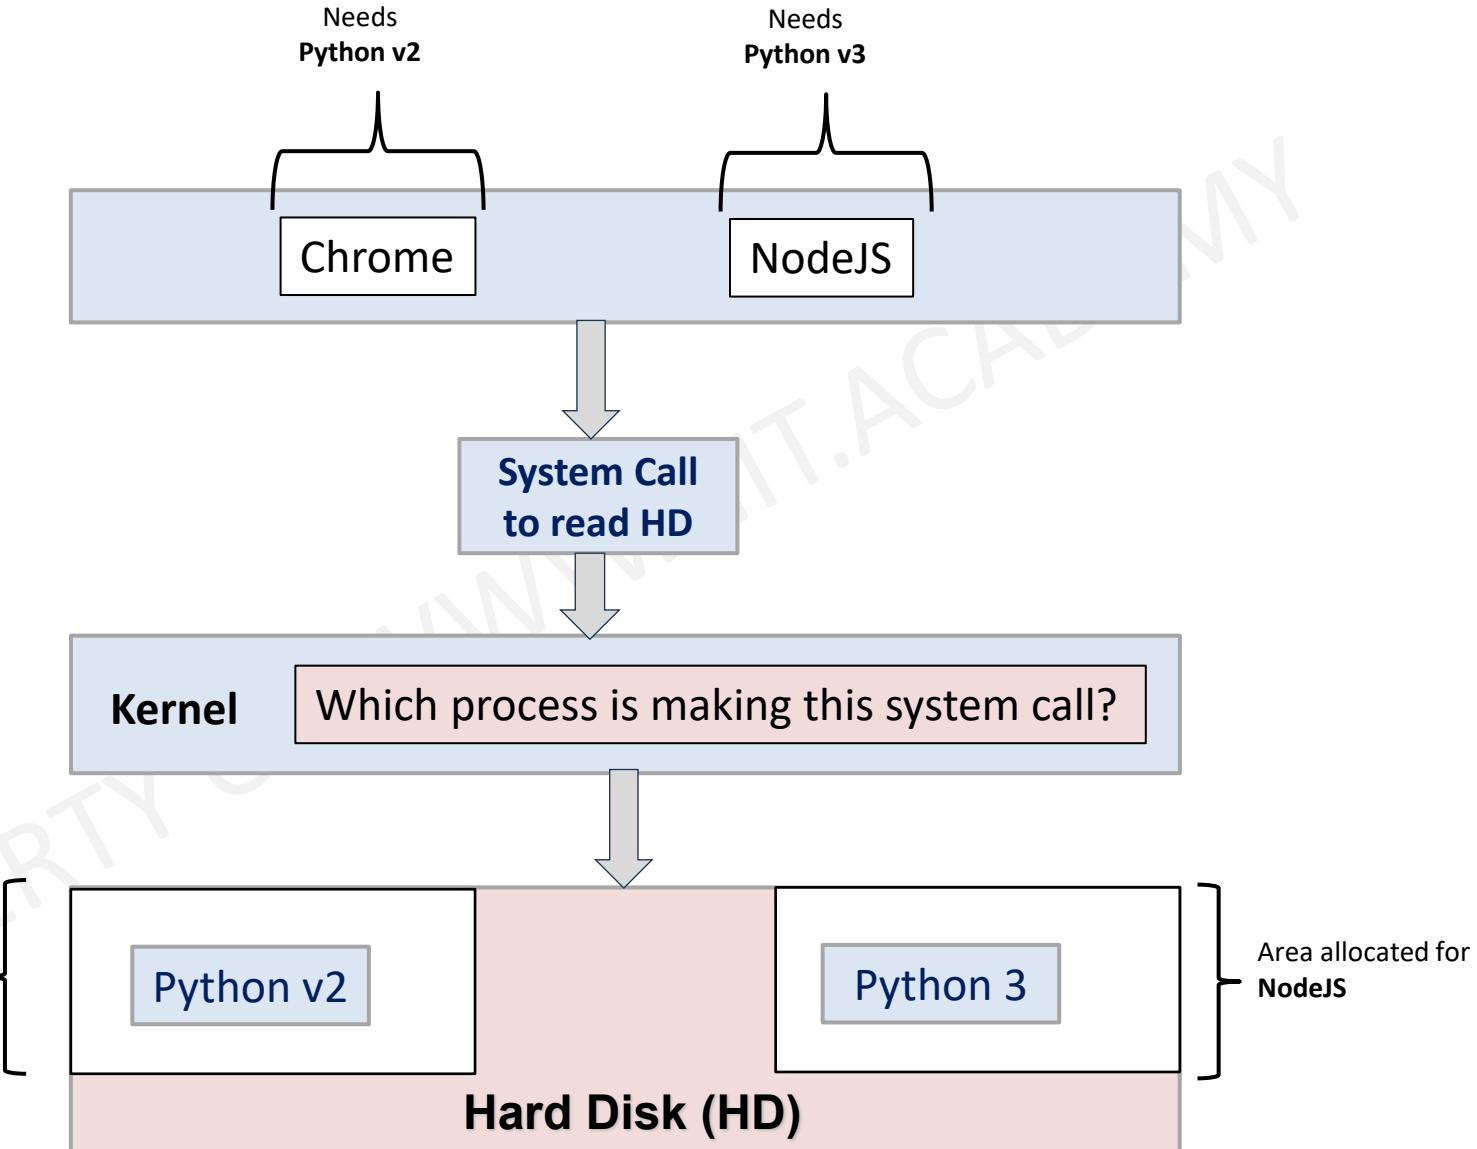



UNIX OPERATING SYSTEM (OS)

History of UNIX

1. Unix: The Beginning

- **1969:** Unix was developed at AT&T's Bell Labs by Ken Thompson, Dennis Ritchie, and others. It was created to be a simple, multitasking, multi-user operating system.
- **1971:** The first version of Unix was released. It was initially written in assembly language.
- **1973:** Unix was rewritten in the C programming language, making it portable across different types of hardware. This was revolutionary and laid the foundation for modern operating systems.
- **Late 1970s and 1980s:** Unix gained popularity in academic and research institutions. Various derivatives, such as BSD (Berkeley Software Distribution), emerged during this time.
- **1984:** AT&T divested its computing division due to antitrust regulations, leading to the commercialization of Unix. Different vendors began creating proprietary versions of Unix, leading to fragmentation.
- .



UNIX/AIX OPERATING SYSTEM (OS)

History of Linux

2. Linux: Inspired by UNIX

• **1991:** Linux was created by Linus Torvalds, a Finnish computer science student. Inspired by Minix (a Unix-like system used for teaching), Torvalds started developing Linux as a free, open-source kernel.

- The first release, Linux 0.01, was shared on the Internet.
- The GNU Project, initiated by Richard Stallman in 1983, provided essential tools and utilities for Linux, forming what is often called "GNU/Linux."

• **1992:** Linux was licensed under the GNU General Public License (GPL), ensuring its continued freedom and openness.

3. Development and Adoption of Linux

• **1990s:** Linux gained traction among hobbyists, academics, and developers. The release of distributions like Slackware (1993) and Debian (1993) made Linux easier to use and more accessible.


• **2000s:** Linux became a dominant force in servers, supercomputing, and embedded systems. Enterprise-focused distributions like **Red Hat Enterprise Linux (RHEL)** and SUSE Linux Enterprise were introduced.


• **2008:** Android, a Linux-based operating system for mobile devices, was launched, significantly increasing Linux's presence worldwide.

LINUX DISTROS/FLAVORS



DEVOPS - OVERVIEW

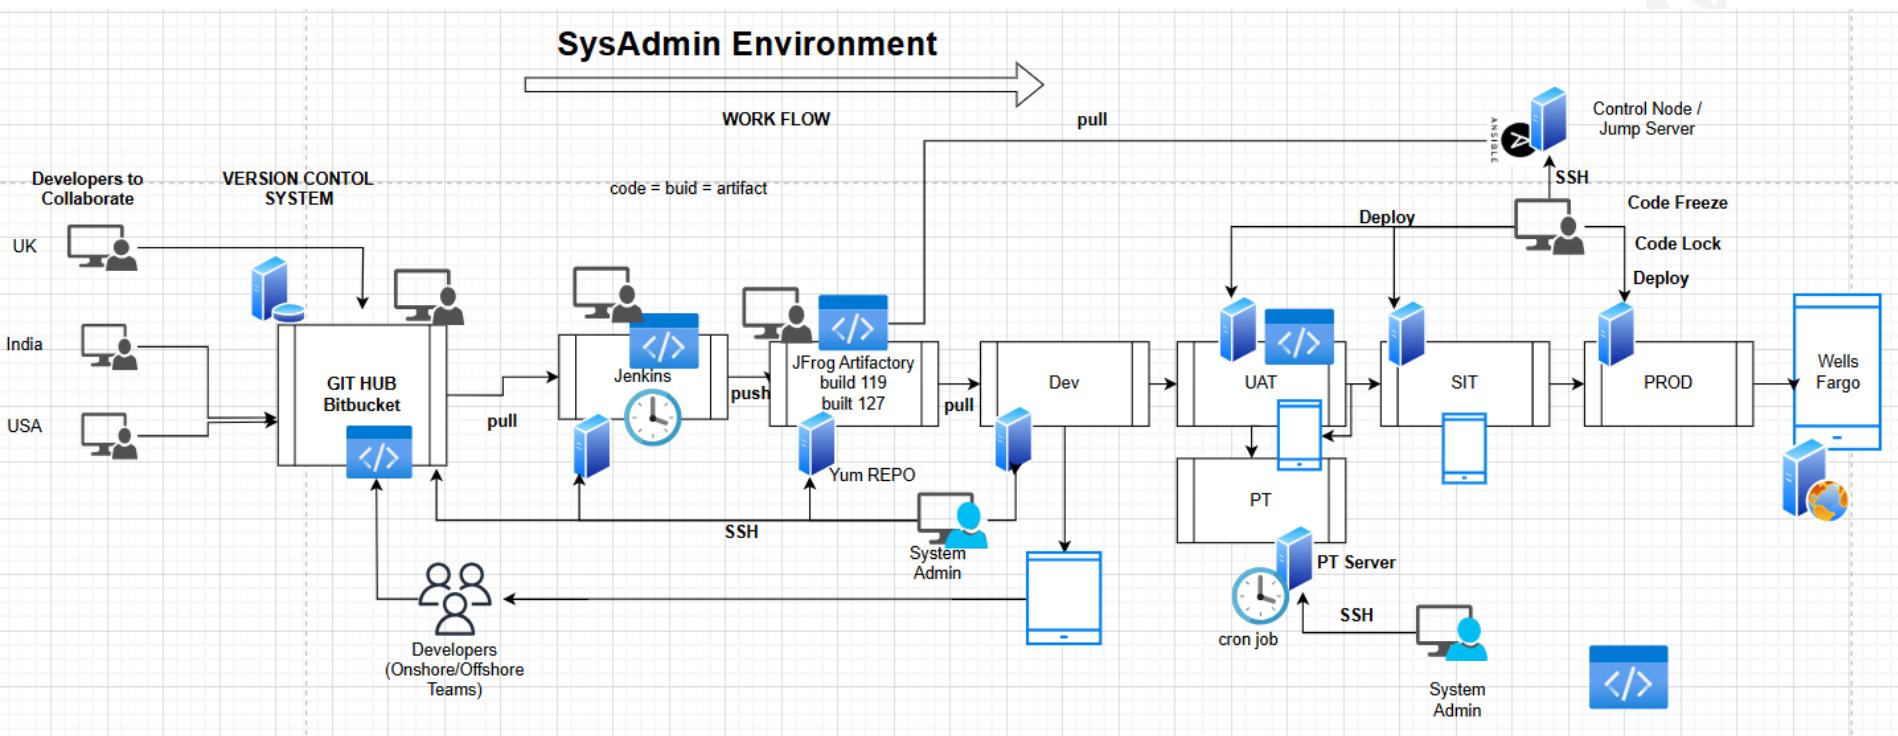



CHAPTER 3


Virtualization

Using the rules and strategies in this section you will gain confidence and a deep insight in setting up yourself for success

- ❑ What is Virtualization ?
- ❑ Why Virtualization
- ❑ Virtual Box – What is it and why use it?
- ❑ Why do we download Redhat or Rocky linux 9 in the lab ?
- ❑ Hypervisors Type 1 and Type 2?
- ❑ Exploring Linux Commands with Shell Login


VIRTUAL MACHINE REQUIREMENTS

Date: July-26th-2025

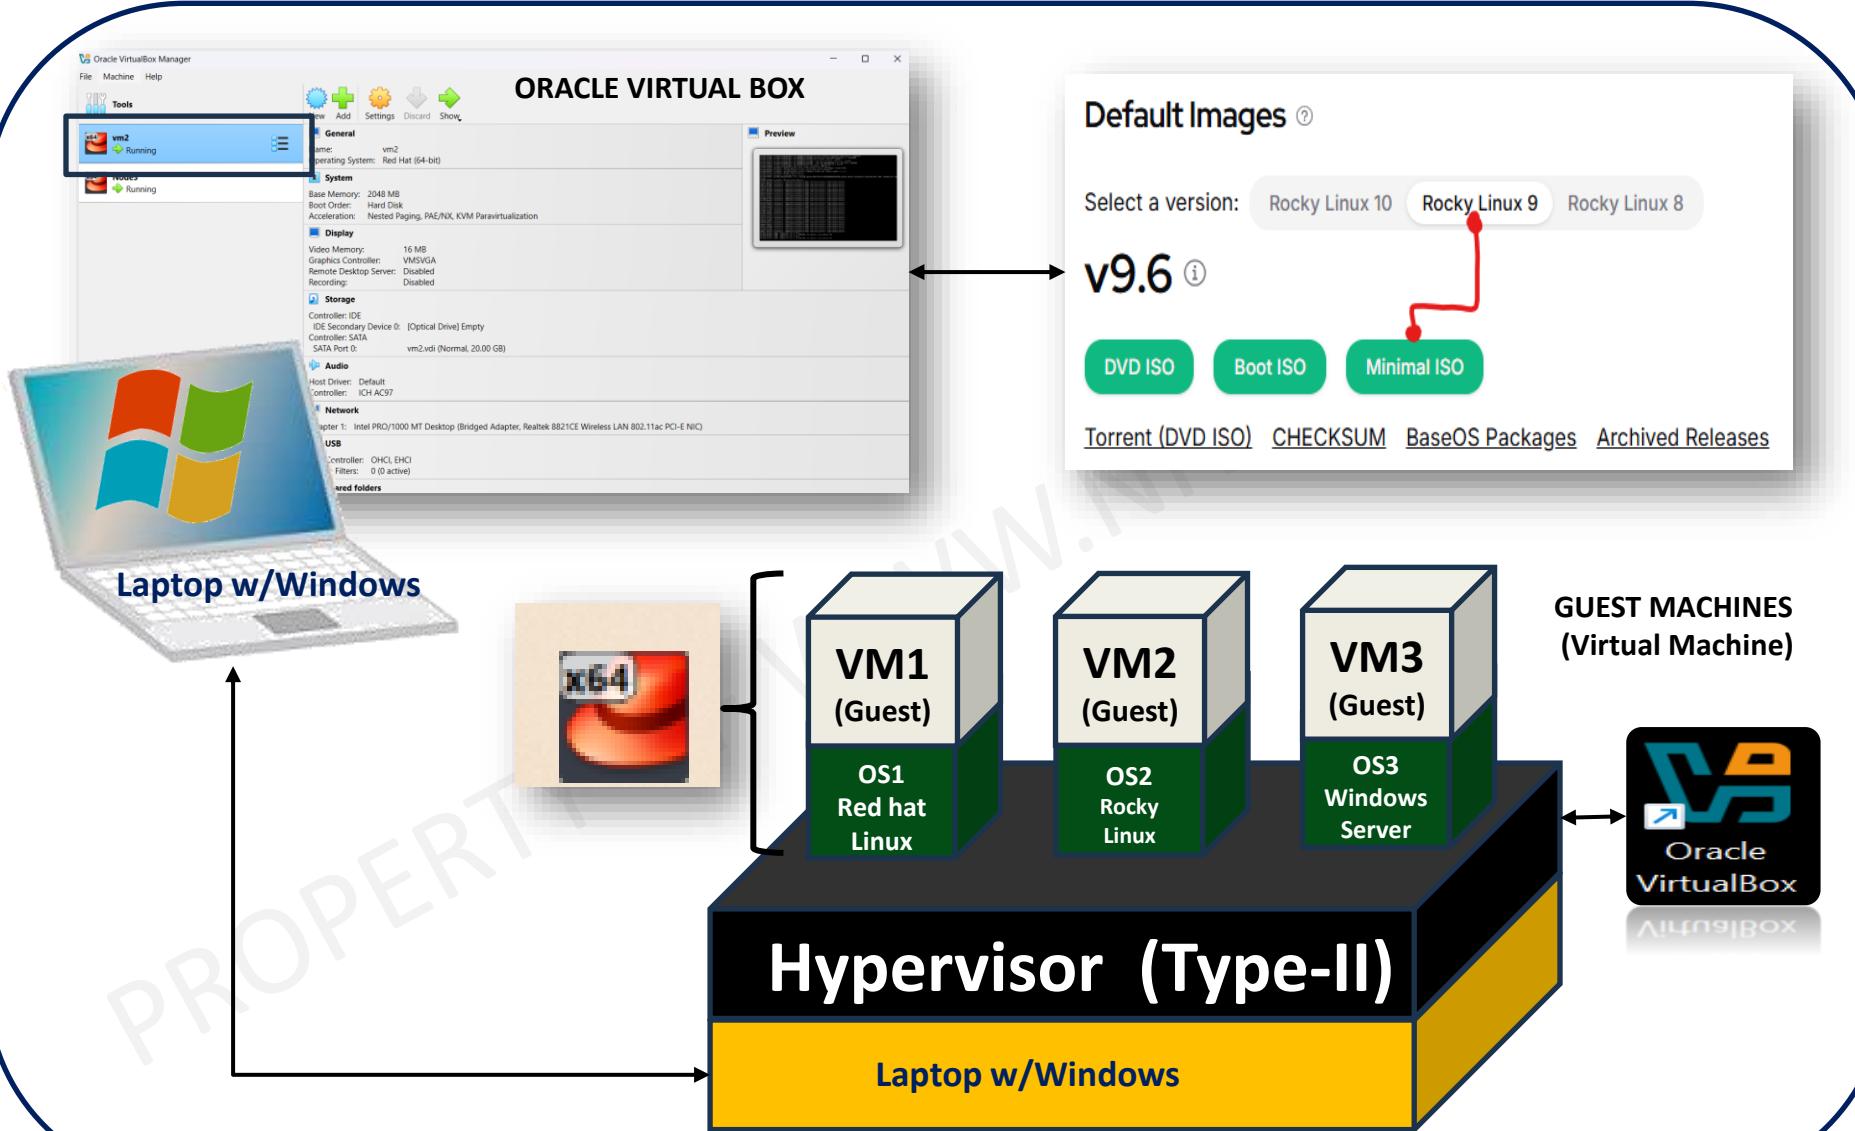

VIRTUAL MACHINE REQUIREMENTS

Date: July-26th-2025

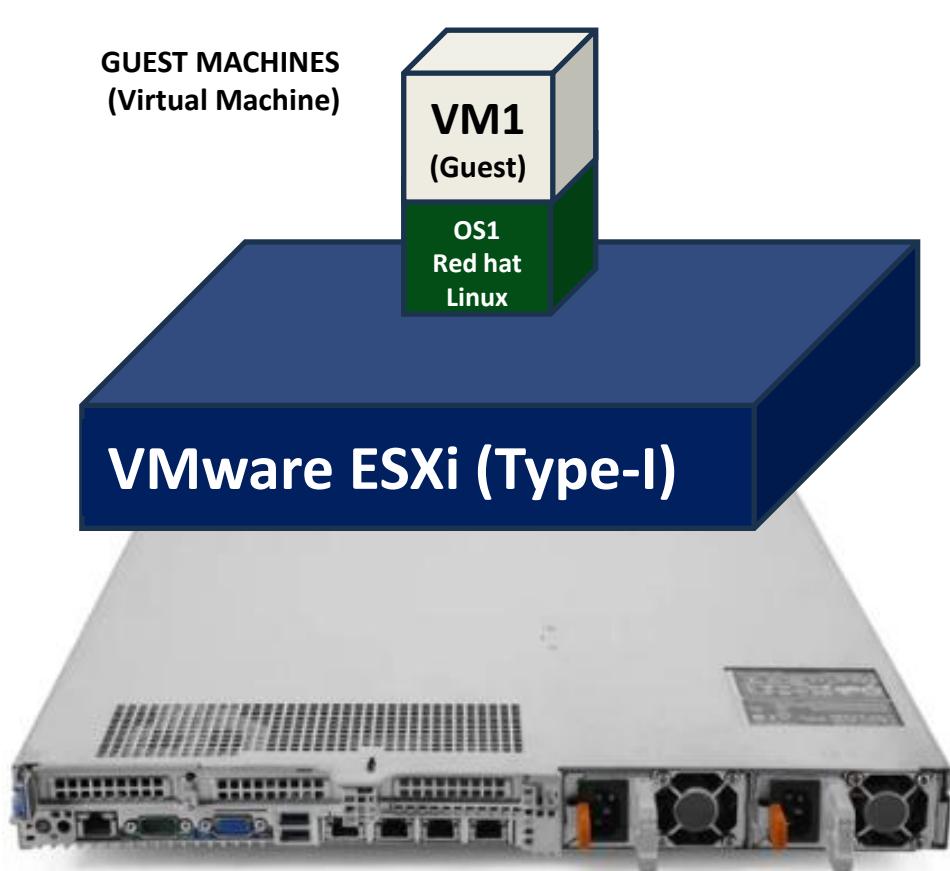

HYPERVISOR-1

Date: July-26th-2025

Run directly on hardware without needing a host OS. Used in enterprise environments.

Hypervisor	Vendor	Notes
VMware ESXi	VMware	Industry-leading, widely used in data centers
Microsoft Hyper-V (Server Core)	Microsoft	Built into Windows Server; native Type 1 option
Xen / XenServer (Citrix Hypervisor)	Citrix / Open Source	Used in AWS and other clouds
KVM (Kernel-based Virtual Machine)	Open Source (Linux)	Built into Linux kernel; used in Proxmox, RHEV, Nutanix AHV
Nutanix AHV (Acropolis Hypervisor)	Nutanix	Built on KVM, tailored for Nutanix HCI
Oracle VM Server for x86	Oracle	Based on Xen; being phased out
Red Hat Virtualization (RHV)	Red Hat	KVM-based; end-of-life as of 2024 (moving to OpenShift)
bhyve	FreeBSD	Lightweight hypervisor in FreeBSD
SmartOS (with KVM or Zones)	Joyent / Open Source	Hypervisor for containers and VMs

HYPERVISOR-2

Date: July-26th-2025

Run on top of a host OS like Windows, macOS, or Linux. Great for desktops and testing labs.

Hypervisor	Vendor	Notes
VMware Workstation	VMware	For Windows and Linux
VMware Fusion	VMware	For macOS
Oracle VirtualBox	Oracle	Free, cross-platform, widely used
Microsoft Hyper-V (Client)	Microsoft	Built into Windows 10/11 Pro (GUI mode)
Parallels Desktop	Parallels	macOS only, optimized for Mac hardware
QEMU	Open Source	Often combined with KVM; popular in embedded systems
GNOME Boxes	Linux (front-end for QEMU/KVM)	Simplified interface for running VMs on Linux

LINUX SHELL

Date: July-25th-2025



Shell: Is a Command-Line Interpreter that connects a user to **Operating System** and allows to execute the commands

Terminal



```
[root@vm1]# cat /etc/shells
[root@vm1]# echo $SHELL
[root@vm1]# ps $$
```

[root@vm1]# date

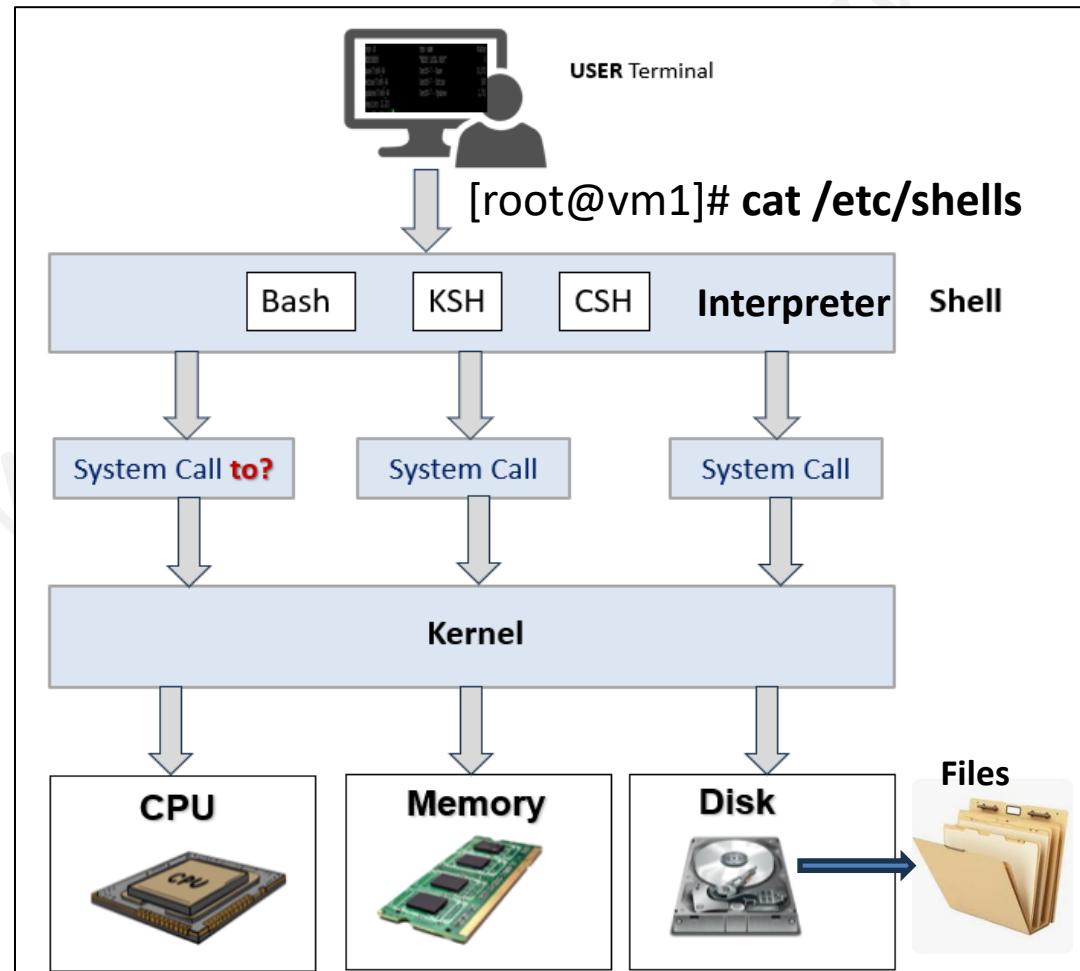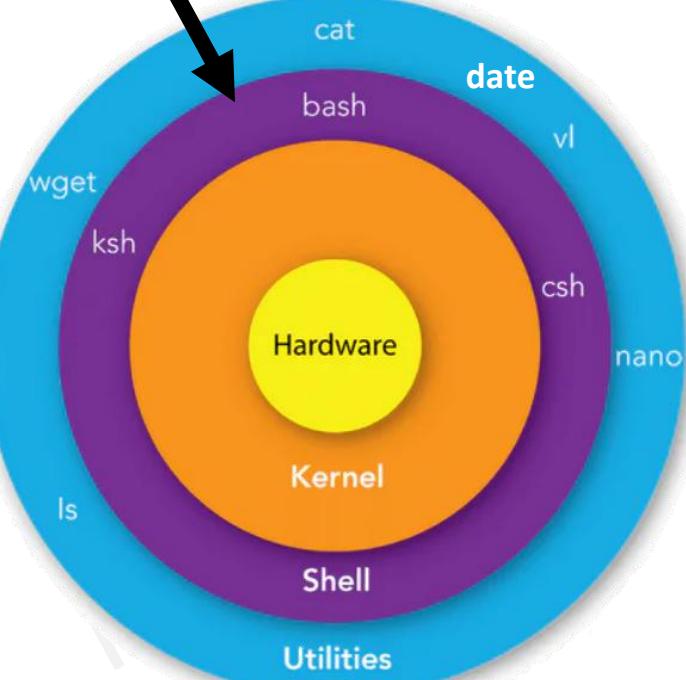


Date: July-26th-2025

LINUX OPERATING SYSTEM



```
oot@servera ~]# date
i Jul 25 05:05:53 AM CDT 2025
oot@servera ~]# hostname
rvera
oot@servera ~]# uptime
5:06:03 up 7 days, 19:32, 2 users, load average: 0.00, 0.01, 0.0
oot@servera ~]# cal
    July 2025
Mo Tu We Th Fr Sa
    1  2  3  4  5
    7  8  9 10 11 12
   14 15 16 17 18 19
   21 22 23 24 25 26
```

Shell: Is a Command-Line Interpreter that connects a user to Operating System and allows to execute the commands

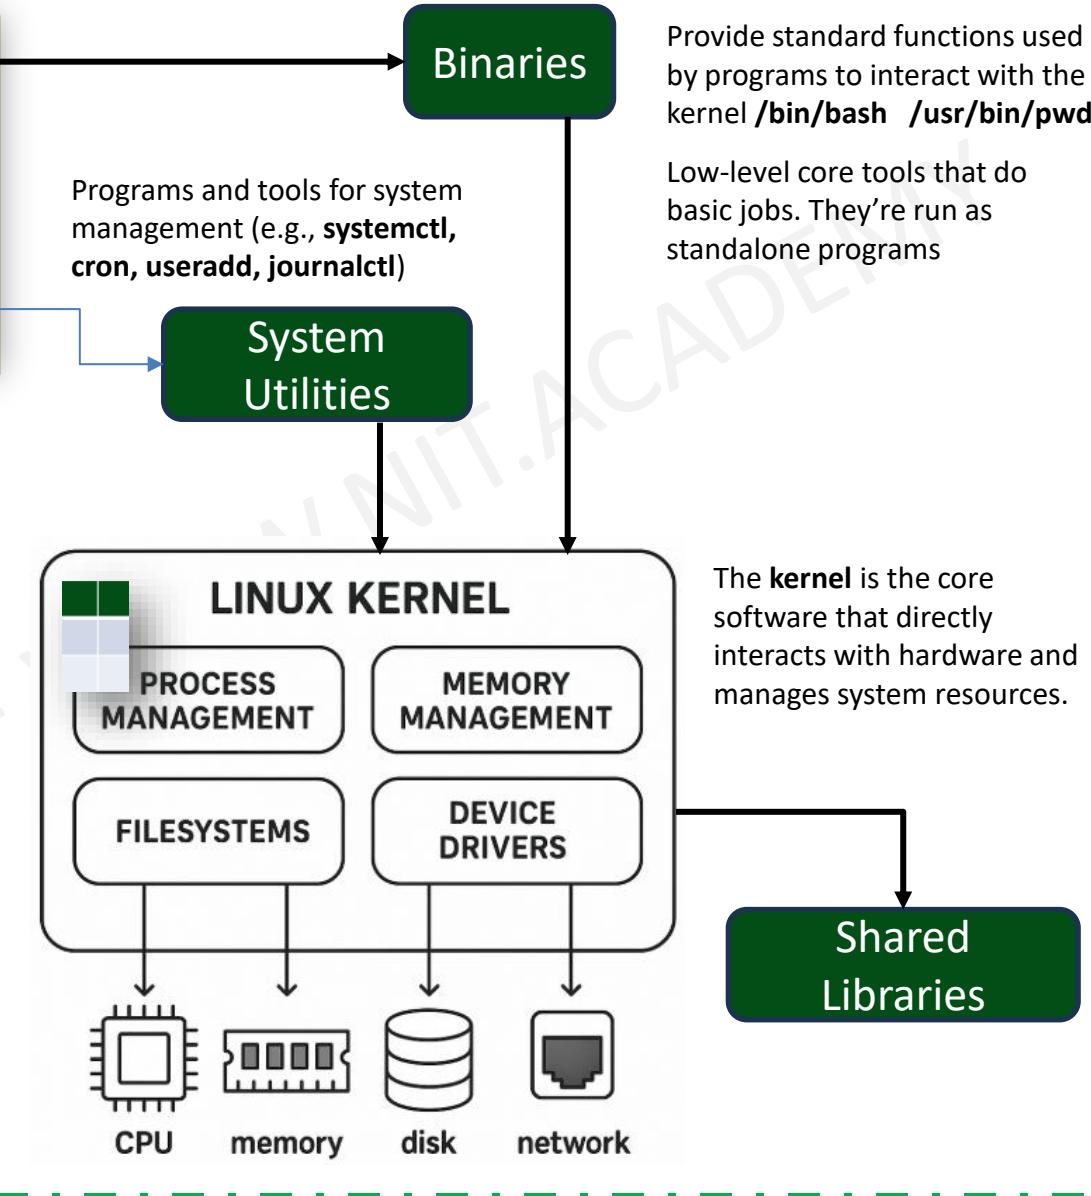

Date: July-25th-2025

LINUX LINE COMMANDS



1

[root@vm1~]#uname -a

```
oot@servera ~]# date
i Jul 25 05:05:53 AM CDT 2025
oot@servera ~]# hostname
rvera
oot@servera ~]# uptime
5:06:03 up 7 days, 19:32,  2 users,  load average: 0.00, 0.01, 0.0
oot@servera ~]# cal
      July 2025
Mo Tu We Th Fr Sa
 1  2  3  4  5
 7  8  9 10 11 12
14 15 16 17 18 19
21 22 23 24 25 26
```

Binaries

[root@vm1~]# pwd

7

2

[root@vm1~]#uname -r

2 LINUX KERNEL

PROCESS MANAGEMENT

MEMORY MANAGEMENT

FILESYSTEMS

DEVICE DRIVERS



3



4



5



6

3

[root@vm1~]#lscpu

4

[root@vm1~]#free -m

5

[root@vm1~]#df -h

Date: July-26th-2025

ALL SYSTEM INFORMATION

```
[root@myserver ~]# uname -a
```

```
Linux myserver 5.14.0-503.14.1.el9_5.x86_64 #1 SMP PREEMPT_DYNAMIC Fri Nov 15  
12:04:32 UTC 2024 x86_64 x86_64 x86_64 GNU/Linux
```

Field	Meaning
Linux	Kernel name (OS type)
myserver	Hostname of machine
5.14.0-503.14.1.el9_5.x86_64	Kernel version
#1	Kernel built version
SMP	Symmetric multiprocessing support
PREEMPT_DYNAMIC	Preemption model used by the kernel
Fri Nov 15 12:04:32 UTC 2024	Build time and date of the kernel
X86_64 (3 times)	Machine hardware name, Processor type, Hardware platform
GNU/Linux	Operating System


Date: July-26th-2025

KERNEL RELEASE VERSION

[root@servera ~]# **uname -r**
 5.14.0-503.14.1.el9_5.x86_64

Field	Meaning
5	Major Version of Linux Kernel
14	Minor Version of Linux Kernel
0	Patch Version of Linux Kernel
503.14.1	Red Hat-specific kernel release/patch level
el9_5	Built for Enterprise Linux 9.5 (RHEL 9.5)
x86	The original Intel CPUs (like 8086, 80286, 386, 486) ended in “86” – hence the name x86
64	AMD64 and Intel64 (Original names)
X86_64 (hardware name)	The machine is running a 64-bit processor (CPU)
X86_64 (architecture)	The kernel was compiled for a 64-bit system
X86_64 (platform)	The OS is also 64-bit capable

CPU

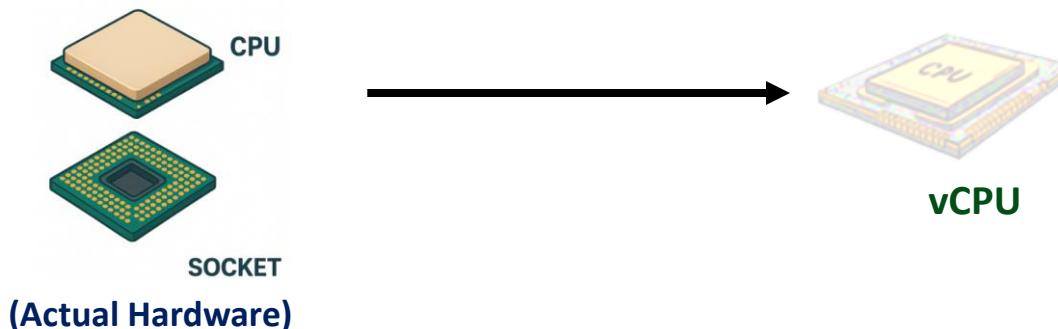

```
[root@myserver ~]# lscpu
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         39 bits physical, 48 bits virtual
Byte Order:            Little Endian
CPU(s):                1
On-line CPU(s) list:   0
Vendor ID:             GenuineIntel
Model name:            Intel(R) Core(TM) i3-N305
CPU family:            6
Model:                 190
Thread(s) per core:    1
Core(s) per socket:    1
Socket(s):             1
Stepping:              0
BogoMIPS:              3609.59
Flags:                 fpu vme de pse tsc msr pae mce cx8
                        apic mmx fxsr sse sse2 fxsr_opt cpuid
                        pni avx avx2 avx512f avx512dq
                        rdseed rdseed洪 rmpl avx512cd
```

NOTE: When “lscpu” or “cat /proc/cpuinfo” command is executed in a VM, it is **not showing the actual hardware**, but rather **what the VM is allowed to see**. Total **Logical Processors**, that is, **vCPU**


Term	Meaning	Example Value
Socket	A server with 1 CPU sockets will have 1 chip installed	Number of physical CPU chips
Core	An Intel CPU with 4 cores can handle 4 tasks simultaneously.	Processing units per CPU chip
Thread	Tasks each core can run (with SMT)	2 per core
Total Logical CPUs = $Sockets \times Cores \times Threads$	$1 \times 4 \times 2 = 8$	
So the system has 8 logical CPUs (what <code>lscpu</code> calls <code>CPU(s)</code>), even though there's just 1 physical chip.		

MEMORY



**Random Access Memory
(RAM)**

(Actual Hardware)

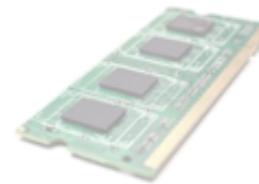

vRAM

RAM - Safe Allocation Rule

- **Never allocate more than 50%–60% of your physical RAM** to a VirtualBox VM.

Example:

- If host has **16 GB**, allocate **max 8–10 GB** to a VM.
- If host has **32 GB**, allocate **max 16–20 GB**.

[root@myserver ~]# free -m						
	total	used	free	shared	buff/cache	available
Mem:	1774	425	1021	32	508	1348
Swap:	2047	0	2047			

NOTE: This “1774 MB” is vRAM, but for the VM, it behaves like **real physical RAM**.

If your **host machine** has:

- **32 GB physical RAM**, and
- You allocate **4 GB RAM** to a VM,
- Then that VM will see 4 GB of RAM via **free -m** and use it just like real RAM — but it is **vRAM**, coming from the hypervisor's memory pool.

LET US EXPLORE LINUX

Date: July-26th-2025

```
# Let us check how types of shells are available in our system  
[root@vm1]# cat /etc/shells
```

```
# Let us check what shell we have?  
[root@vm1]# echo $SHELL
```

```
# Let us check our shell process ID & kill the shell process from another session  
[root@vm1]# ps $$
```

```
# Let us type another command:  
[root@vm1]# date
```

```
# Let us type another command:  
[root@vm1]# whereis date
```

HOW TO GET HELP IN LINUX?

Date: July-26th-2025

```
# Let us get information on “uptime”:
```

```
[root@vm1]# uptime --help
```

```
#Let us get more information on “date”
```

```
[root@vm1]# man date
```

```
#Where do we stand in the system as a user?
```

```
[root@vm1]# pwd
```

PROVISIONING & CONFIGURATION

Date: July-26th-2025

In server management:

Provisioning: refers to the initial setup and allocation of resources like hardware, operating systems, and basic software to create a functional server environment like creating a Virtual Machine.

Configuration involves customizing the settings and parameters of that provisioned server to meet specific needs, including network settings, application configurations, and user access levels; essentially, provisioning prepares the server to be used, while configuration fine-tunes it for its intended purpose.



PROVISIONING

Date: July-26th-2025

Provisioning of Virtual Machine:

- We created the basic infrastructure (**CPU, MEM, Disk Space**)
- Installed Linux operating system(s) on hypervisor **Type-2 (Oracle Virtual Box)**
- Set-up initial network connectivity (**Bridged vs NAT**)

Example of Provisioning:

We deployed a new virtual server (machine) with a standard Linux operating system and basic network settings.

- Enterprise Linux – Redhat
- Linux Community Based Linux Distro – Rocky Linux 9

NOTE: Once a machine is provisioned then STOPPING & STARTING that machine is called “REBOOT”

CONFIGURATION

Date: July-26th-2025

Configuration:

- We will customize settings based on specific requirements.
- We will configure application parameters.
- Manage user permissions and access.
- Adjustments to maintain desired state.


Example Configuration:

- Setting up a **STATIC IP** address and **YUM REPOSITORY**
- Configuring **Firewall Rules**
- Changing **File Permissions**


CONGRATS TO THE LEADERS!

Date: July-26th-2025

```
[root@vm1~]# ip a  
[root@vm1~]# ping 10.0.0.7  
[root@vm1~]# ssh root@10.0.0.7  
[root@vm1~]# date  
[root@vm1~]# cal  
[admin@vm1~]# sudo poweroff  
[root@vm1~]# exit
```

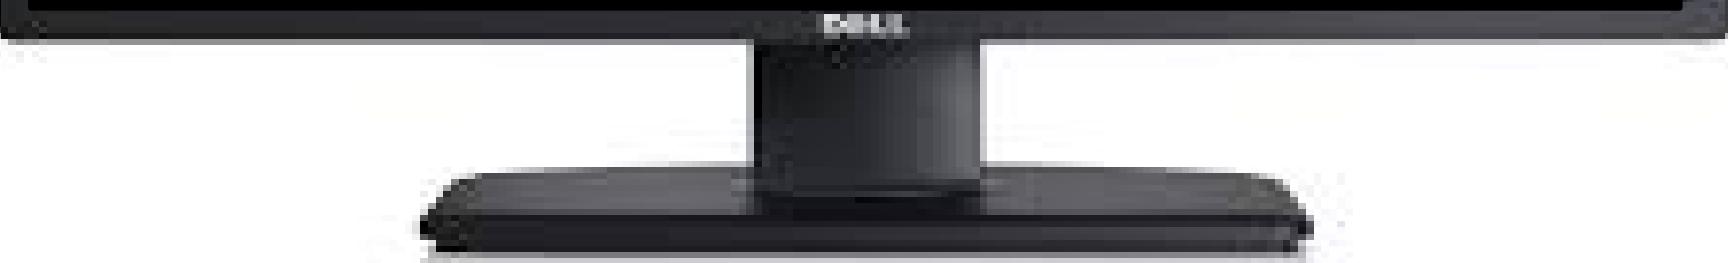

THANK YOU
Questions?



CHAPTER 4

Linux Initialization


Using the rules and strategies in this section you will gain confidence and a deep insight in setting up yourself for success

- ❑ Quick Overview of Chapter 3
- ❑ Login shell vs nologin shell
- ❑ Post login initialization
- ❑ User Home Directory
- ❑ Introduction to SSH
- ❑ Keyboard shortcuts
- ❑ Easy Bash Scripting


UNDERSTAND THE DIFFERENCE

Date: July-27th-2025

Difference between Hypervisor 1 and Hypervisor 2

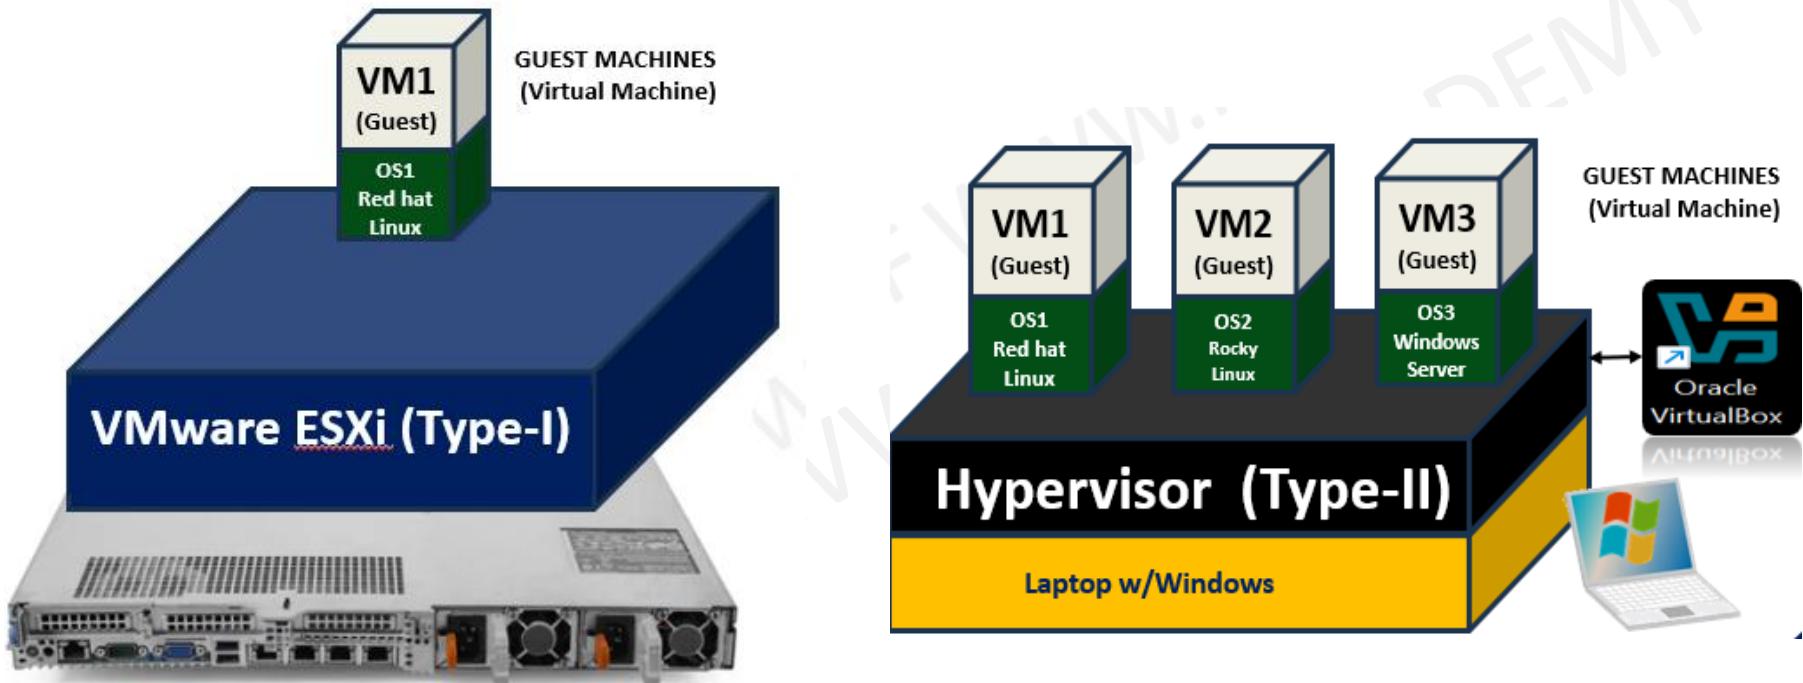


LINUX FILE SYSTEM

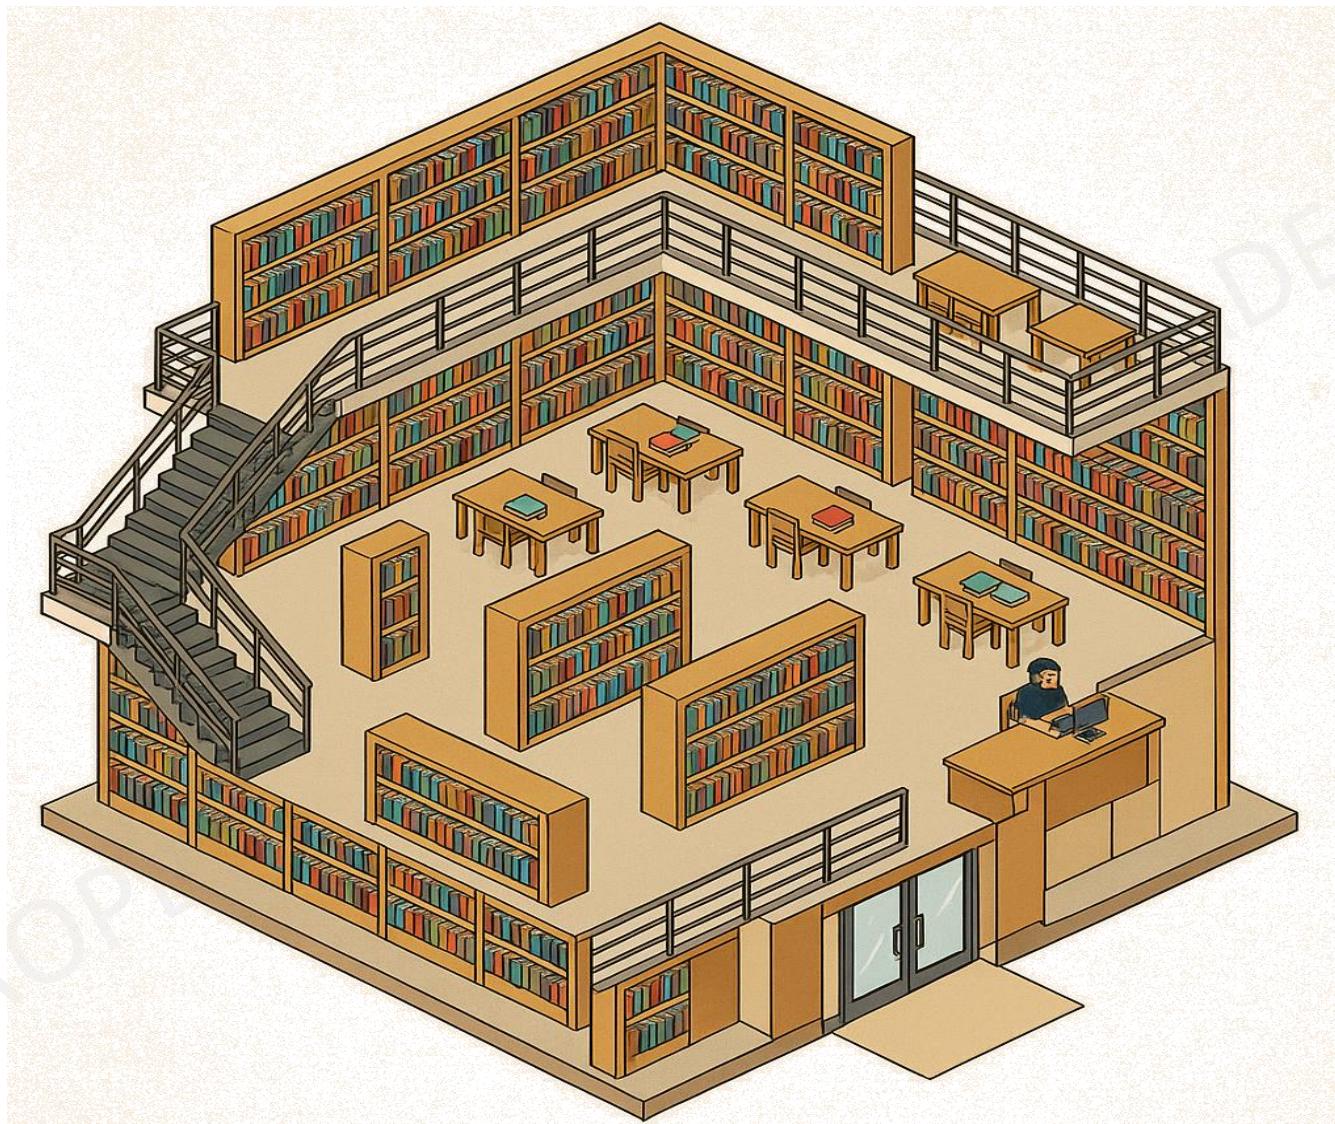

NAVIGATING FILES & DIRECTORIES IN LINUX

```
#pwd  
#ls  
#cd  
#cat
```

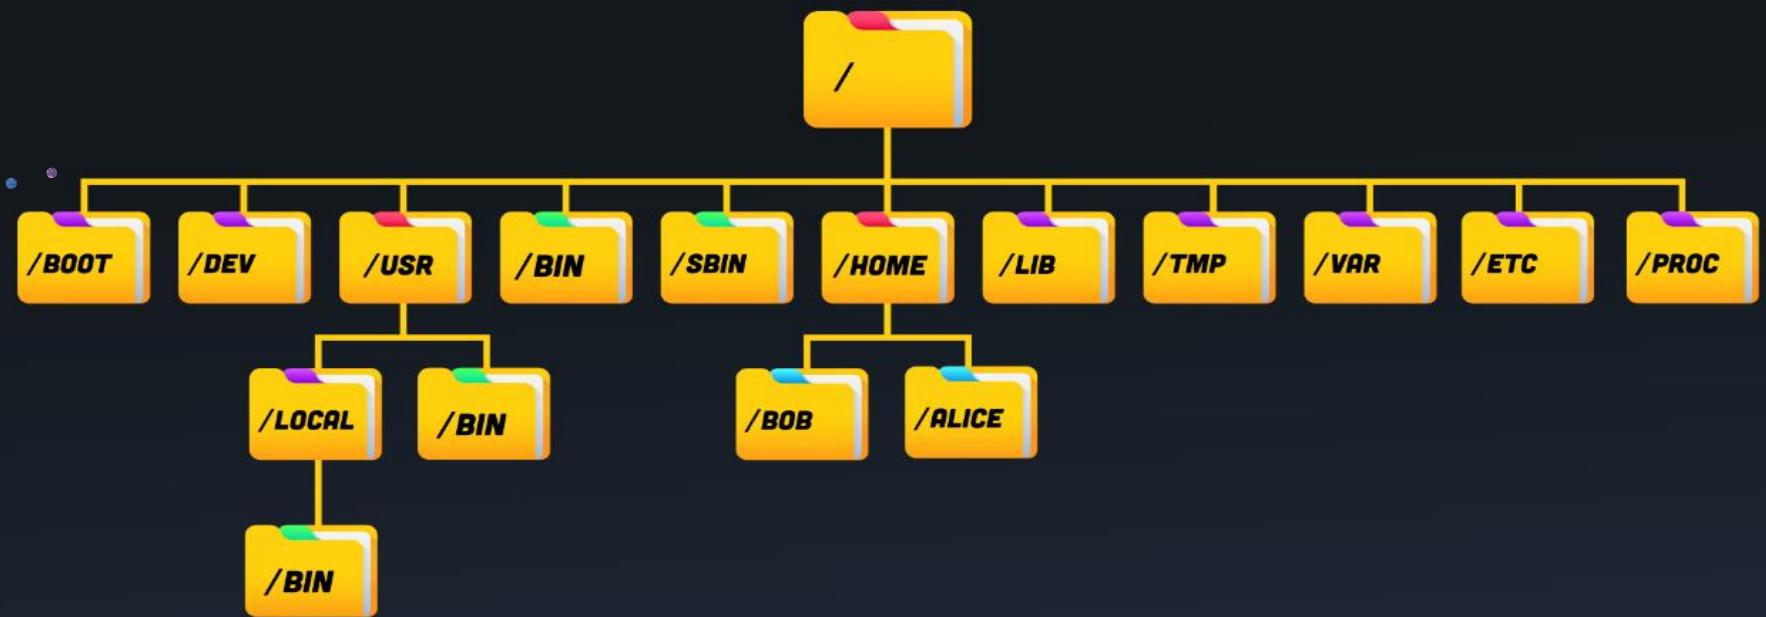


LOGIN SHELL

In essence, a **login shell** provides interactive access and a configured environment, while a **nologin interactive shell** provides a limited environment.

Login Shell:

- A shell session started **when you log in** to the system (e.g., via SSH, virtual terminal Ctrl+Alt+F1, or console login).
- A **login shell is the first process** that executes after a user successfully logs into a system (either locally or remotely via SSH).
- It **reads configuration files**:
 - /etc/profile,
 - ~/.bash_profile,
 - ~/.profile.


Feature	Login Shell
Started via	SSH, <code>su -</code> , Console
Reads	/etc/profile, ~/.bash_profile, ~/.bashrc
Typical use case	User session on login
Example command	<code>su - username</code>

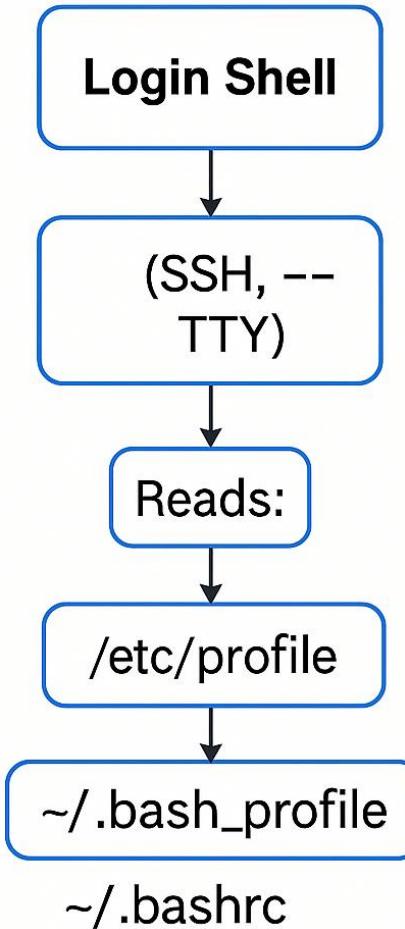

In essence, a **login shell** provides interactive access and a configured environment, while a **nologin interactive shell provides a limited environment**.

- An interactive **nologin shell** (often /sbin/nologin or /bin/false) **does not execute typical shell startup files for interactive sessions.**

Feature	Non-login Shell
Started via	Terminal in GUI, <code>bash</code>
Reads	<code>~/.bashrc</code> only
Typical use case	Running commands/scripts
Example command	<code>bash</code>

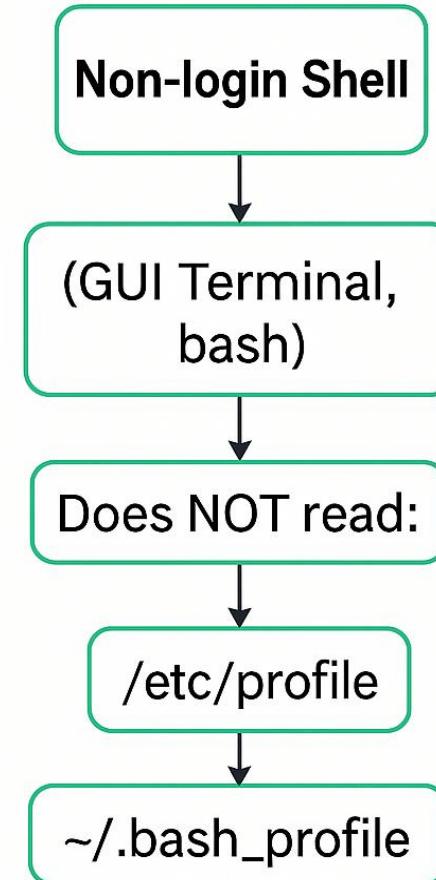

INITIALIZATION

Date: July-27th-2025

```
oot@servera ~]# date
i Jul 25 05:05:53 AM CDT 2025
oot@servera ~]# hostname
rvera
oot@servera ~]# uptime
5:06:03 up 7 days, 19:32, 2 users, load average: 0.00, 0.01, 0.0
oot@servera ~]# cal
      July 2025
Mo Tu We Th Fr Sa
       1  2  3  4  5
    7  8  9 10 11 12
   14 15 16 17 18 19
  21 22 23 24 25 26
```


1

Invoking Bash

1. Post Login Bash is launched as the shell
2. Typing /bin/bash
3. Run a shell script #!/bin/bash





/bin/bash: ELF binary (Executable and Linkable Format) compiled from C source code
Check using [root@vm1~]# file /bin/bash

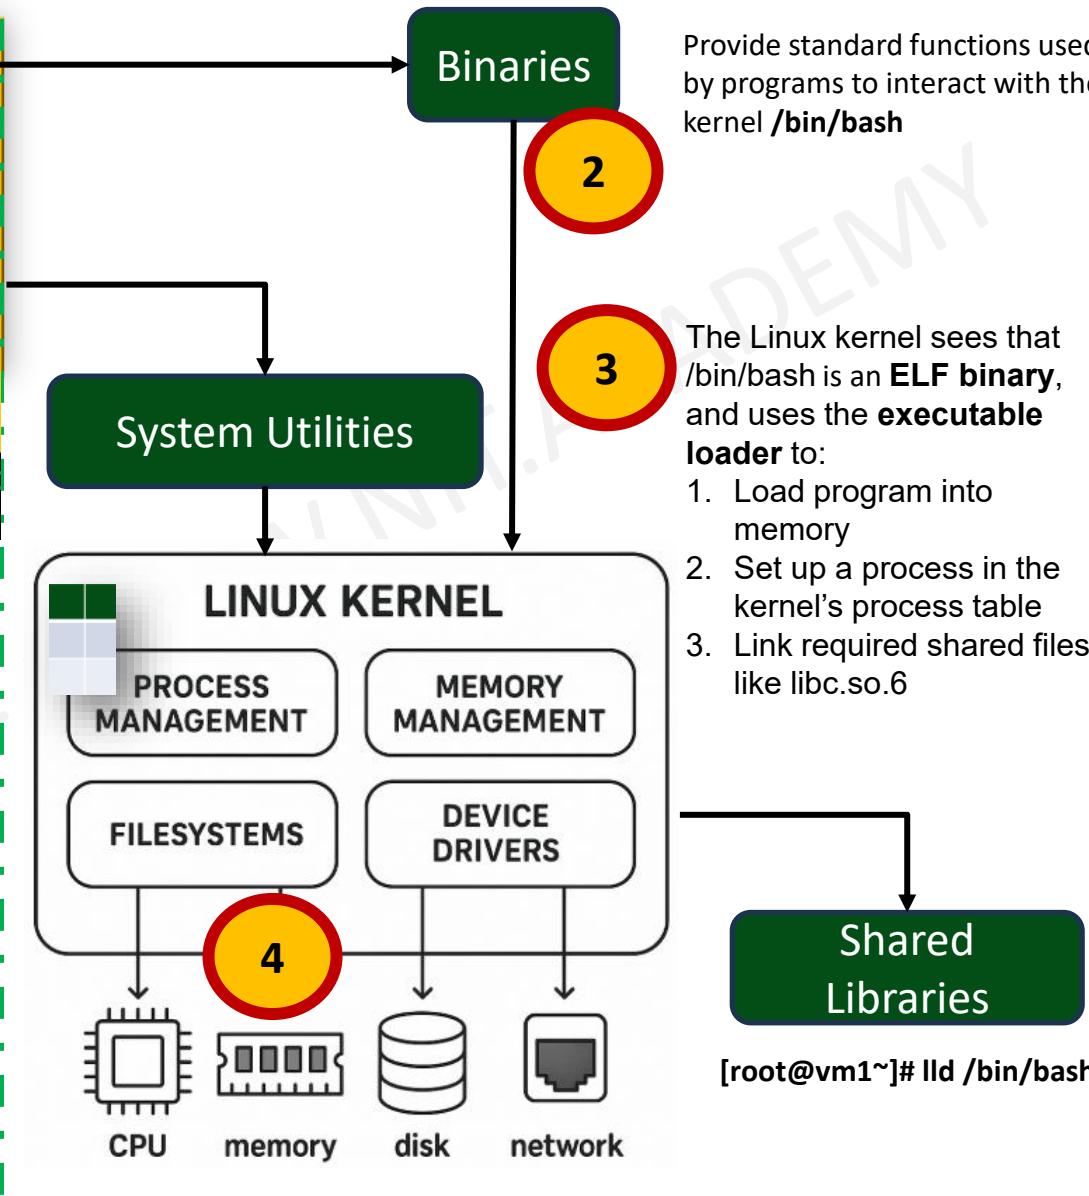


STANDARD I/O CONNECTED...

Initializing....
Once in memory

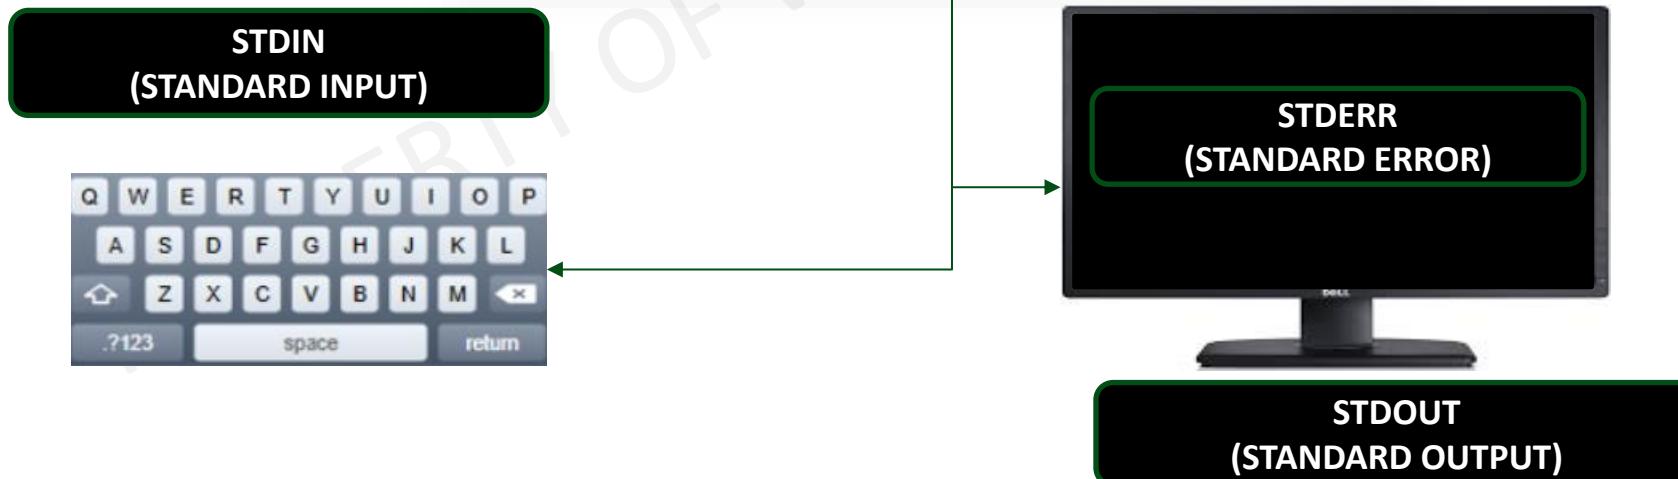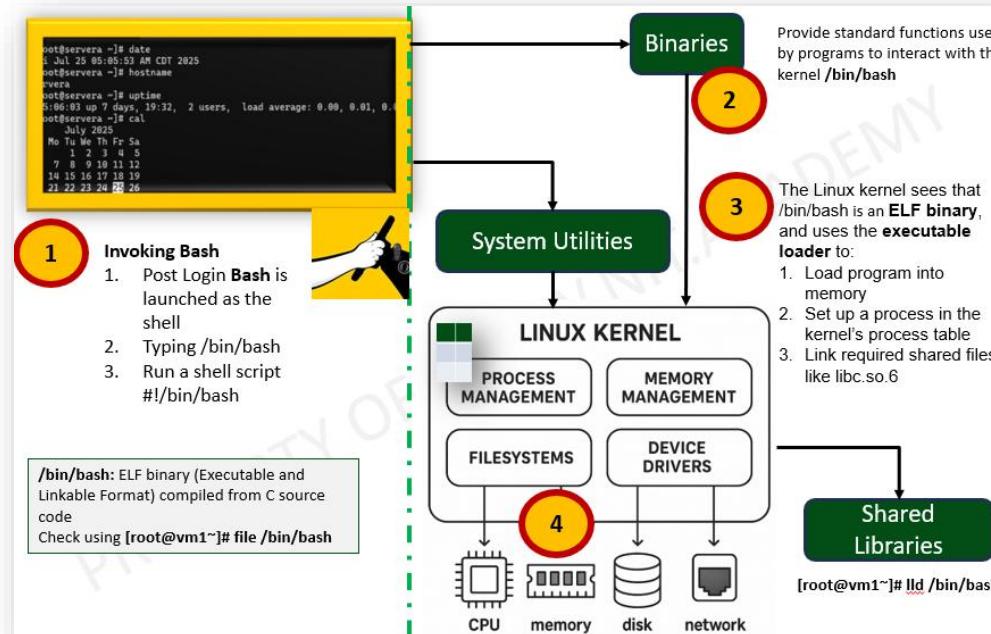

READS CONFIGURATION FILES...

Initializing....
Once in memory

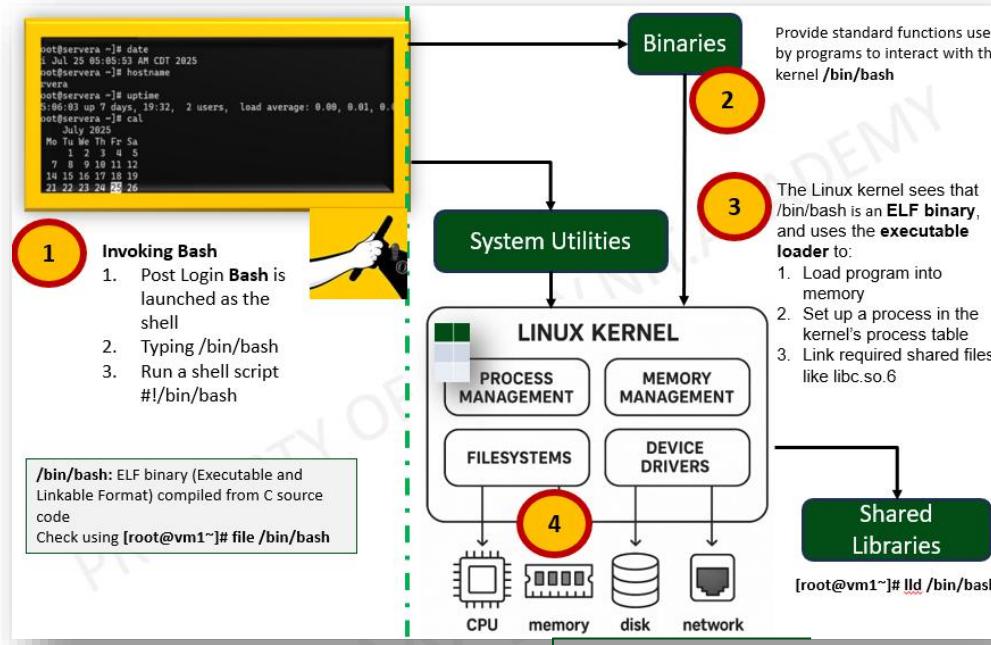

5

[root@vm1~]# cat /etc/profile

What is this file?

- Maintained by System Admin (and Root)
- Information in this file **affects all users** who log-in
- This file sets the shell (environmental) variables like **PATH, USER and HOSTNAME**

Commands

```
echo $PATH
echo $SHELL
echo $HOST
echo $USER
```

[root@vm1~]# cat /etc/bashrc

What is this file?

- Maintained by System Admin (and Root)
- Information in this file **affects all users** who are already logged-in and start another session by typing `/bin/bash`
- When User logs in it is called **no Logon Shell**

REPL – INTERACTIVE LOOP

Bash now enters a loop called a REPL (Read-Eval-Print Loop):

Step	Action
Read	Waits for user to type a command
Eval	Parses and executes the command
Print	Displays output or error
Loop	Waits again for next input

Bash parses the command into:


- **ls** (program)
- -l and /etc (arguments)

Then it:

- Locates **ls** using the **\$PATH** variable
- Creates a **child process**
- **Executes /bin/ls** with those arguments
- Waits for the command to finish
- Displays the output

Bash is just a shell (interface) — when you type a command like **uname -r**, it:

- Searches for it in PATH
- Runs it (binary or script)
- Passes arguments if any

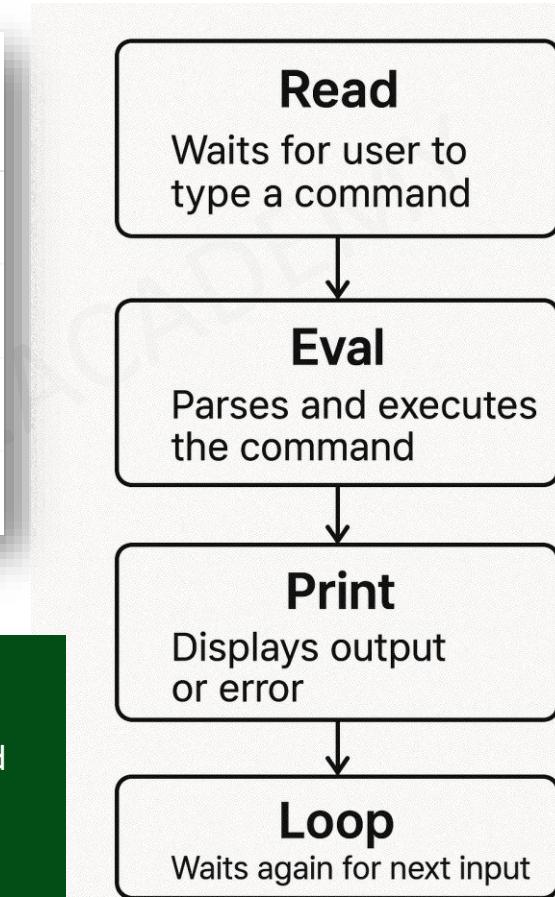

SUMMARY

BASH STARTUP SCRIPTS: INITIALIZATION PROCESS

System Files (Global)

When Root logs in the SYSTEM FILES are executed. USER can not change these files:


1. /etc/profile
2. /etc/bashrc



User Files (Local)

User can change these files

1. USER initialization files
2. USER can make changes
3. These are environmental files that are found under #/etc/shell

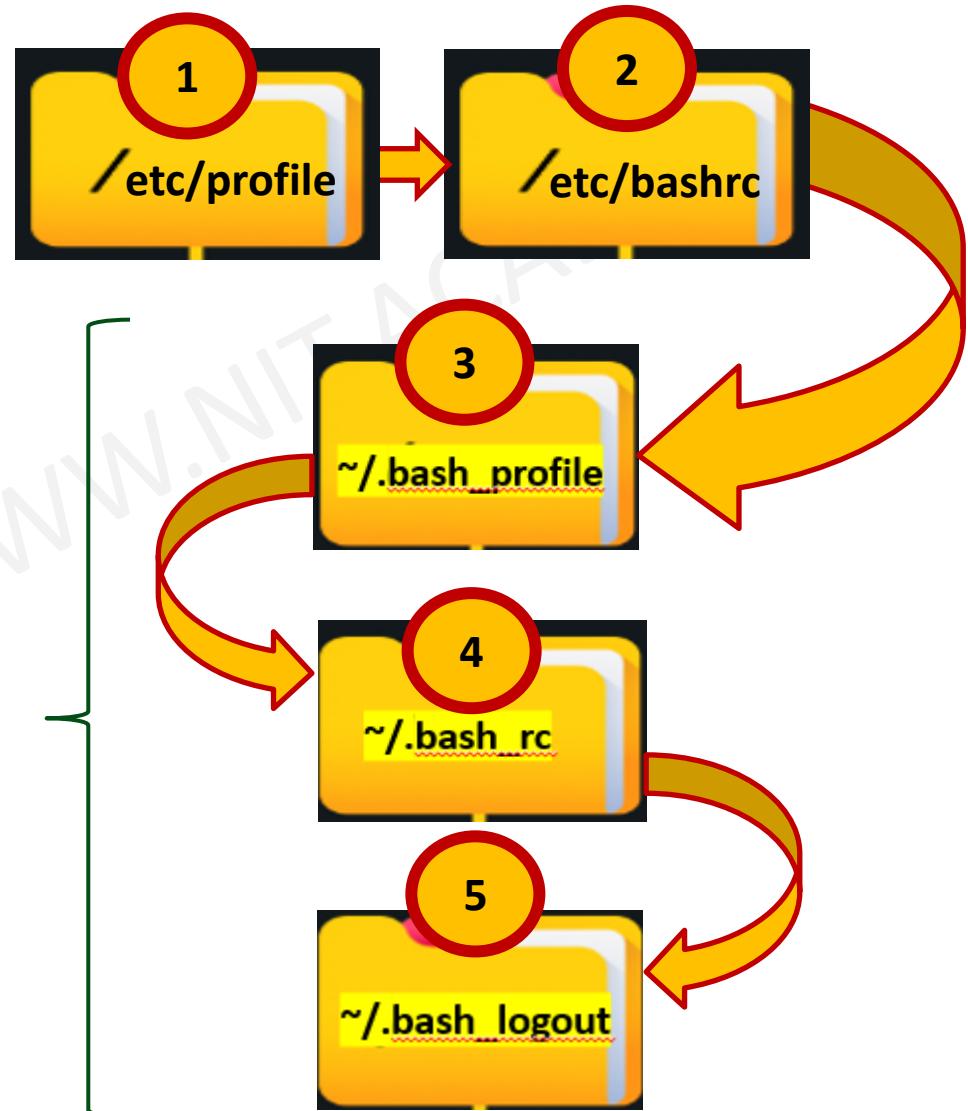

USER INITIALIZATION FILES

These are files that each USER can change / modify



Hey as a User I can edit this configuration file that I can modify and add extra stuff!



Every time I the User open a new shell, this file is executed



.BASH_LOGOUT FILE...

These are files that each USER can change / modify

#vi /home/tom/.bash_logout



```
[tom@VM01 ~]$ cat .bash_logout
# ~/.bash_logout

# Clear my terminal Screen on logout
clear

#Remove all temporary files
rm -rf ~/tmp/*

# Unmount any NFS
#umount ~/network_share

#Kill Background processes
kill -9 $(jobs -p)
pkill -u $(whoami)


#Append a Timestamp
#date +"%Y-%m-%d %H:%M:%S Logout by $(whoami)" >> ~/.logout_history
```

LAB SESSION – HOME DIRECTORY

Login (Home Directory)

- A **home directory**, also called a **login directory**, is the directory on Linux-like operating systems that serves as the repository for a user's personal files, directories, and programs. It is also the directory that a user is first in after logging into the system.
- A **home directory** is created automatically for every ordinary user in the directory called **/home**. A **standard subdirectory of the root directory (/root)** and **/home** has the sole purpose of containing users' home directories.
- Apart from having a home directory to create and store files, **users need an environment** that gives them access to the tools and resources. When a user logs in to a system, the user's work environment is determined by the **initialization files**.
- These **initialization files are defined by the user's startup shell**, which can vary depending on the release. The default initialization files in your home directory enable you to customize your working environment.


SECURE SHELL (SSH)

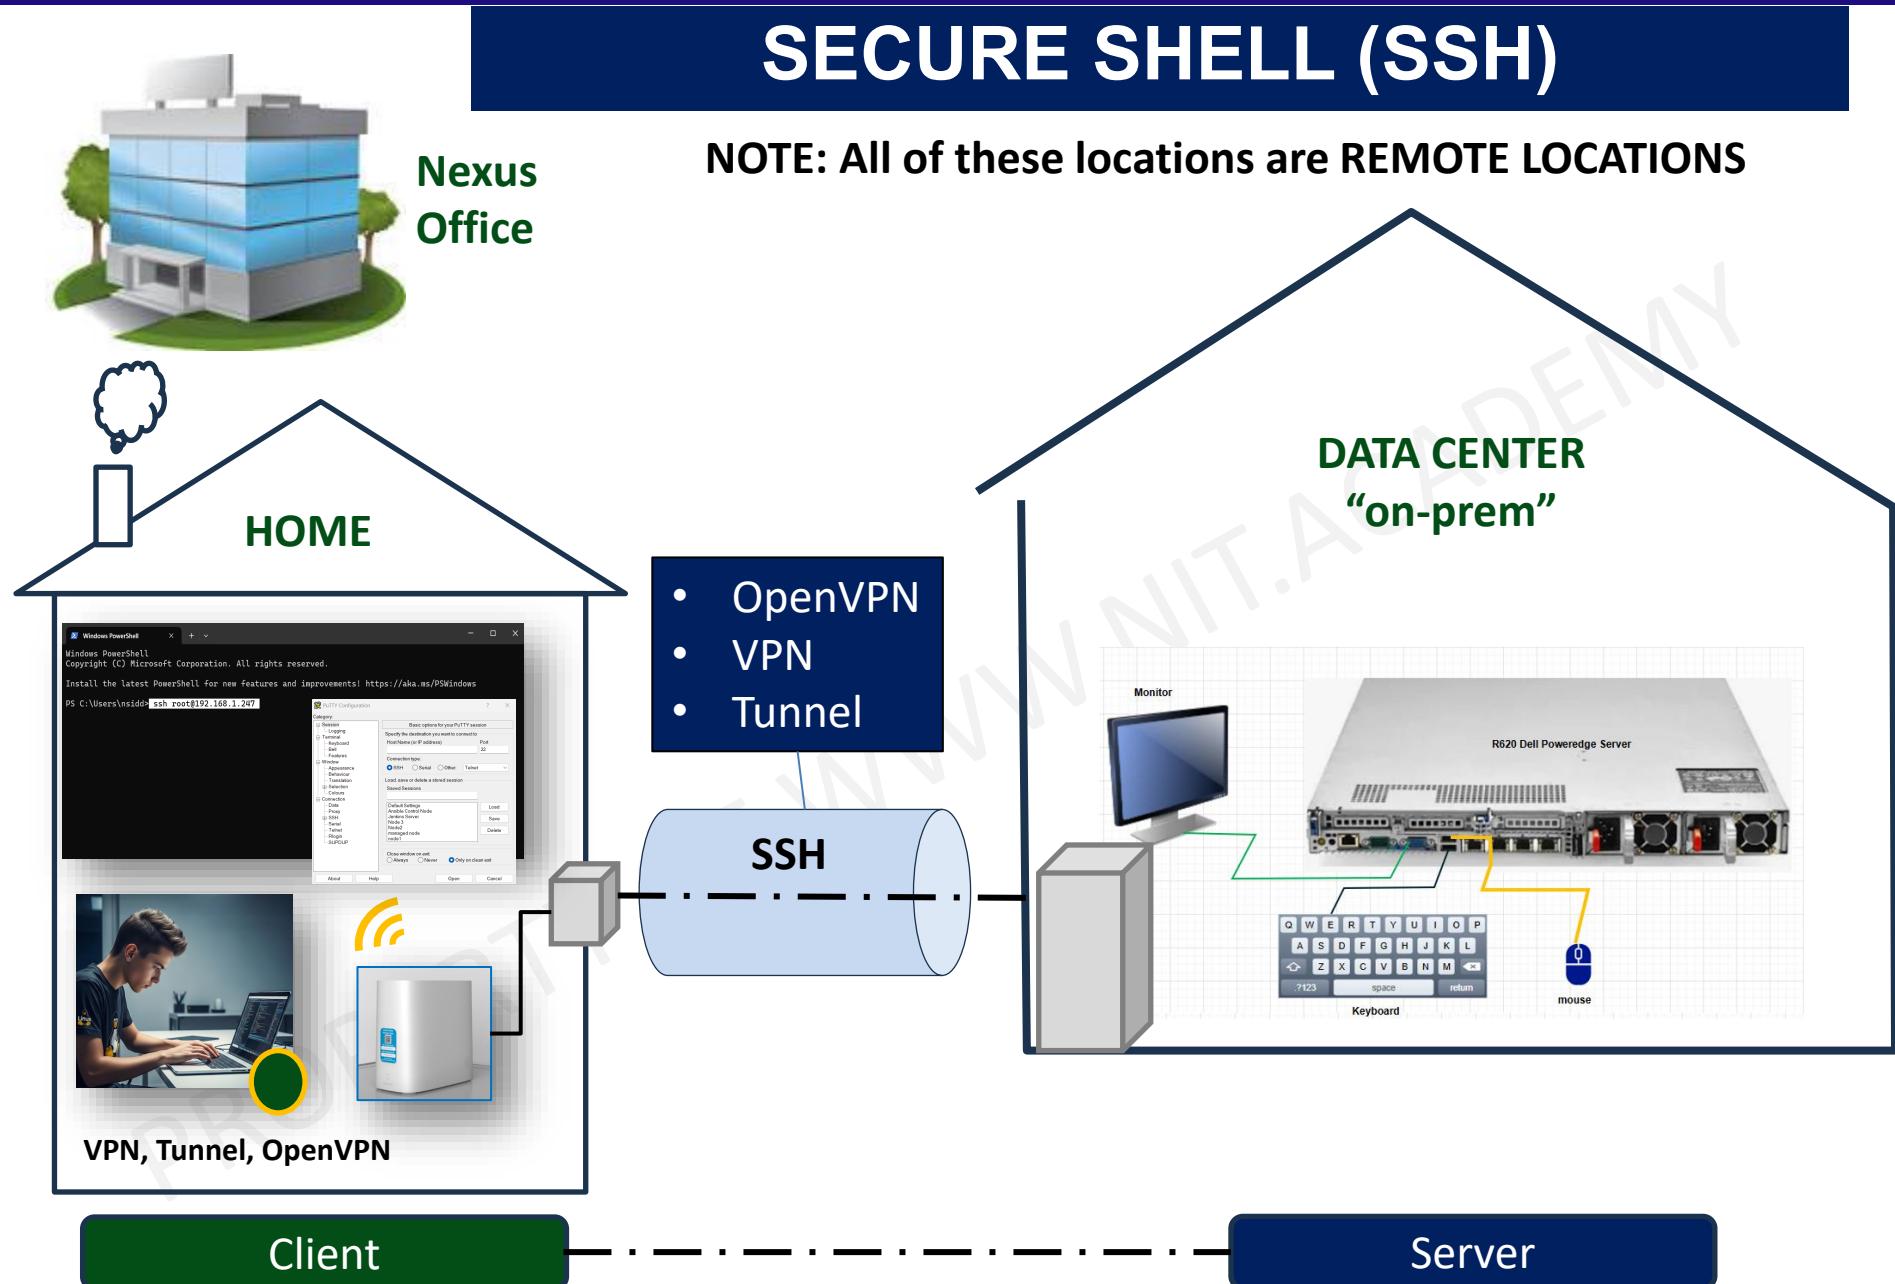

SSH – HOW MANY WAYS CAN YOU ACCESS A REMOTE SERVER

Date: July-27th-2025


- Terminal
- CMD
- Windows Powershell

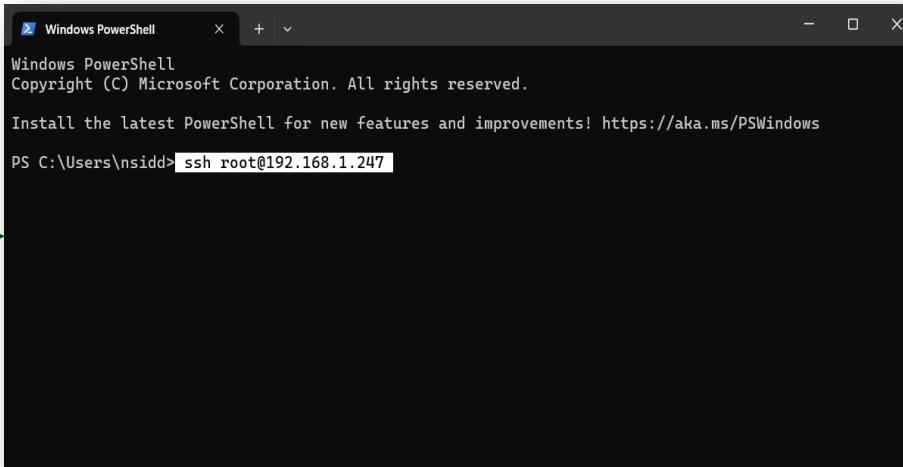

```
Windows PowerShell
Copyright (C) Microsoft Corporation. All rights reserved.

Install the latest PowerShell for new features and improvements! https://aka.ms/PSWindows

PS C:\Users\nsidd> ssh root@192.168.1.247
```

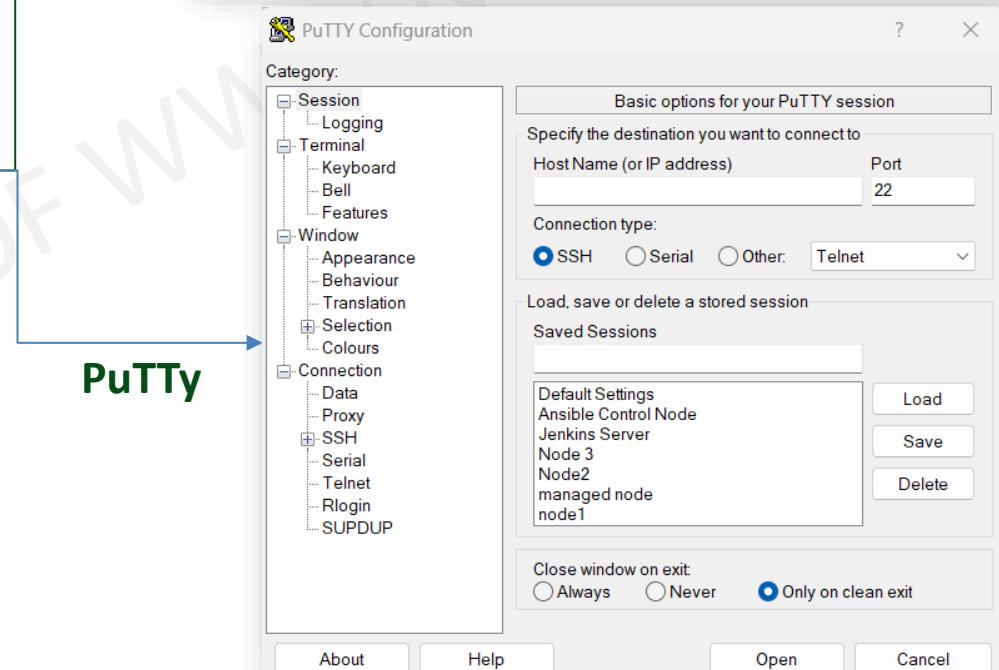

Bash/Shell Scripting Essentials

□ Automating Repetitive Tasks

Shell scripting streamlines repetitive processes in Unix-based systems, saving time and reducing manual work for users.

□ File and Process Management

Users can create scripts to manage files, automate processes, and monitor system status efficiently.

□ Boosting Productivity

Learning shell scripting increases efficiency for developers, system administrators, and power users through automation and process optimization.

□ What is Shell Scripting?

► **A shell script is a file containing a series of commands.**

The shell reads this file and carries out the commands as though they have been entered directly on the command line.

► **It can be used to automate day-to-day various Unix/Linux tasks.**


This can make Unix/Linux Administrators work easy, efficient and fast.

□ Every shell script consists of

- Shell commands such as **pwd, echo, read, exit, type** etc.
- Shell keywords such as **if..else, for, while loop** etc.
- Linux binary commands such as **w, who, free** etc.
- Text processing utilities such as **sed, awk, cut, egrep** etc.
- Functions
- Control flow statements



if...else loop (logic)

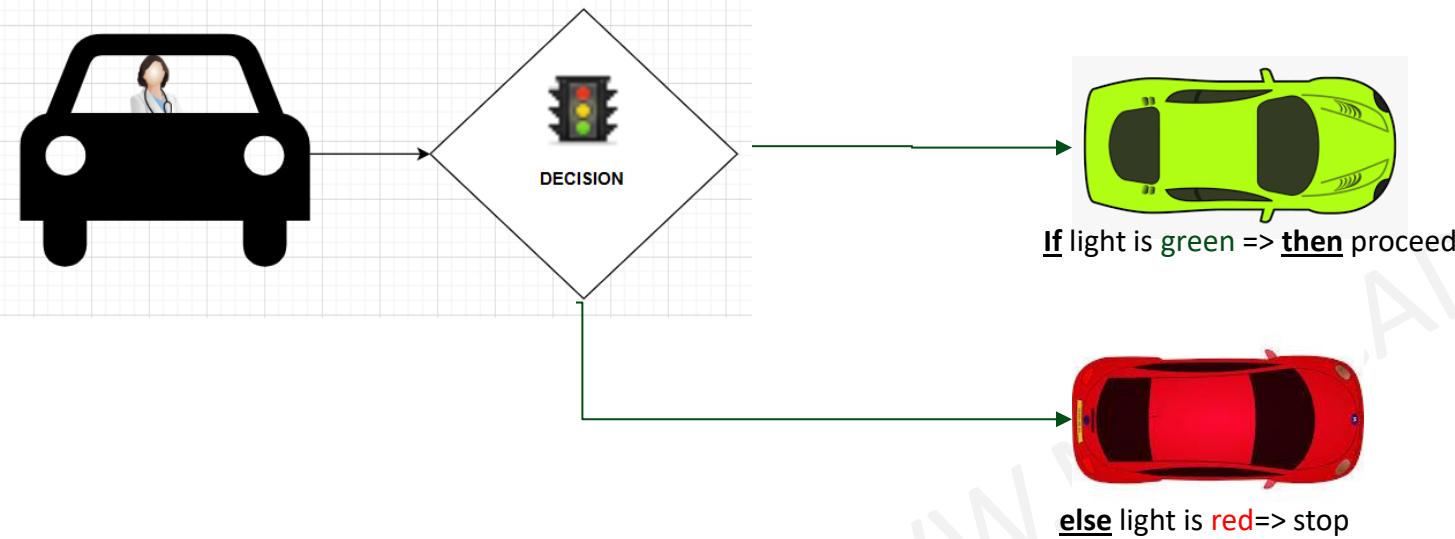

Explanation: This diagram illustrates an `if...else` statement. Imagine a car approaching a traffic light.

- **Condition:** The traffic light's color is the condition.
- **If (Green Light):** If the light is green (condition is true), the car proceeds straight through the intersection.
- **Else (Red Light):** If the light is red (condition is false), the car stops.


This demonstrates how an `if...else` statement allows a program to choose between two different paths of execution based on whether a condition is true or false.

For loop (logic)


Explanation: This diagram represents a `for` loop. Think of a series of cars passing through a traffic light that stays green for a set number of cars.

- **Initialization:** The first car starts the process.
- **Condition Check:** Each car checks if there are more cars to go (the loop's condition).
- **Execution:** If the condition is true, the car passes through the light (the code inside the loop executes).
- **Increment/Decrement:** After passing, the next car in the series is ready (the loop's counter is updated).

This loop continues for a predetermined number of iterations, much like a specific number of cars passing through.

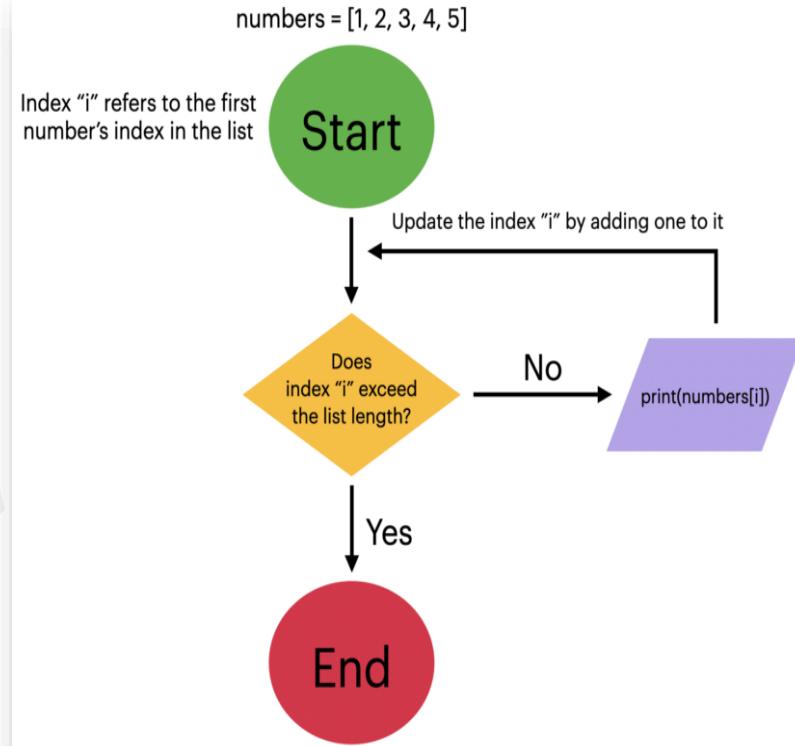

while loop (logic)

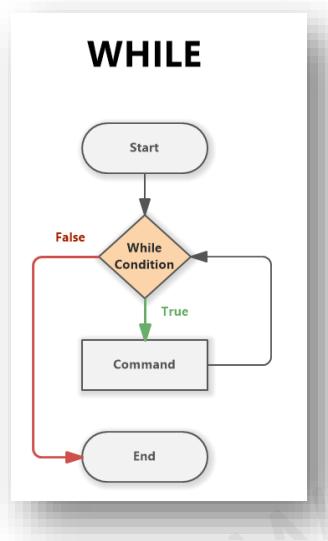

Explanation: This diagram shows a `while` loop. Consider a car driving around a traffic circle.

- **Condition:** The car continues to circle as long as a specific condition is true (e.g., a certain landmark hasn't been reached, or a traffic light at an exit remains red).
 - **Execution:** The car keeps driving around the circle (the code inside the loop executes).
 - **Loop Termination:** Once the condition becomes false (e.g., the landmark is reached, or the light turns green), the car exits the circle.
- A `while` loop continues to execute as long as its condition remains true, and it stops when the condition becomes false.

10 - KEYBOARD SHORTCUTS

Date: July-27th-2025



- 1 Ctrl + A => BOL (beginning of line)
- 2 Ctrl + C => Interrupt a process
- 3 Ctrl + D => exit
- 4 Ctrl + E => EOL (end of line)
- 5 Ctrl + L => This clears the screen
- 6 Ctrl + U => Clears line and takes you to BOL (acts like an eraser)
- 7 Ctrl + Z => STOPS a process (BG %1)

- 8 -----> scroll history UP
- 9 -----> scroll history DOWN

10 tab -----> saves time typing

THANK YOU
Questions?