
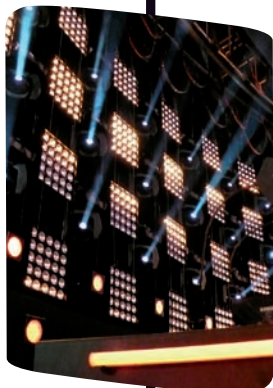


Product

by Chromlech

Jarag-5 / PAR30



Subtle

Sophisticated



Powerful

Innovative



Overview

Enter the world of the halogen array

The JARAG range represents a timeless merger between retro and new technology. It provides a complete range of uniquely shaped projectors and accessories which have been specifically designed to give a broad spectrum of visual effects. The scope for creating original designs is unlimited as they can be juxtaposed and reassembled in any configuration.

This modular, extendable system is created from separate units each containing 25 halogen lamps and a built-in controller for instant use. 25 channels of DMX give independent control of each lamp. Together this fully integrated, programmable, multiple light source system provides a simple means of producing a multitude of custom lighting effects.

The JARAG-5 uses standard halogen lamps with digital control to give a range of fine, precise changes in colour temperatures ranging from amber to white, with effects ranging JARAG-5 flash transitions to soft, slow variations.


A combination of several JARAG arrays can be arranged to create walls of light to display video, patterns or animated text. Patterns and animations can be programmed into the system and videos sent from advanced DMX consoles or media servers. No additional dimmers are required, only a DC power supply and a DMX cable.

Setting up creative lamp arrays has never been so easy.






Product

by Chromlech

Jarag-5 / PAR30



JA221

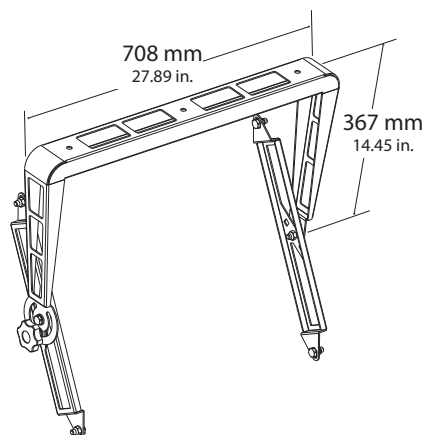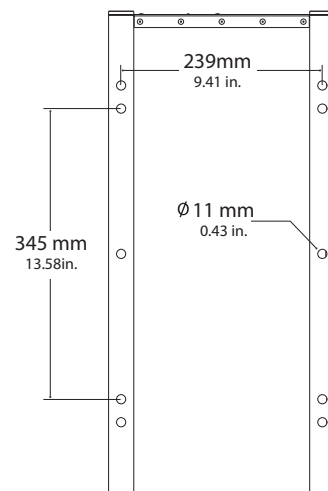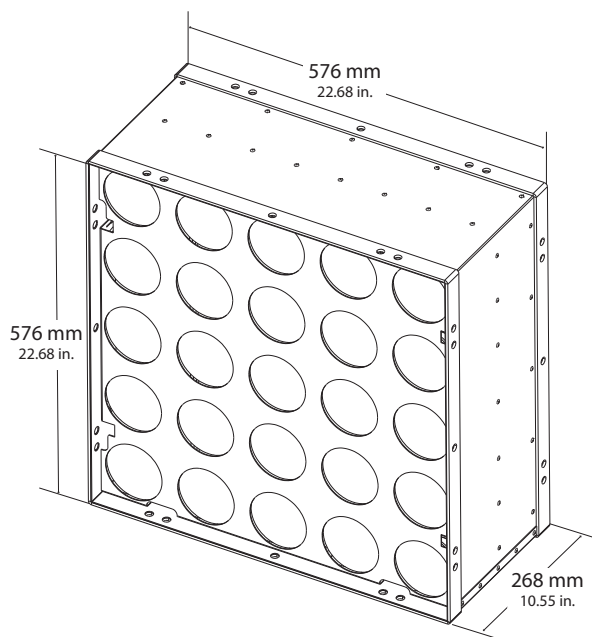

From right to left:
Main Switch
FUSE
AC Mains
RS232-C
DMX OUT
DMX IN

Specifications

Power supply	Integrated dimmers, 200-230V / 50-60Hz / 8A / 1875 W
Lamps	25 lamps 230V, 75W, HALOPAR30 type, 10°, 2900K, 2000h, E27, aluminium reflector
Construction	Aluminium body, Black epoxy finish
Dimensions	576 x 576 x 270 mm (HxWxD)
Weight	8,6 Kg (without lamps) - 13,1 Kg (with lamps) - Yoke : 4,3 Kg
Rigging	Rigging points on fixture's body. Up to 5 JARAG with screws. Up to 18 JARAG with JARAG Rigging system (JA241 & JA242)
Assembly	JARAG can be juxtaposed and assembled together in many configurations while preserving a constant lamp's grid spacing
Connectors	Powercon 20A, DMX in (XLR5), DMX out (XLR5), RS232-C connector (SUBD9)
Control	DMX : 6, 25, or 6+25 channels The integrated sequencer is controlled through 6 DMX channels (intensity, speed, effects/fade, rotation/symmetry, sequence selection), and manages up to 256 sequences of 32 steps. 128 sequences are factory programmed, 128 other sequences are available for user

CHROMLECH

19, avenue Gabriel Fauré - 35235 Thorigné-Fouillard - France
Tel : +33 (0) 223 207 767 - Fax : +33 (0) 223 207 571
E-mail : contact@chromlech.com - Web : www.chromlech.com