Waves and Oscillation

Course- PHY 2105 / PHY 105

Lecture 2

Md Shafqat Amin Inan

UNITED INTERNATIONAL UNIVERSITY

Looking back

Motion
Change of position, with respect to time

Linear Motion

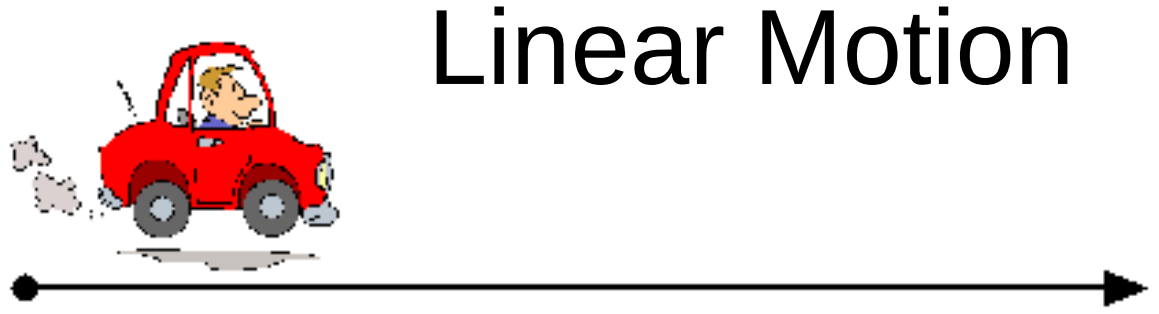

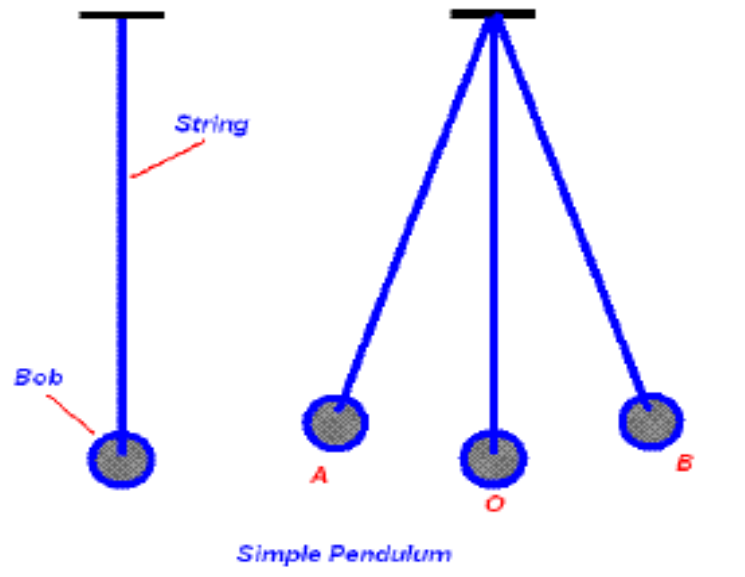

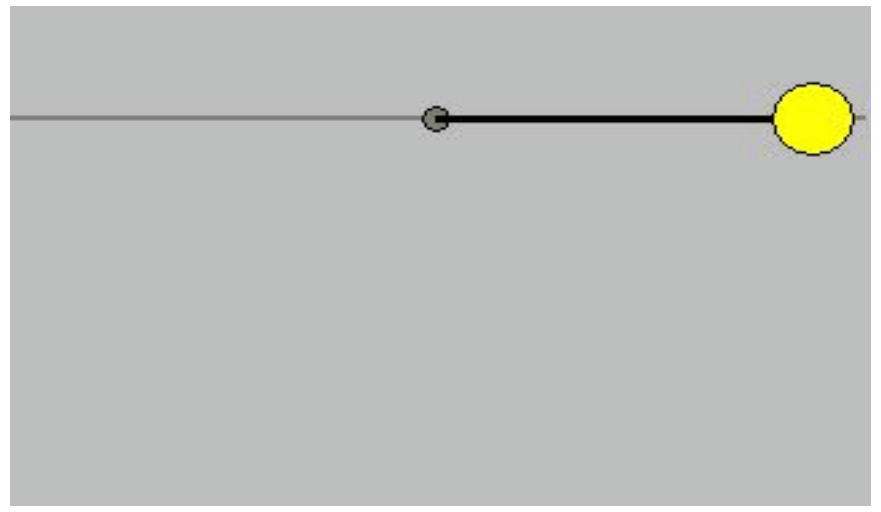

Oscillatory Motion (Simple Pendulum)

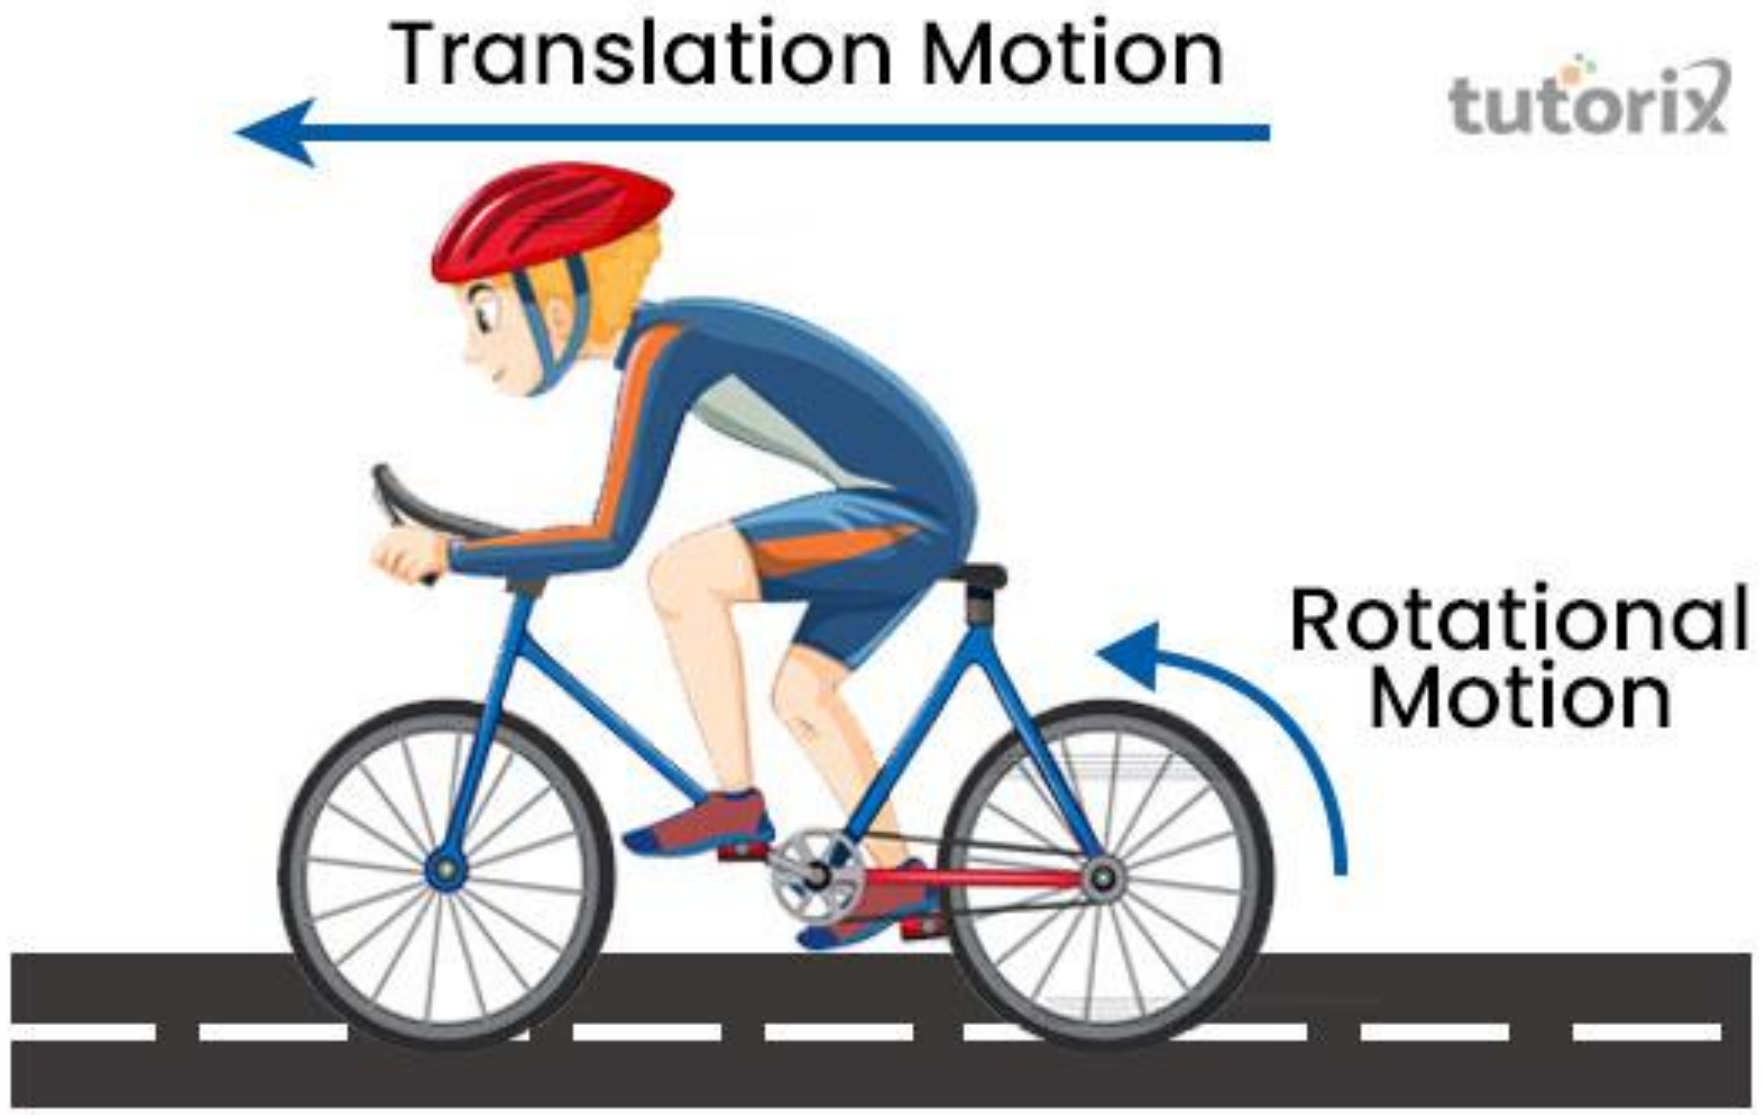

Uniform Circular Motion

Oscillatory Motion (Spring Mass)

UNITED INTERNATIONAL UNIVERSITY

Periodic Motion

A motion that repeats itself after an equal interval of time.

Periodicity

Examples:
- the Earth in its orbit
- ceiling fan
- analog clock
- a water wave

Oscillatory Motion

Periodic motion of an object that moves on either side of the equilibrium (or) mean position is an oscillatory motion.

Examples:

- Power line oscillates when the wind blows past it
- Earthquake oscillations move buildings
- Block attached to a spring
- Motion of a swing
- Motion of a pendulum
- Vibrations on a stringed musical instrument
- Back and forth motion of a piston
- Vibrations of a Quartz crystal

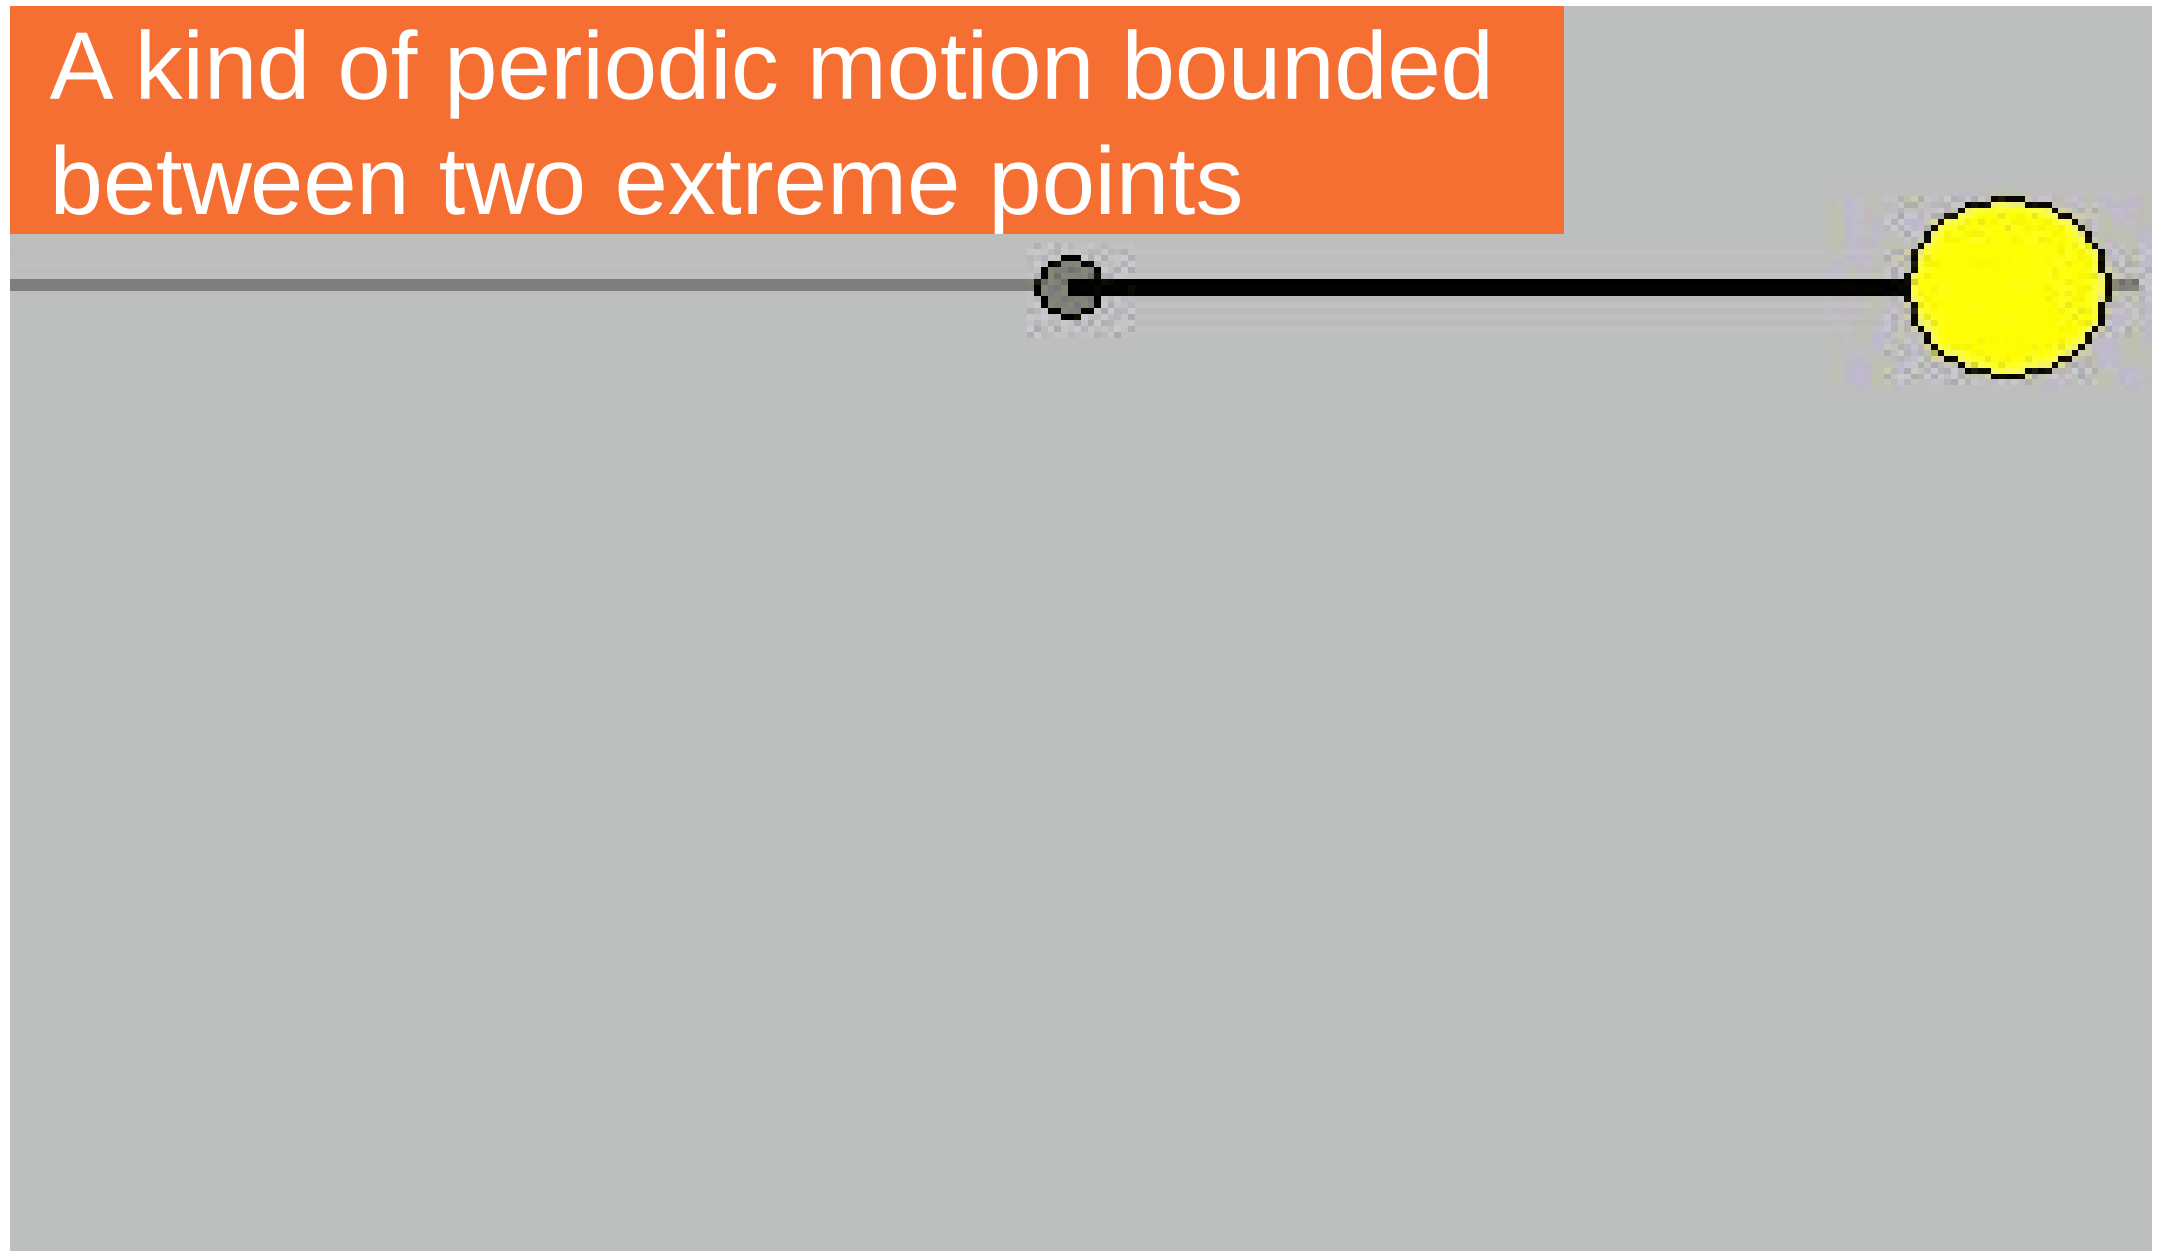

Differences

Generic Periodic Motion

- There is no equilibrium position.
- There is no restoring force

An oscillatory motion is always periodic. A periodic motion may or may not be oscillatory

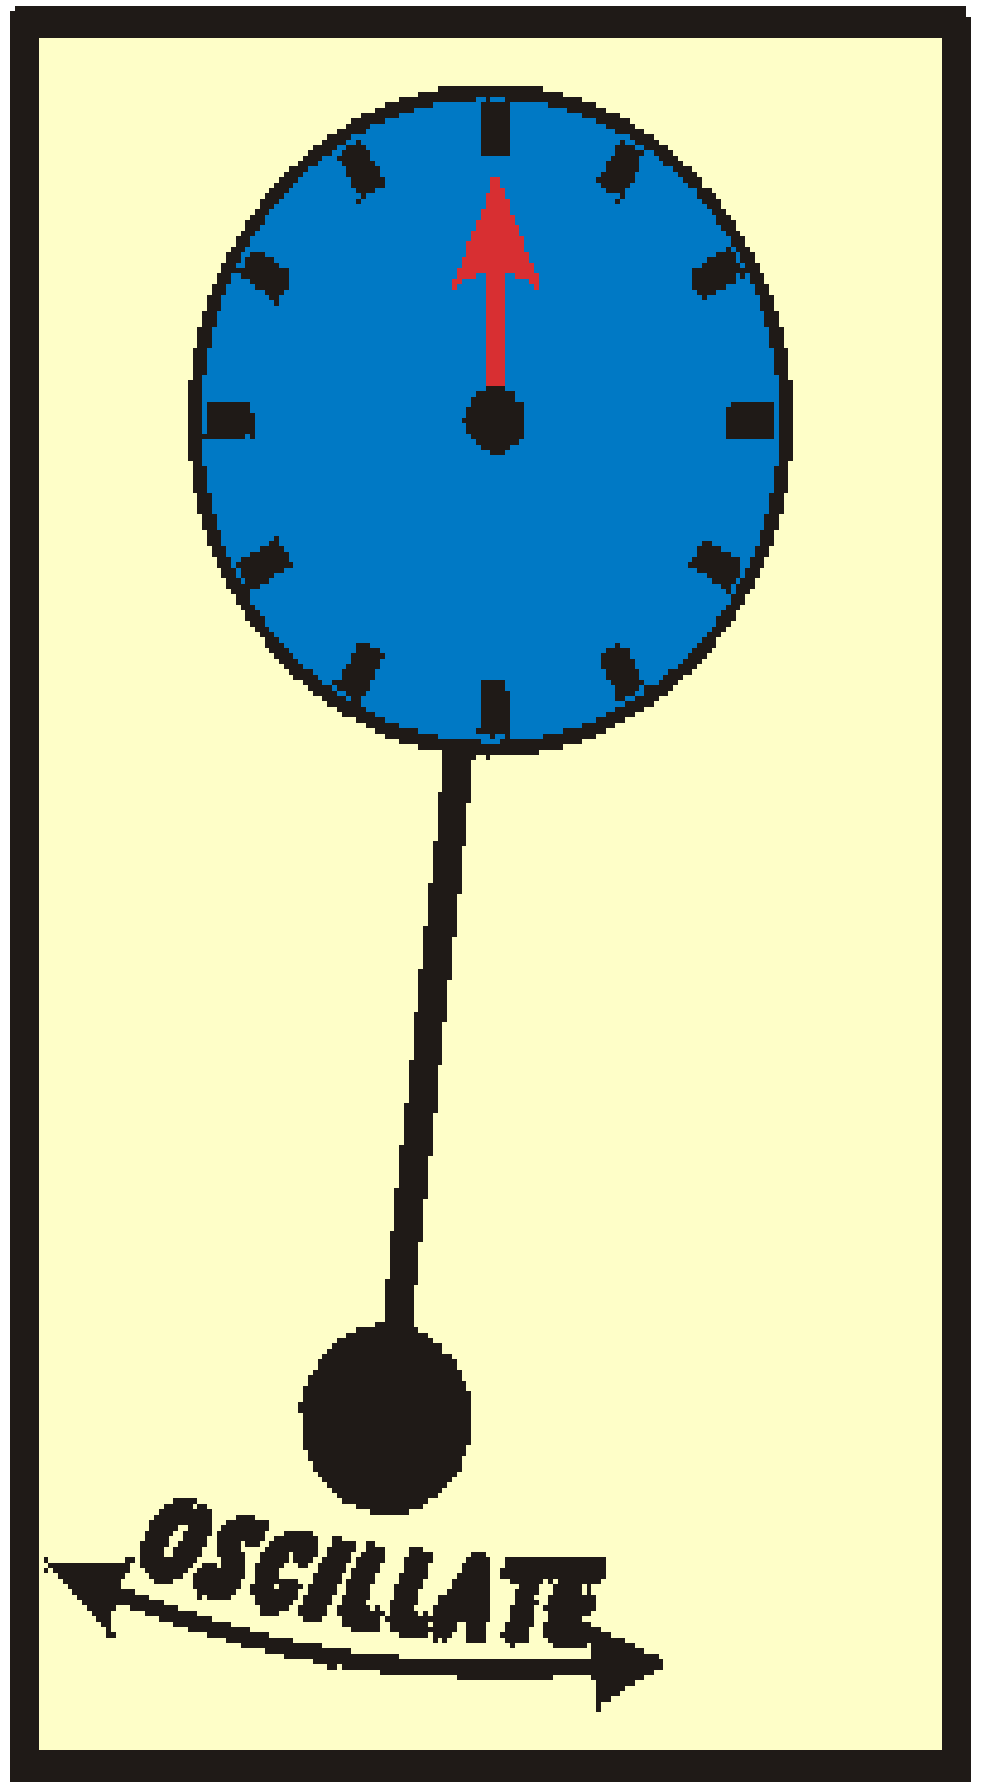

Oscillatory Motion

- There will be a restoring force directed towards the stable equilibrium position (or) mean position

UNITED INTERNATIONAL UNIVERSITY

Simple Harmonic Motion

The simplest kind of oscillation occurs when the **restoring** force F_x is directly proportional to the displacement from the equilibrium x, given by equation

$$F_x = -kx$$

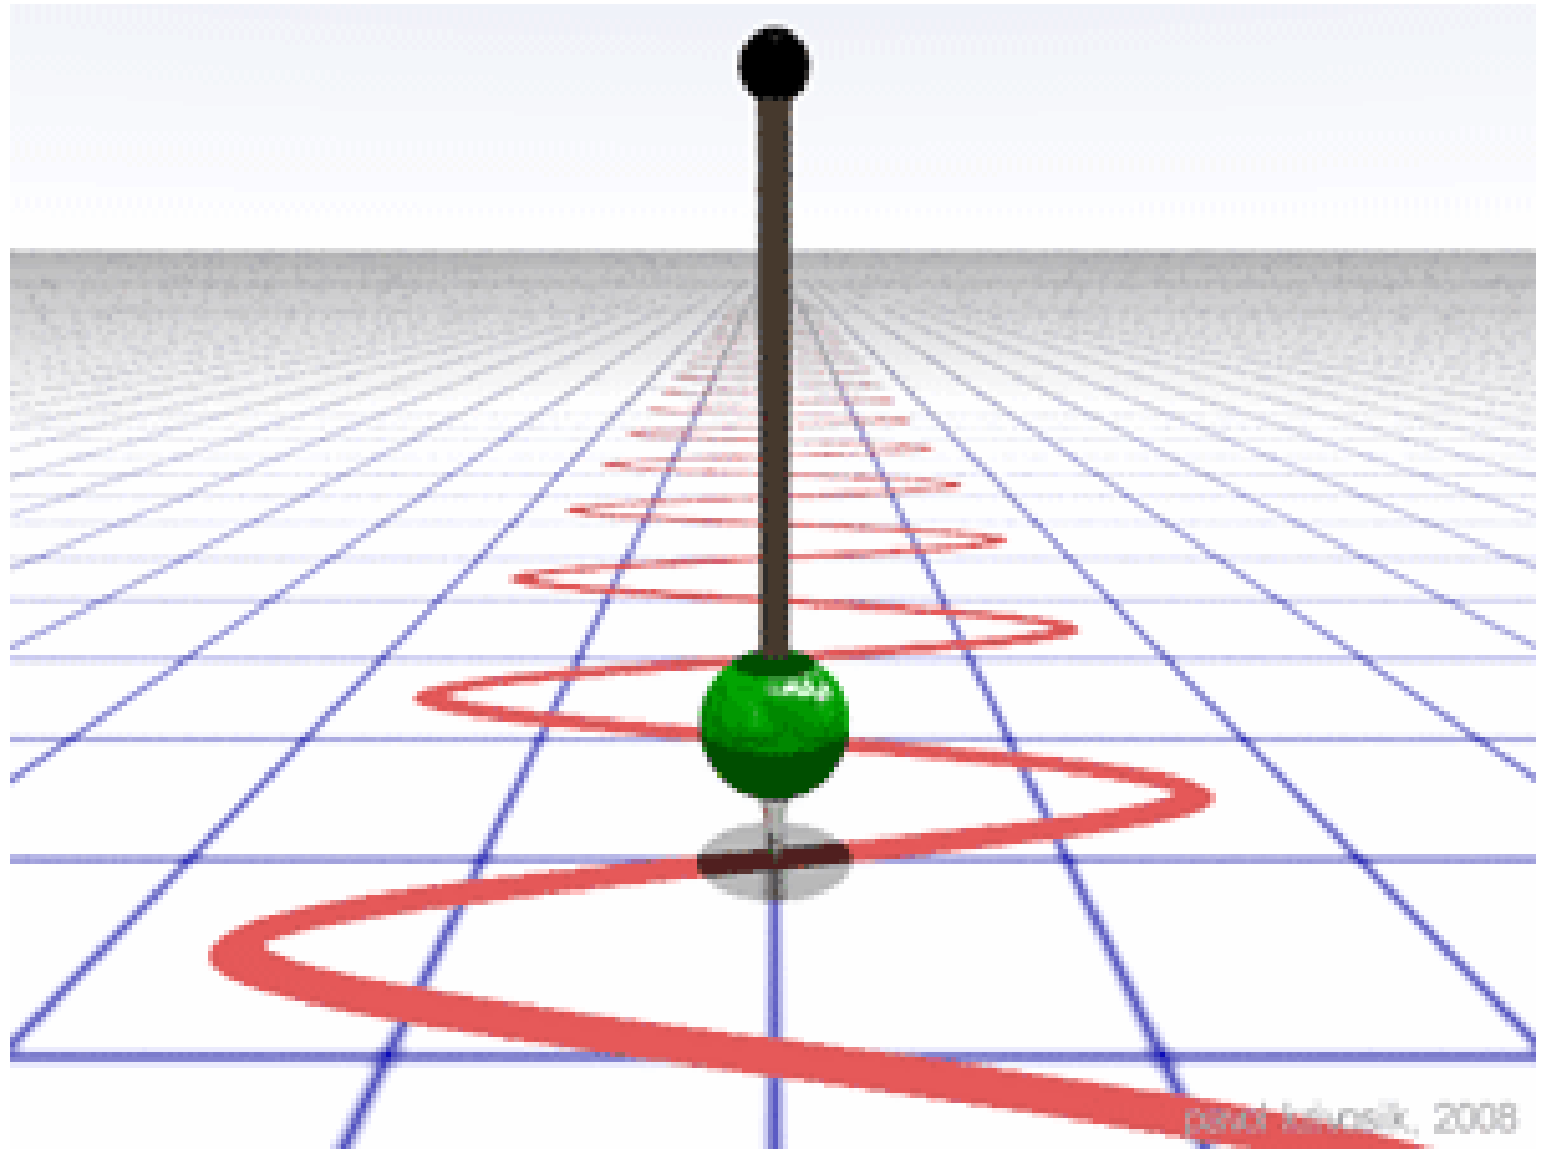

This oscillation is called a

Simple Harmonic Motion(SHM).

A system that oscillates with SHM is called a **simple harmonic oscillator**.

Definitions

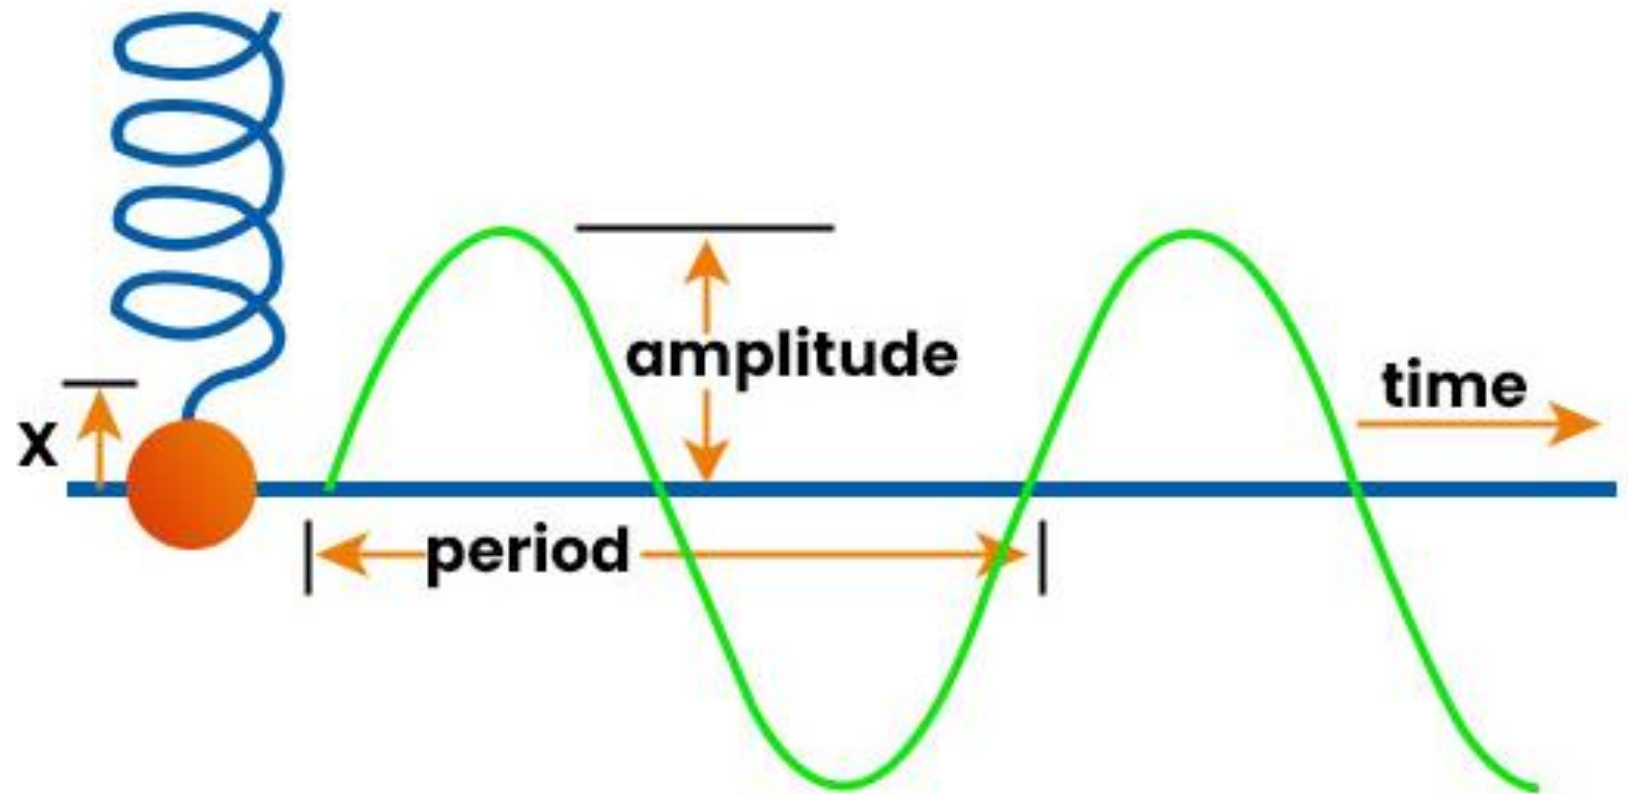

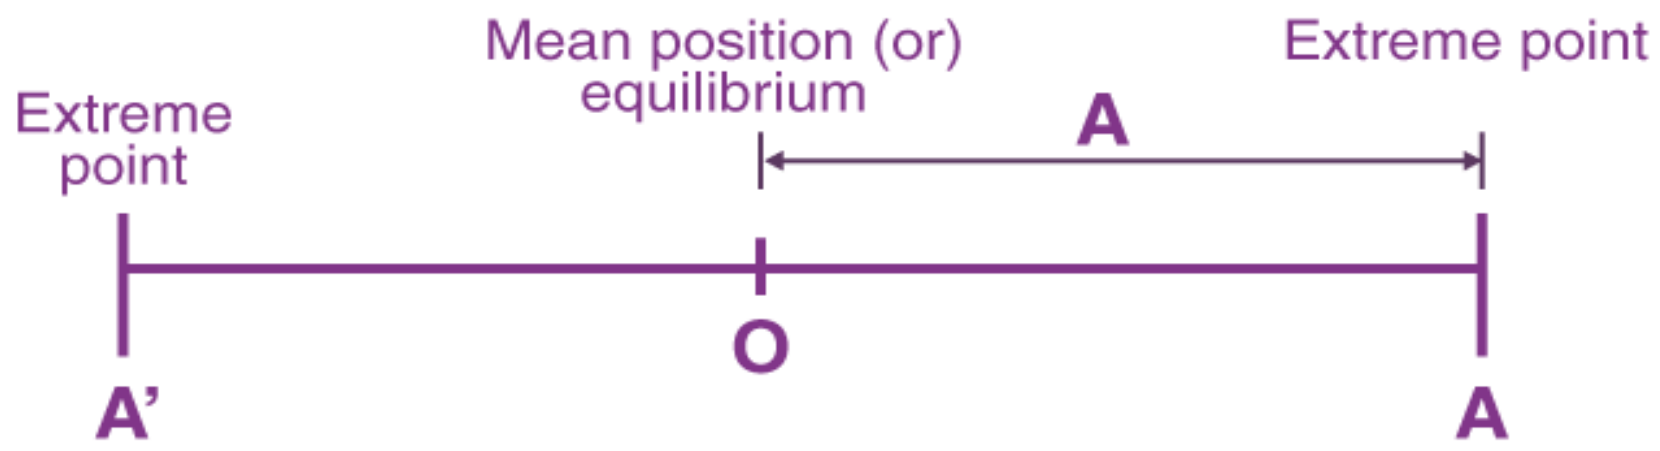

A= Amplitude = distance from the mean point to the extreme point

<u>Amplitude, A</u>

The amplitude of the motion, denoted by A, is the maximum magnitude of displacement from the equilibrium position. It is always positive

<u>Period, T</u>

The period T, is the time required for one complete oscillation, or a cycle.

<u>Frequency, f</u>

The frequency, f, is the number of cycles completed in a unit time.

Formulae

For displacement x, velocity v, acceleration a, frequency f, time t, oscillation period T and angular frequency ω

$$v = \frac{dx}{dt} \qquad \text{a} = \frac{dv}{dt} = \frac{d}{dt}\left(\frac{dx}{dt}\right) = \frac{d^2x}{dt^2}$$

$$f = \frac{1}{T} \qquad \omega = 2\pi f = \frac{2\pi}{T}$$

BE MINDFUL OF THE UNITS

What is the oscillation period of an FM radio station that broadcasts at 100 MHz?

10 ns

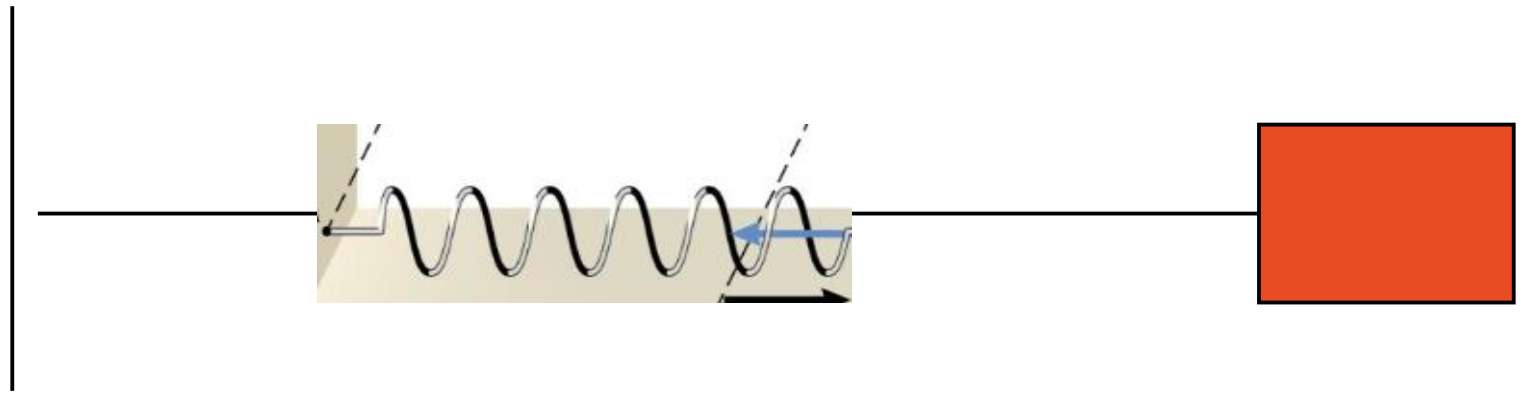

$$F = ma = -kx$$

Simple Harmonic Oscillator

Mass-spring oscillator

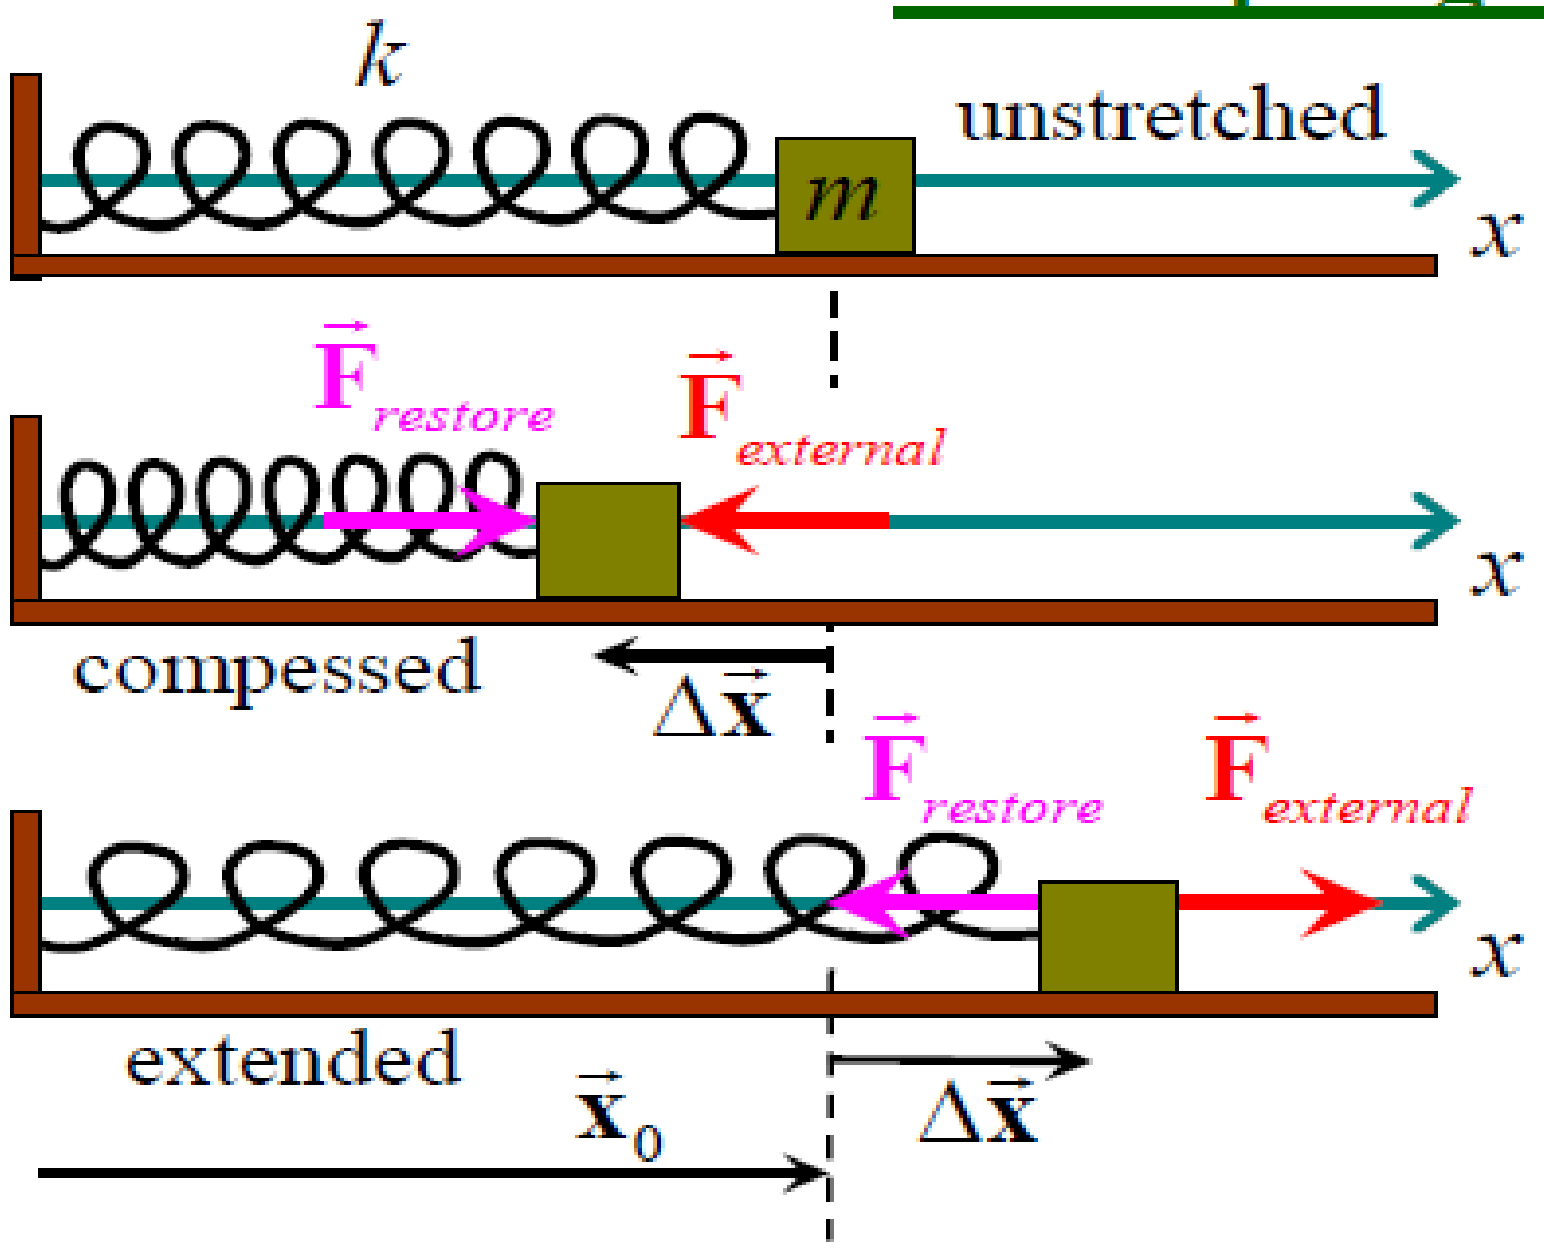

Hooke's Law:
Restoring force,

$$\vec{\mathbf{F}}_{restore} = -k\Delta\vec{\mathbf{x}}$$

where $\Delta\vec{\mathbf{x}} = \vec{\mathbf{x}} - \vec{\mathbf{x}}_0$

and k is the "spring constant" [N m^{-1}]

Start with the momentum principle: $\dfrac{d\vec{\mathbf{p}}}{dt} = \vec{\mathbf{F}}_{\text{net}}$

For horizontal forces on the mass: $\dfrac{dp_x}{dt} = -kx$

$$\therefore \frac{d(mv_x)}{dt} = -kx \quad \text{or} \quad \frac{d}{dt}\left(m\frac{dx}{dt}\right) = -kx$$

Equation of SHM: $\therefore \dfrac{d^2x}{dt^2} = -\dfrac{k}{m}x$

9

Motion properties

Shape of a SHM oscillation function : **Sinusoidal**

Functional equation:

$$x = A\cos(\omega t + \varphi)$$

x = displacement

A = amplitude

ω = angular frequency

Φ = phase angle

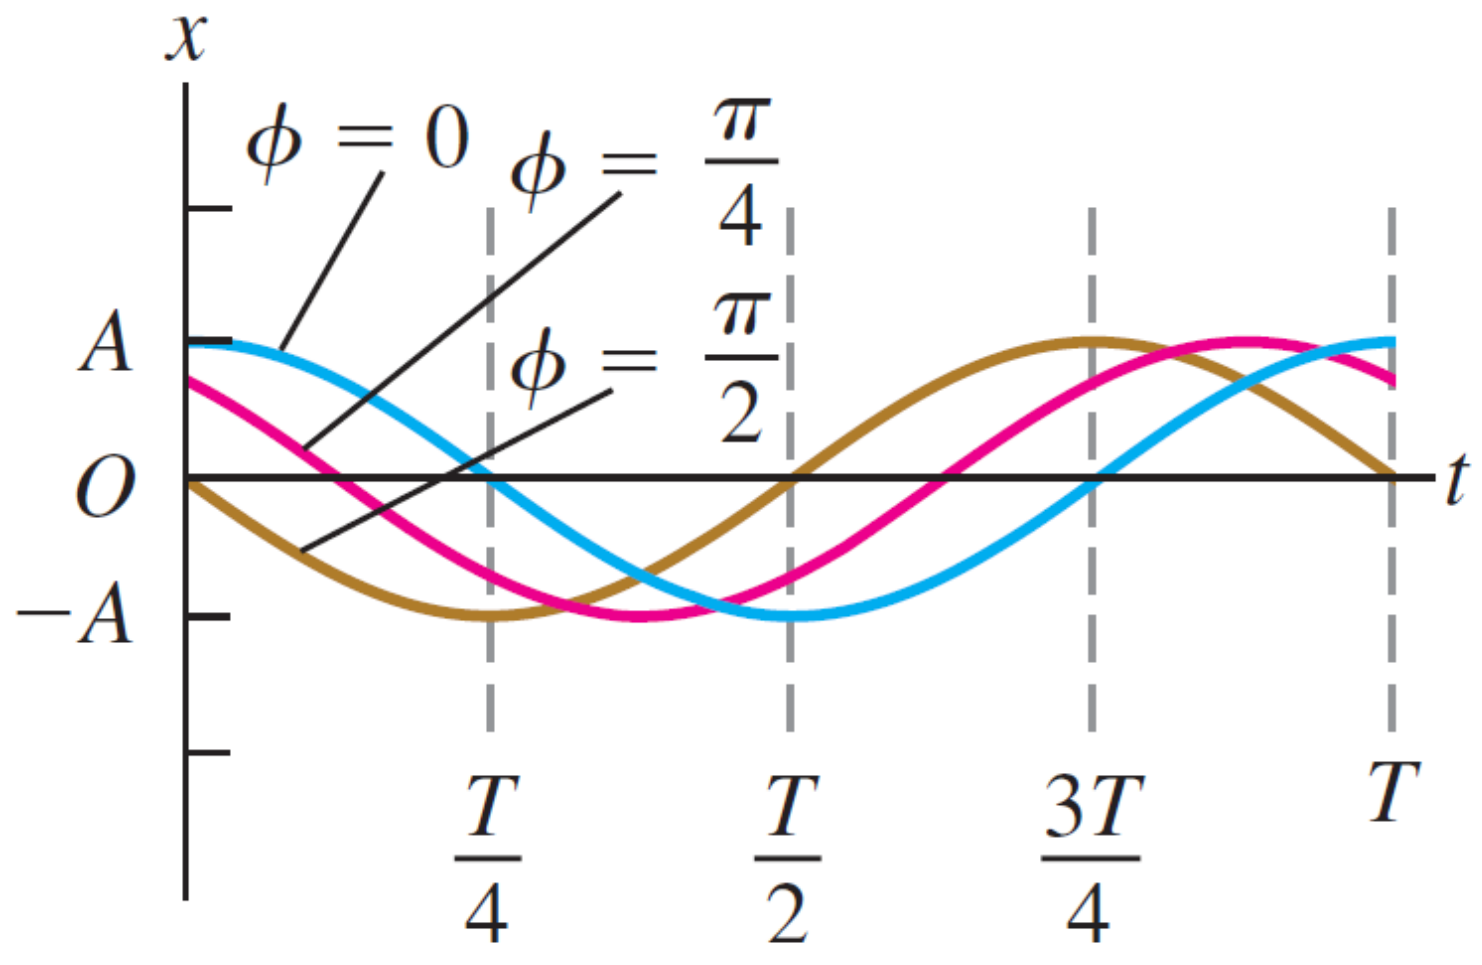

These three curves show SHM with the same period T and amplitude A but with different phase angles ϕ.

At $t = 0$, write $x = x_0$ and $v = v_0$.

Then at $t = 0$:

$$\left.\begin{aligned} x_0 &= A\cos(\phi) \\ v_0 &= -\omega_0 A\sin(\phi) \end{aligned}\right\} \quad \tan\phi = -\frac{v_0}{\omega_0 x_0}$$

and $\quad x_0{}^2 + \left(\frac{v_0}{\omega_0}\right)^2 = A^2\cos^2(\phi) + A^2\sin^2(\phi) = A^2$

$$\therefore A = \sqrt{x_0{}^2 + \left(\frac{v_0}{\omega_0}\right)^2}$$

UNITED INTERNATIONAL UNIVERSITY

Example 2.1

Ex. A block of mass 680gm is fastened to a spring of spring constant 65N/m. The block is pulled a distance 11cm from its equilibrium on a frictionless table and released

(a) What are the angular frequency, the frequency, and the time period of the motion?
(b) What is amplitude of the motion?
(c) What is the maximum speed of the block?

$\boldsymbol{(a)\ T = 0.643\ s\ and\ f = 1.555\ Hz\ and\ \omega = 9.777\ rad/s}$

$\boldsymbol{(b)\ A = 11\ cm}$ $\boldsymbol{(c)\ v = 1.075\ m/s}$

Example 2.2

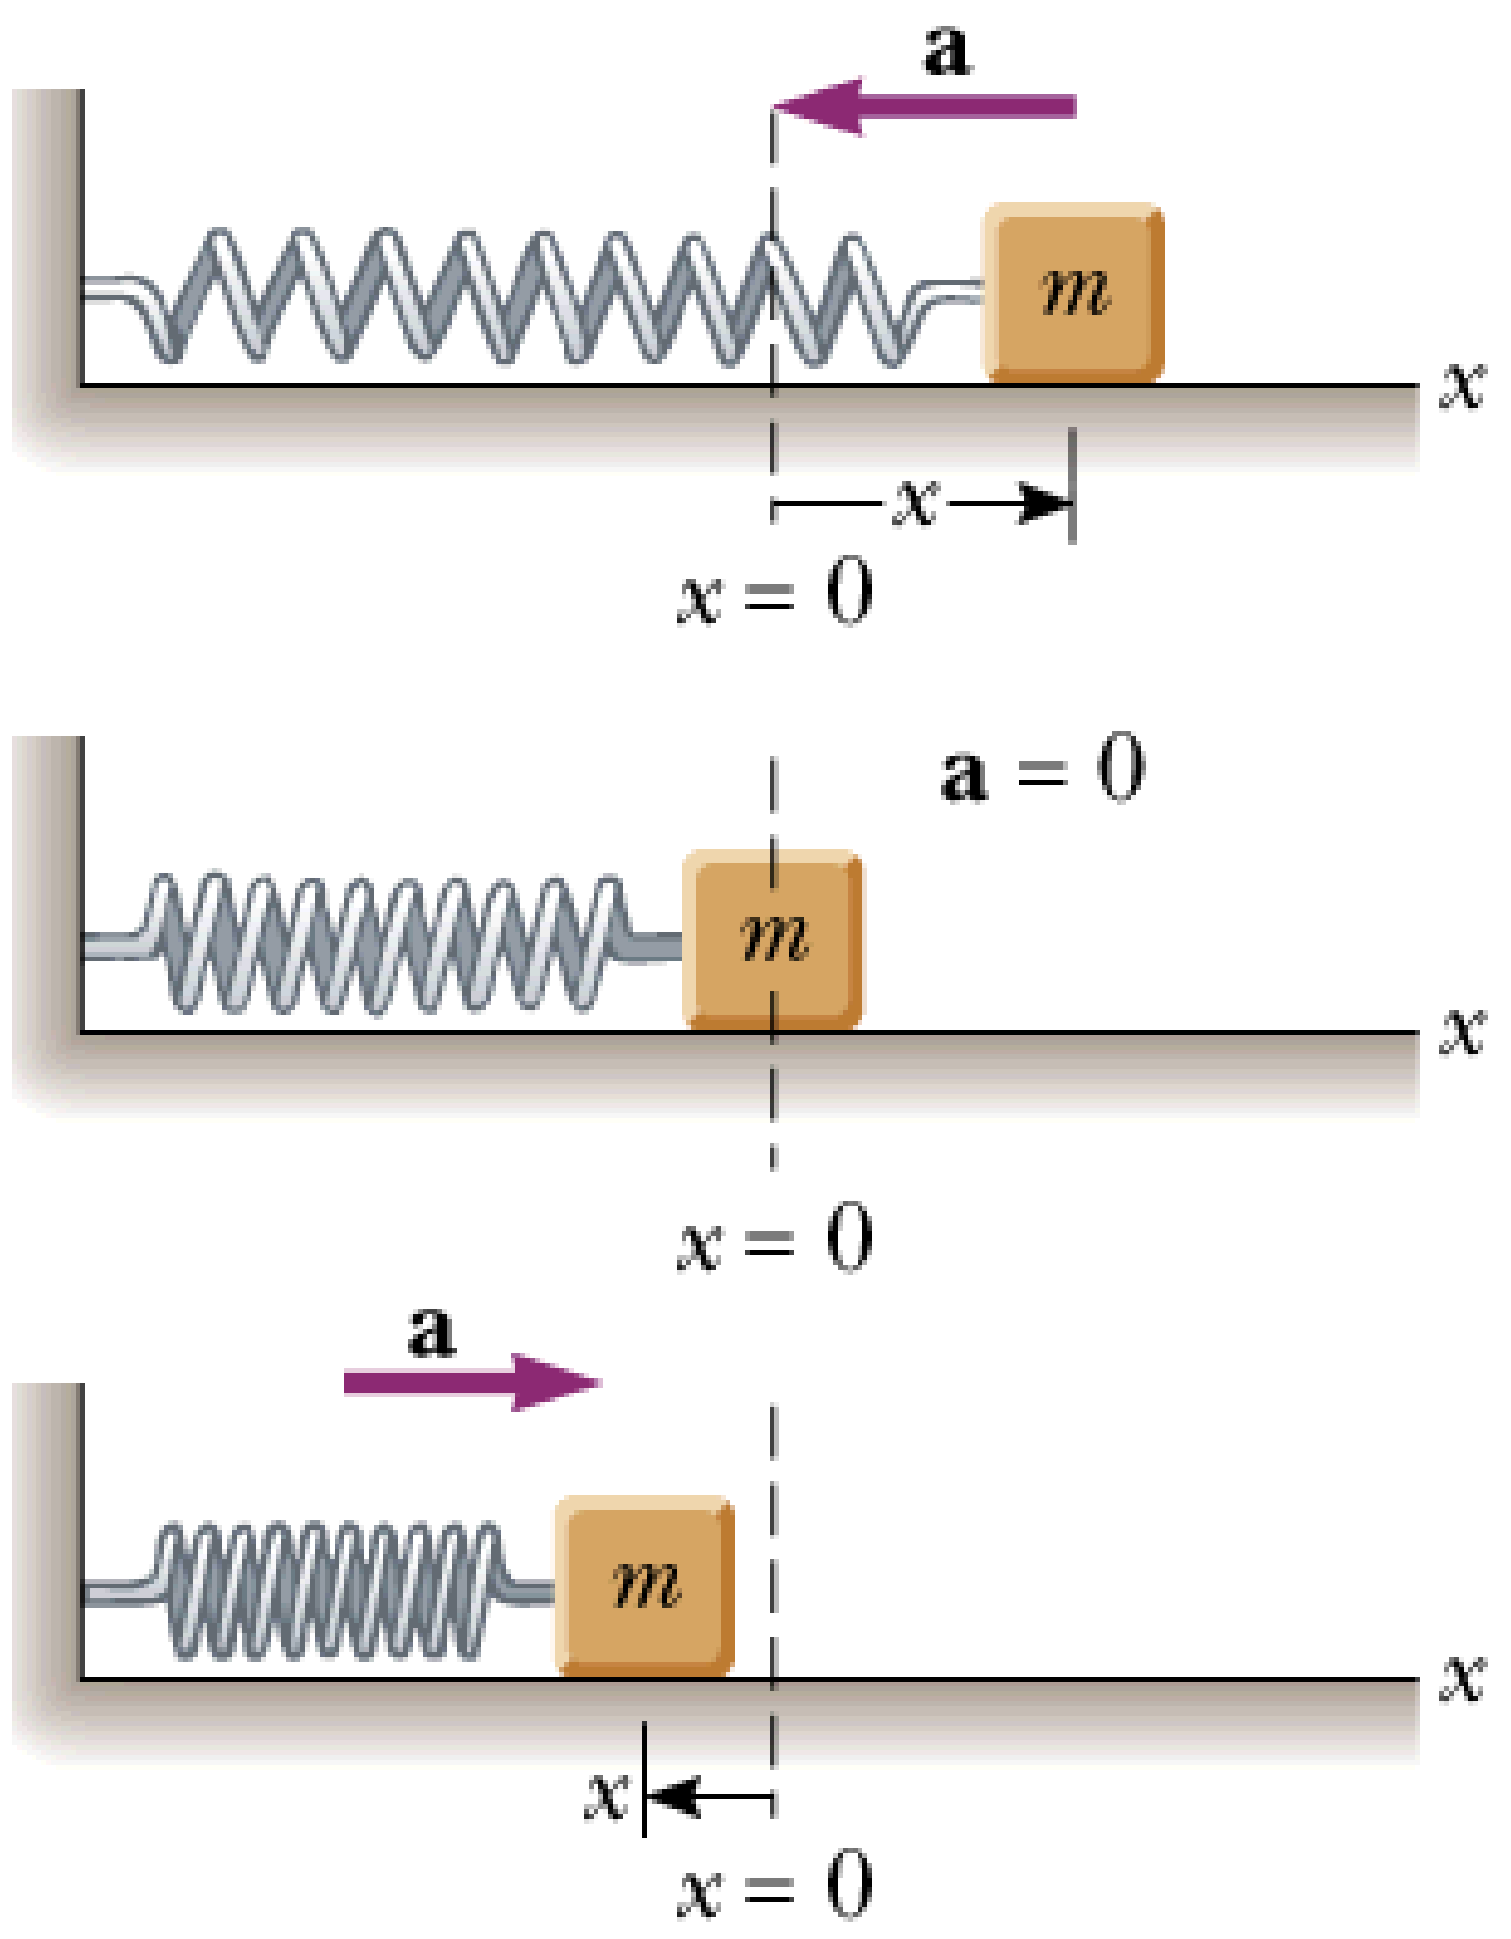

A spring stretches by 3.90 cm when a 10.0 g mass is hung from it. A 25.0 g mass attached to this spring oscillates in simple harmonic motion.

(a) Calculate the period of the motion.

(b) Calculate frequency and the angular velocity of the motion.

$(a)\ T = 0.63\ s\ (b)\ f = 1.60\ Hz\ and\ \omega = 10\ rad/s$

Phase difference examples

Phase Difference 180° | Phase Difference 90° | Phase Difference 45°

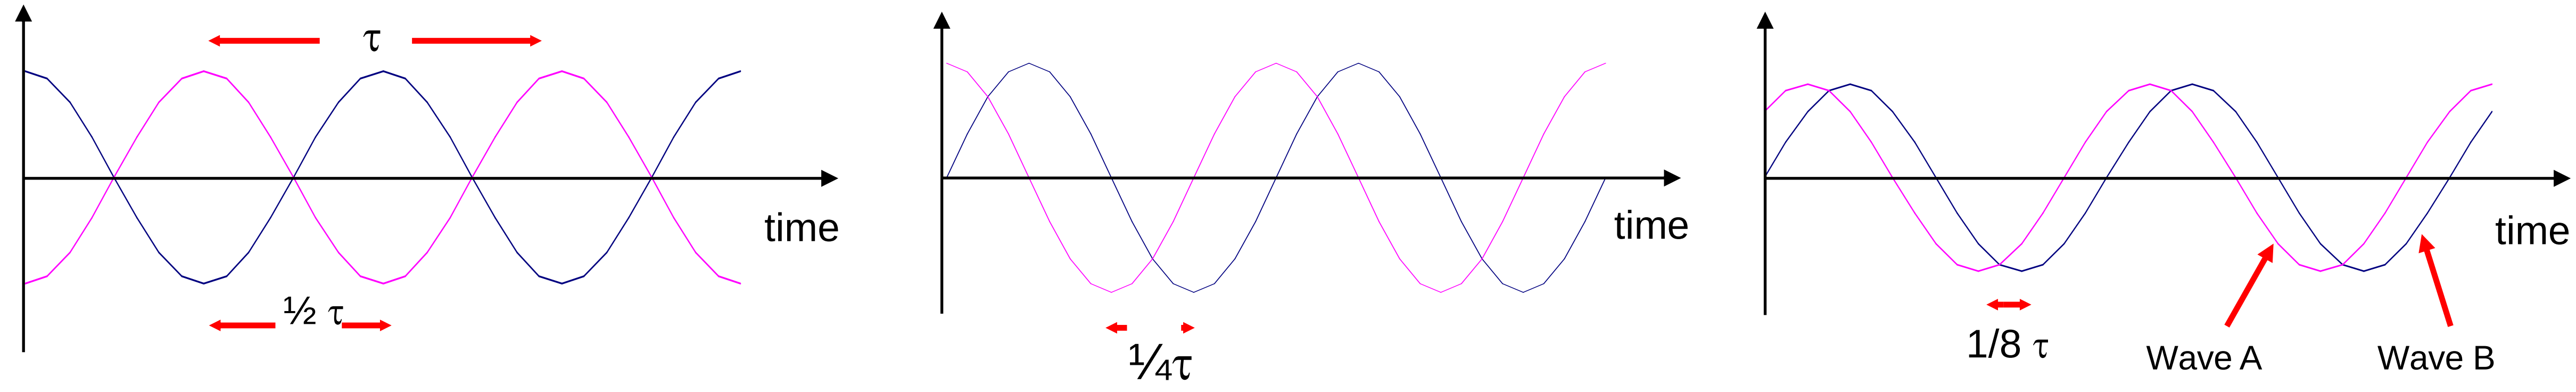

- The phase of periodic wave describes where the wave is in its cycle
- Phase difference is used to describe the phase position of one wave relative to another

$$\frac{d^2x(t)}{dt^2} = \frac{-k}{m}x(t)$$

... a second order differential equation
... we know that if we displace a mass-spring system from its rest position and then release it, it will perform SHM ...

Guess a trial solution: $x(t) = A\cos(\omega t + \phi)$

then $\frac{d^2x}{dt^2} = -A\omega^2 \cos(\omega t + \phi)$

and substitute into our DE: $-A\omega^2 \cos(\omega t + \phi) = -A\frac{k}{m}\cos(\omega t + \phi)$

... which is true provided $\omega^2 = \frac{k}{m}$

Therefore our solution is $x(t) = A\cos(\omega t + \phi)$ where $\omega = \sqrt{\frac{k}{m}}$

UNITED INTERNATIONAL UNIVERSITY

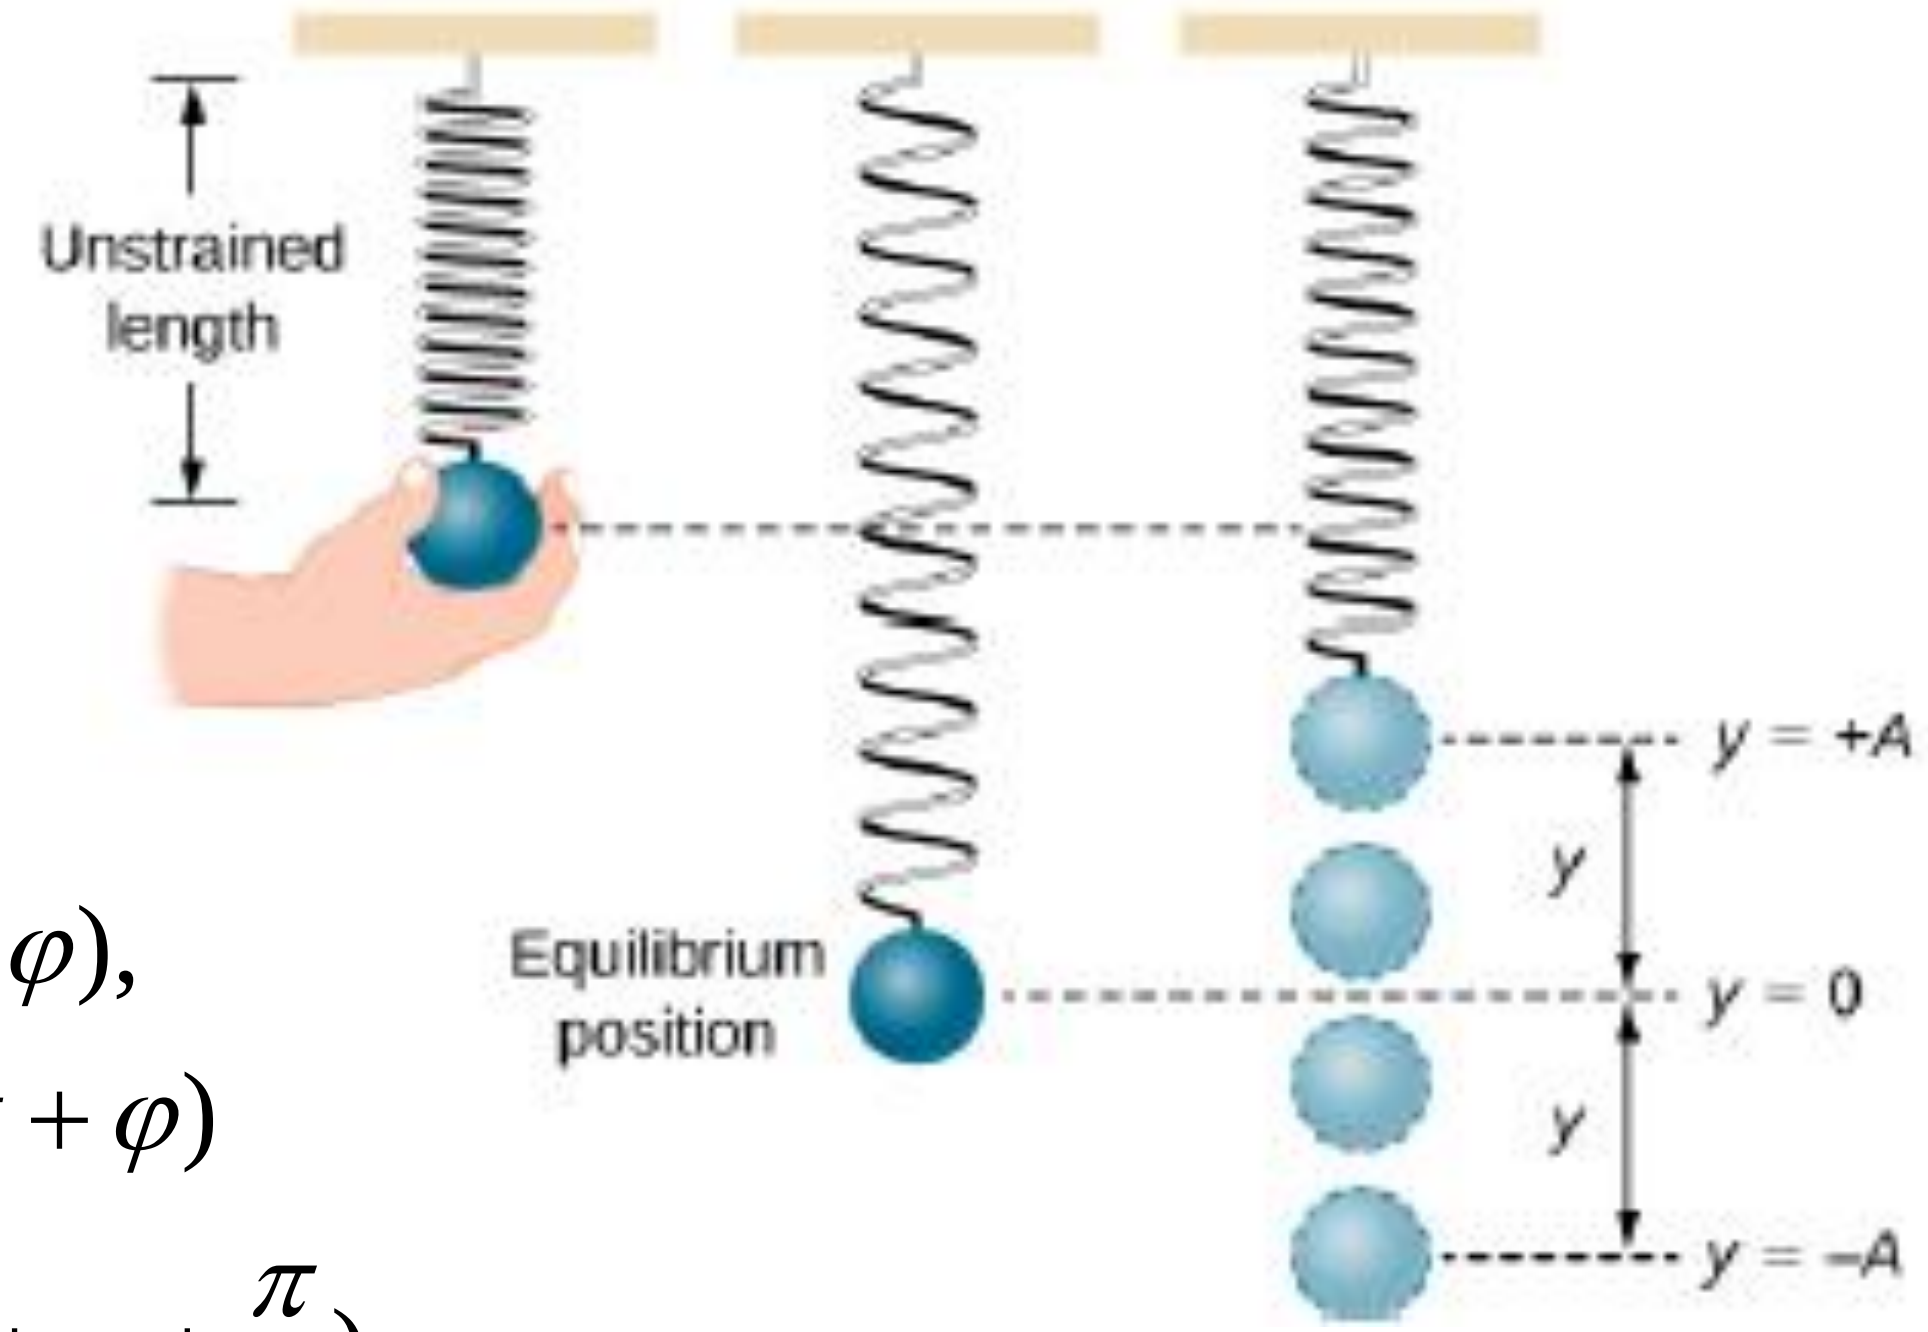

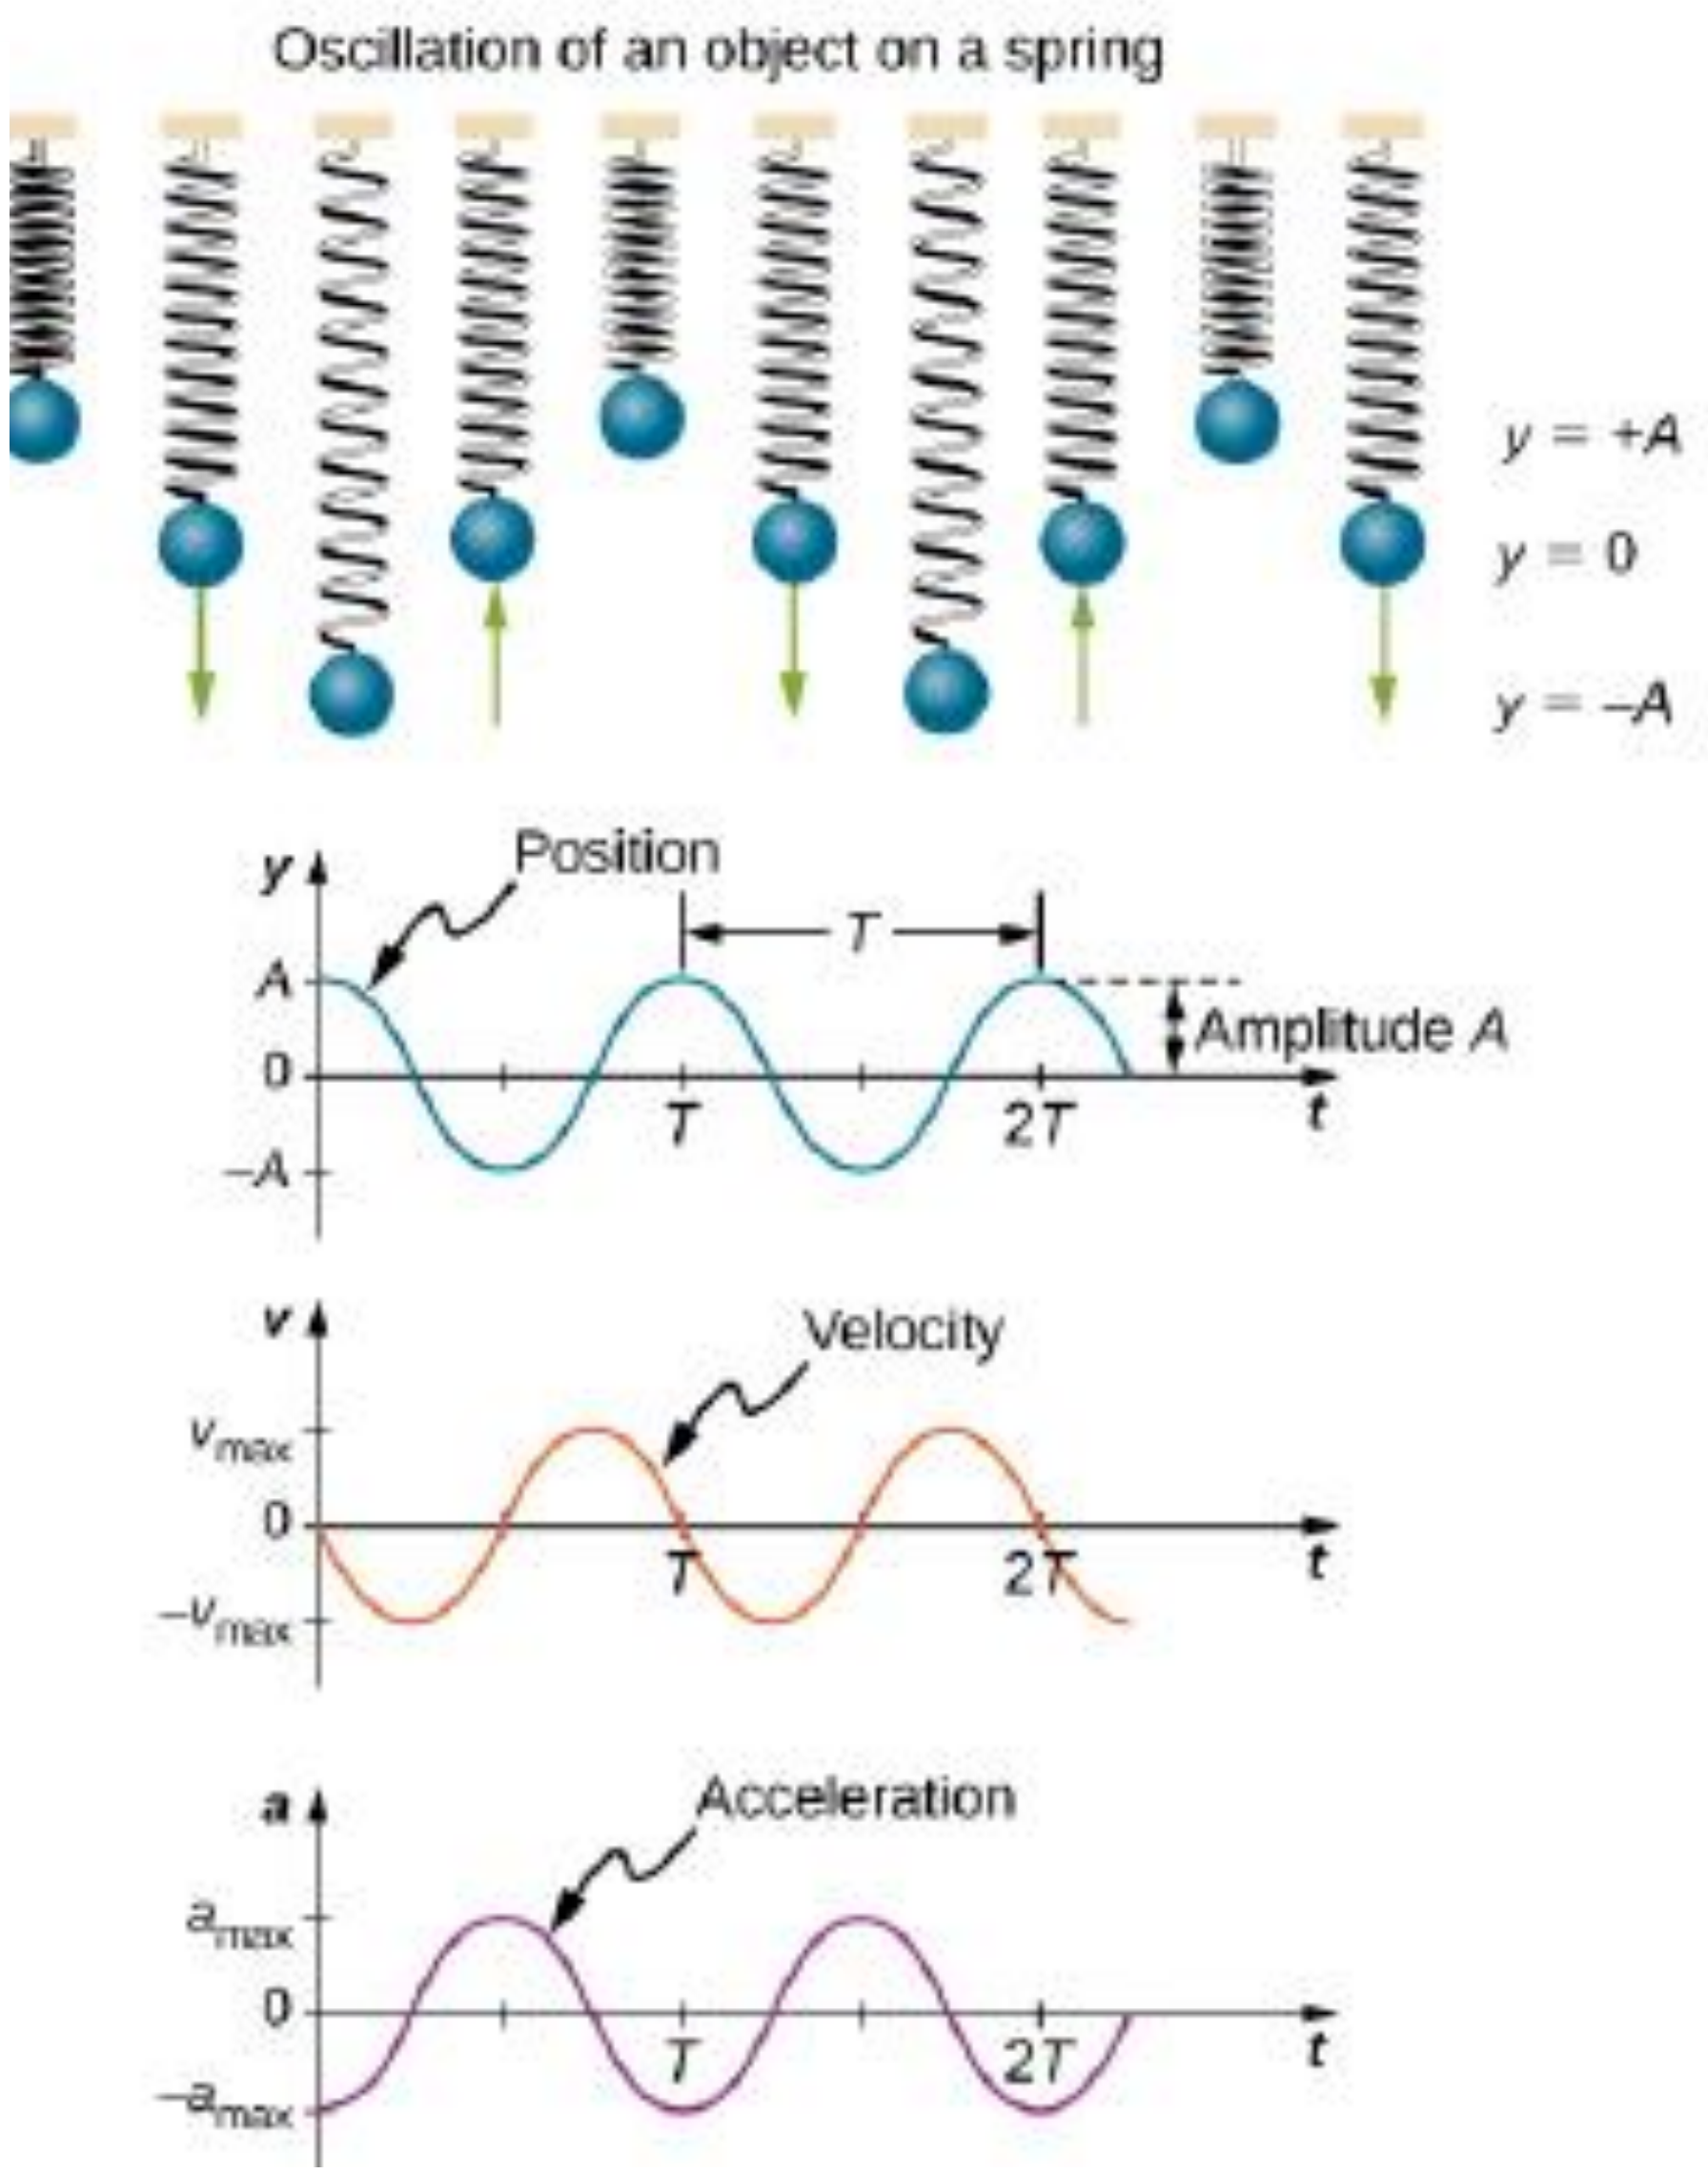

$$x = A\cos(\omega t + \varphi),$$

$$v = -\omega A\sin(\omega t + \varphi)$$

$$= \omega A\cos(\omega t + \varphi + \frac{\pi}{2}),$$

$$a = -\omega^2 A\cos(\omega t + \varphi)$$

$$= -\omega^2 A\sin(\omega t + \varphi + \frac{\pi}{2}).$$

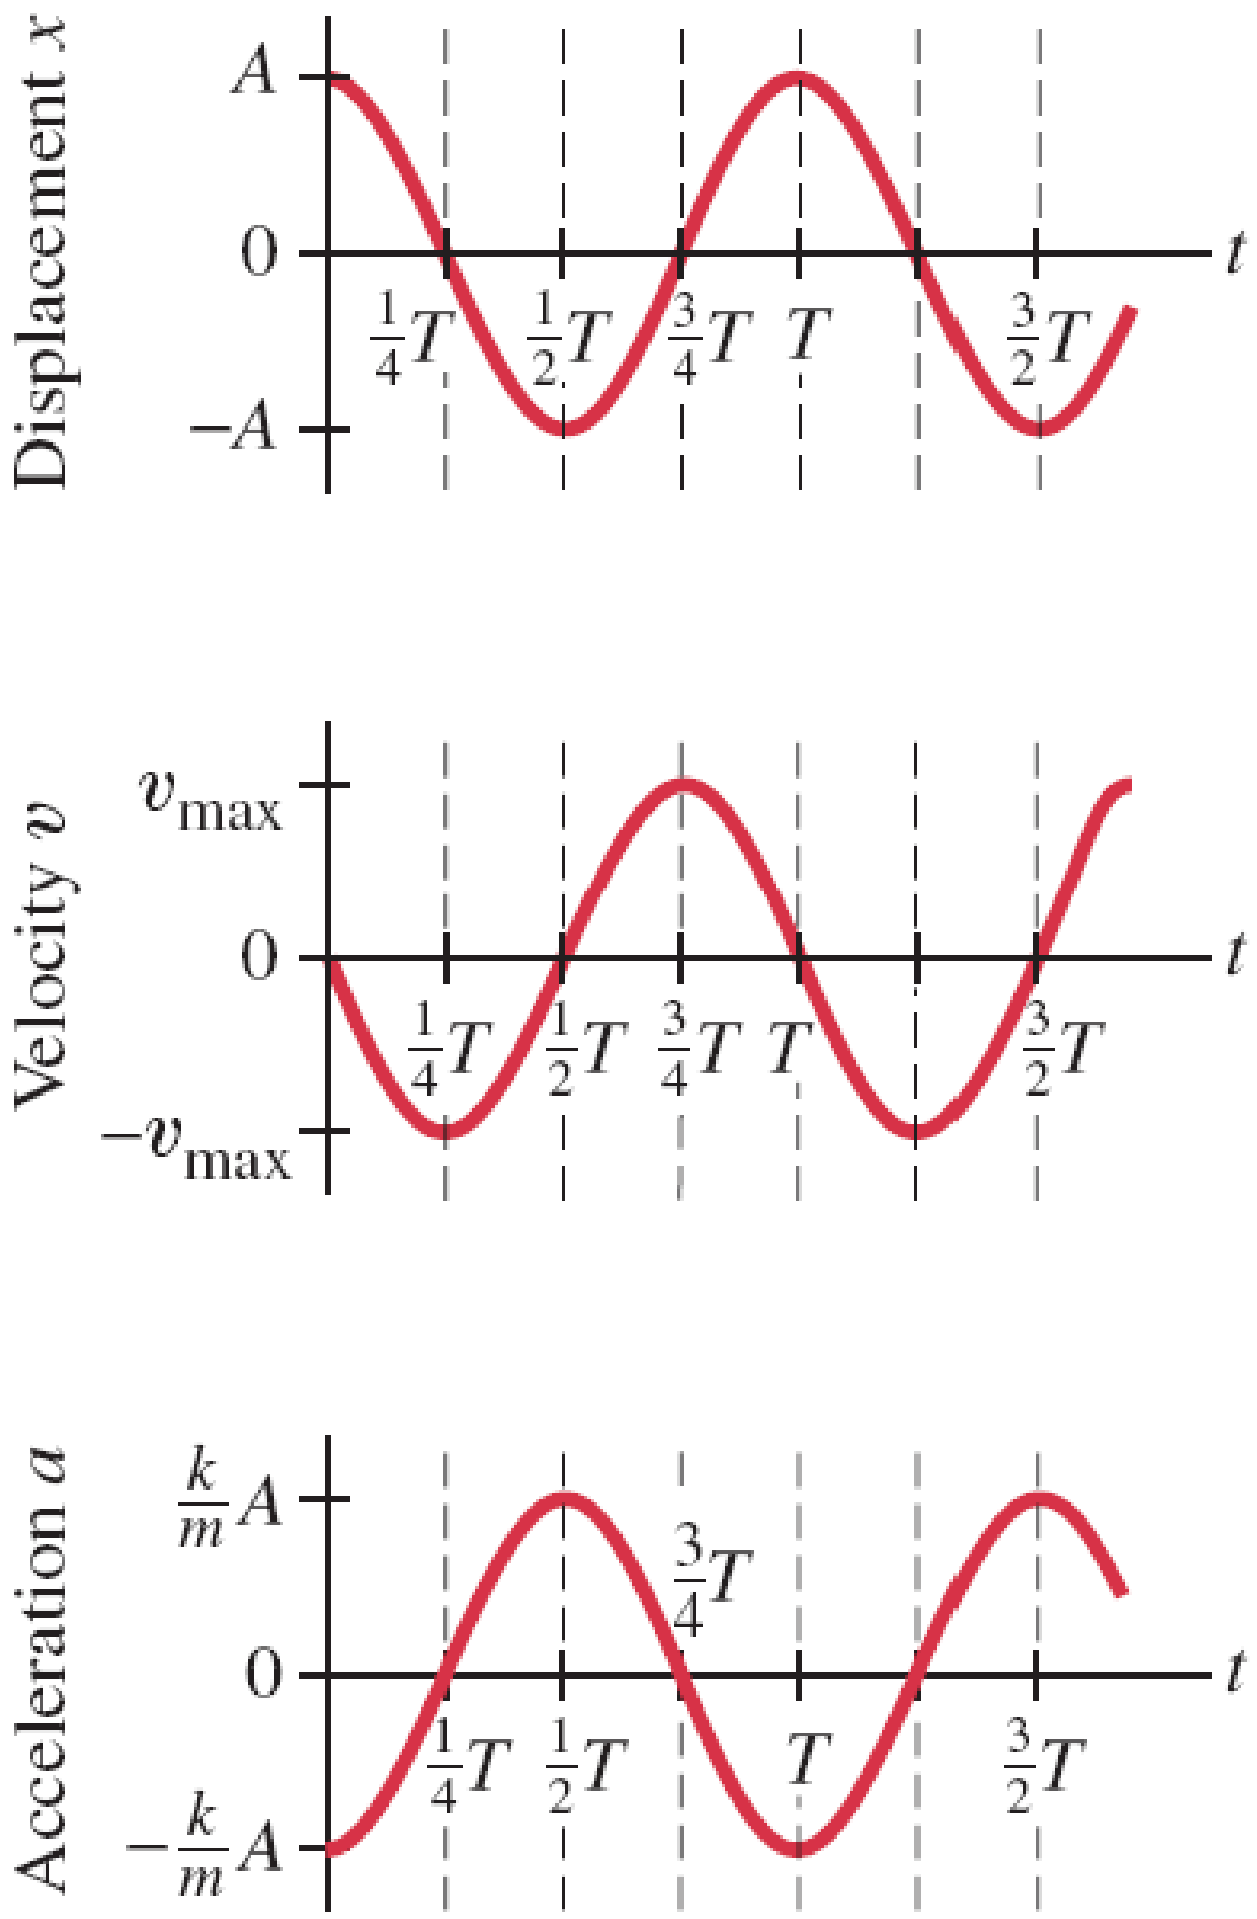
Displacement x
A
0
–A
t
¼T ½T ¾T T 3/2T
Velocity v
vmax
0
–vmax
t
¼T ½T ¾T T 3/2T
Acceleration a
k/m A
0
–k/m A
t
¼T ½T ¾T T 3/2T

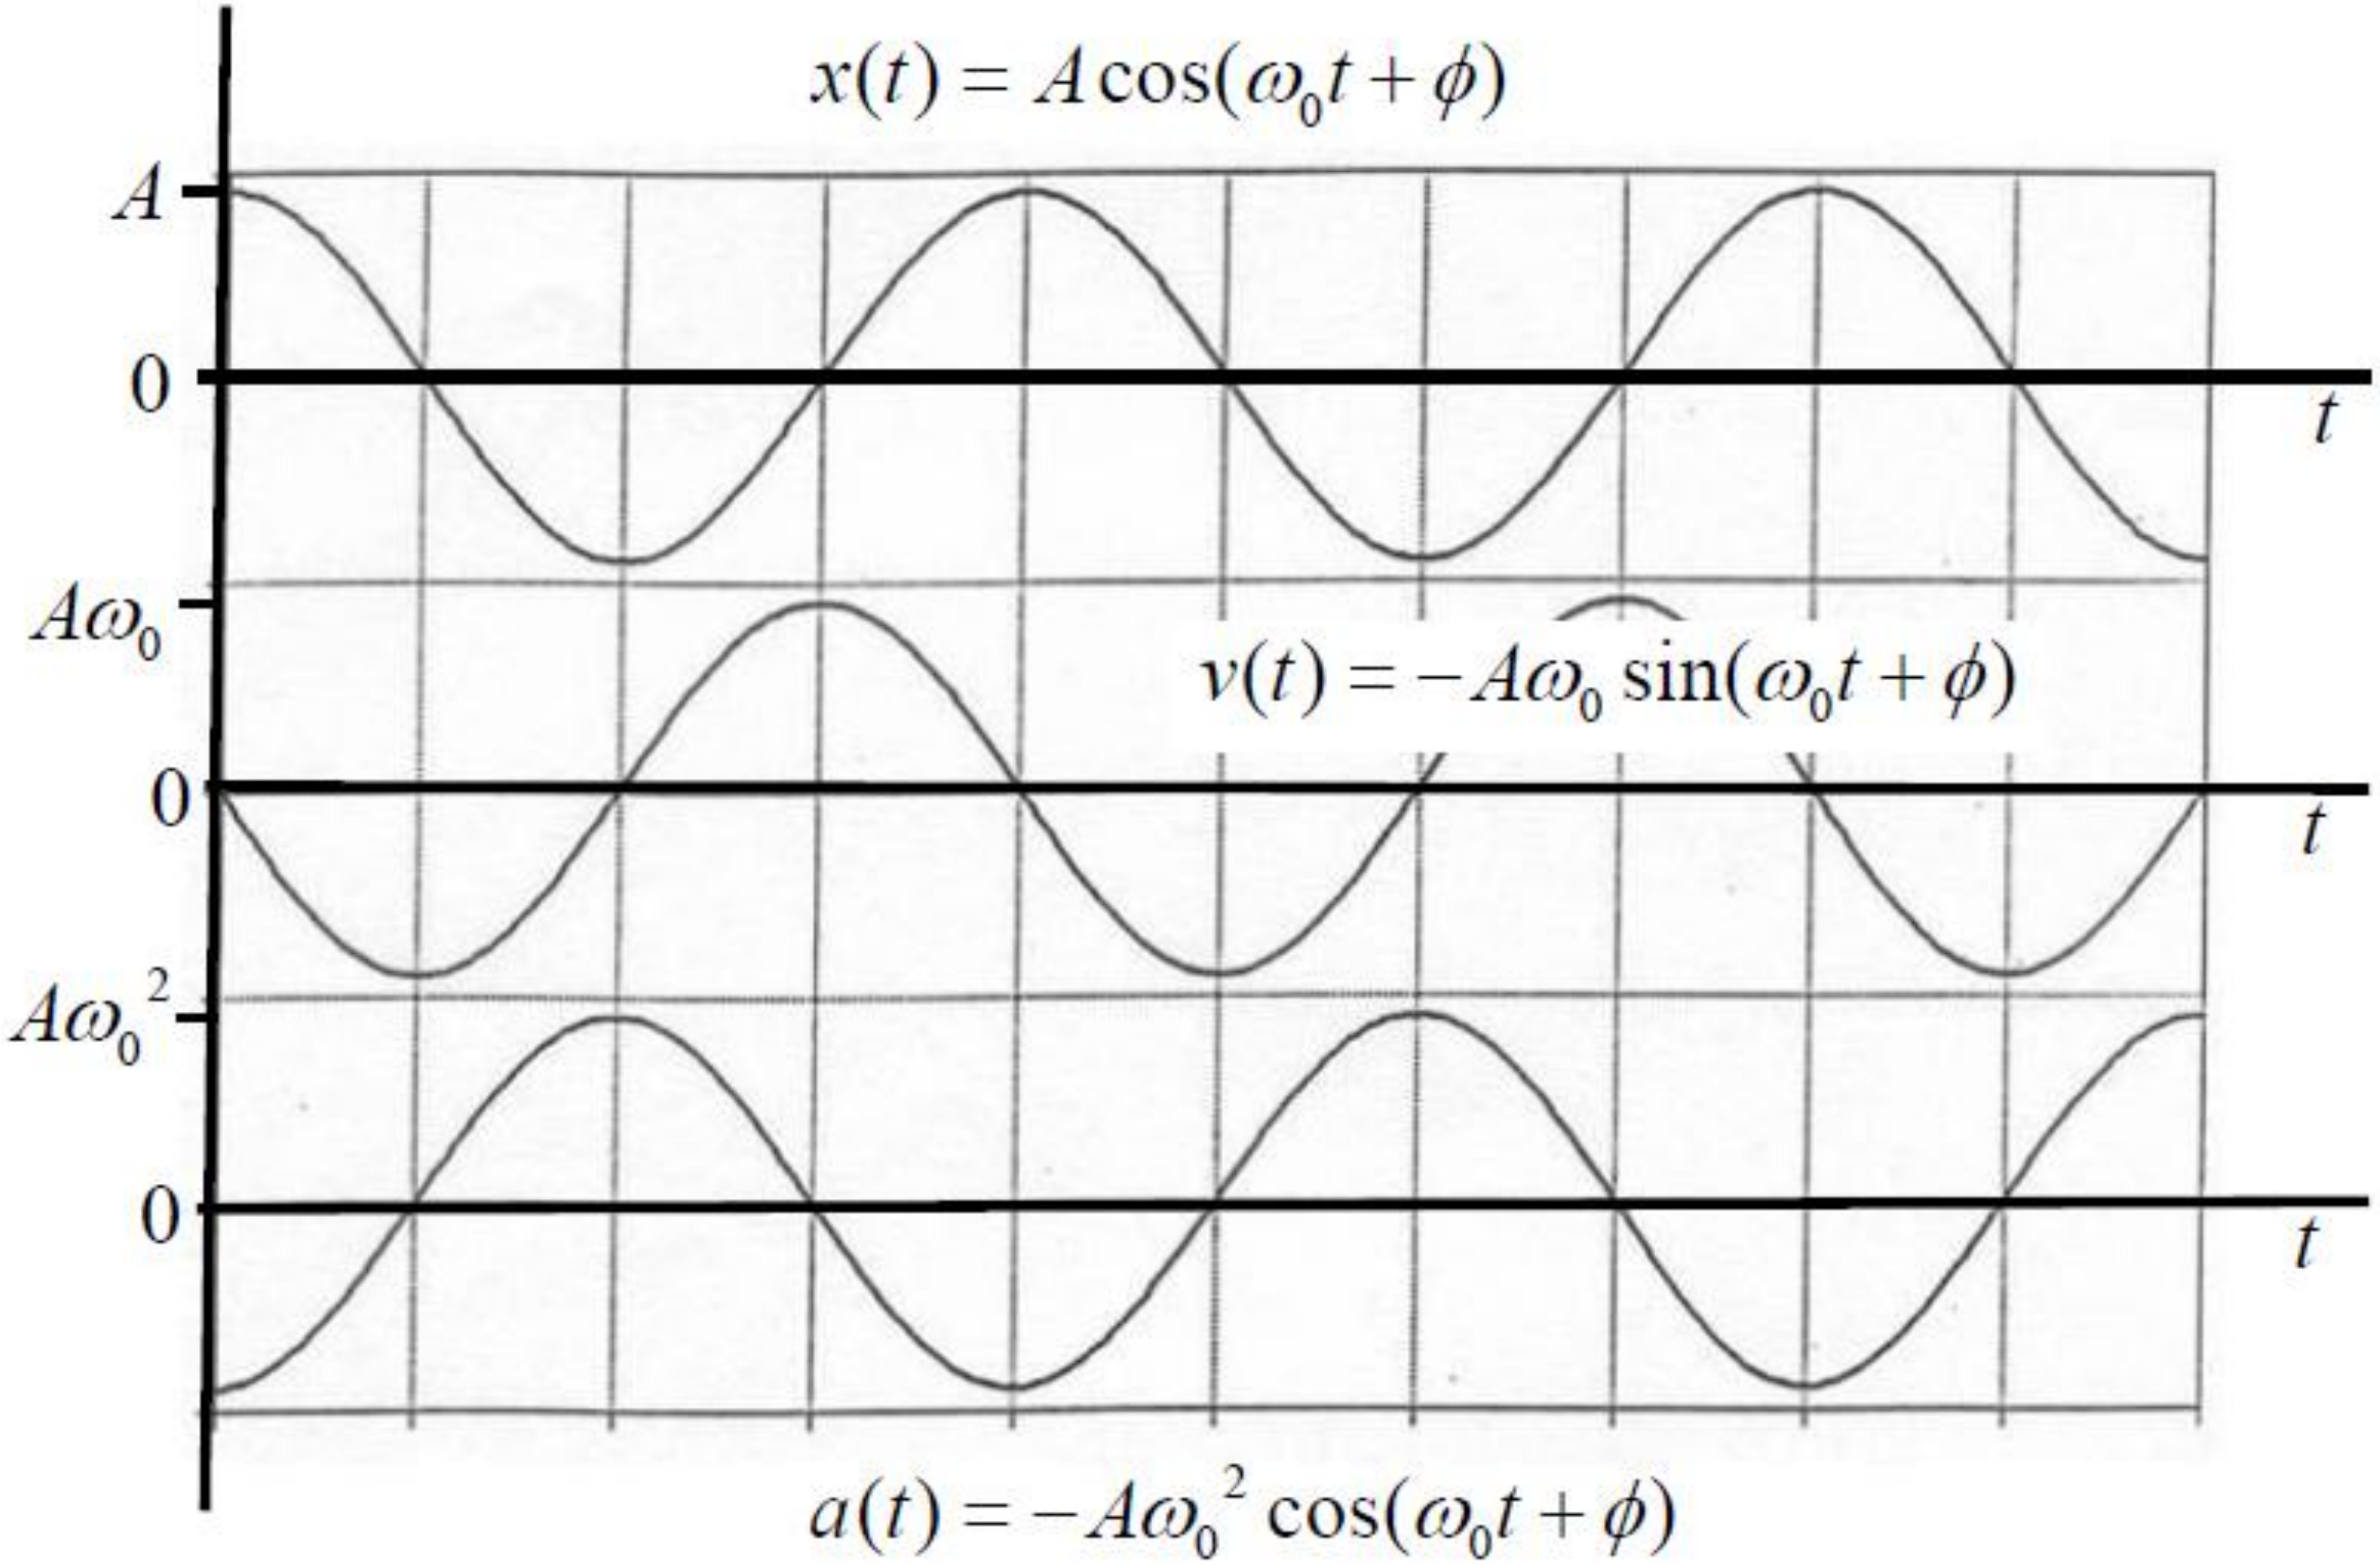
$x(t) = A\cos(\omega_0 t + \phi)$
A
0
t
$A\omega_0$
$v(t) = -A\omega_0 \sin(\omega_0 t + \phi)$
0
t
$A\omega_0^2$
0
t
$a(t) = -A\omega_0^2 \cos(\omega_0 t + \phi)$

Mass-spring oscillator: an energy approach

For our mass-spring system: $\frac{1}{2}mv^2 + \frac{1}{2}kx^2 = \text{constant}$

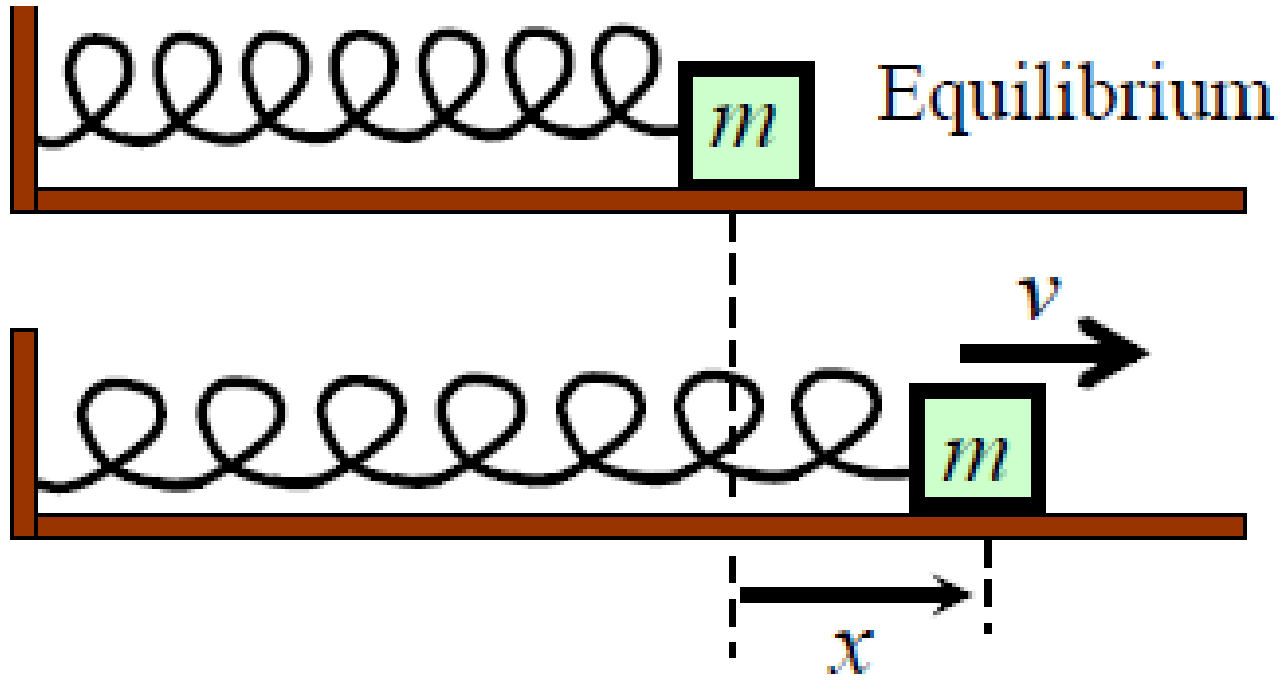

Suppose that the mass has a speed v when it has displacement x

Kinetic energy of mass $= \frac{1}{2}mv^2$

Potential energy of spring $= \int_0^x F\,dx' = \int_0^x kx'\,dx' = \frac{1}{2}kx^2$

There are no dissipative mechanisms in our model (no friction).
… the total energy of the mass-spring system is conserved.

$$\frac{1}{2}mv^2 + \frac{1}{2}kx^2 = \text{constant}$$

$$\therefore \frac{d}{dt}\left(\tfrac{1}{2}mv^2 + \tfrac{1}{2}kx^2\right) = 0$$

$$\therefore mv\frac{dv}{dt} + kx\frac{dx}{dt} = 0$$

$$\therefore mv\frac{dv}{dt} + kxv = 0$$

$$\therefore m\frac{dv}{dt} + kx = 0$$

$$\therefore \frac{d^2x}{dt^2} = -\frac{k}{m}x$$

Energy

Energy of the mass-spring simple harmonic oscillator

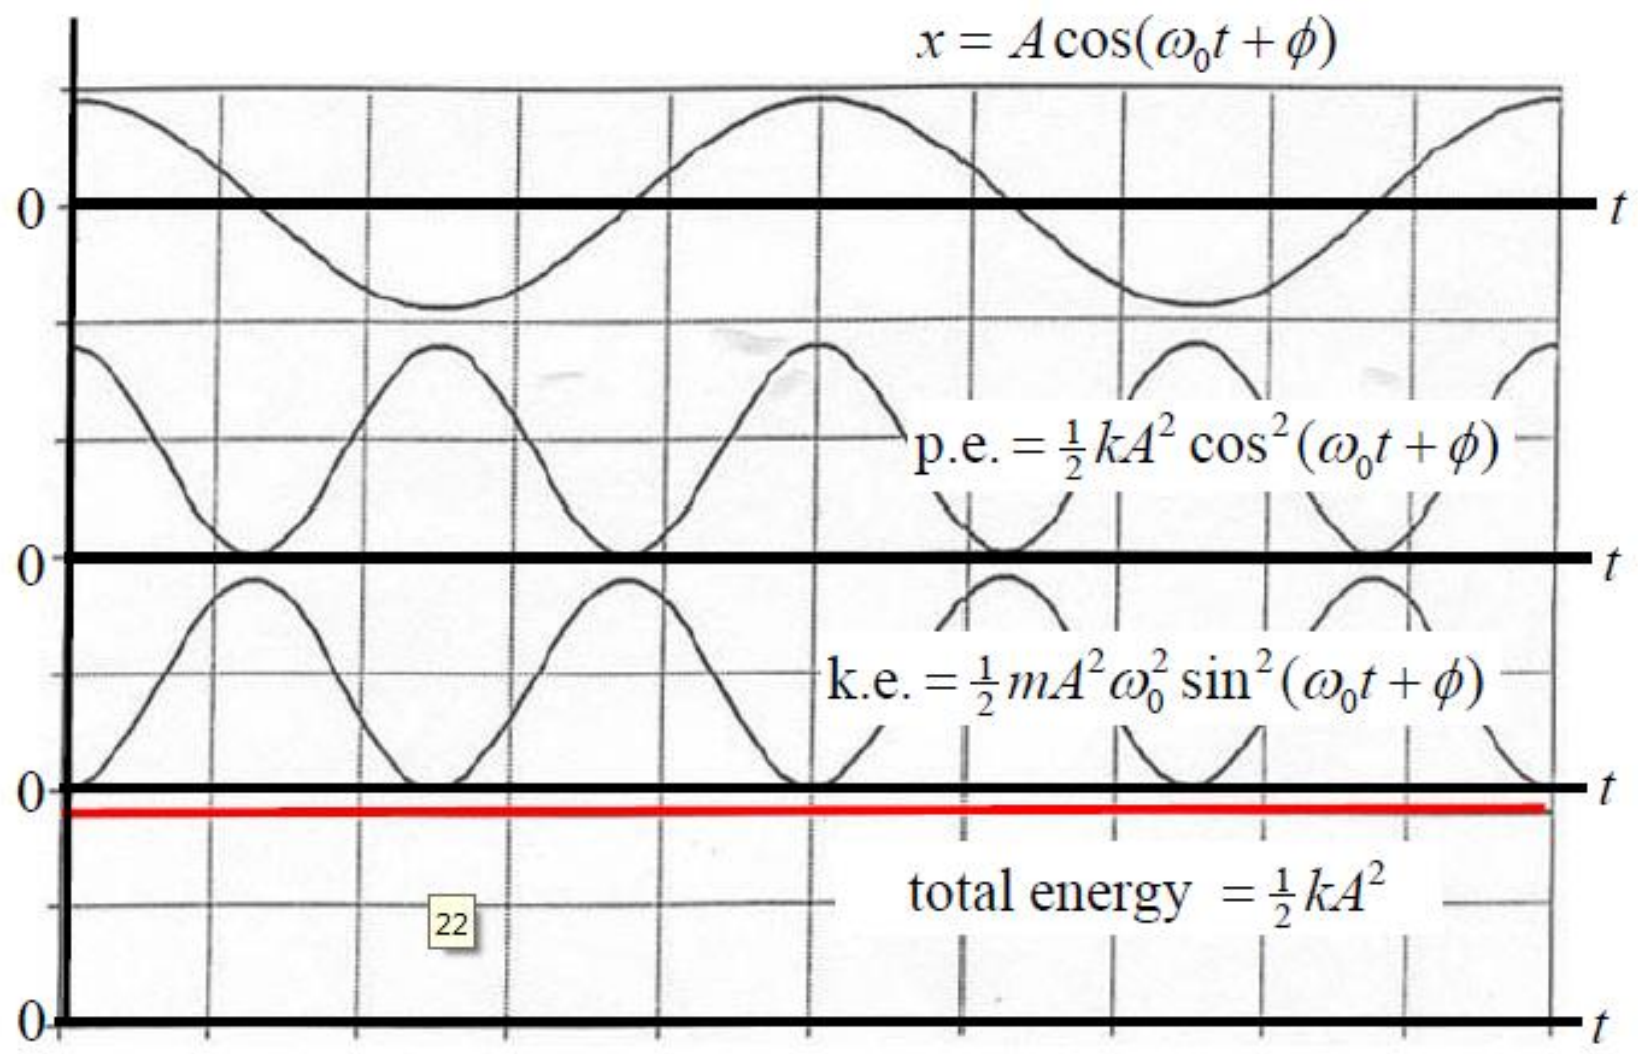

For the mass-spring system: $x = A\cos(\omega_0 t + \phi)$

Potential energy = $\frac{1}{2}kx^2 = \frac{1}{2}kA^2\cos^2(\omega_0 t + \phi)$

k.e. = $\frac{1}{2}mv^2 = \frac{1}{2}m[-A\omega_0\sin(\omega_0 t + \phi)]^2 = \frac{1}{2}mA^2\omega_0^2\sin^2(\omega_0 t + \phi)$

Total energy = p.e. + k.e

$$= \frac{1}{2}kA^2\cos^2(\omega_0 t + \phi) + \frac{1}{2}mA^2\omega_0^2\sin^2(\omega_0 t + \phi)$$

$$= \frac{1}{2}kA^2 \quad (= \frac{1}{2}m\omega_0{}^2A^2) \qquad (\therefore E \propto A^2)$$

We can now write: $\frac{1}{2}kx^2 + \frac{1}{2}mv^2 = \frac{1}{2}kA^2$

$$\therefore v = \pm\sqrt{\frac{k}{m}(A^2 - x^2)} \quad \text{or} \quad v(x) = \pm\omega_0\sqrt{A^2 - x^2}$$

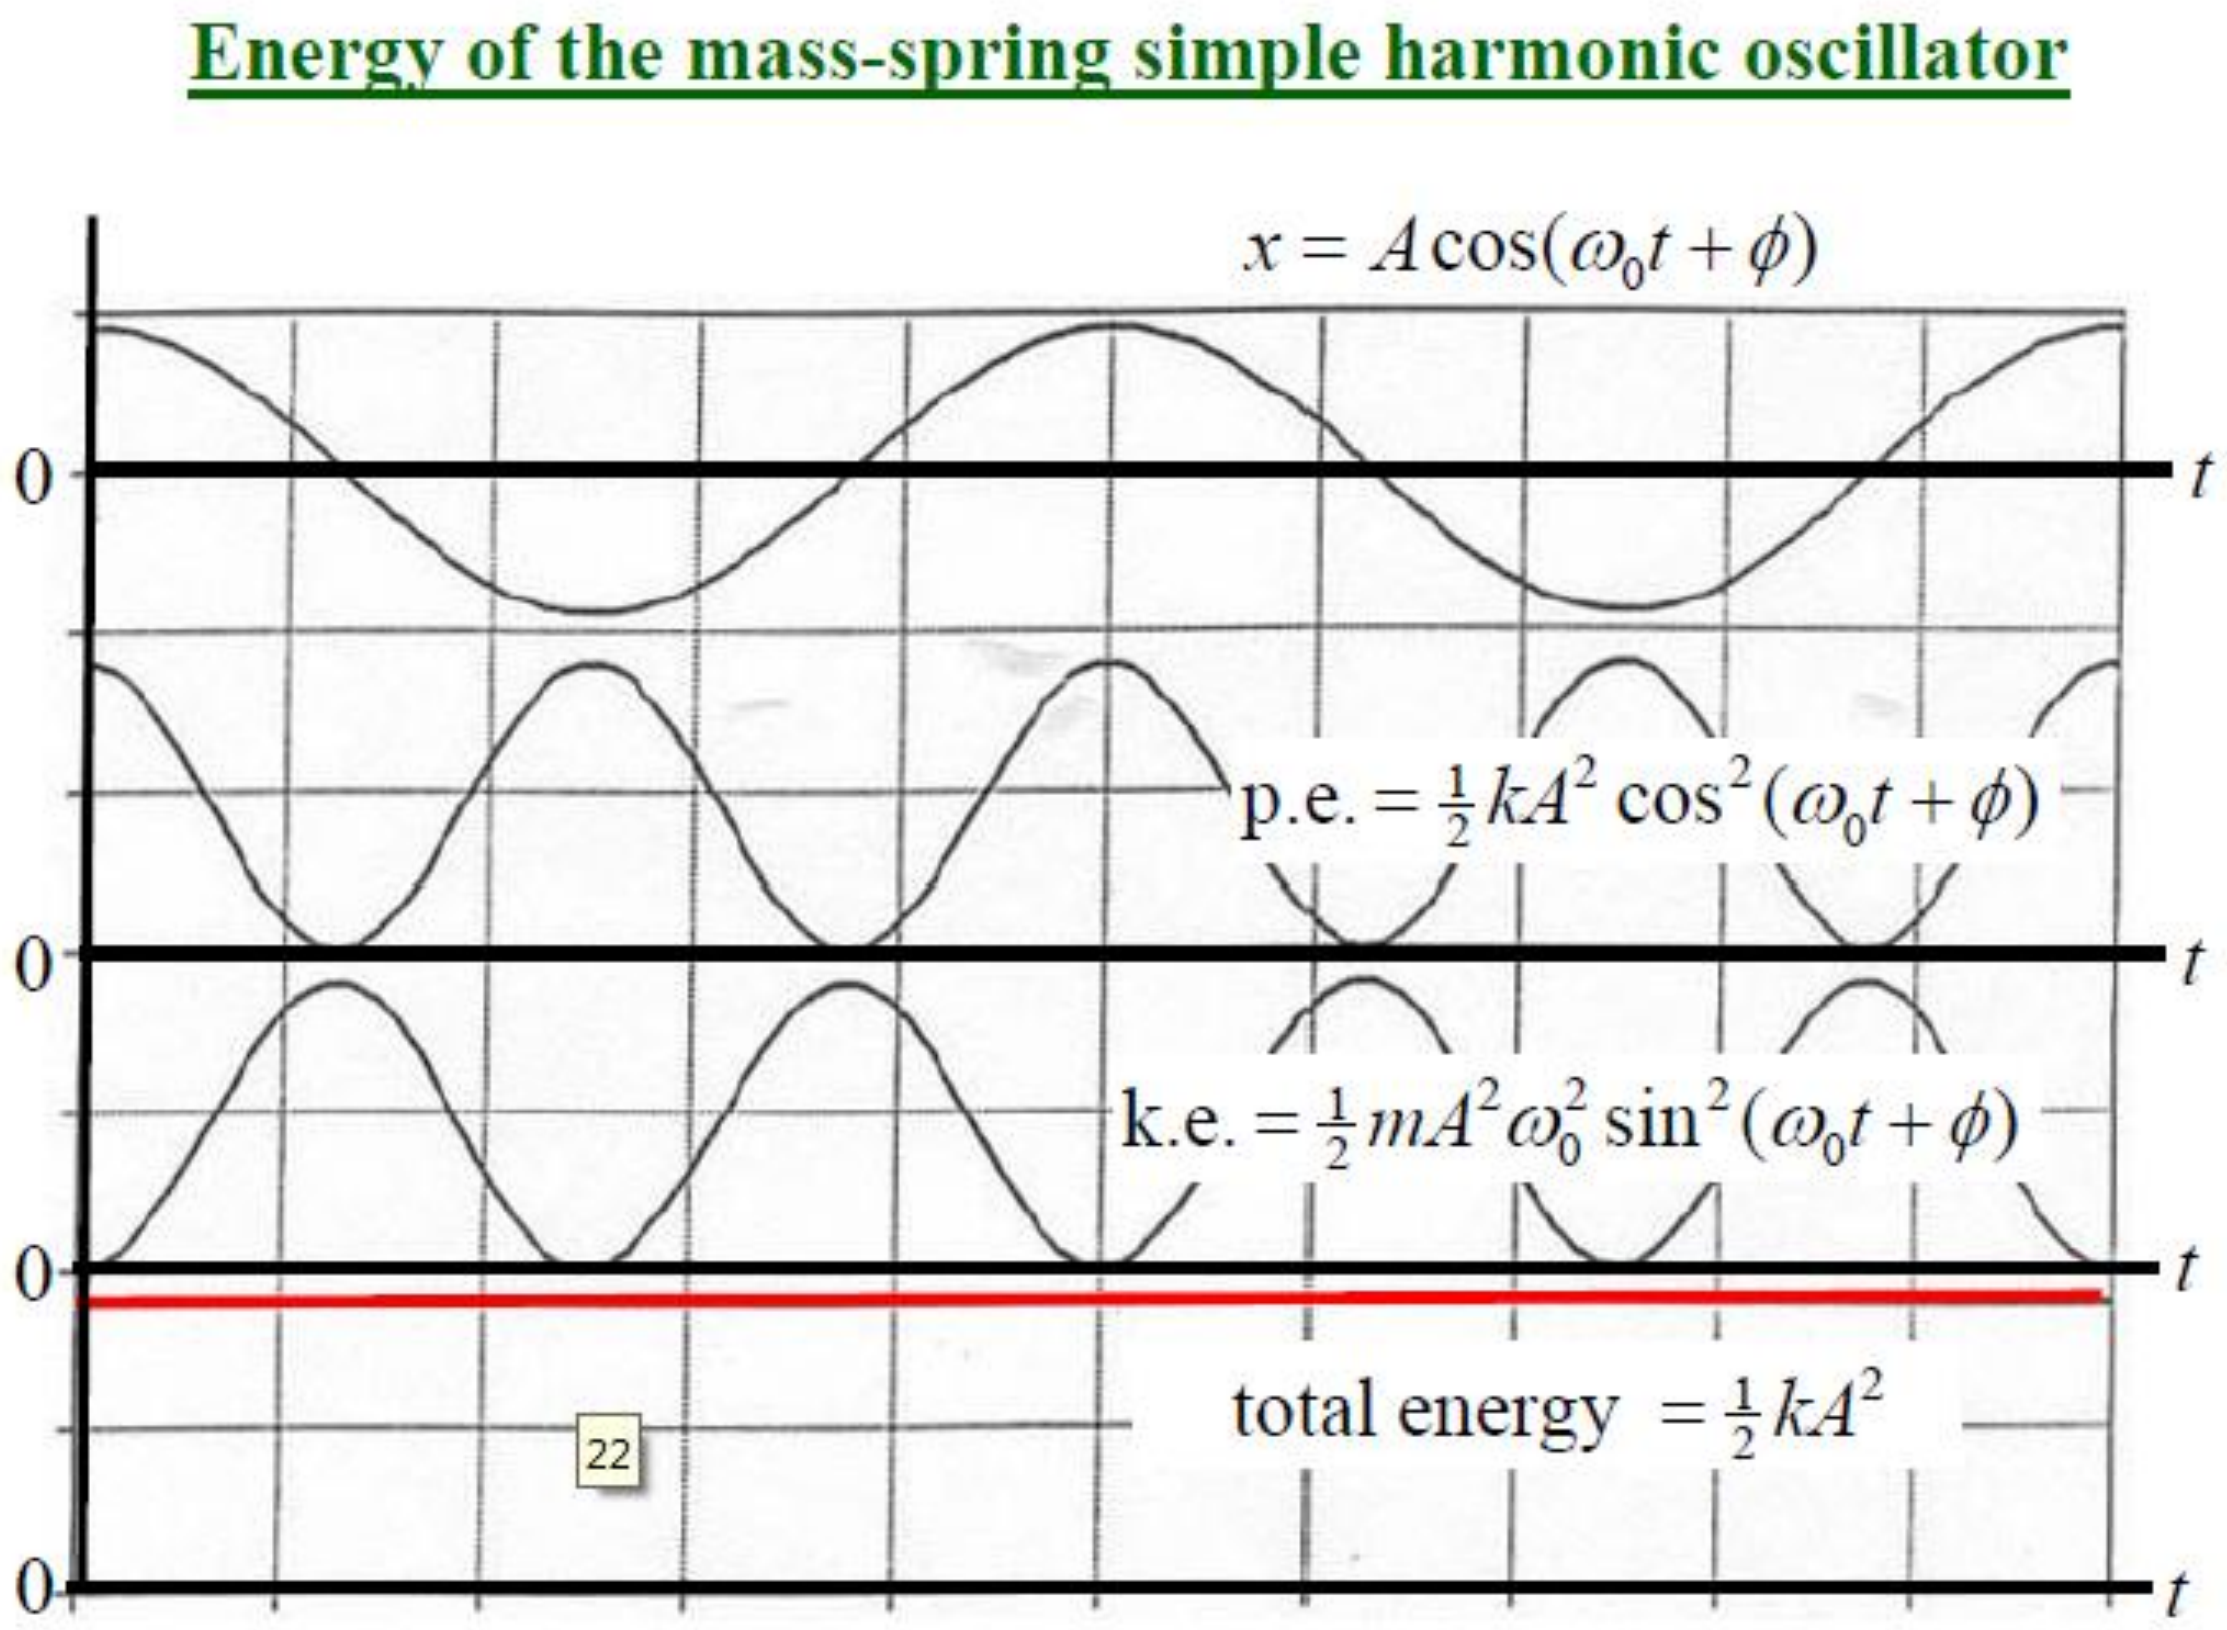
Energy of the mass-spring simple harmonic oscillator
$x = A\cos(\omega_0 t + \phi)$
p.e. $= \frac{1}{2}kA^2\cos^2(\omega_0 t + \phi)$
k.e. $= \frac{1}{2}mA^2\omega_0^2\sin^2(\omega_0 t + \phi)$
total energy $= \frac{1}{2}kA^2$
0
t
22

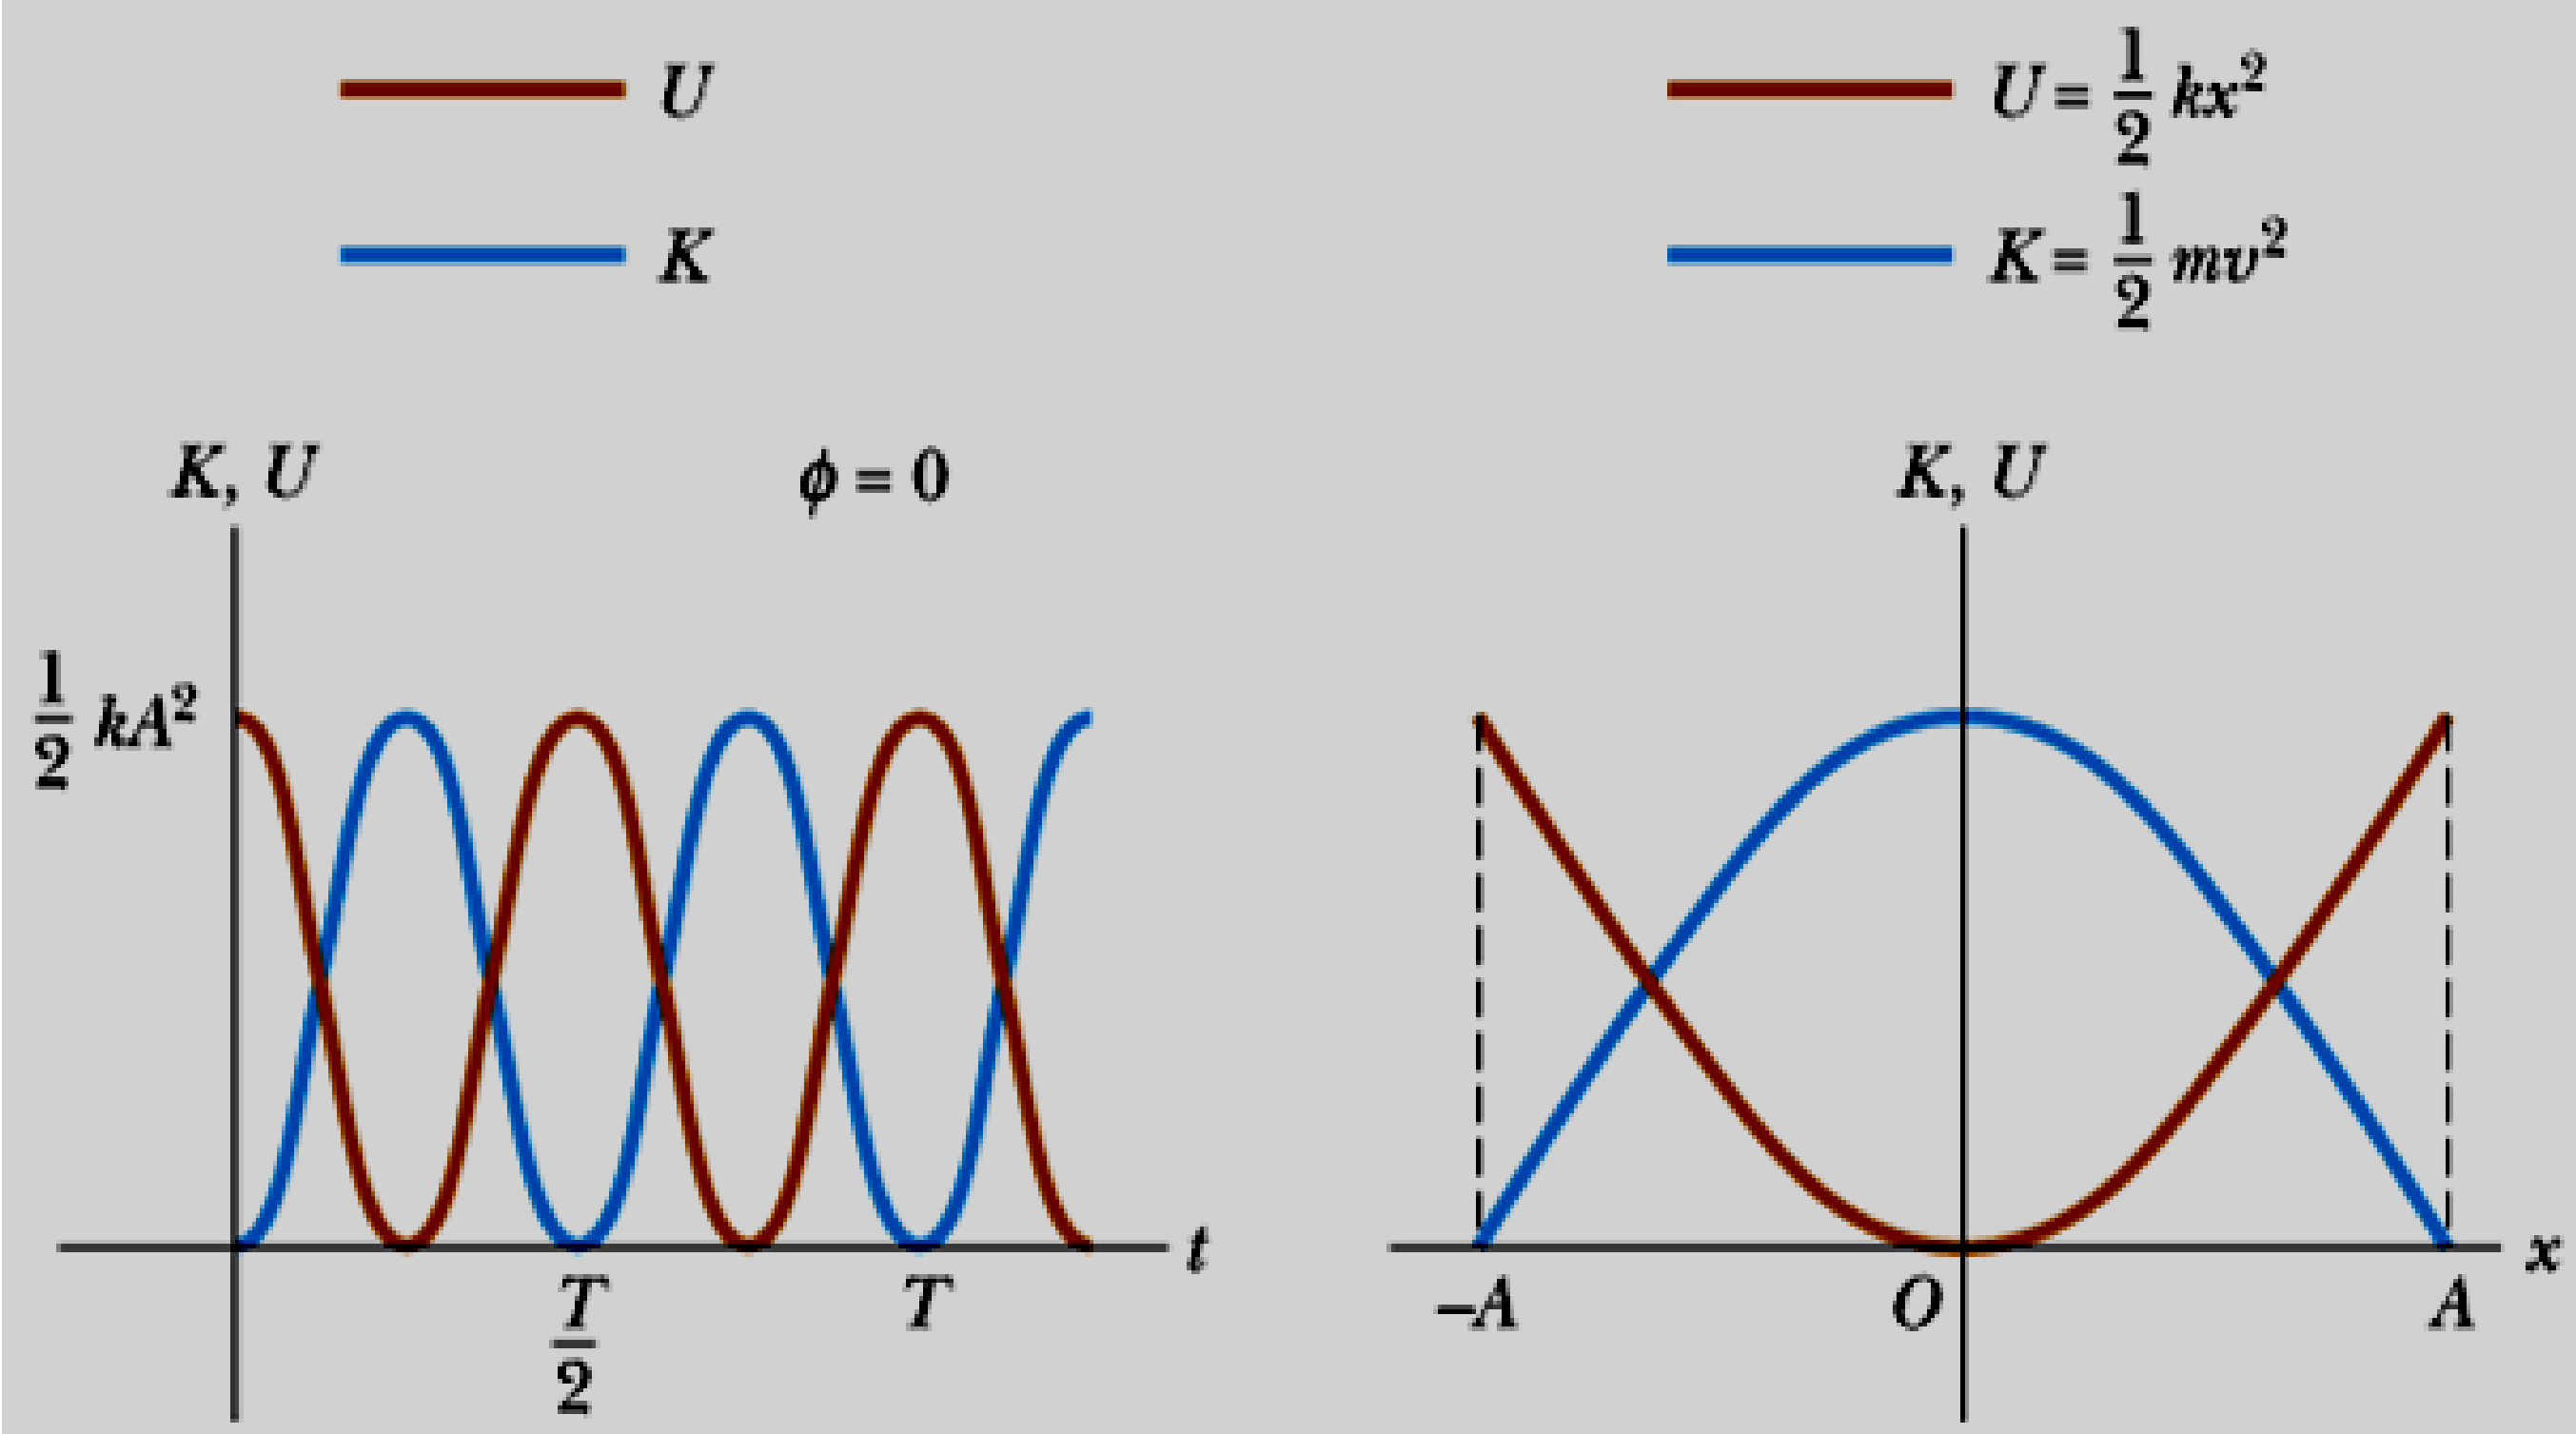
U
K
$U = \frac{1}{2}kx^2$
$K = \frac{1}{2}mv^2$
K, U
$\phi = 0$
$\frac{1}{2}kA^2$
$\frac{T}{2}$
T
t
–A
O
A
x

Example 2.3

For the simple harmonic oscillation where k = 19.6 N/m, A = 0.100 m, x = -(0.100 m) cos 8.08t, and v = (0.808 m/s) sin 8.08t, determine:

(a) the total energy

(b) the kinetic and potential energies as a function of time

(c) the velocity when the mass is 0.050 m from equilibrium

(d) the kinetic and potential energies at half amplitude ($x = \pm A/2$).

$$(a)\ E_{total} = 9.8 \times 10^{-2} J\ \text{(b) U} = 9.8 \times 10^{-2} J\ \cos^2(8.08t)\ and\ \text{K} = 9.8 \times 10^{-2} J\ \sin^2(8.08t)$$

$$(c)\ v = 0.7 \frac{m}{s}\ (d)\ \text{U} = 2.45 \times 10^{-2} J\ and\ \text{K} = 7.35 \times 10^{-2} J$$

UNITED INTERNATIONAL UNIVERSITY


That's all Folks!