

```
MINGW64:/c/Users/Samuels

Samuels@Felix-Laptop MINGW64 ~
$

Samuels@Felix-Laptop MINGW64 ~
$ Samuels@Felix-Laptop MINGW64 ~
bash: Samuels@Felix-Laptop: command not found

Samuels@Felix-Laptop MINGW64 ~
$ $ git clone
bash: $: command not found

Samuels@Felix-Laptop MINGW64 ~
$ git clone https://github.com/SikYinSun/CSE_110_Lab1.git
Cloning into 'CSE_110_Lab1'...
remote: Enumerating objects: 3, done.
remote: Counting objects: 100% (3/3), done.
remote: Total 3 (delta 0), reused 0 (delta 0), pack-reused 0
Receiving objects: 100% (3/3), done.

Samuels@Felix-Laptop MINGW64 ~
$ cd

Samuels@Felix-Laptop MINGW64 ~
$
```

```
MINGW64/c/Users/Samuels/CSE_110_Lab1
Videos/
anaconda3/
anse1/
ntuser.dat.LOG1
ntuser.dat.LOG2
ntuser.ini

Samuels@Felix-Laptop MINGW64 ~
$ cd CSE_110_Lab1/

Samuels@Felix-Laptop MINGW64 ~/CSE_110_Lab1 (main)
$ ls
README.md

Samuels@Felix-Laptop MINGW64 ~/CSE_110_Lab1 (main)
$ git branch add-read-me

Samuels@Felix-Laptop MINGW64 ~/CSE_110_Lab1 (main)
$ git checkout add-read-me
Switched to branch 'add-read-me'

Samuels@Felix-Laptop MINGW64 ~/CSE_110_Lab1 (add-read-me)
$ ls
README.md

Samuels@Felix-Laptop MINGW64 ~/CSE_110_Lab1 (add-read-me)
$ git add README.md

Samuels@Felix-Laptop MINGW64 ~/CSE_110_Lab1 (add-read-me)
$ git commit -m "Update readme file."
Author identity unknown

*** Please tell me who you are.

Run

git config --global user.email "you@example.com"
git config --global user.name "Your Name"
```

```
Remote Status Pull Push

MINGW64:/c/Users/Samuels/CSE_110_Lab1

Samuels@Felix-Laptop MINGW64 ~/CSE_110_Lab1 (add-read-me)
$ git config --global user.email
error: key does not contain a section: user,email

Samuels@Felix-Laptop MINGW64 ~/CSE_110_Lab1 (add-read-me)
$ git config --global user.email
: Alvsysun@ucsd.edu

Samuels@Felix-Laptop MINGW64 ~/CSE_110_Lab1 (add-read-me)
$ git commit -m "Update readme file".
[add-read-me 9b41c0b] "Update readme file".
1 file changed, 2 insertions(+), 1 deletion(-)

Samuels@Felix-Laptop MINGW64 ~/CSE_110_Lab1 (add-read-me)
$ git push
fatal: The current branch add-read-me has no upstream branch.
To push the current branch and set the remote as upstream, use

    git push --set-upstream origin add-read-me

Samuels@Felix-Laptop MINGW64 ~/CSE_110_Lab1 (add-read-me)
$ git push --set-upstream origin add-read-me
Enumerating objects: 5, done.
Counting objects: 100% (5/5), done.
Writing objects: 100% (3/3), 276 bytes | 276.00 KiB/s, done.
Total 3 (delta 0), reused 0 (delta 0), pack-reused 0
remote:
remote: Create a pull request for 'add-read-me' on GitHub by visiting:
remote:   https://github.com/SikYinSun/CSE_110_Lab1/pull/new/add-read-me
remote:
To https://github.com/SikYinSun/CSE_110_Lab1.git
 * [new branch]      add-read-me -> add-read-me
Branch 'add-read-me' set up to track remote branch 'add-read-me' from 'origin'.

Samuels@Felix-Laptop MINGW64 ~/CSE_110_Lab1 (add-read-me)
$
```

Learn new skills by completing fun, realistic projects in your very own

## VSCode

```
File Edit Selection View Go Run Terminal Help
README.md - CSE_110_Lab1 - Visual Studio Code


EXPLORER
CSE_110_LAB1
  README.md

Welcome | README.md X
1 # CSE_110_Lab1
2 Sik's User Page
3 My favorite programming language is C++
4

PROBLEMS OUTPUT TERMINAL DEBUG CONSOLE
Samuels@Felix-Laptop MINGW64 ~/CSE_110_Lab1 (add-read-me)
$ git branch new-add-read-me

Samuels@Felix-Laptop MINGW64 ~/CSE_110_Lab1 (add-read-me)
$ git checkout new-add-read-me
Switched to branch 'new-add-read-me'

Samuels@Felix-Laptop MINGW64 ~/CSE_110_Lab1 (new-add-read-me)
$ git add README.md
```

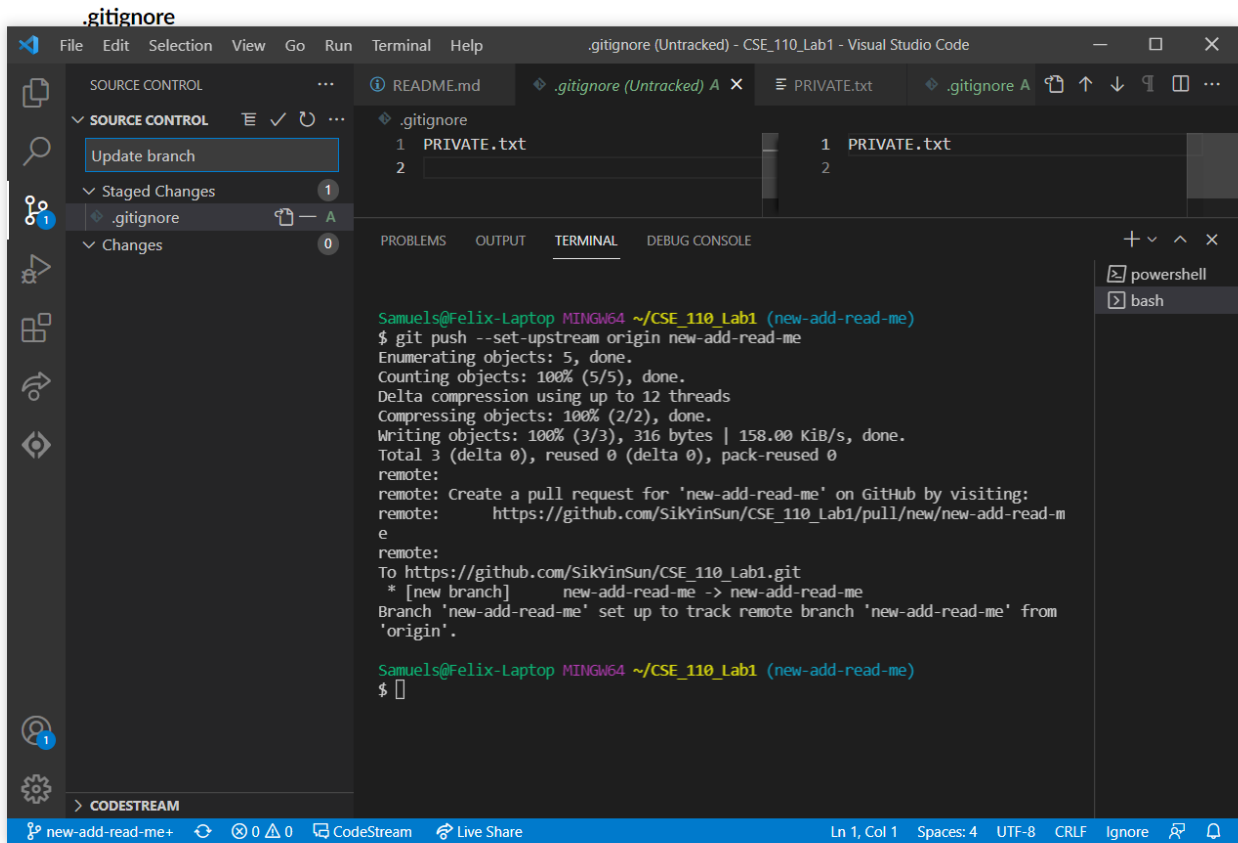

published site in your README.md file