



# TRAINING DRAGON WEB DESIGN


TRAINER: EMILIANO

SPEEDING UP  
YOUR  
WORKFLOW  
WITH EMMET  
SHORTCUTS

# WORKING WITH EMMET

- What is Emmet
- Getting Emmet
- Bootstrapping an HTML document
- Adding an element
- Adding multiple elements
- Adding elements with children
- Adding elements with classes or ids
- Adding elements with attributes
- Adding elements with content
- Emmet Cheatsheet

# WHAT IS EMMET

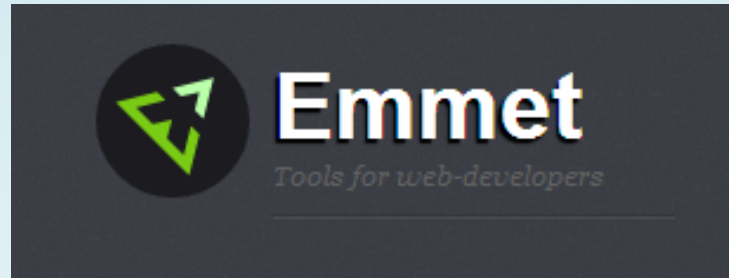

*"Emmet is a plugin for many popular text editors which greatly improves HTML & CSS workflow"*

# GETTING EMMET

you can download the plugin [here](#)

# BOOTSTRAPPING AN HTML DOCUMENT

! + TAB

generates:

```
<!doctype html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <title>Document</title>
</head>
<body>

</body>
</html>
```

# ADDING AN ELEMENT

```
// tagname + TAB  
p + TAB
```

generates:

```
<p></p>
```

# ADDING MULTIPLE ELEMENTS

```
// tagname * noOfElements  
p*3 + TAB
```

generates:

```
<p></p>  
<p></p>  
<p></p>
```



# ADDING ELEMENTS WITH CHILDREN

```
// element>child>child  
main>div>p +TAB
```

generates:

```
<main>  
  <div>  
    <p></p>  
  </div>  
</main>
```

# ADDING ELEMENTS WITH MANY CHILDREN

```
// element>child*noOfChildren  
ul>li*3>a +TAB
```

generates:

```
<ul>  
  <li><a href=""></a></li>  
  <li><a href=""></a></li>  
  <li><a href=""></a></li>  
</ul>
```

# ADDING ELEMENTS WITH CHILDREN AS SIBLINGS

```
// element>child*noOfChildren+sibling+sibling*noOfSiblings  
main>div*2+p+button*2 +TAB
```

generates:

```
<main>  
  <div></div>  
  <div></div>  
  <p></p>  
  <button></button>  
  <button></button>  
</main>
```

# ADDING ELEMENTS WITH CHILDREN ON DIFFERENT TREE LEVELS

```
// element>child*noOfChildren>grandchild^child  
main>div*2>p^button +TAB
```

generates:

```
<main>  
  <div>  
    <p></p>  
  </div>  
  <button></button>  
  <div>  
    <p></p>  
  </div>  
  <button></button>  
</main>
```

# ADDING ELEMENTS WITH CLASSES OR IDS

```
// element#id>element.class  
div#blog>p.posts*3 + TAB
```

generates:

```
<div id="blog">  
  <p class="posts"></p>  
  <p class="posts"></p>  
  <p class="posts"></p>  
</div>
```

# ADDING ELEMENTS WITH ATTRIBUTES

```
// element[attribute][attribute=value]  
button[disabled][title="will not work"]*2 + TAB
```

generates:

```
<button disabled title="will not work"></button>  
<button disabled title="will not work"></button>
```

# ADDING ELEMENTS WITH CONTENT

```
// element{content}  
p{click }>a[href=#]{here} + TAB
```

generates:

```
<p>click <a href="#">here</a></p>
```

# EMMET CHEATSHEET

read more [here](#)