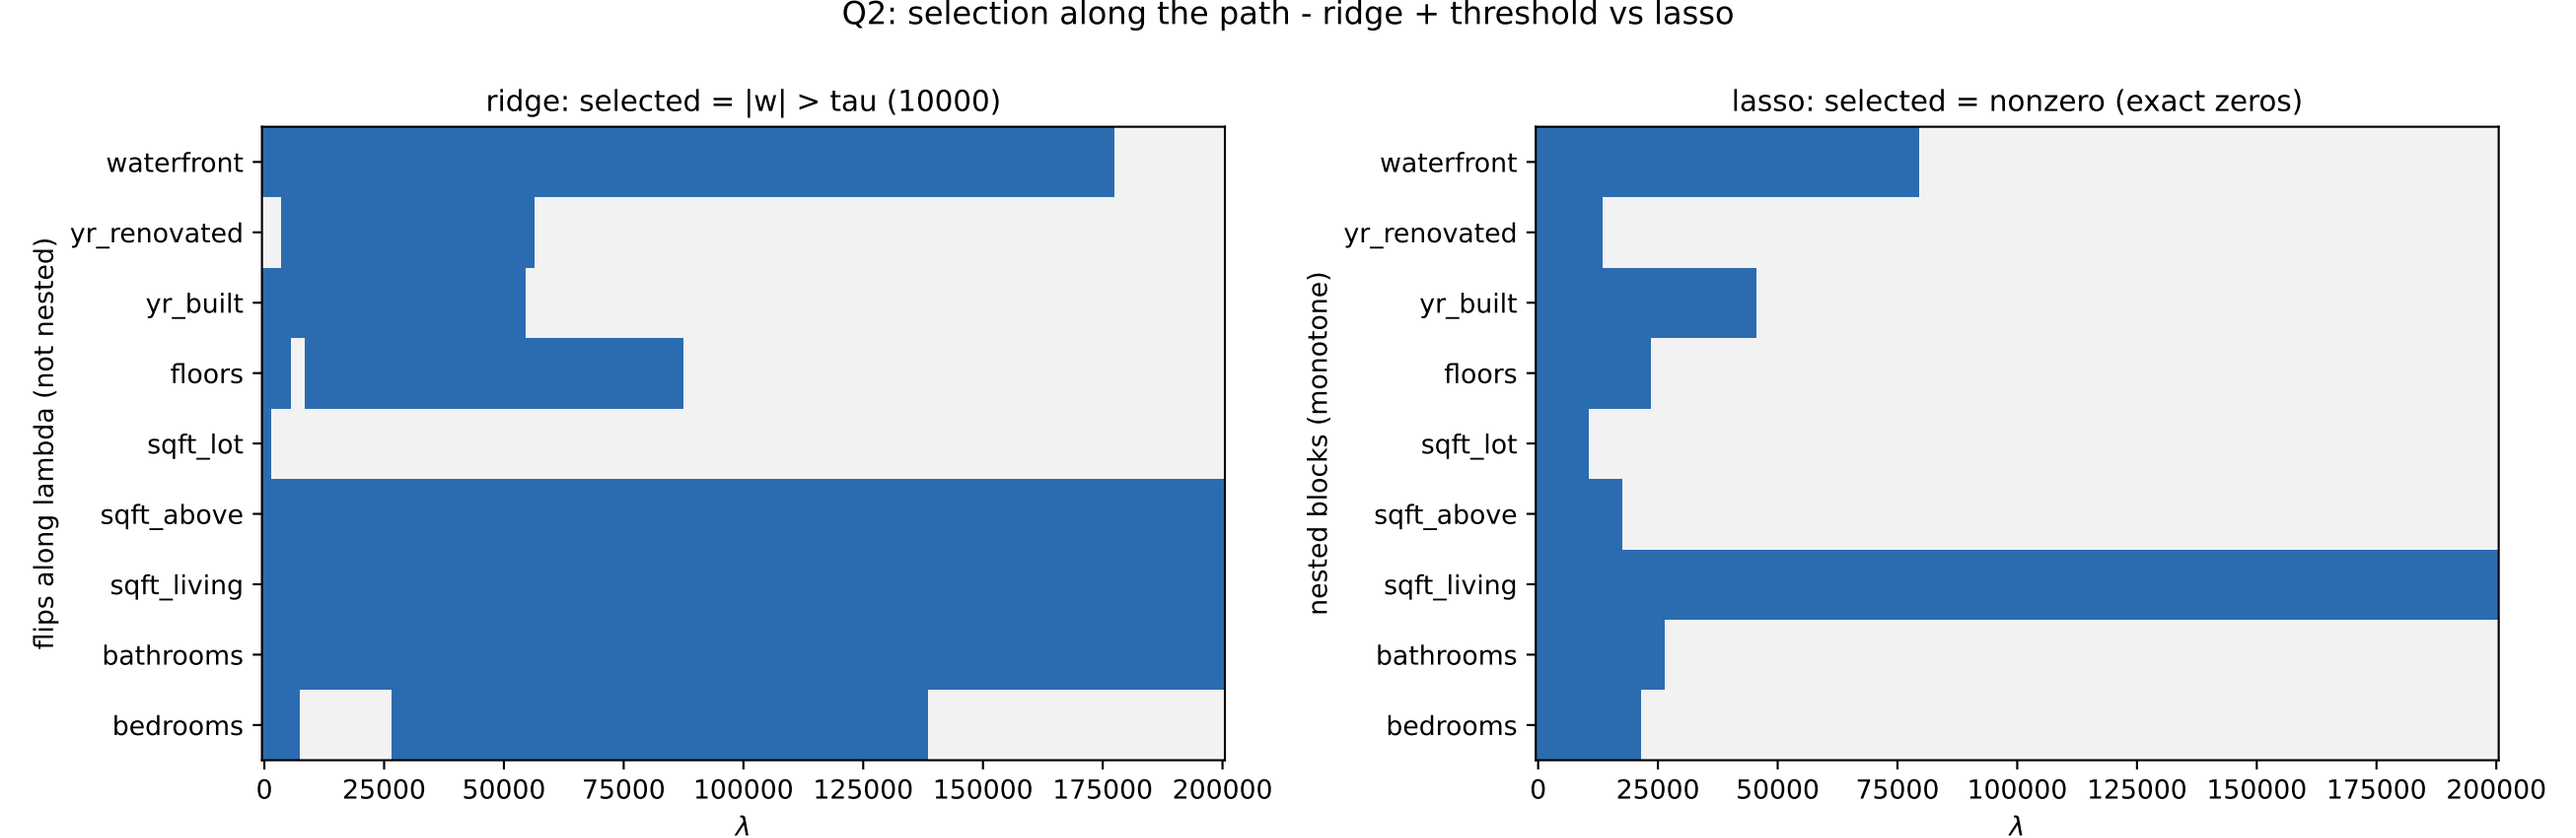

Q2: selection along the path - ridge + threshold vs lasso
ridge: selected = |w| > tau (10000)
lasso: selected = nonzero (exact zeros)
flips along lambda (not nested)
nested blocks (monotone)
waterfront
yr_renovated
yr_built
floors
sqft_lot
sqft_above
sqft_living
bathrooms
bedrooms
0
25000
50000
75000
100000
125000
150000
175000
200000
λ