


Learning a 30-layer 2nd-order TDME Lindbladian with a 3-layer ansatz (N=30, depolarizing noise)

1st-order Trotter vs PQC
 $\log_{10}(\text{Trott1} / \text{PQC}); + \rightarrow \text{PQC better}$



2nd-order Trotter vs PQC
 $\log_{10}(\text{Trott2} / \text{PQC}); + \rightarrow \text{PQC better}$

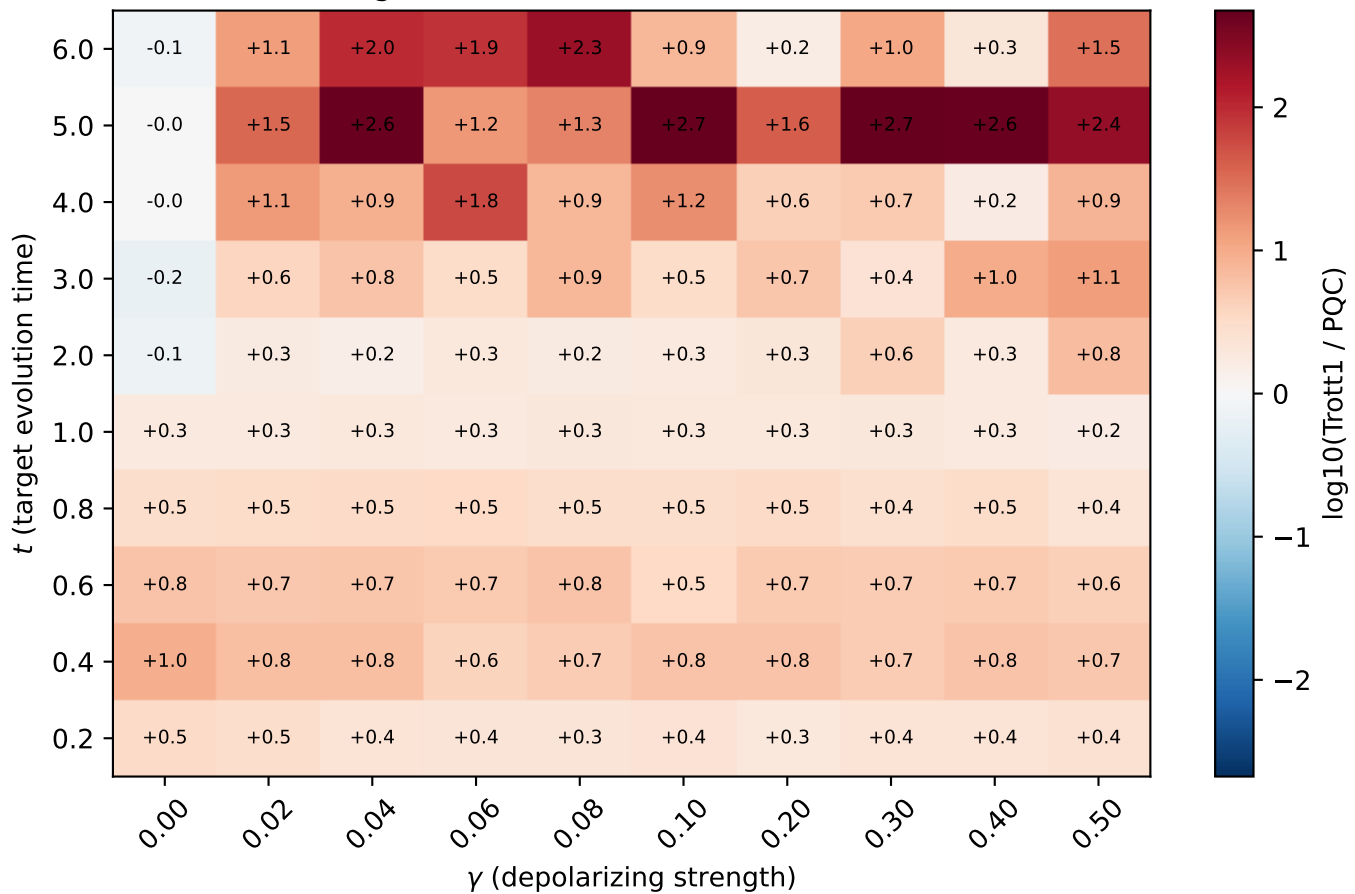