


tesseract\_task\_composer  
/include/tesseract\_task  
\_composer/profiles/time  
\_optimal\_parameterization  
\_profile.h

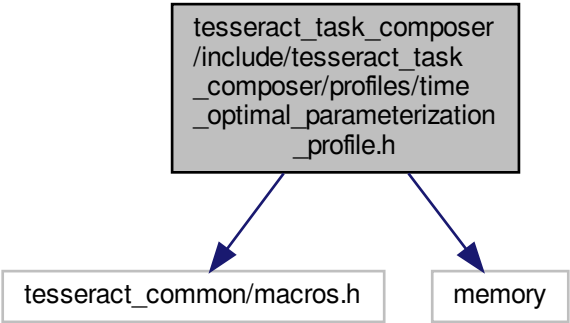

```
graph TD; A["tesseract_task_composer  
/include/tesseract_task  
_composer/profiles/time  
_optimal_parameterization  
_profile.h"] --> B["tesseract_common/macros.h"]; A --> C["memory"];
```

tesseract\_common/macros.h

memory