


tesseract_task_composer
/include/tesseract_task
_composer/profiles/ruckig
_trajectory_smoothing_profile.h

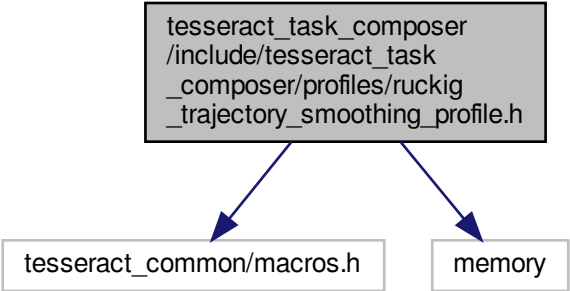

```
graph TD; A["tesseract_task_composer  
/include/tesseract_task  
_composer/profiles/ruckig  
_trajectory_smoothing_profile.h"] --> B["tesseract_common/macros.h"]; A --> C["memory"]
```

tesseract_common/macros.h

memory