

Using EnviroCar data in R

Nikolai Gorte & Simon Schoemaker

November 20, 2014

enviroCaR - Analysis of Car Trajectories

The capital R in the name “enviroCaR” obviously reveals that it is the R package corresponding to the project we will work on (<https://envirocar.org/>). In general, enviroCaR provides basic functions to load and analyse measurements from the enviroCar server (Pebesma, Stasch, and Wirwahn 2014).

R is a open-source software for general data analysis. It compiles and runs on a wide variety of platforms and provides a big sample of statistical and graphical methods. Furthermore, R is easily extendable through a massive amount of so-called packages. Currently, there are round about 6000 packages available on the “Comprehensive R Archive Network”, short called CRAN. The number of developers and published packages are growing continuously. Additionally, each package has got help pages, several documentations and useful example code chunks (R Core Team 2014).

As mentioned before R packages are usually available on CRAN and can be installed from there relatively straightforward. However, the EnviroCaR package is not on CRAN as yet and needs to be installed from github (<https://github.com/enviroCar/enviroCaR>). For the installation you can use Hadley’s devtools package to accomplish this easily (Wickham and Chang 2014).

```
library(devtools)
install_github('enviroCaR', 'enviroCar')
```

- Trajectories
- Track
- Tracks
- TracksCollection
- EnviroCaR (github)
- ImportSingleTrack
- ImportEnviroCar

Aggregation

One function provided by the `enviroCaR` package is `aggregateTrack`. This function is used to aggregate measurements of a `Track` object.

It is possible to specify the phenomenon for aggregation, the interval size of measurements that have to be aggregated and a function for aggregation (e.g. mean).

Aggregation over time is not possible at the moment! In Figure 1 we can see an example of an aggregated track. The raw track (black) is aggregated to six points (red).

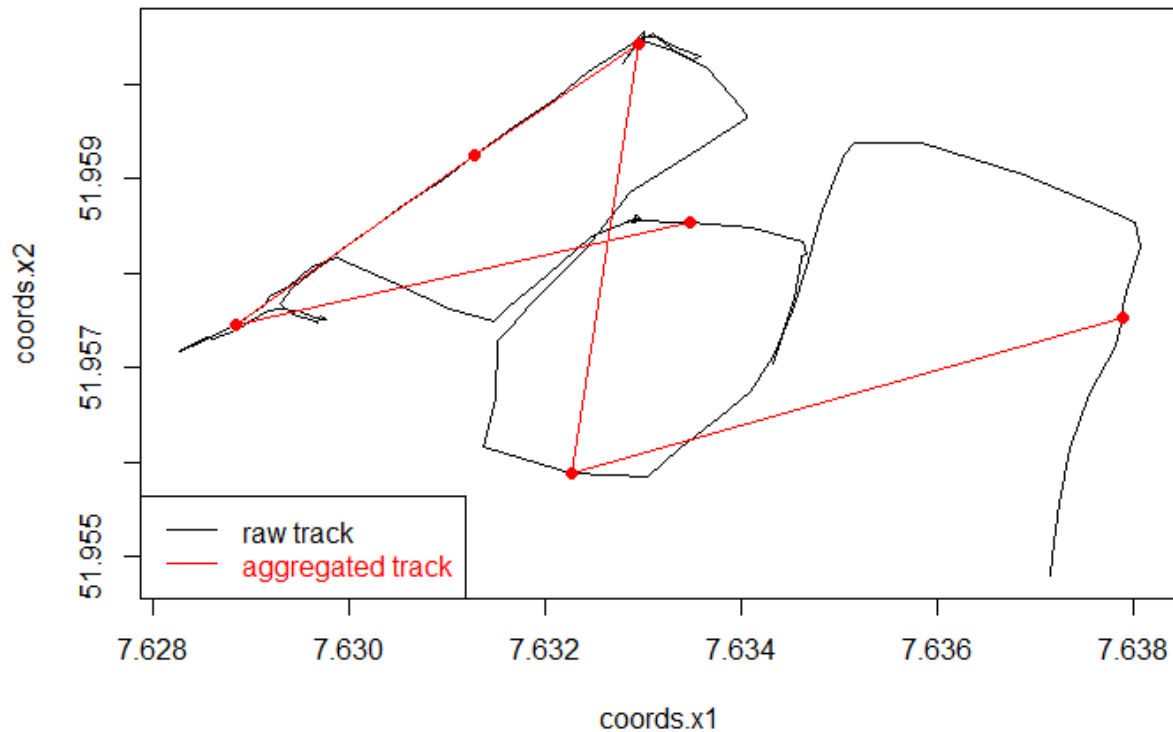


Figure 1: Aggregated Track

Map Matching

Map matching is the process of matching GPS trajectories to a digital road network and is done using map matching algorithms. This is necessary because positions acquired from GPS, as they are in the `enviroCaR` project, are affected by several kind of errors resulting in inaccurate positions on maps.

Matching the `enviroCar` trajectories to a digital road network would not only improve the visual representation, but could also be useful when it comes to analysis or comparison of trajectories.

One possible way of achieving this is the `fuzzyMM` package (Gorte 2014) which implements a fuzzy logic based map matching algorithm.

As can be seen in Figure 2 the raw GPS positions are matched to road segments after the application of the map matching algorithm.

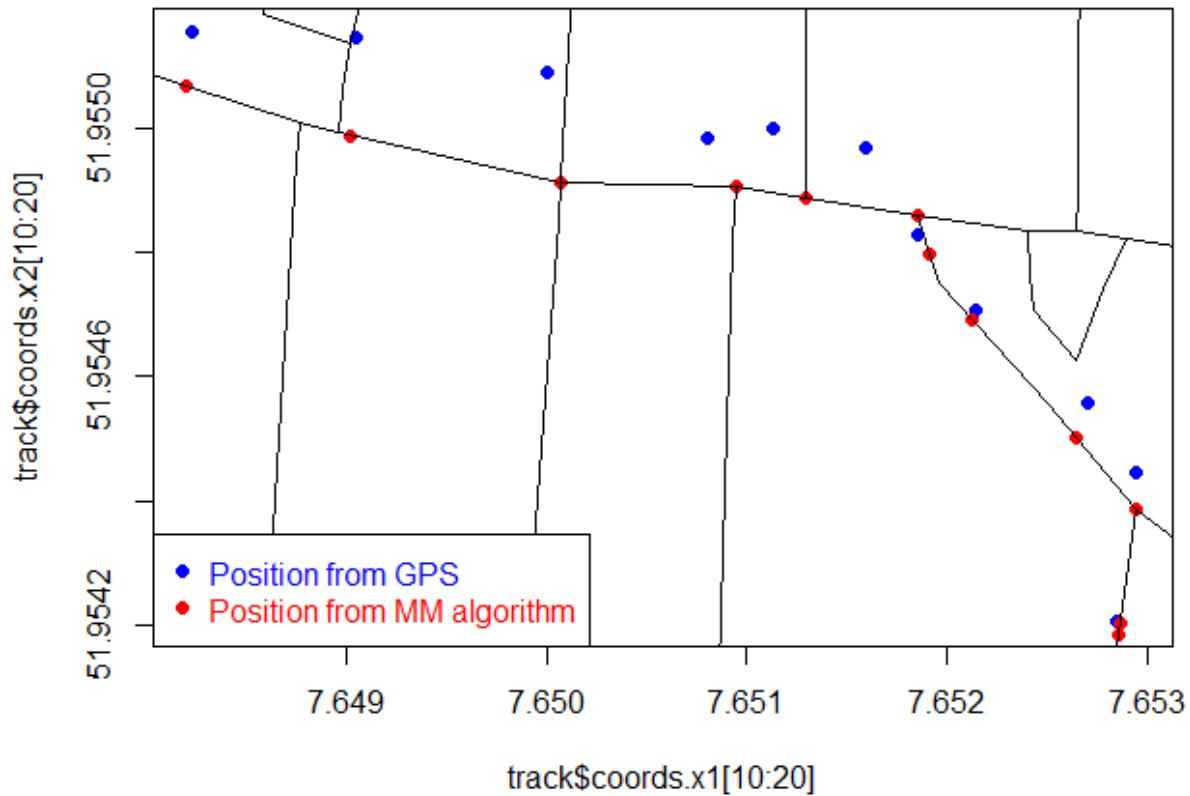


Figure 2: Map Matching

At the moment fuzzyMM only works for `SpatialPointsDataFrame` objects which contain the GPS positions of the track and GPS data such as HDOP, speed and bearing. Since all of this is also included in the `Track` class, it should be no problem to modify the function to work with the trajectory classes.

Conclusion

As can be seen in the previous sections, what we can do with the `enviroCar` data in R until now is mostly basics. We can load `enviroCar` tracks into R, where they are represented by the classes from the `trajectories` package and we can also do some basic plotting and aggregate measurements of a `Track` object.

So there are several things that could be done in the future and maybe in the scope of this course. This, for example, includes implementing map matching to assign trajectories to road segments. Other things to think about are aggregation methods, e.g. the aggregation over multiple trajectories or aggregation over space and/or time. What may be also important and interesting is comparing trajectories of one driver and also comparing trajectories between different drivers.

References

- Gorte, Nikolai. 2014. *fuzzyMM: Map Matching Using Fuzzy Logic*. <http://CRAN.R-project.org/package=fuzzyMM>.
- Pebesma, Edzer, Christoph Stasch, and Jan Wirwahn. 2014. *enviroCaR: Analysis of Car Trajectories Provided by EnviroCar Project*. <https://github.com/enviroCar/enviroCaR>.
- R Core Team. 2014. *R: A Language and Environment for Statistical Computing*. Vienna, Austria: R Foundation for Statistical Computing. <http://www.R-project.org/>.
- Wickham, Hadley, and Winston Chang. 2014. *devtools: Tools to Make Developing R Code Easier*. <http://CRAN.R-project.org/package=devtools>.