create.project: One-Call Projects

Simon Labarthe

October 2026

Abstract

[1 sentence: the problem, in the user's words, not the package's] [1 sentence: who has this problem (researchers in X, analysts doing Y)] [1-2 sentences: what `create.project` does, and how it differs from existing tools] [1 sentence: key design idea (e.g. one call, convention over configuration, no dependencies)] [1 sentence: availability: open source, license, where to get it]

Keywords: R, [domain], [Keyword 3], [Keyword 4], reproducibility

1 Introduction

[The problem] [Concrete situation where the problem bites. One example a reader recognises from their own work.]

[Why it matters] [Cost of the problem: lost time, errors, non-reproducible results. Cite evidence if any exists.]

[What this package does] [One paragraph: `create.project` provides [main functions], which [what they achieve].]

[Roadmap] [Section 2 states the need, Section 3 compares existing tools, Section 4 explains the design, Section 5 shows usage, Section 6 reports how it is tested, Section 7 discusses limitations.]

2 Statement of Need

[Who is the target user (field, skill level)? What do they do today without the package? Why is that insufficient? Be specific: a reviewer must be convinced the package fills a real gap, not reinvents a wheel.]

3 State of the Field

[Name the existing tools and what each does well (Author, 2020). Then state precisely what none of them does, which is what this package adds. Be fair to alternatives: say when they are the better choice.]

Table 1: [Comparison with existing tools] Example: droids

Feature	`create.project`	R2-D2	C-3PO	BB-8
Repairs a hyperdrive	✓	✓		
Speaks 6 million languages	✓		✓	
Rolls on sand	✓			✓
Films in `starwars`	–	7	6	1

4 Design

4.1 Design Principles

[2-4 principles that explain every decision, e.g. “convention over configuration”, “every step is idempotent”, “generated, not hand-written”. One short paragraph each.]

4.2 Architecture

[How the functions relate to each other and to what they produce (Figure 1). Which functions are exported, which are internal helpers, and why.]

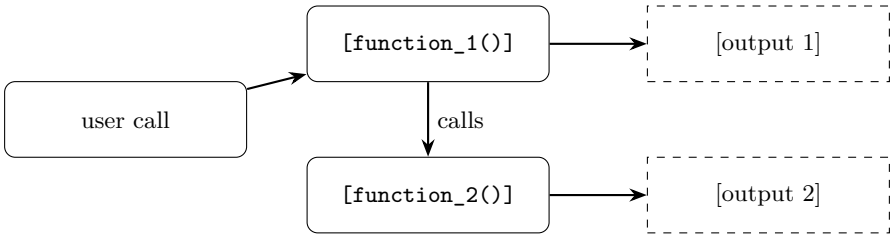


Figure 1: [Architecture: exported functions and what they produce]

4.3 Key Decisions and Trade-offs

[What did you choose NOT to do, and why? Each feature you left out is a decision a reviewer will ask about. E.g. "we rely on `usethis` rather than reimplementing file creation, at the cost of one dependency".]

5 Usage

5.1 Installation

```
remotes::install_github("SimonLabarthe/create.project")
library(create.project)
```

5.2 Minimal Example

[The smallest call that shows the value of the package. The reader should be able to copy-paste it.]

```
# [what this example does]
[function_1](["argument"])
```

[Describe the output: what was created or returned, and why it is useful.]

5.3 Realistic Example

[A longer case that mirrors real use: options, combinations of functions, edge cases. Show the output (table, figure, file tree) as in Figure 2.]



Figure 2: [Output of the realistic example] Example: a figure drawn in R

6 Quality and Validation

[How do you know it works? Unit tests (`testthat`, number of tests, coverage), `R CMD check` status, continuous integration, platforms tested (Windows, macOS, Linux). If the package computes results, compare them with a reference implementation or known values.]

7 Limitations and Future Work

[Be honest: what it does not do, when it fails, which platforms are untested. Then the roadmap: 2-3 concrete next features.]

8 Conclusion

[Restate the problem and how `create.project` solves it, in two or three sentences. No new information.]

Software Availability

- Repository: https://github.com/SimonLabarthe/create.project
- Version described: [0.1.0], archived at [Zenodo DOI]
- License: [MIT]
- Requirements: R $\geq$ [4.1], [dependencies]

Acknowledgements

[People, funding, and the packages this one builds on.]

References

Author, A. (2020). An example article. *Journal of Examples*.

A Function Reference

[One entry per exported function: signature, arguments, return value. Can be generated from the roxygen documentation.]

B Session Information

[Output of `sessionInfo()` for the examples in this paper.]