Legend: DOM extraction flowchart

Light Blue
extractFromCurrentDom(url)

Dark Yellow
waitForDomStage, selectorMap, timeout = 10000)

Light Green
findCorrectFrame(stage, selectorMap)

Light Violet
frameWordCounter(frames)

Light Red
calculateFrameScore(frame, argWordCount, selectorMap)

Light Yellow
extractFromFrame(frame, selectors, selectorMap, cmpType = null)

Violet
clickAndExtractSettings(frame, selector, page, cmpType)

Blue
getFrameState(frame)

Gray
findSettingsButtonViaLLM(html)

Additional Hints for Used Variables
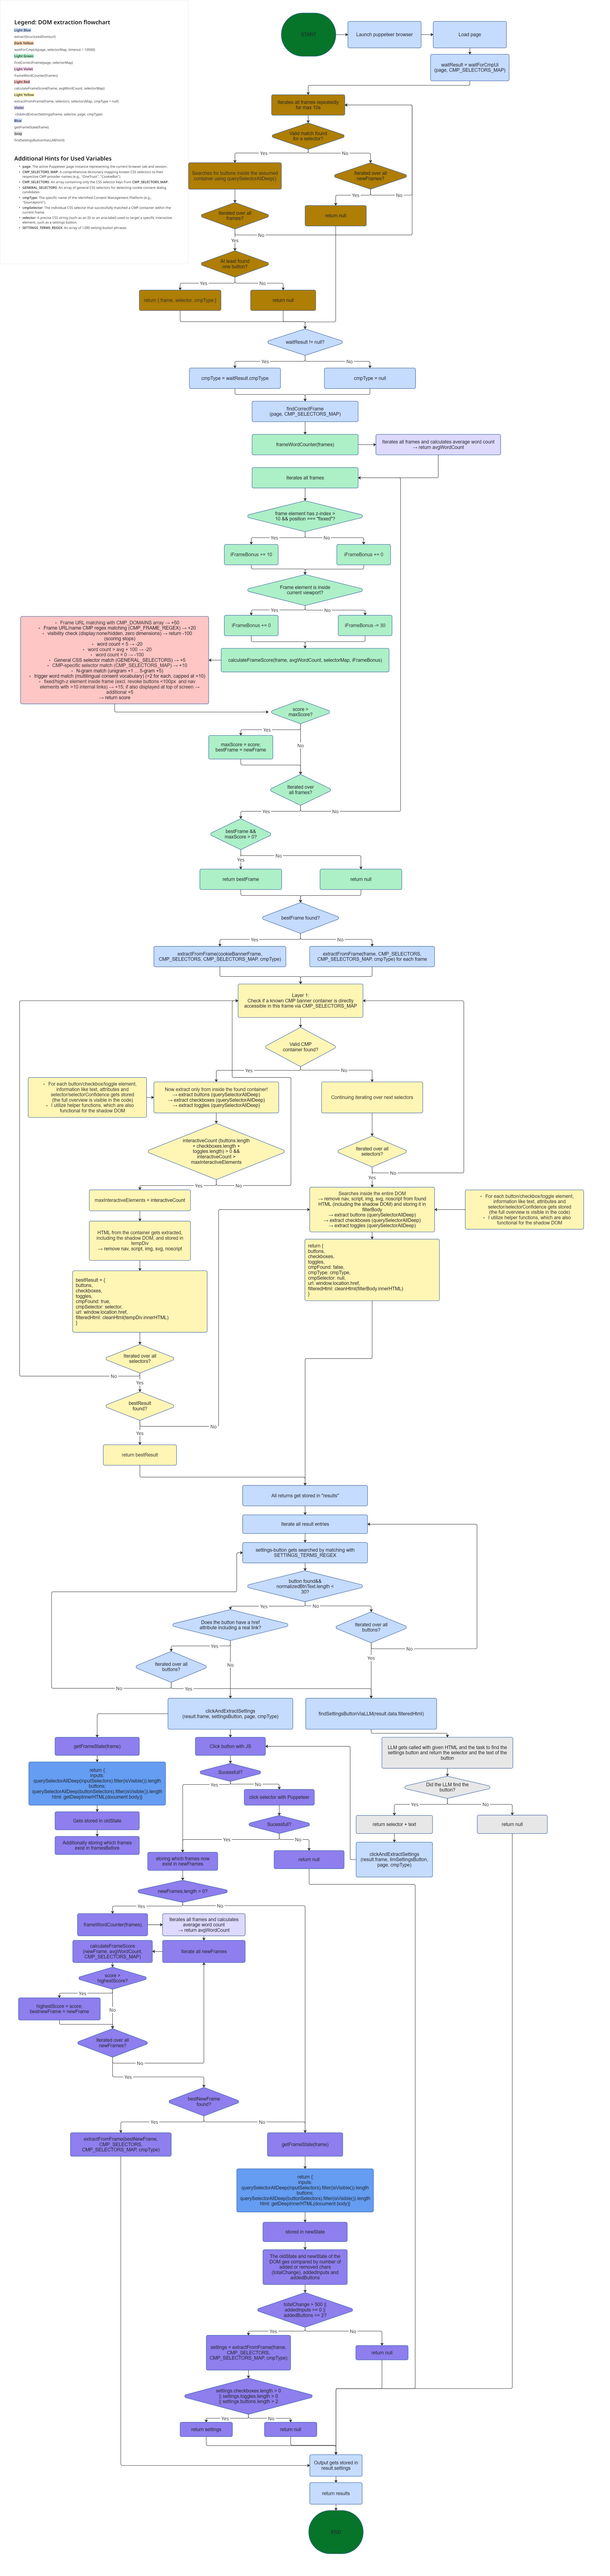
- **page**: The active Puppeteer page instance representing the current browser tab and session.
- **CMP_SELECTORS_MAP**: A comprehensive dictionary mapping known CSS selectors to their corresponding CMP provider names (e.g., `"OneTrust": ["#onetrust-..."]`).
- **CMP_SELECTORS**: An array containing only the CSS selector keys from **CMP_SELECTORS_MAP**.
- **ALL_SELECTORS**: An array of general CSS selectors for detecting cookie consent dialog containers.
- **cmpType**: The specific name of the identified Consent Management Platform (e.g., `"Cookiebot"`).
- **cmpSelector**: The individual CSS selector that successfully matched a CMP container within the current frame.
- **SETTINGS_TERMS**: A concise CSS string (such as an ID or an aria-label) used to target a specific interactive element, such as a settings button.
- **SETTINGS_TERMS_REGEX**: An array of 1280 setting-button phrases