Run 15

Generated by test

Generated: 2026-04-09T17:15:55.927535+02:00
Runs: **5** • Messages: **0** • Files: **38**

Overview

5	0	38	5
Runs (Prediction / Workflow)	Messages All chat + system events	Artifacts Input + Output + misc	Reproducible units Hyperparams + Inputs + Outputs

Each run below corresponds to prediction or workflow execution. It documents tool identity, configuration and produced artifacts.

Runs

Dysregnet v0

#1 | App Prediction | Dysregnet | Status: FINISHED

DysRegNet is a computational method for identifying dysregulated gene regulatory interactions by comparing gene expression patterns between case and control samples. The algorithm integrates gene expression data with prior knowledge of gene regulatory networks to identify interactions that show significantly different regulatory patterns between conditions.

Configuration

zscoring
Apply z-score normalization to expression values before analysis.
`false`

bonferroni_alpha
Bonferroni-corrected significance level (alpha).
`0.01`

r2_threshold
R^2 threshold for filtering; set to null to disable.
`0.2`

normaltest
Perform D'Agostino-Pearson normality test on residuals.
`false`

normaltest_alpha
Alpha level for the normality test.
`0.001`

direction_condition
Enforce directionality condition when assessing dysregulation.
`false`

con_cov
List of continuous covariates. They should match the name of their columns in the meta Dataframe, separated by commas.
`birth_days_to`

cat_cov
List of categorical variable names. They should match the name of their columns in the meta Dataframe, separated by commas.
`race,gender`

con_col
Column name for the condition in the meta DataFrame.
`sample_type`

Inputs

grn
Gene Regulatory Network (GRN) with two columns in the following order ['TF', 'target'].

grn.csv
text/csv • 484 bytes
Download

meta
Gene expression matrix in the format patients as rows (first column - patients/samples ids), and genes as columns

meta.csv
text/csv • 15184 bytes
Download

expr
Gene expression matrix in the format - patients as rows (first column - patients/samples ids), and genes as columns.

expr.csv
text/csv • 18316584 bytes
Download

Result

adjacency_heatmap
Distribution of non-zero values (representing interaction strengths)

r2_distribution.png
image/png • 80224 bytes

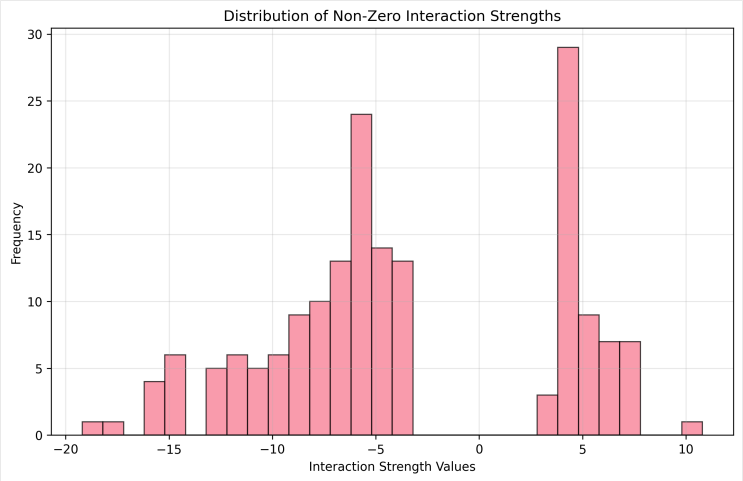

Download

pvalue_distribution
Heatmap of results matrix (sample of top interactions)

pvalue_distribution.png
image/png • 178860 bytes

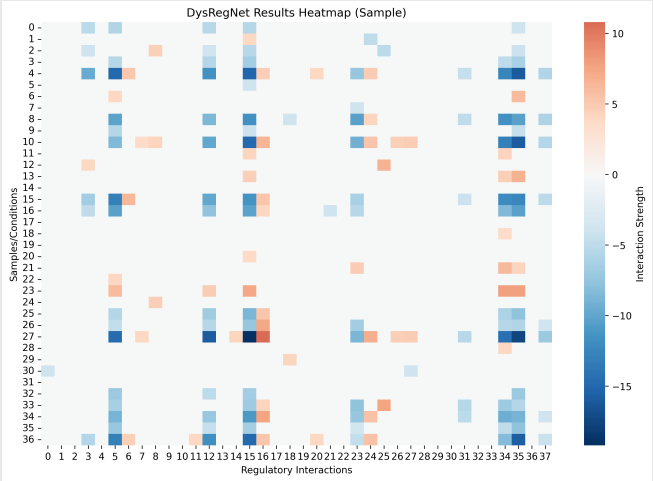

Download

top_interactions
Top 20 Strongest Regulatory Interactions

top_interactions.png
image/png • 203014 bytes

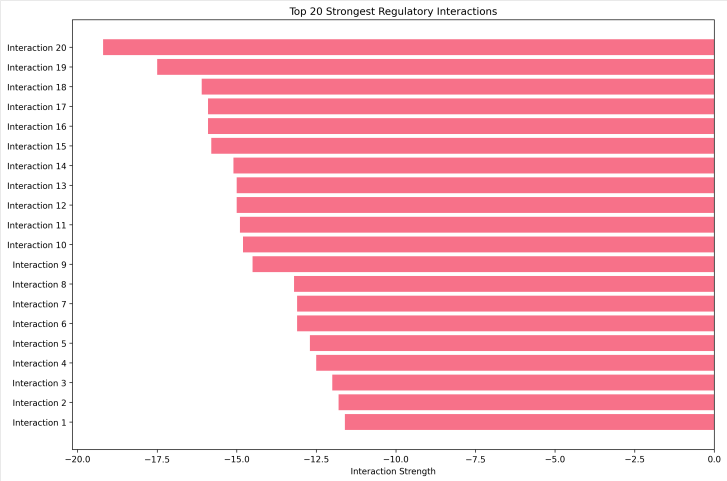

Download

results
Results of the analysis in CSV format

results.csv
text/csv • 6457 bytes
Download

Runtime Notes

Last error

Last log

```
Received output: ['visualisations', 'pvalue_distribution', 'adjacency_heatmap',
'top_interactions', 'results']
```

Dysregnet v0

#2 | App Prediction | Dysregnet | Status: FINISHED

DysRegNet is a computational method for identifying dysregulated gene regulatory interactions by comparing gene expression patterns between case and control samples. The algorithm integrates gene expression data with prior knowledge of gene regulatory networks to identify interactions that show significantly different regulatory patterns between conditions.

Configuration

zscoring
Apply z-score normalization to expression values before analysis.
`false`

bonferroni_alpha
Bonferroni-corrected significance level (alpha).
`0.01`

r2_threshold
R^2 threshold for filtering; set to null to disable.
`0.2`

normaltest
Perform D'Agostino-Pearson normality test on residuals.
`false`

normaltest_alpha
Alpha level for the normality test.
`0.001`

direction_condition
Enforce directionality condition when assessing dysregulation.
`false`

con_cov
List of continuous covariates. They should match the name of their columns in the meta Dataframe, separated by commas.
`birth_days_to`

cat_cov
List of categorical variable names. They should match the name of their columns in the meta Dataframe, separated by commas.
`race,gender`

con_col
Column name for the condition in the meta DataFrame.
`sample_type`

Inputs

grn
Gene Regulatory Network (GRN) with two columns in the following order ['TF', 'target'].

grn.csv
text/csv • 484 bytes
Download

meta
Gene expression matrix in the format patients as rows (first column - patients/samples ids), and genes as columns

meta.csv
text/csv • 15184 bytes
Download

expr
Gene expression matrix in the format - patients as rows (first column - patients/samples ids), and genes as columns.

expr.csv
text/csv • 18316584 bytes
Download

Result

adjacency_heatmap

Distribution of non-zero values (representing interaction strengths)

r2_distribution.png

image/png • 80224 bytes

Download

pvalue_distribution

Heatmap of results matrix (sample of top interactions)

pvalue_distribution.png

image/png • 178860 bytes

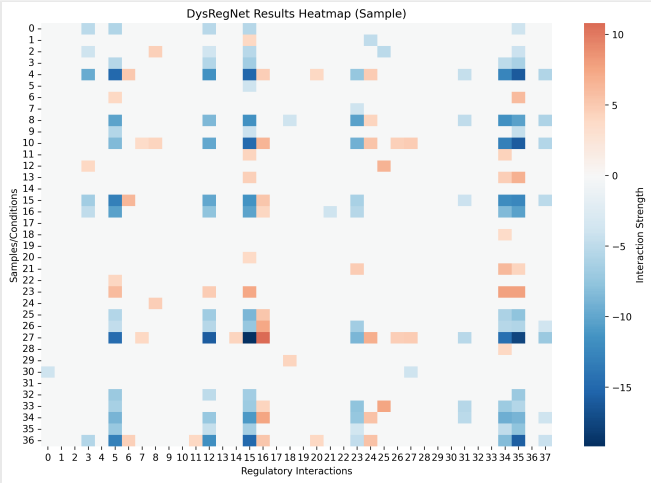

Download

top_interactions

Top 20 Strongest Regulatory Interactions

top_interactions.png

image/png • 203014 bytes

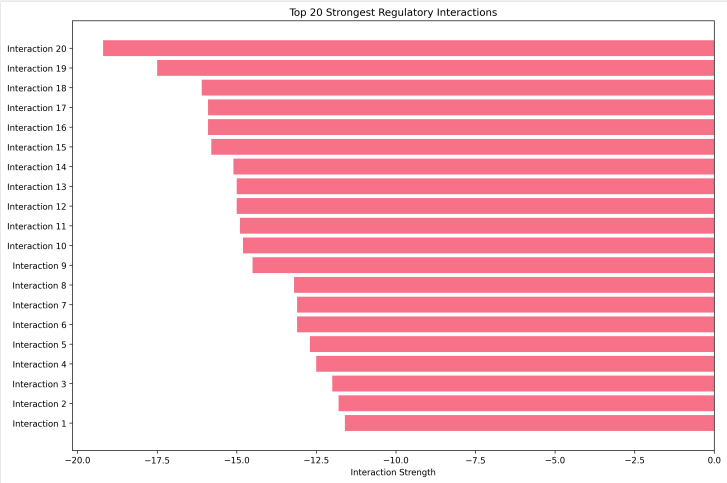

Download

results

Results of the analysis in CSV format

results.csv

text/csv • 6457 bytes

Download

Runtime Notes

Last error

Last log

```
Received output: ['visualisations', 'pvalue_distribution', 'adjacency_heatmap',
'top_interactions', 'results']
```

Dysregnet v0

#3 | App Prediction | Dysregnet | Status: FINISHED

DysRegNet is a computational method for identifying dysregulated gene regulatory interactions by comparing gene expression patterns between case and control samples. The algorithm integrates gene expression data with prior knowledge of gene regulatory networks to identify interactions that show significantly different regulatory patterns between conditions.

Configuration

zscoring
Apply z-score normalization to expression values before analysis.
`false`

bonferroni_alpha
Bonferroni-corrected significance level (alpha).
`0.01`

r2_threshold
R^2 threshold for filtering; set to null to disable.
`0.2`

normaltest
Perform D'Agostino-Pearson normality test on residuals.
`false`

normaltest_alpha
Alpha level for the normality test.
`0.001`

direction_condition
Enforce directionality condition when assessing dysregulation.
`false`

con_cov
List of continuous covariates. They should match the name of their columns in the meta Dataframe, separated by commas.
`birth_days_to`

cat_cov
List of categorical variable names. They should match the name of their columns in the meta Dataframe, separated by commas.
`race,gender`

con_col
Column name for the condition in the meta DataFrame.
`sample_type`

Inputs

grn
Gene Regulatory Network (GRN) with two columns in the following order ['TF', 'target'].

grn.csv
text/csv • 484 bytes
Download

meta
Gene expression matrix in the format patients as rows (first column - patients/samples ids), and genes as columns

meta.csv
text/csv • 15184 bytes
Download

expr
Gene expression matrix in the format - patients as rows (first column - patients/samples ids), and genes as columns.

expr.csv
text/csv • 18316584 bytes
Download

Result

adjacency_heatmap
Distribution of non-zero values (representing interaction strengths)

r2_distribution.png
image/png • 80224 bytes

pvalue_distribution
Heatmap of results matrix (sample of top interactions)

pvalue_distribution.png
image/png • 178860 bytes

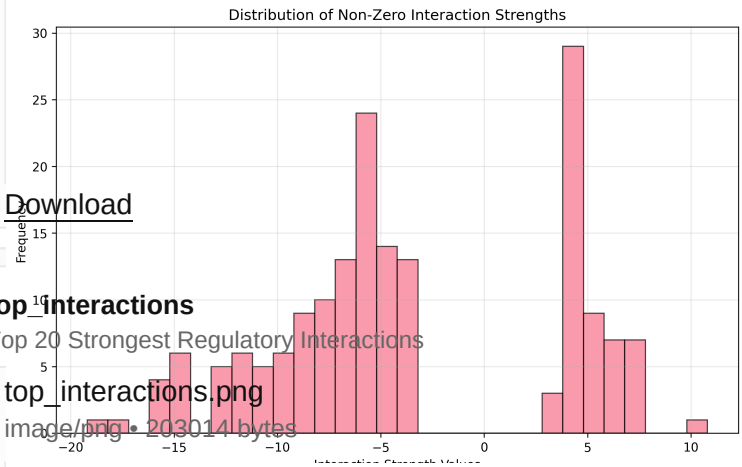

Download

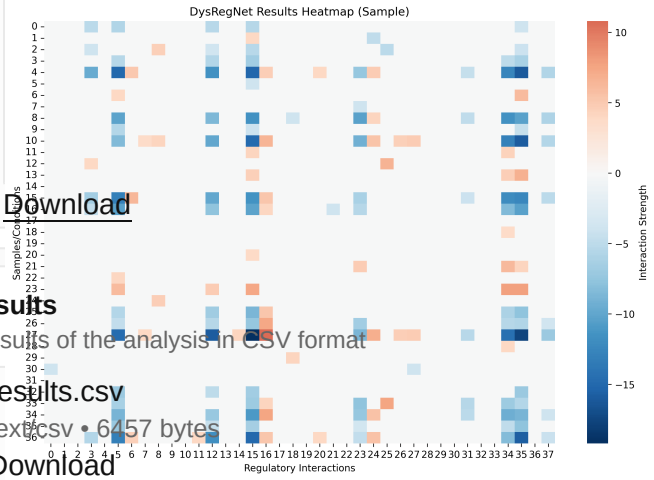

Download

top_interactions

Top 20 Strongest Regulatory Interactions

top_interactions.png

image/png • 203014 bytes

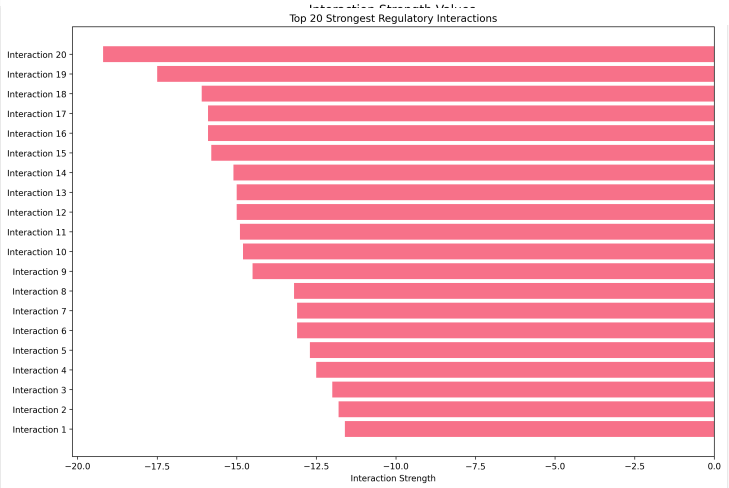

Download

results

Results of the analysis in CSV format

results.csv

text/csv • 6457 bytes

Download

Runtime Notes

Last error

Last log

```
Received output: ['visualisations', 'pvalue_distribution', 'adjacency_heatmap',
'top_interactions', 'results']
```

Dysregnet v0

#4 | App Prediction | Dysregnet | Status: FINISHED

DysRegNet is a computational method for identifying dysregulated gene regulatory interactions by comparing gene expression patterns between case and control samples. The algorithm integrates gene expression data with prior knowledge of gene regulatory networks to identify interactions that show significantly different regulatory patterns between conditions.

Configuration

zscoring
Apply z-score normalization to expression values before analysis.
`false`

bonferroni_alpha
Bonferroni-corrected significance level (alpha).
`0.01`

r2_threshold
R^2 threshold for filtering; set to null to disable.
`0.2`

normaltest
Perform D'Agostino-Pearson normality test on residuals.
`false`

normaltest_alpha
Alpha level for the normality test.

direction_condition
Enforce directionality condition when assessing dysregulation.

0.001

false

con_cov
List of continuous covariates. They should match the name of their columns in the meta Dataframe, separated by commas.

birth_days_to

cat_cov
List of categorical variable names. They should match the name of their columns in the meta Dataframe, separated by commas.

race,gender

con_col
Column name for the condition in the meta DataFrame.

sample_type

Inputs

grn
Gene Regulatory Network (GRN) with two columns in the following order ['TF', 'target'].

grn.csv
text/csv • 484 bytes
Download

meta
Gene expression matrix in the format patients as rows (first column - patients/samples ids), and genes as columns

meta.csv
text/csv • 15184 bytes
Download

expr
Gene expression matrix in the format - patients as rows (first column - patients/samples ids), and genes as columns.

expr.csv
text/csv • 18316584 bytes
Download

Result

adjacency_heatmap
Distribution of non-zero values (representing interaction strengths)

r2_distribution.png
image/png • 80224 bytes

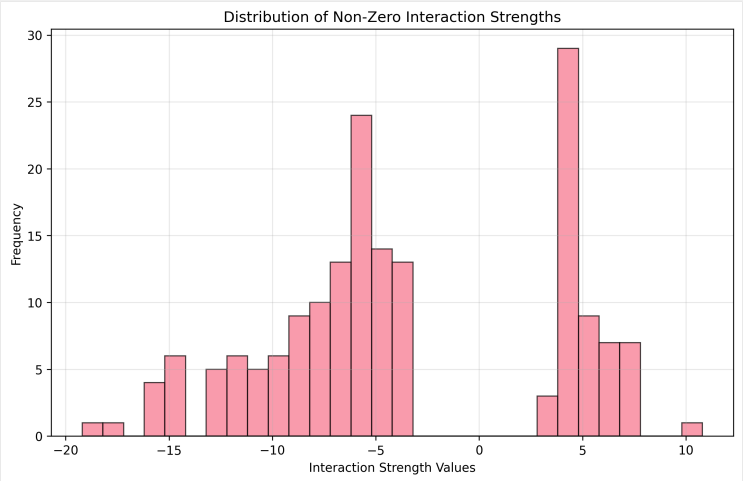

Download

pvalue_distribution
Heatmap of results matrix (sample of top interactions)

pvalue_distribution.png
image/png • 178860 bytes

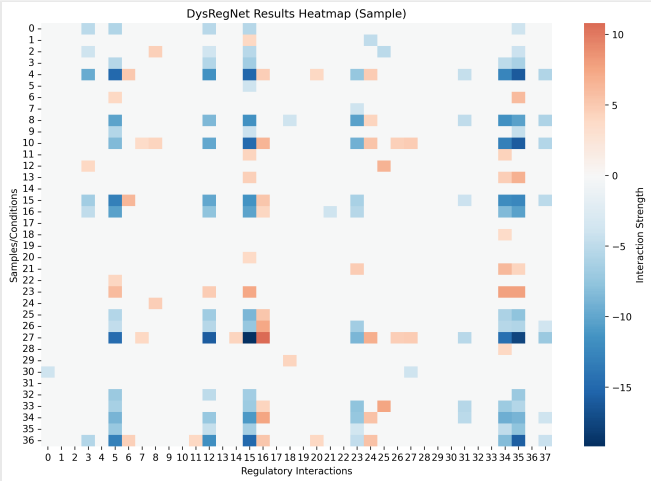

Download

top_interactions
Top 20 Strongest Regulatory Interactions

top_interactions.png
image/png • 203014 bytes

results
Results of the analysis in CSV format

results.csv
text/csv • 6457 bytes
Download

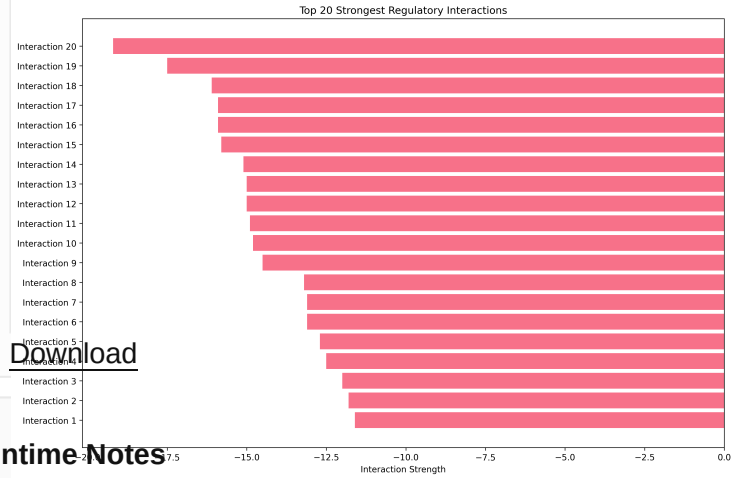

Download

Runtime Notes

Last error

Last log

```
Received output: ['visualisations', 'pvalue_distribution', 'adjacency_heatmap',
'top_interactions', 'results']
```

Dysregnet v0

#5 | App Prediction | Dysregnet | Status: FINISHED

DysRegNet is a computational method for identifying dysregulated gene regulatory interactions by comparing gene expression patterns between case and control samples. The algorithm integrates gene expression data with prior knowledge of gene regulatory networks to identify interactions that show significantly different regulatory patterns between conditions.

Configuration

zscoring
Apply z-score normalization to expression values before analysis.
`false`

bonferroni_alpha
Bonferroni-corrected significance level (alpha).
`0.01`

r2_threshold
R^2 threshold for filtering; set to null to disable.
`0.2`

normaltest
Perform D'Agostino-Pearson normality test on residuals.
`false`

normaltest_alpha
Alpha level for the normality test.
`0.001`

direction_condition
Enforce directionality condition when assessing dysregulation.
`false`

con_cov
List of continuous covariates. They should match the name of their columns in the meta Dataframe, separated by commas.
`birth_days_to`

cat_cov
List of categorical variable names. They should match the name of their columns in the meta Dataframe, separated by commas.
`race,gender`

con_col
Column name for the condition in the meta DataFrame.
`sample_type`

Inputs

grn
Gene Regulatory Network (GRN) with two columns in the following order ['TF', 'target'].

meta
Gene expression matrix in the format patients as rows (first column - patients/samples ids), and genes as columns

grn.csv
text/csv • 484 bytes
Download

meta.csv
text/csv • 15184 bytes
Download

expr
Gene expression matrix in the format - patients as rows (first column - patients/samples ids), and genes as columns.

expr.csv
text/csv • 18316584 bytes
Download

Result

adjacency_heatmap
Distribution of non-zero values (representing interaction strengths)

r2_distribution.png
image/png • 80224 bytes

Download

pvalue_distribution
Heatmap of results matrix (sample of top interactions)

pvalue_distribution.png
image/png • 178860 bytes

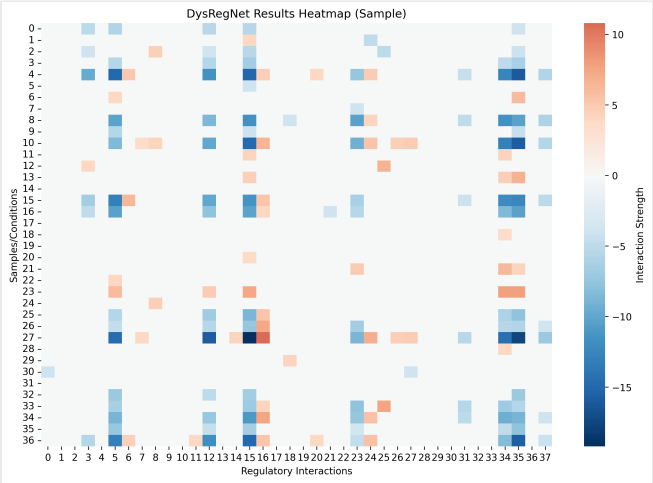

Download

top_interactions
Top 20 Strongest Regulatory Interactions

top_interactions.png
image/png • 203014 bytes

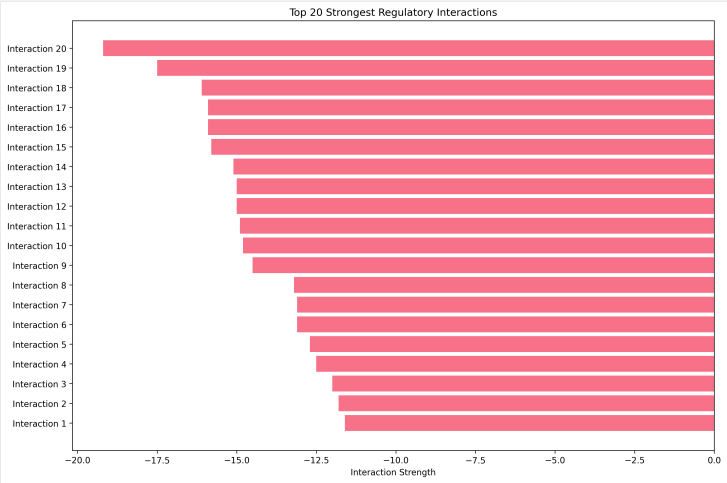

Download

results
Results of the analysis in CSV format

results.csv
text/csv • 6457 bytes
Download

Runtime Notes

Last error

Last log

```
Received output: ['visualisations', 'pvalue_distribution', 'adjacency_heatmap',
'top_interactions', 'results']
```

All Files

File	Type	Size	Link
expr.csv	text/csv	18316584	Download
grn.csv	text/csv	484	Download
meta.csv	text/csv	15184	Download
grn.csv	text/csv	484	Download
meta.csv	text/csv	15184	Download
expr.csv	text/csv	18316584	Download
pvalue_distribution.png	image/png	178860	Download
r2_distribution.png	image/png	80224	Download
top_interactions.png	image/png	203014	Download
results.csv	text/csv	6457	Download
grn.csv	text/csv	484	Download
meta.csv	text/csv	15184	Download
expr.csv	text/csv	18316584	Download
pvalue_distribution.png	image/png	178860	Download
r2_distribution.png	image/png	80224	Download
top_interactions.png	image/png	203014	Download
results.csv	text/csv	6457	Download
grn.csv	text/csv	484	Download
meta.csv	text/csv	15184	Download
expr.csv	text/csv	18316584	Download
pvalue_distribution.png	image/png	178860	Download
r2_distribution.png	image/png	80224	Download
top_interactions.png	image/png	203014	Download
results.csv	text/csv	6457	Download
grn.csv	text/csv	484	Download

meta.csv	text/csv	15184	Download
expr.csv	text/csv	18316584	Download
pvalue_distribution.png	image/png	178860	Download
r2_distribution.png	image/png	80224	Download
top_interactions.png	image/png	203014	Download
results.csv	text/csv	6457	Download
grn.csv	text/csv	484	Download
meta.csv	text/csv	15184	Download
expr.csv	text/csv	18316584	Download
pvalue_distribution.png	image/png	178860	Download
r2_distribution.png	image/png	80224	Download
top_interactions.png	image/png	203014	Download
results.csv	text/csv	6457	Download

This report is intended for reproducibility: each run documents tool identity, configuration and produced artifacts in a compact, auditable format.